




Yale® Z-Wave Plus™ Smart Module Installation Guide

Adding a Yale Z-Wave Plus™ Smart Module to your Assure Lock & Z-Wave™ System






Please use this procedure only when the network primary controller is missing or otherwise inoperable

1. Install the Yale Smart Module into the slot above the battery compartment


IMPORTANT: The batteries must be removed before removing the Yale Smart Module:

- Remove battery cover
- Remove batteries
- Insert or remove Yale Smart Module
- Reinstall batteries
- Reinstall battery cover



2. Open the Z-Wave system's smart home or alarm app on your smartphone or tablet

3. Follow the in-app instructions for adding a new device

4. On your lock keypad, enter your master entry code followed by the  icon

5. Press the 7 key followed by the  icon

6. Press the 1 key followed by the  icon

Removing a Yale Z-Wave Plus Smart Module from your Assure Lock & Z-Wave System

1. On your lock keypad, enter your master entry code followed by the  icon

2. Press the 7 key followed by the  icon




3. Press the 3 key followed by the  icon

4. Open the Z-Wave system's smart home or alarm app and follow the instructions for removing a device

5. Remove the Yale Smart Module from the slot above the battery compartment

IMPORTANT: The batteries must be removed before removing the Yale Smart Module:

- Remove battery cover
- Remove batteries
- Insert or remove Yale Smart Module
- Reinstall batteries
- Reinstall battery cover



6. If you're adding a new Yale Smart Module, follow the instructions included with it



WARNING: Changes or modifications to this device, not expressly approved by Yale Home could void the user's authority to operate the equipment.

This device is a security enabled Z-Wave Plus product that is able to use encrypted Z-Wave Plus messages to communicate to other security enabled Z-Wave Plus products. This device must be used in conjunction with a Security Enabled Z-Wave Controller in order to fully utilize all implemented functions. This product can be operated in any Z-Wave network with other Z-Wave certified devices from other manufacturers. All non-battery operated nodes within the network will act as repeaters regardless of vendor to increase reliability of the network.

FCC:

Contain FCC ID: U4A-YRHCPZW0FM

Model: YRMZW2-US

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS.

(1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRE OPERATION.

Industry Canada:

Contain IC: 6982A-YRHCPZW0FM

Model: YRMZW2-US

Section 7.1.2 of RSS-GEN Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

En vertu des règlements d'Industrie Canada, cet émetteur radio ne peut fonctionner avec une antenne d'un type et un maximum (ou moins) approuvés pour gagner de l'émetteur par Industrie Canada. Pour réduire le risque d'interférence aux autres utilisateurs, le type d'antenne et son gain doivent être choisis de façon que la puissance isotrope rayonnée équivalente (PIRE) ne dépasse pas ce qui est nécessaire pour une communication réussie.

Section 7.1.3 of RSS-GEN This Device complies with Industry Canada License-exempt RSS standard(s). Operation is subject to the following two conditions: 1) this device may not cause interference, and 2) this device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil est conforme avec Industrie Canada RSS standard exemptes de licence(s). Son fonctionnement est soumis aux deux conditions suivantes: 1) ce dispositif ne peut causer des interférences, et 2) cet appareil doit accepter toute interférence, y compris les interférences qui peuvent causer un mauvais fonctionnement du dispositif.

This radio transmitter 6982A-YRHCPZW0FM has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Le présent émetteur radio 6982A-YRHCPZW0FM a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal. Les types d'antenne non inclus dans cette liste, et dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

CAN ICES-3B/NMB-3B

Yale Home

24/7 Tech Support : 1-855-492-0505 • www.US.YaleHome.com

Yale® is a registered trademark of Yale Home. Other products' brand names may be trademarks or registered trademarks of their respective owners and are mentioned for reference purposes only. © Copyright 2020. All rights reserved.

Reproduction in whole or in part without the express written permission of Yale Home is prohibited.



Yale® Assure Lock® Touchscreen Deadbolt Installation and Programming Instructions (YRD226/YRD620/YRD622)

This manual will walk you through all the required steps to add your new Yale Assure Lock to your door.


- Remove existing deadbolt
- Double check door measurements
- Install your Assure Lock
- Program your Assure Lock
- Add your Assure Lock to your smart home system or Yale Access app if purchased with Yale Smart Module or Yale Access Upgrade Kit

Tools Needed



Standard
Phillips Head
Screwdriver

Tools Needed For New Doors Or Adjusting Existing Door



Drill



Utility
Knife




Pencil



Wood
Mortise
Chisel



Tape
Measure



Level

Before you begin

DOWNLOAD
THE BILT APP
BILT.




Using the app on your smart phone, scan this QR for step-by-step installation instructions & to register your lock



Failure to follow these instructions could result in damage to the product, voiding the factory warranty and could lead to failure of the product to provide access.




What's In The Box

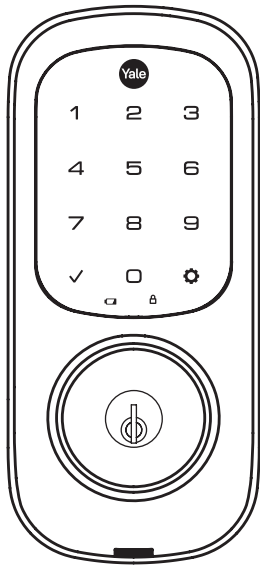


Touchscreen Keypad




Keys

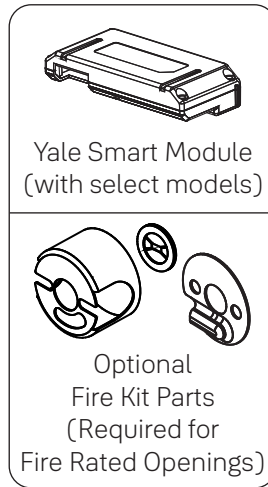


Yale Smart Module
(with select models)




Optional
Fire Kit Parts
(Required for
Fire Rated Openings)




Installation Guide
and Door Template

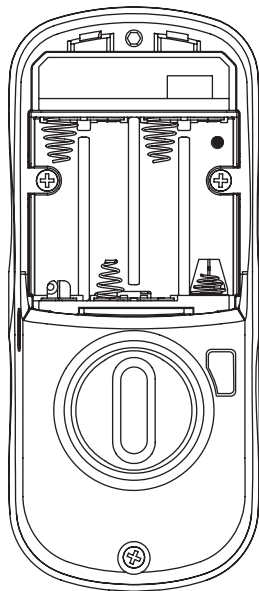


Inside Lock

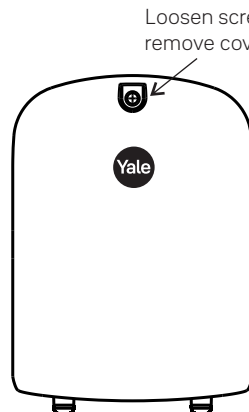

Battery Cover




4 AA Batteries

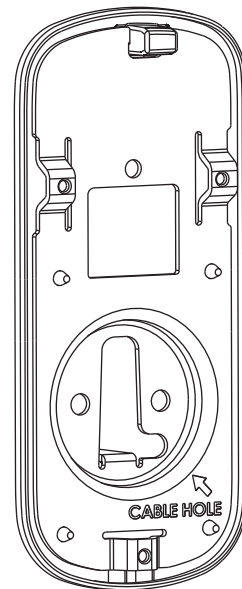

Mounting Plate

Mounting Hardware



Strike Plate

Adjustable
Deadbolt
(AYRDB-DRIVE
Adjustable Drive-In Deadbolt
available for purchase)



x2

Inside Lock
Screws



x4

Strike Plate and
Deadbolt Screws




x2

Optional
Security
Strike Plate Screws



x2



Long Through-bolt for
1-3/4" - 2-1/4"
Door Thickness




Remove Existing Deadbolt



Do not discard old lock hardware until Assure Lock has been successfully installed.

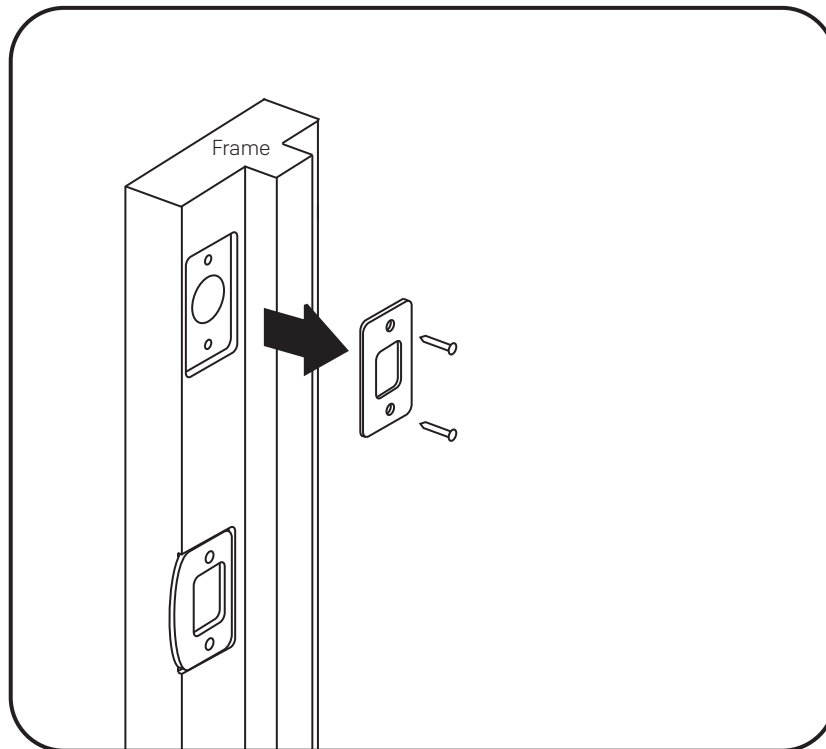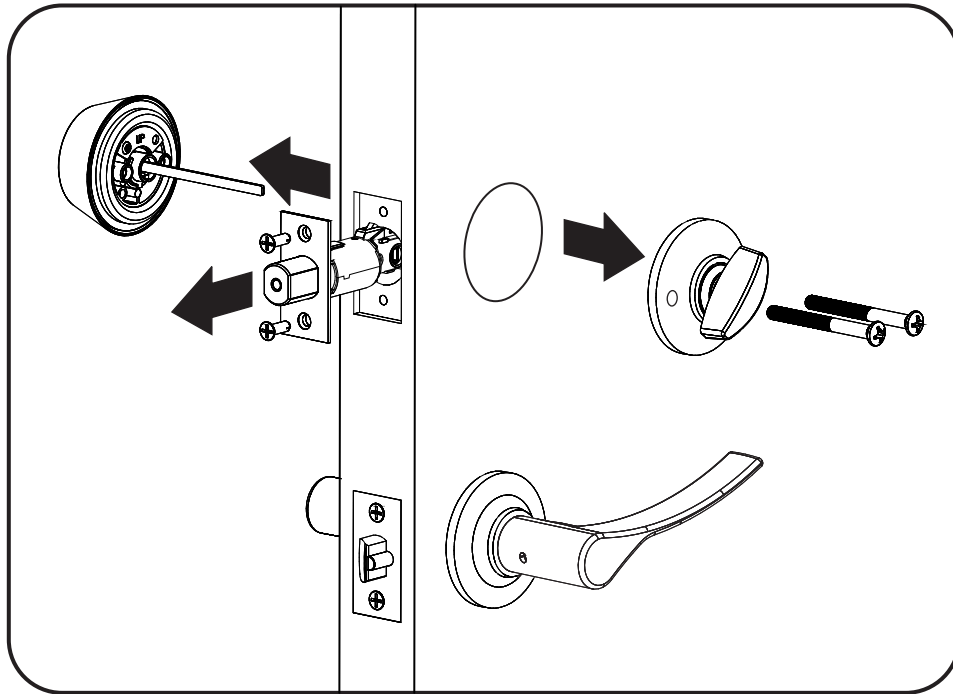




Check Door Measurements And Make Adjustments If Needed



Door Checker

Use door checker from installation guide envelope to verify your door measurements and make any needed adjustments.

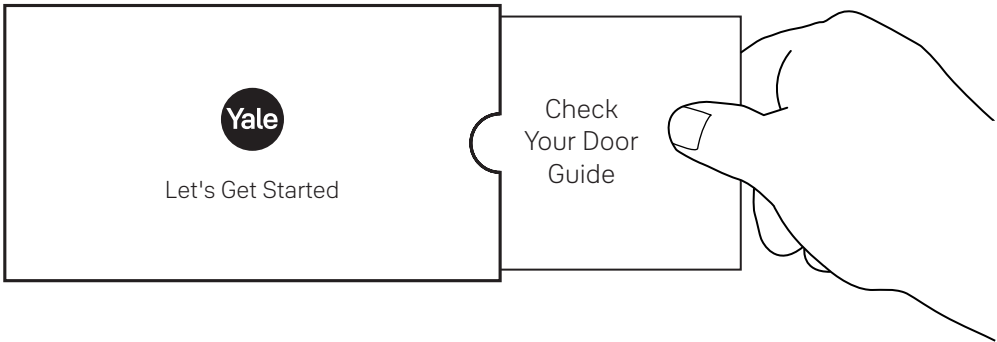


New Door Marking Template

With the door checker, use the template from installation guide envelope to prep a new door that has not been predrilled for hardware.

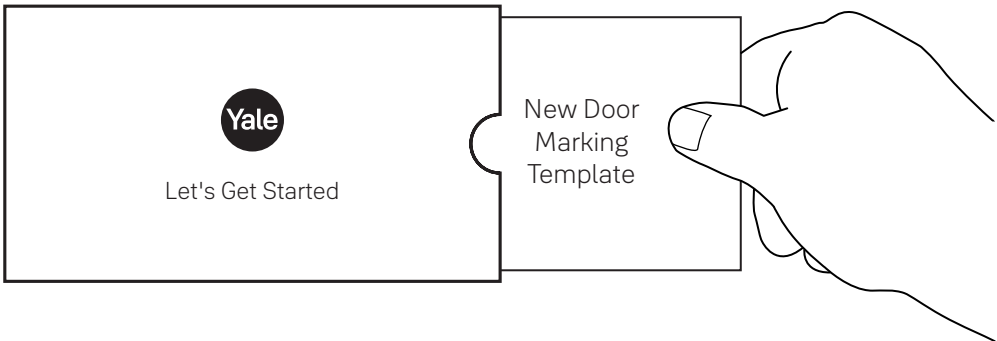

Install Optional Fire Cup for Fire Rated Openings

Only included with select models

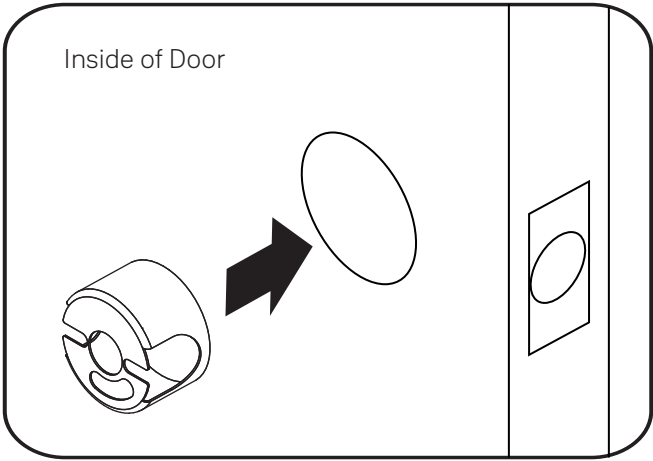

3

Install Deadbolt and Strike Plate



x2

For Deadbolt
Actual Size




x2

For Strike Plate
Actual Size



Choose
standard strike
plate screws or
security
screws.




x2

For Strike Plate, optional
Actual Size



*2-3/8" Backset, default

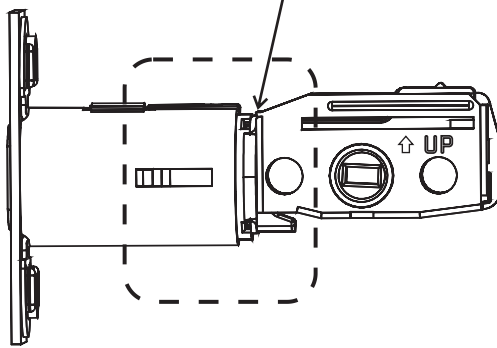


*Deadbolt position is based on
backset. Choose position
appropriate for your door.
Reference Door Checker
measurements E and F.

AYRDB-DRIVE
Adjustable Drive-In Deadbolt
available for purchase



*2-3/4" Backset, optional

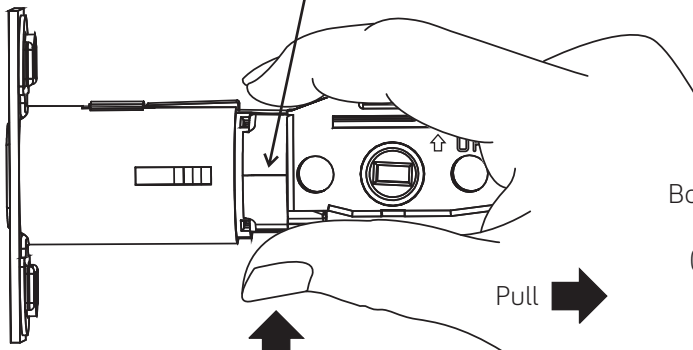


Press

Pull




Bolt must be in
retracted
(unlocked)
position.

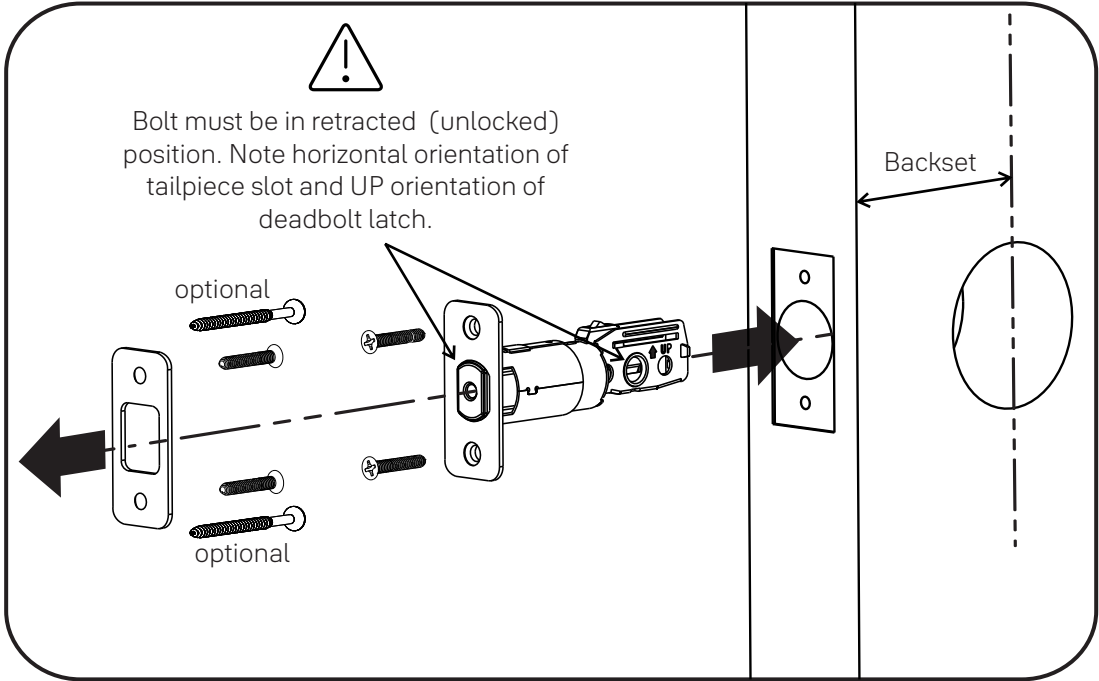

4


Install Touchscreen Keypad

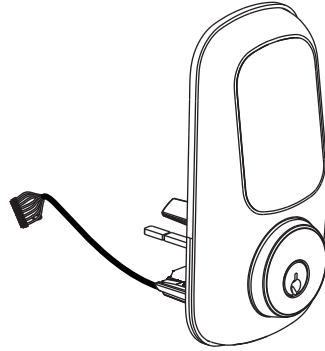


Door face hole must be at least 2-1/8".

If hole is too small, a door lock installation kit or jig should be used to increase hole size.


Inside of Door



Outside of Door

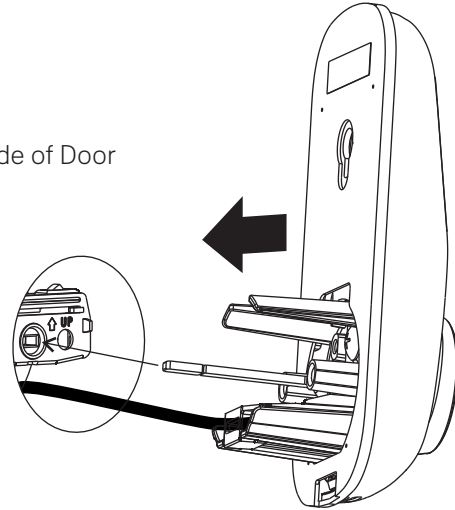

Bolt must be in retracted (unlocked) position. Note horizontal orientation of mechanism.

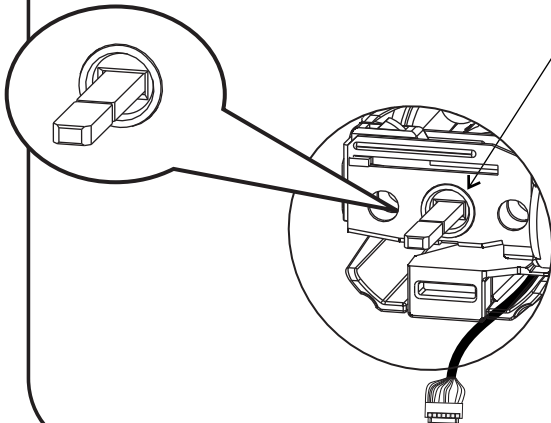

0


optional
2 of 3



To be used with Fire Cup for Fire Rated openings




5

Install Inside Mounting Plate





x2

Actual Size

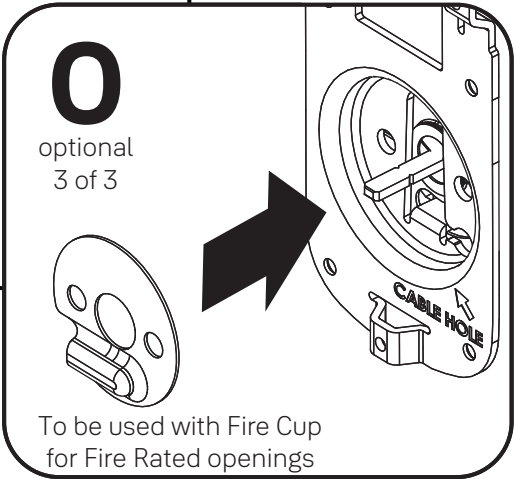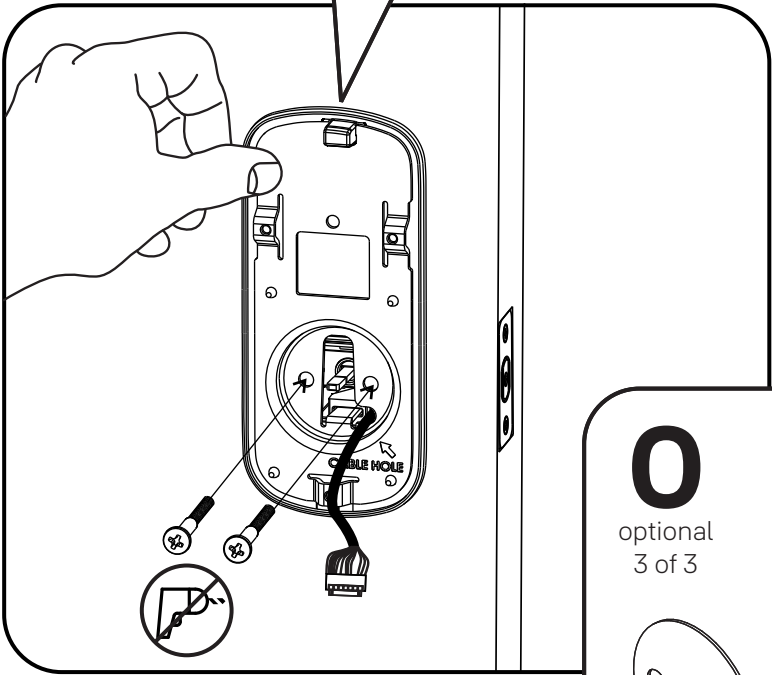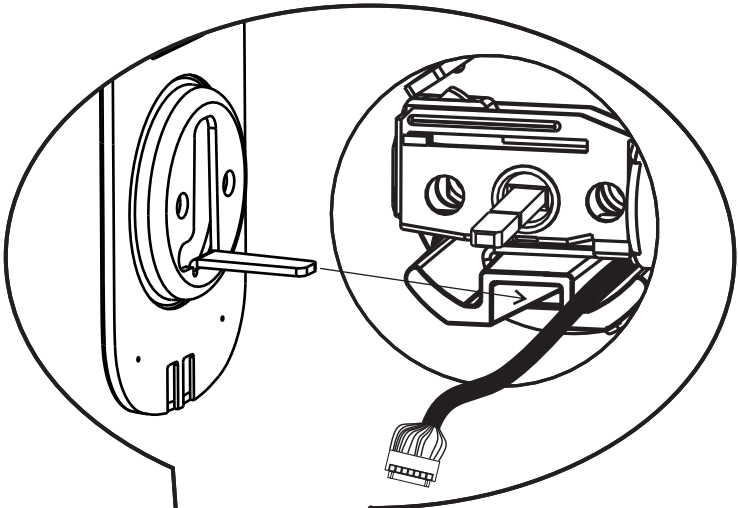

6

Attach Cable

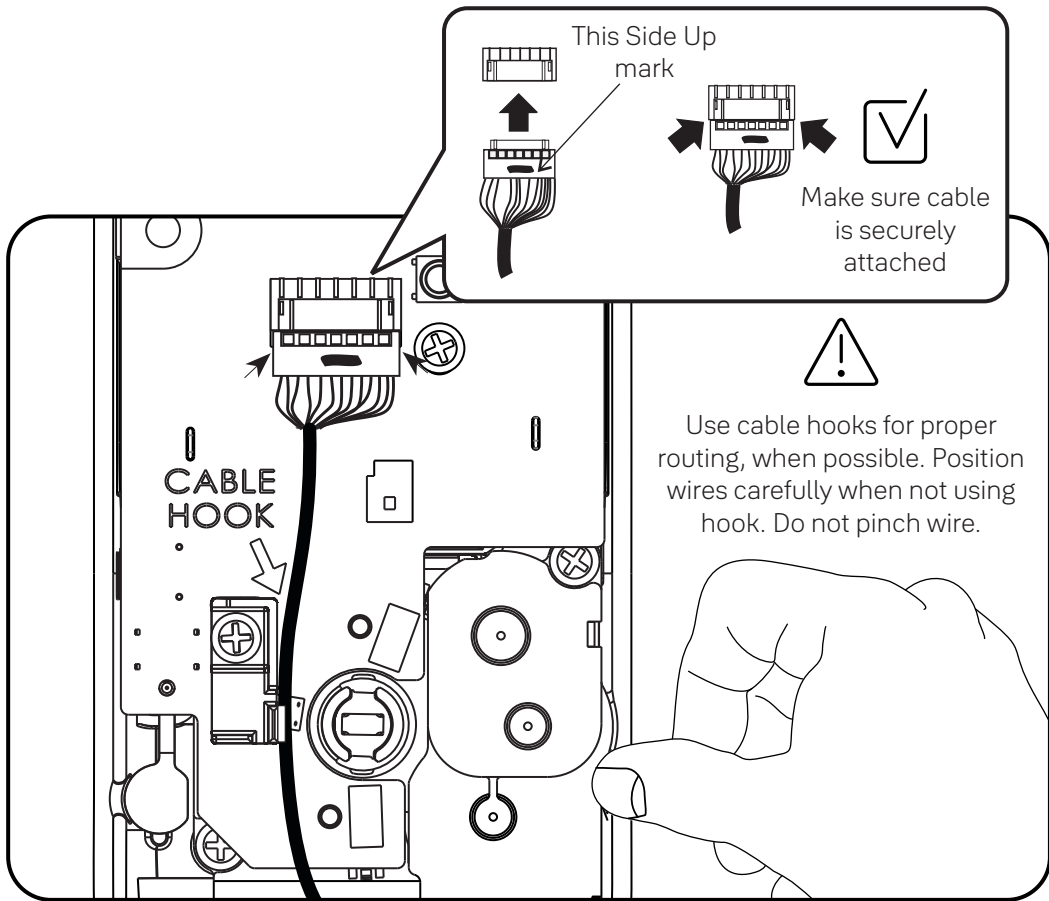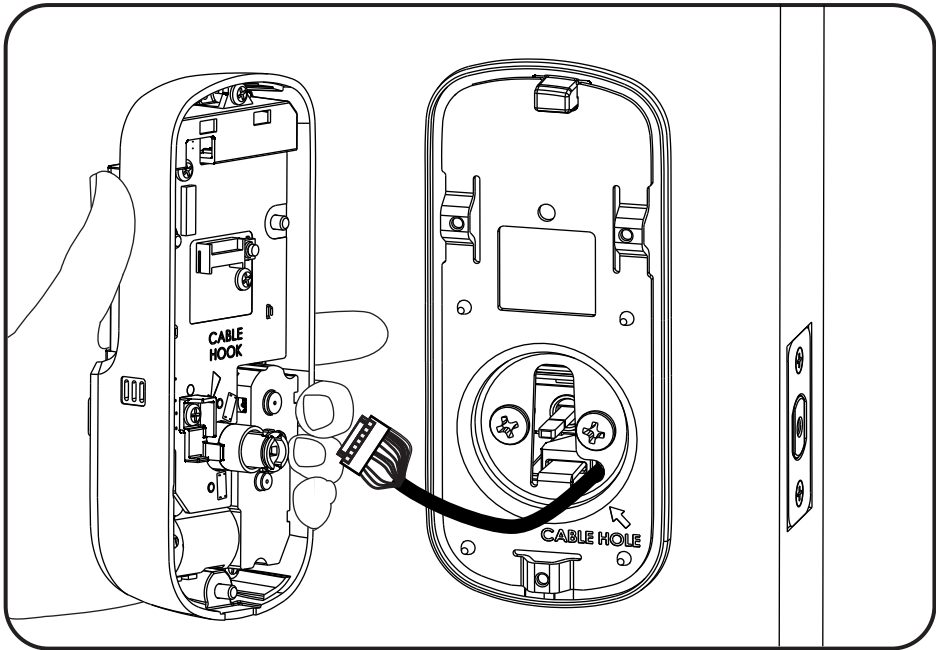


7

Install Inside Lock




x3

Actual Size



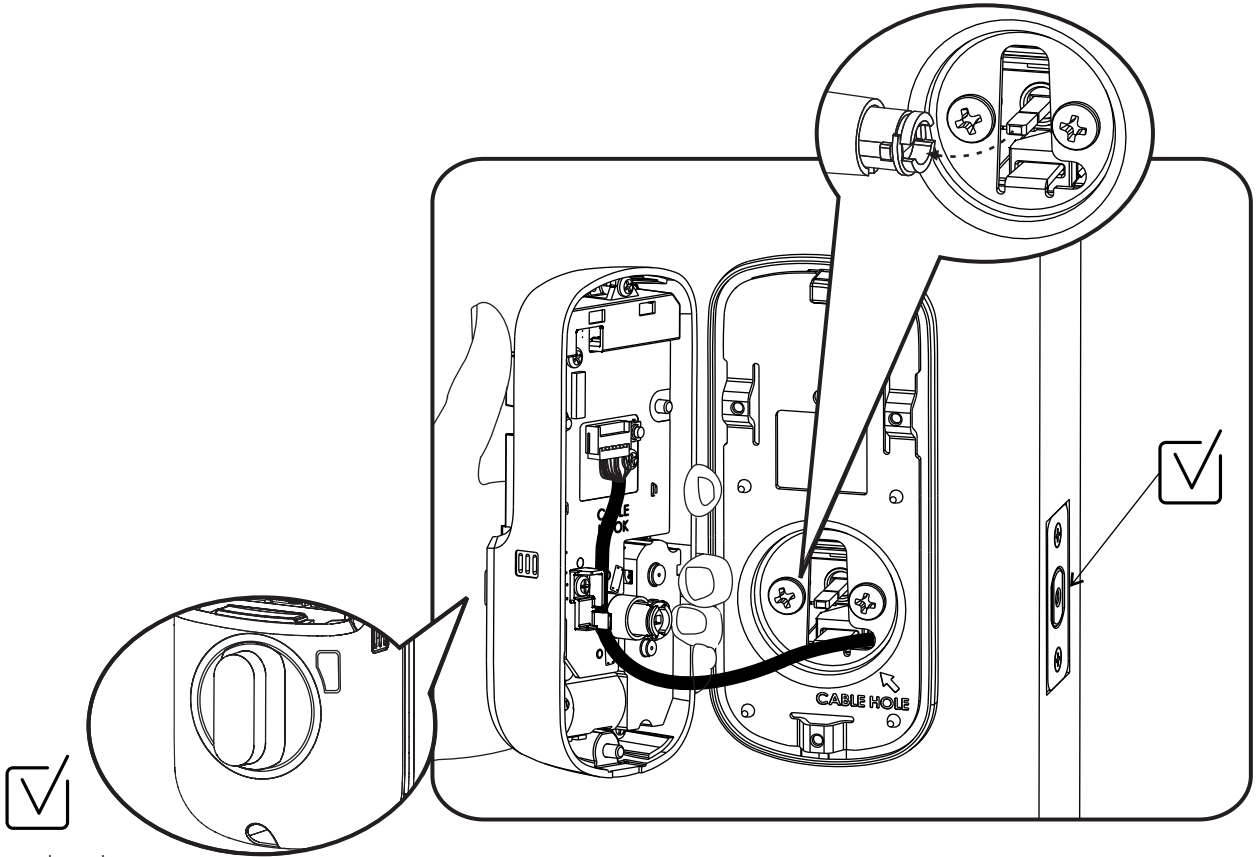


Make sure thumbturn is vertical. If thumbturn does not move freely, refer to "Hardware Troubleshooting".

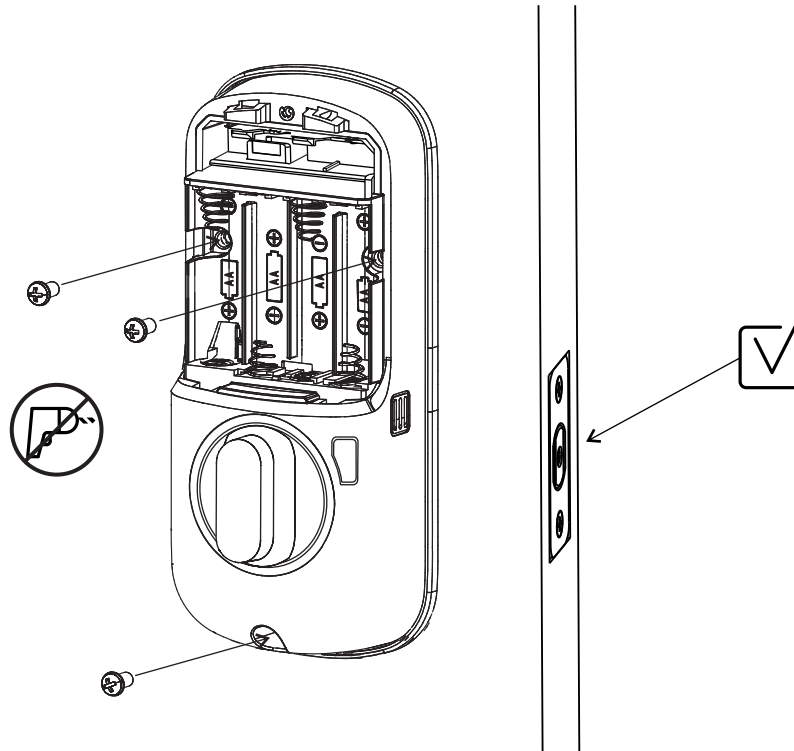





Test Mechanical Operation

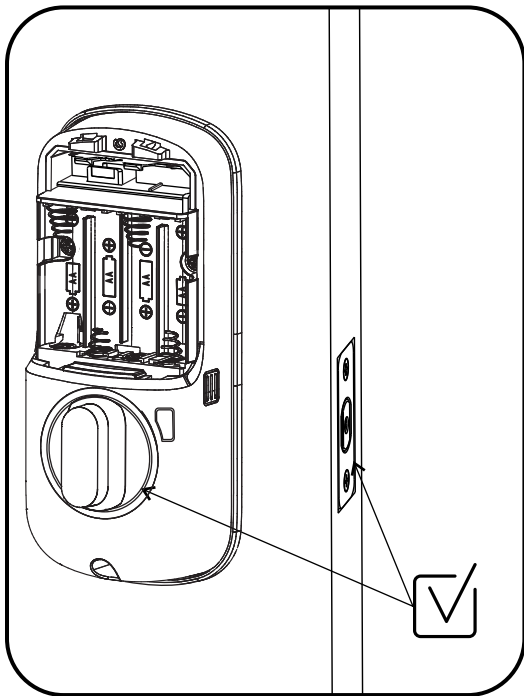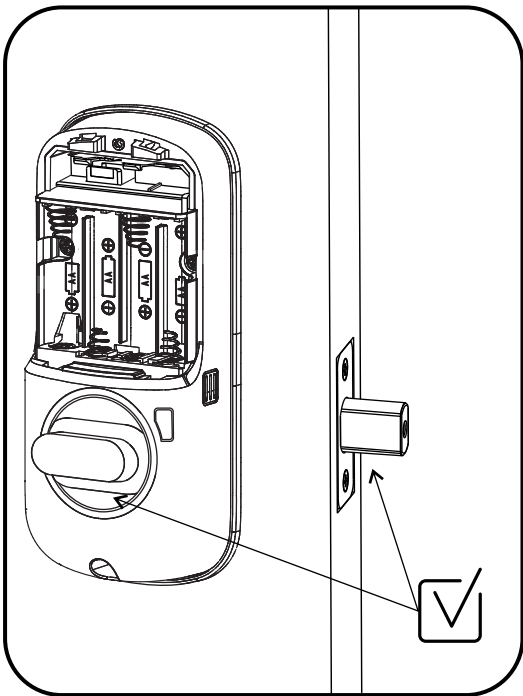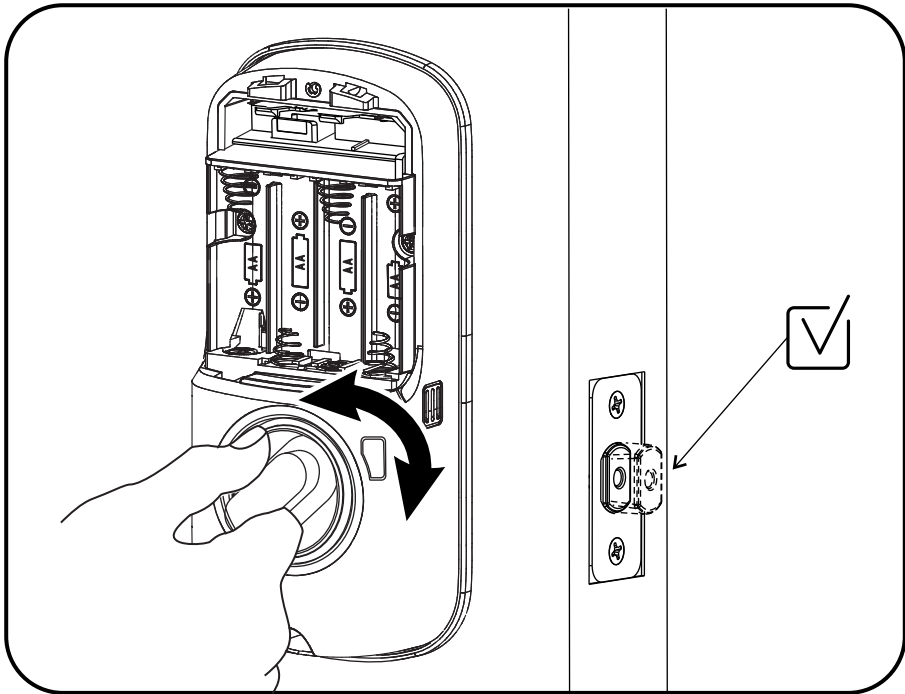

If thumbturn operation fails, check the installation beginning with Step 7.



Test Mechanical Operation

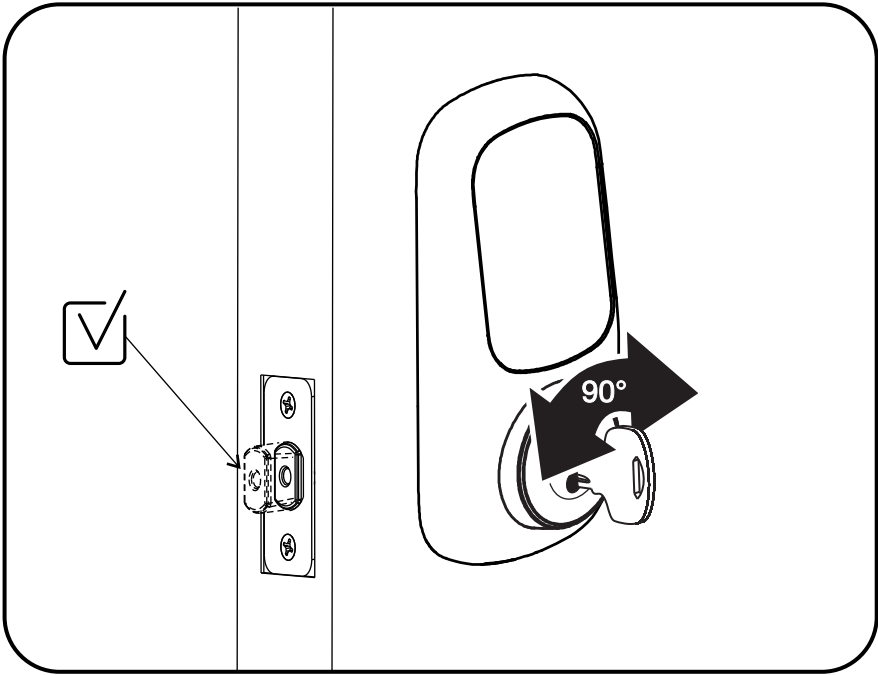


If key operation fails, check installation beginning with Step 4.



Install Yale Smart Module



Included with select models

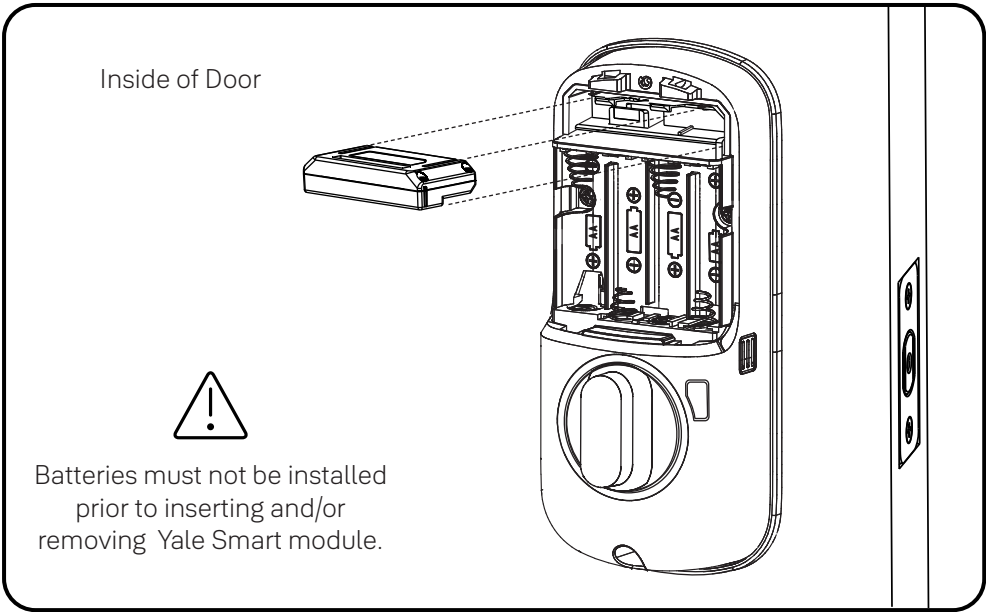

For more information about Yale Smart modules and smart home features visit US.YaleHome.com/Smart

8

Install Batteries and Cover

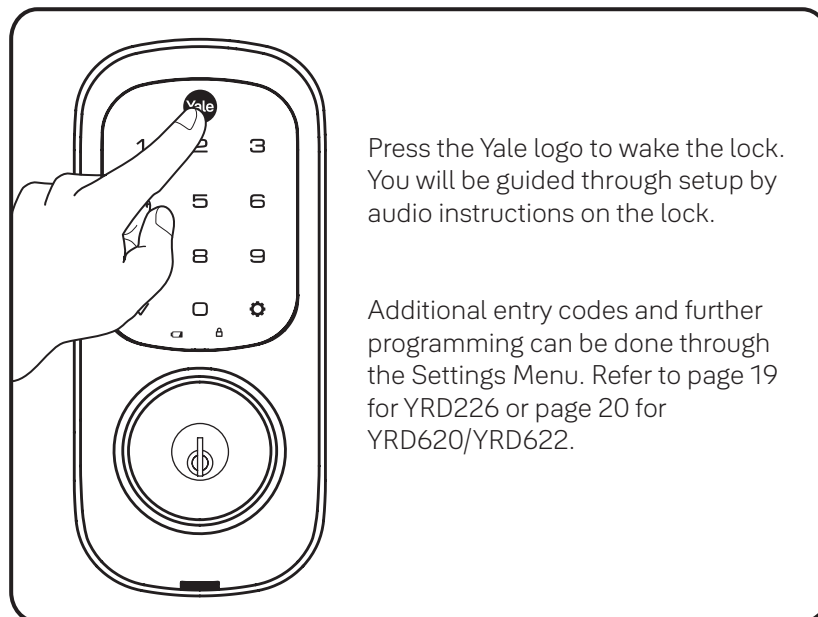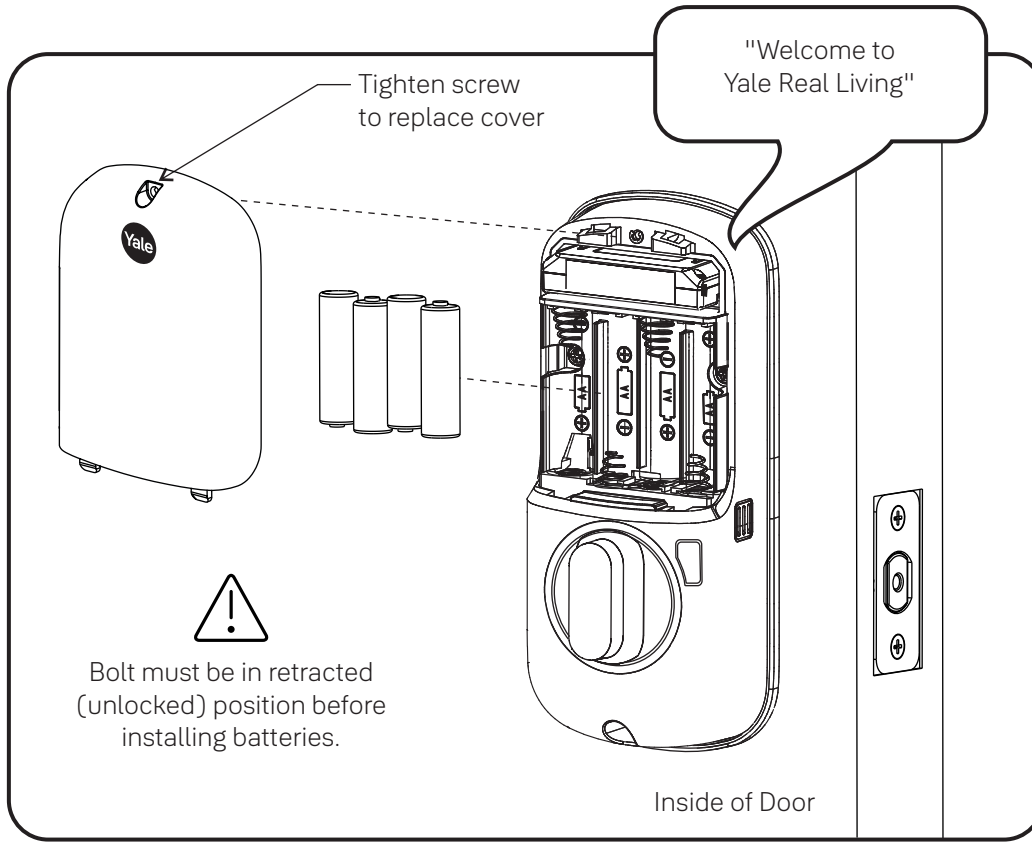


Congratulations, you've installed the Yale® Assure Lock® Touchscreen Deadbolt (YRD226/YRD620/YRD622)! Using Your Lock instructions will help you customize your lock.





Using Your Lock

Touchscreen Keypad

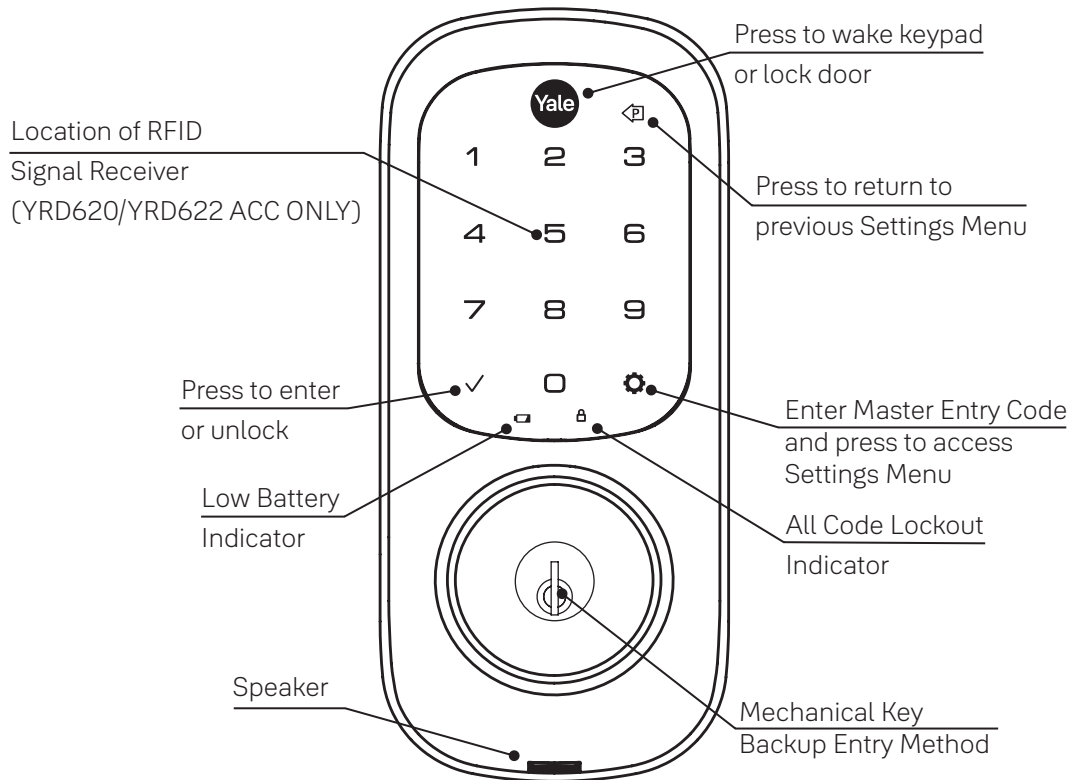

Inside Lock



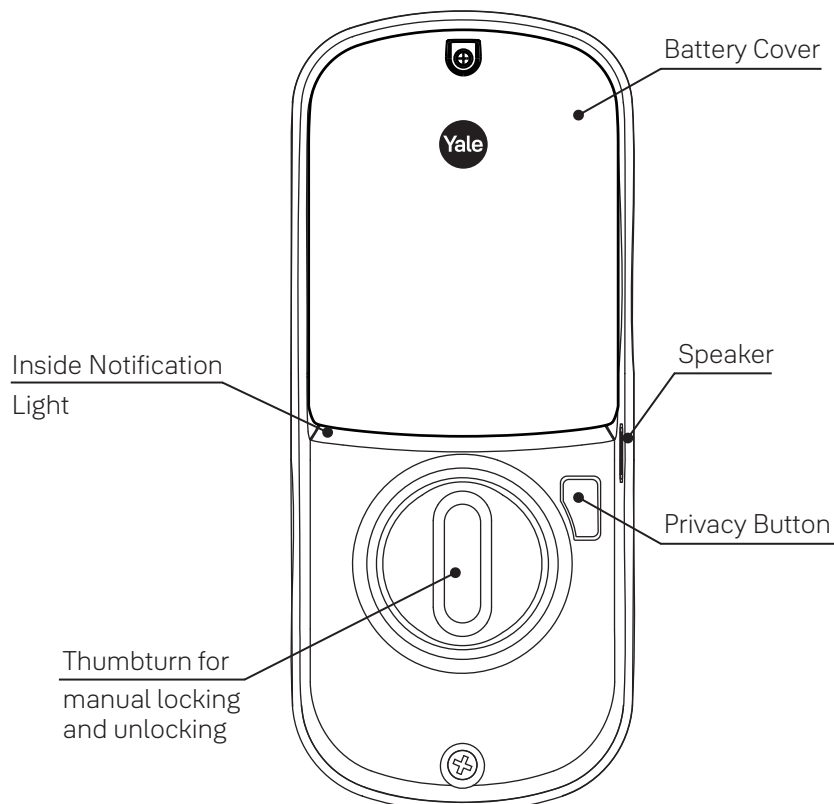





Creating Master Entry Code

The Master Entry Code is used to change lock settings.

A security best practice is to set your Master Entry Code with 6 or more digits and create a separate code that is used daily to lock and unlock the door.

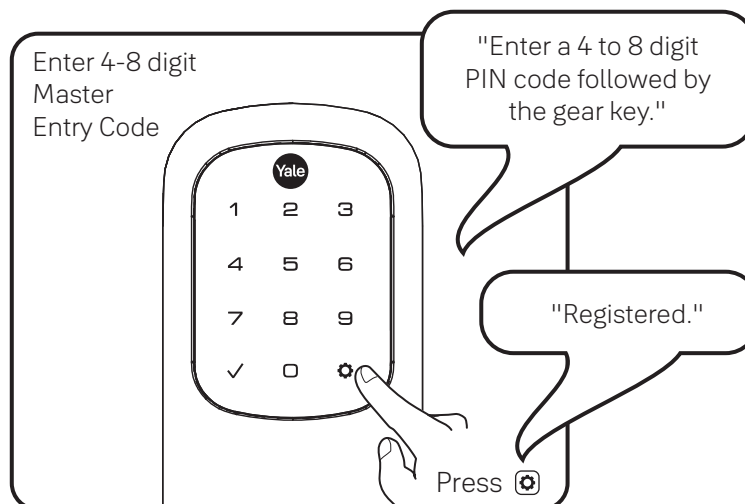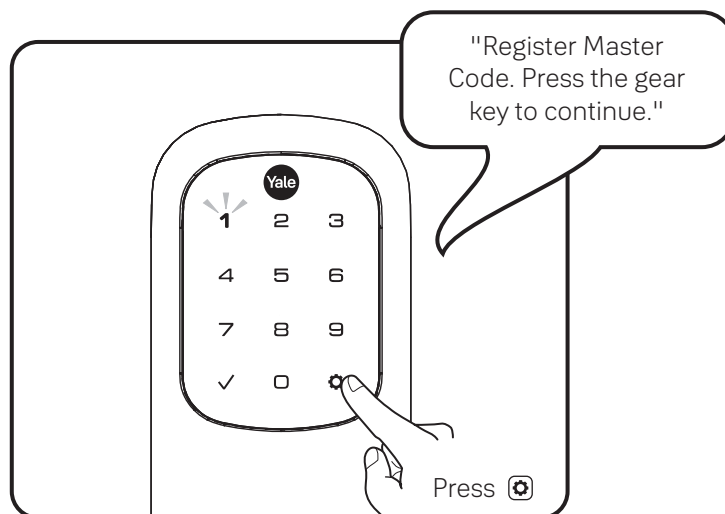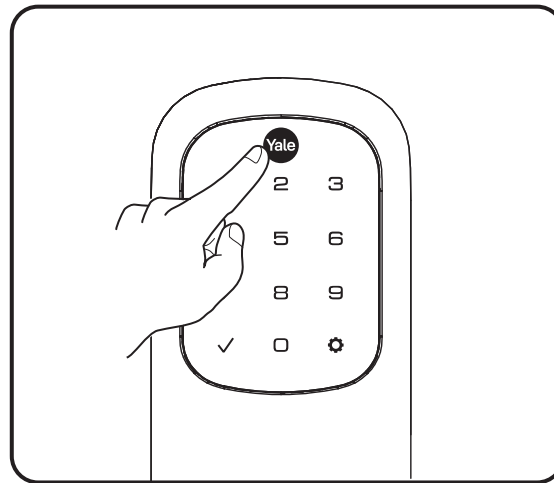





Creating Entry Codes



Master Entry Code must be created first.

*Max Entry Codes = 250 with Smart Module; 25 without.

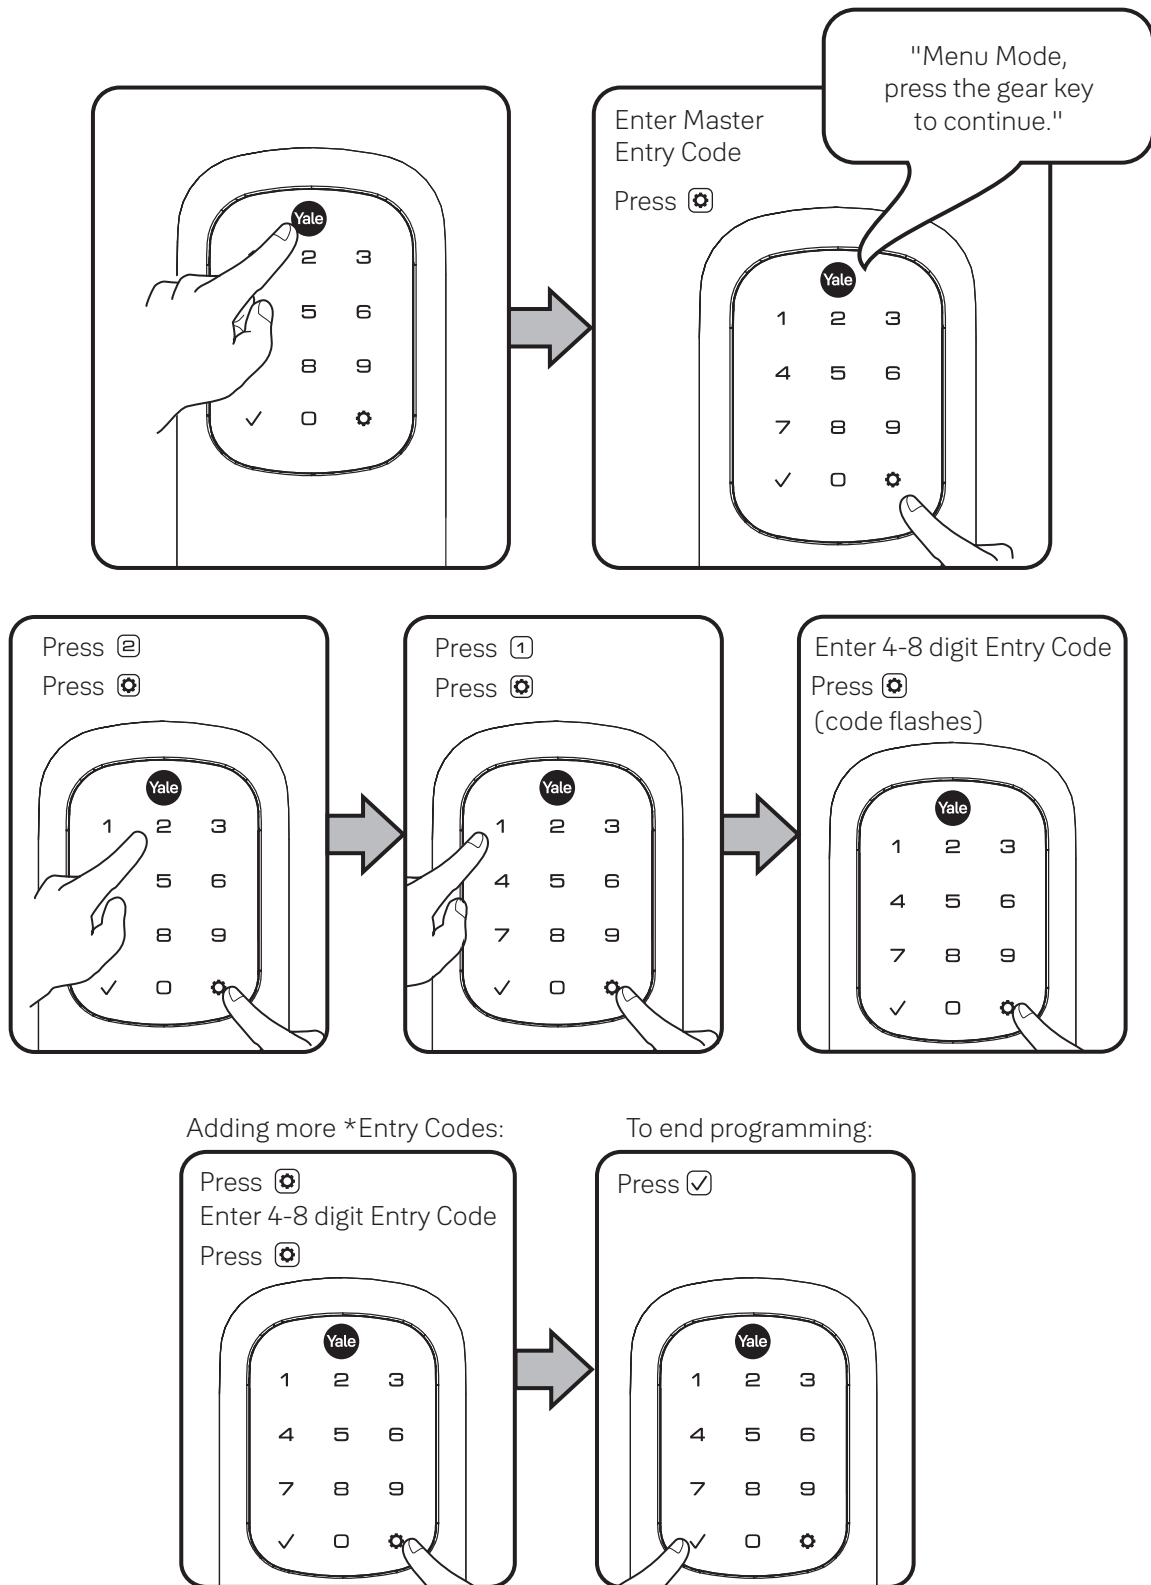




Deleting Entry Codes

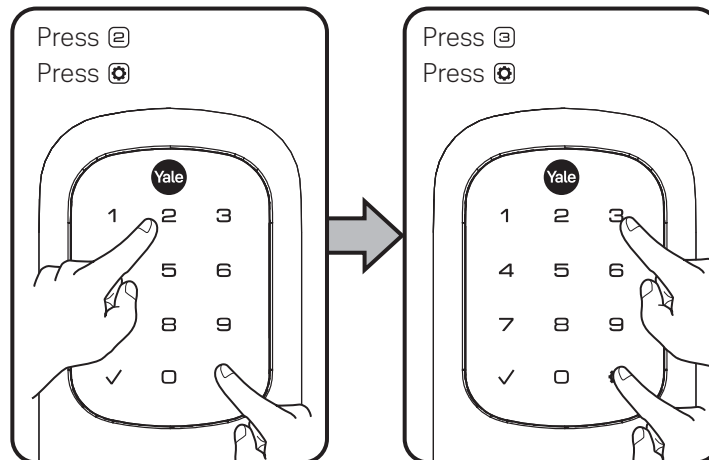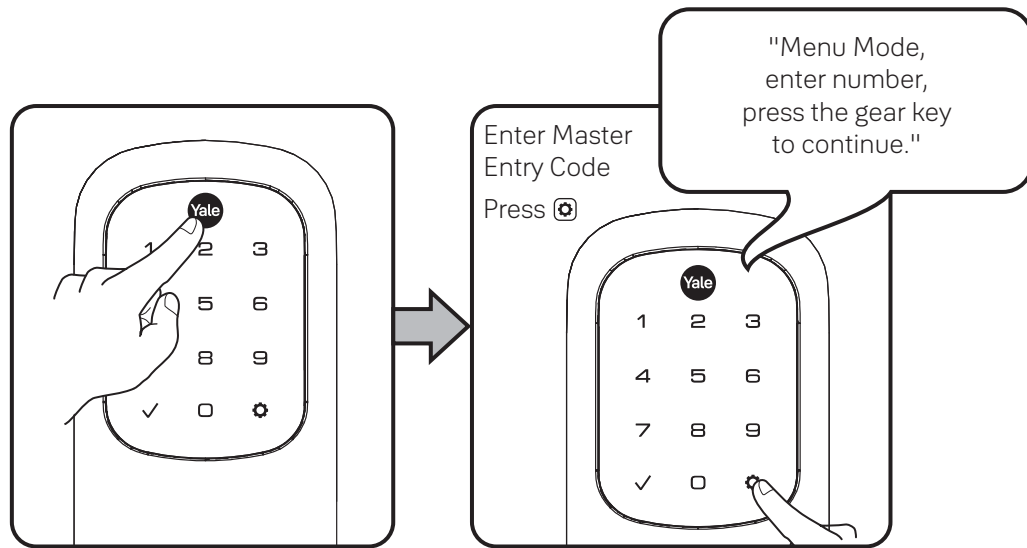



Deleting one Entry Code:
To delete one Entry Code,
you must enter the Entry
Code you wish to delete.

To delete all Entry Codes:
(Does not delete
Master Entry Code)

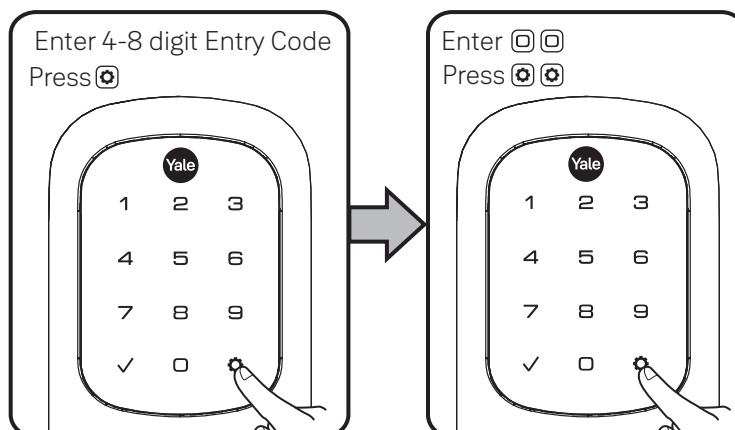




Unlocking Door with Entry Codes

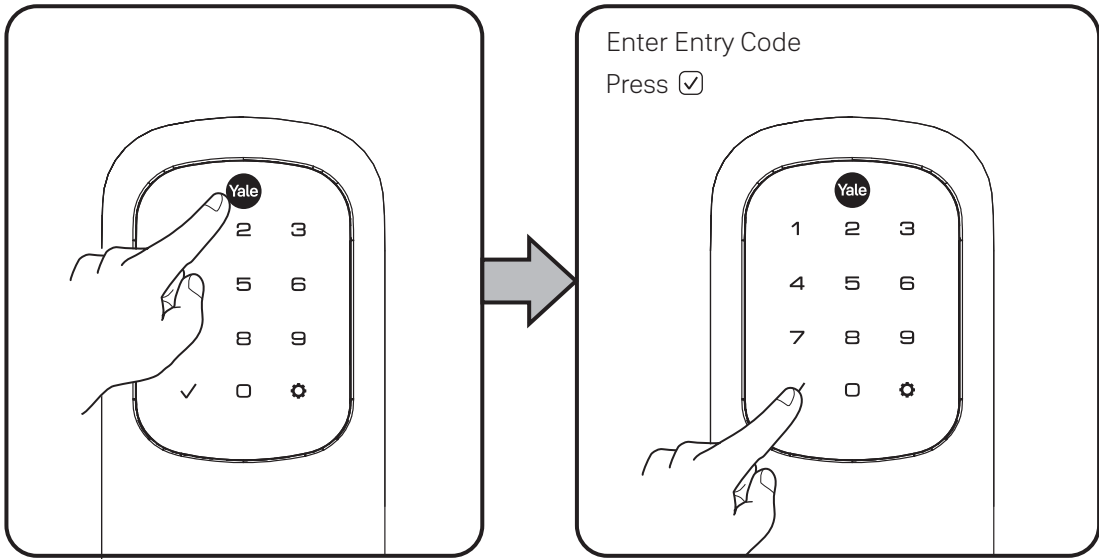

Unlocking Door with RFID (YRD620/YRD622 ACC ONLY)

See "Customizing YRD620/YRD622 Lock Using Settings Menu", page 20 to configure RFID communication.

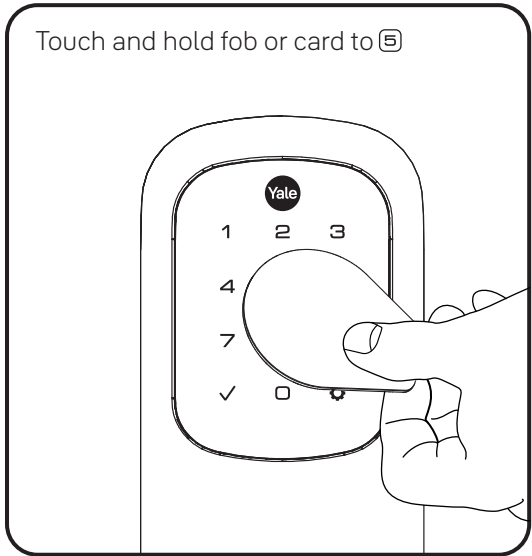




Setting Definitions




Settings	Default Setting	Definition
Master Entry Code	Creation required*	The Master Entry Code is used for programming and feature settings. It must be created prior to programming the lock. The Master Entry Code will also operate (unlock/lock) the lock.
All Code Lockout	Disabled	This feature is enabled by the Master Entry Code. When enabled, it restricts all Entry Code access (except Master). When attempting to enter a code while the lock is in All Code Lockout, the RED locked padlock will appear on the screen.
Auto Re-lock	Disabled	After a successful code entry or manual unlock with the key, the lock will automatically re-lock after each unlock in an effort to keep your home secure. This feature is optional, and can be turned off. When enabled, the lock will automatically re-lock after thirty (30) seconds.
Escape Return Mode (YRD620/YRD622 ONLY)	Disabled	When enabled, Auto Re-lock is prohibited. Requires door to be physically manipulated for lock to be re-locked once door is open from the inside.
Inside Indicator Light	Disabled (Off)	Located on the inside lock. Shows active status (Locked) of lock and can be enabled or disabled in Advanced Lock Settings (Main Menu selection #3).
Language	English	Choosing English (1), Spanish (2) or French (3) becomes the (default) setting for the lock voice prompts.
One Touch Locking	Enabled	When the latch is retracted, activating the keypad will extend the latch (during Auto Re-lock duration or when Auto Re-lock is disabled). When One-Touch Re-lock is not in use (disabled), any valid Entry Code will re-lock the lock.
Privacy Button	Disabled	Privacy mode is disabled by default. When enabled, activate Privacy mode by pressing the privacy button for 4 seconds to put the lock in do-not-disturb mode (all Entry Codes are disabled).
Shutdown Time	60 Seconds	The lock will shutdown (flashing RED) for sixty (60) seconds and not allow operation after the wrong code entry limit (5 attempts) has been met.
Volume	Enabled (Low)	The volume setting for Entry Code verification is set to Low (2) by default; otherwise it can be set to High (1) or Silent (3) for quiet areas.
Wrong Code Entry Limit	5 Times	After five (5) unsuccessful attempts at entering a valid Entry Code, the lock will shut down and not allow operation for sixty (60) seconds.


*The Master Entry Code must be created prior to any other programming of the lock.



Customizing YRD226 Lock Using Settings Menu

*Master Entry Code required

1. Press Yale logo to wake up lock .
2. Enter Master Entry Code* followed by  icon.
Lock Response: "Welcome to the Settings Menu. Press each number to hear available settings and then press the settings icon to enter."
3. Enter digit corresponding to the function to be performed followed by the  icon. Follow the voice commands.

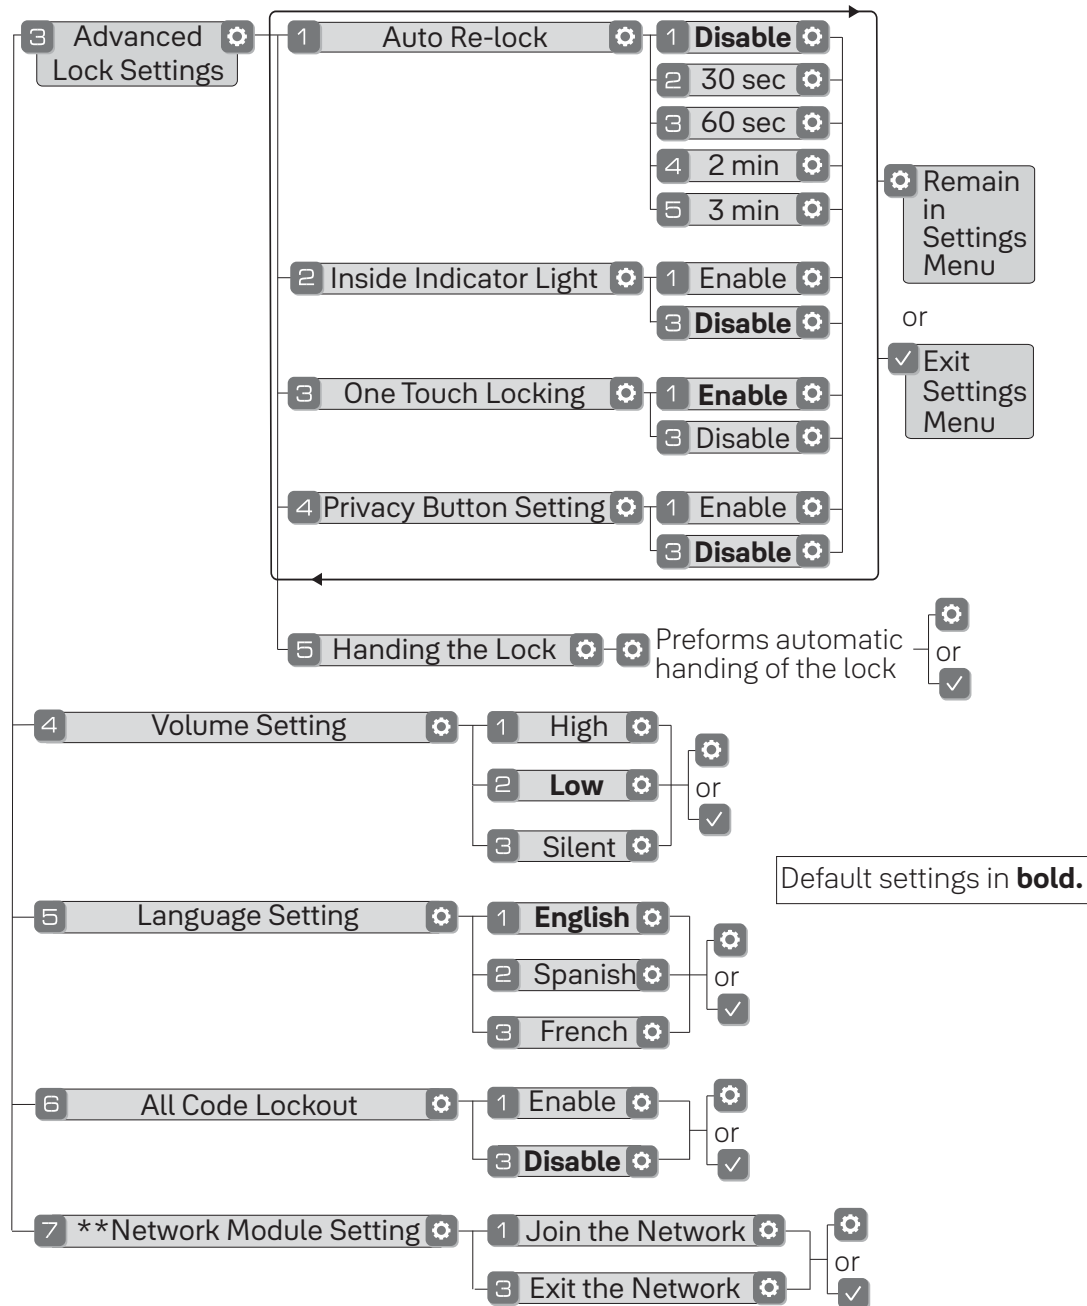


Here is an example of how to set Auto Lock to 30 seconds:




Master Entry Code , 3 , 1 , 2 , 


*The Master Entry Code must be created prior to any other programming of the lock.

**Network Module Setting function appears only with Yale Smart module installed.



Customizing YRD620/YRD622 ACC ONLY Lock Using Settings Menu *Master Entry Code Required


1. Press Yale logo to wake up lock .
2. Enter Master Entry Code* followed by .
- Lock Response: "Welcome to the Settings Menu. Press each number to hear available settings and then press the settings icon to enter."
3. Enter digit corresponding to the function to be performed followed by the  icon. Follow the voice commands.

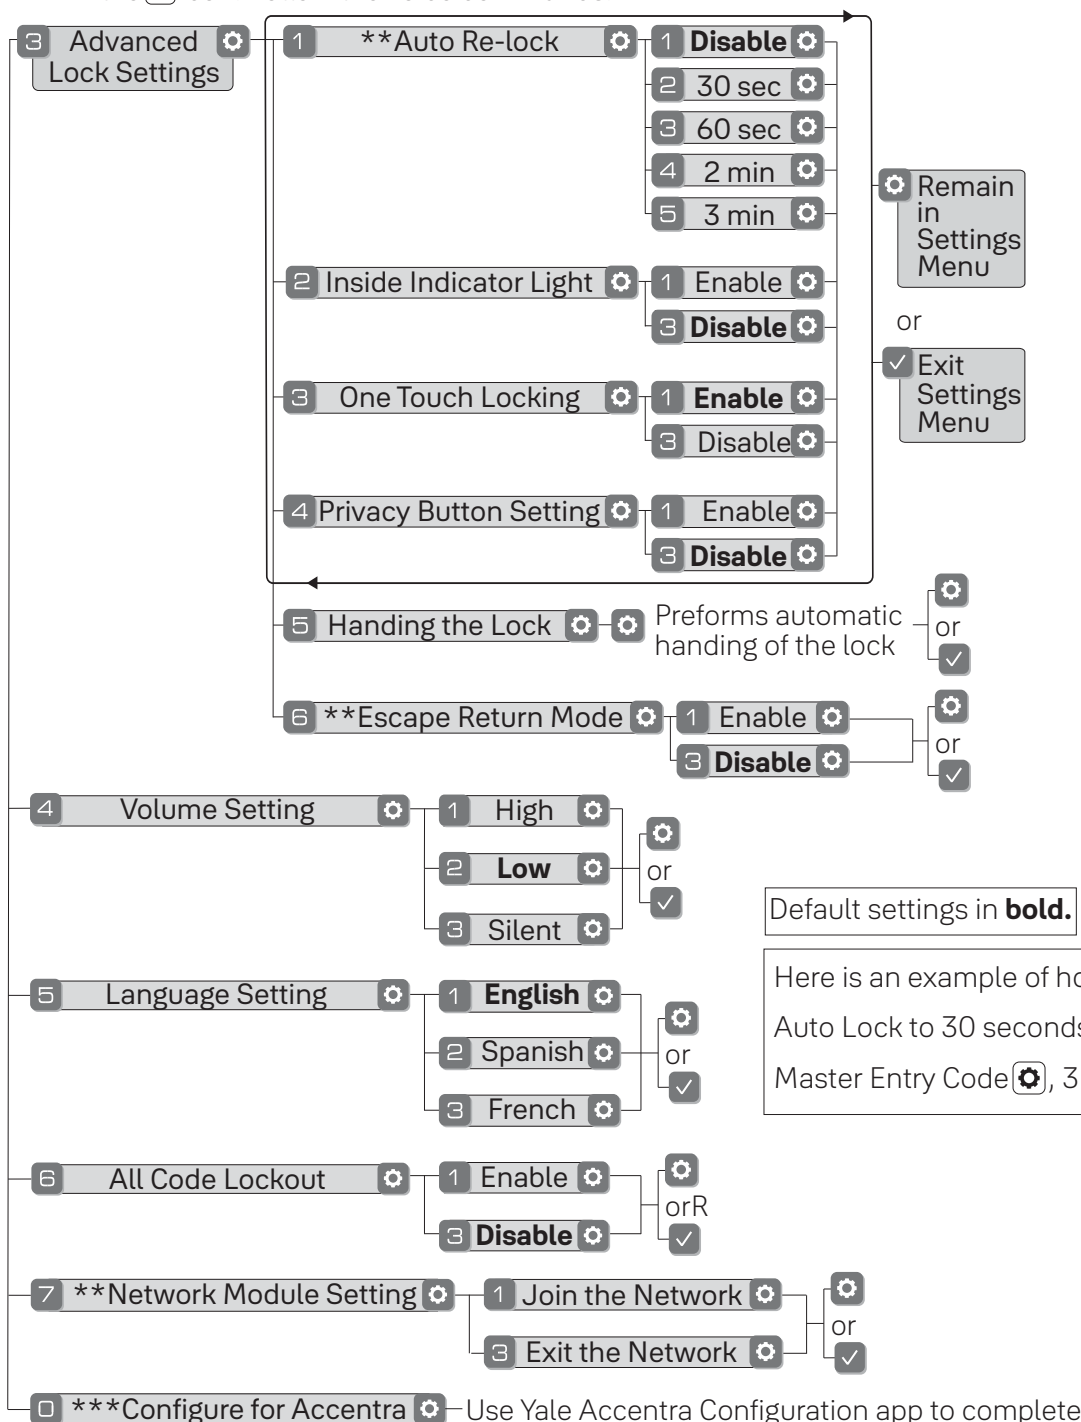







*Master Entry Code must be created prior to any other programming of the lock.

**If Escape Return Mode is enabled, Auto Re-lock cannot be enabled.

***Configuration will disable locking/unlocking via Entry Codes.





Troubleshooting

Symptom	Suggested Action
Lock does not respond – door is open and accessible.	<ul style="list-style-type: none"> Keypad becomes active when the Yale logo is pressed. Verify contact with the logo. If keypad numbers are visible, check they respond when pressed. Check batteries are installed and oriented correctly (polarity) in battery case. Replace batteries* if batteries are dead. Check keypad cable is fully connected and not pinched.
Lock does not respond – door is locked and inaccessible.	<ul style="list-style-type: none"> Batteries may not have enough power. Replace batteries*. Apply a 9V battery to terminals below the keypad for backup power option.
Lock is on for a while then shows no reaction. Lights dim.	<ul style="list-style-type: none"> Batteries do not have enough power. Replace batteries*.
Lock chimes indicating code acceptance, but door will not open.	<ul style="list-style-type: none"> Check for any foreign objects between door and frame. Check that the cable is firmly connected to inside lock.
Lock operates to allow access, but will not automatically re-lock.	<ul style="list-style-type: none"> Check to see if Auto Re-lock is enabled. Disable Auto Re-lock to lock the door (manually).
Entry Codes will not register.	<ul style="list-style-type: none"> If low battery indicator is lit, change batteries*. Entry Codes must consist of 4 to 8 digits. The same Entry Code cannot be used for multiple users. Entry Codes are set by the Master Entry Code, which is set first. Contact the Master user. Entry Codes must be entered within 5 seconds (while keypad is active) or process will have to be restarted. Check  or gear  cannot be part of the Entry Code.
Upon entering an Entry Code and pressing  key, the lock displays "invalid code" error or lock times out without responding.	<ul style="list-style-type: none"> Verify entered code is a valid, previously programmed, 4 to 8 digit code. All Code Lockout is enabled. Only the Master Entry Code can change All Code Lockout. Contact the Master user.
Upon entering an Entry Code and pressing the  key, red padlock icon appears and there are different tones.	<ul style="list-style-type: none"> Check to see if the lock is set to All Code Lockout. Setting/managing All Code Lockout is done through Master Entry Code only.
Lock operates, but makes no sound.	<ul style="list-style-type: none"> Check to see if Volume is set to Silent (see Feature #4).
Lock responds "Low Battery"	<ul style="list-style-type: none"> This is the alert to replace the batteries. Replace all four (4) batteries* with new AA Alkaline batteries.
Upon entering an Entry Code and pressing the  key, lock responds "Wrong number of digits".	<ul style="list-style-type: none"> The digits entered were incorrect or incomplete. Re-enter the correct code followed by the  key.
Lock shows an X on keypad after entering a code.	<ul style="list-style-type: none"> Bolt failed to fully retract. Refer to "Hardware Troubleshooting". Entry Code has not been scheduled for use at time of day it is tried. Try Entry Code again during scheduled time.
Deadbolt does not extend when locking the door with keypad.	<ul style="list-style-type: none"> Lock was not handed properly. Rehand lock through Settings Menu.

* When batteries are replaced, Smart Module locks have a real time clock that will be set through the User Interface. It is recommended to verify correct date and time; particularly those locks operating under Daylight Savings Time.



Hardware Troubleshooting

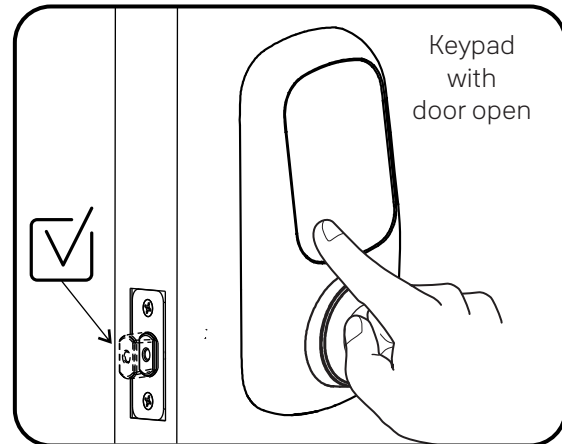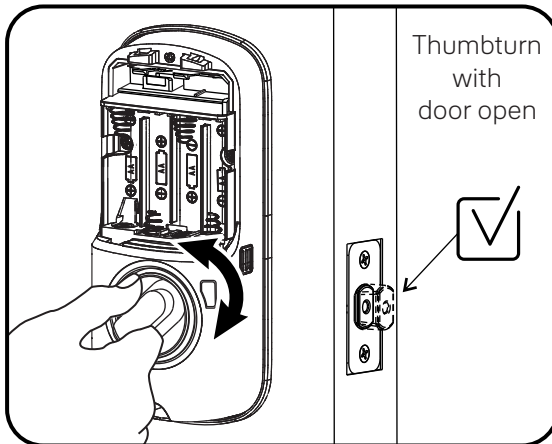


- If deadbolt does not extend or retract easily when testing thumbturn and keypad operation, revisit installation steps. It is important that the bolt be in the retracted position during lock installation and that installation procedure is followed carefully.
- Attempt rehanding using Settings Menu.



Helpful Tip:

Ensuring smooth deadbolt operation can enhance your battery life.

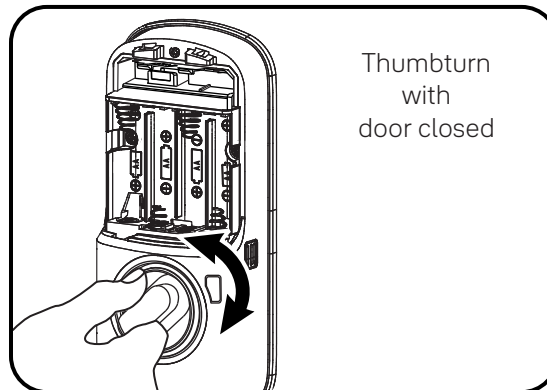


If you feel resistance, ensure deadbolt strike plate aligns with deadbolt. If deadbolt strike plate is out of alignment, please attempt to adjust knob/ lever/ handleset strike using steps below. The knob/ lever/ handleset latch engagement into the strike is the main component used for door alignment.

If deadbolt does not fully extend, consider increasing depth of deadbolt strike pocket in frame.

To adjust Knob/Lever/Handleset strike plate:

1. Remove plate from door frame with a manual screwdriver. (Using an electric driver may strip screw heads or enlarge screw holes.)

2. Locate strike plate tab.
Bend the tab towards surface of strike.
Note: A small change may be all that is required.



3. Reinstall strike plate using a manual screw driver and test again.
4. If door cannot be adjusted sufficiently with strike tab, both knob/lever/handleset latch and deadbolt latch could require adjustment – we suggest you contact a local locksmith for assistance.

For help with misalignments, watch our door alignment video: US.YaleHome.com/en/support/yale-assure-lock-faq/electronic-lock-installation/




Resetting Lock to Factory Defaults

When lock is reset to factory defaults all Entry Codes (including the Master Entry Code*) are deleted and all programming features are reset to original default settings (see below).


1. Remove battery cover and batteries.
2. Remove inside lock to access reset button.
3. Reset button (see image at right) is located beside cable adapter.
4. While pressing reset button reinstall batteries. Hold reset button a minimum of 3 seconds then release.
5. Replace battery cover.

After reset, Master Entry Code creation is the only option available and must be performed prior to any other programming of the lock.

Please use this procedure only when the network primary controller is missing or otherwise inoperable.

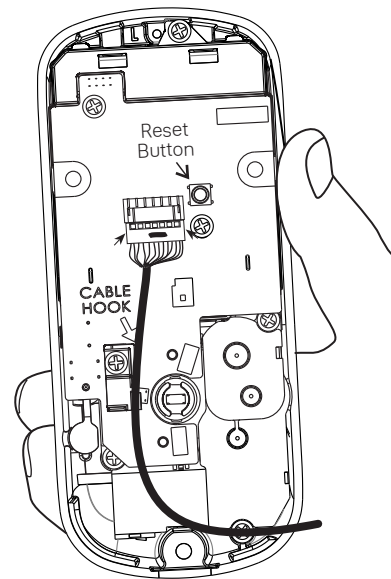

Inside Lock






Replacing Cylinder

1. To Remove cylinder:
 - A. Remove outside lock from door.
 - B. Remove rubber gasket.
 - C. Insert small flathead screwdriver under spring. Gently lift spring. Note: Notch on top of cylinder engages spring.
 - D. Remove cylinder by pulling outward.

Before installing cylinder, be sure tailpiece is correct length (see below).

2. To install new cylinder:
 - A. Reverse previous steps for removing cylinder.

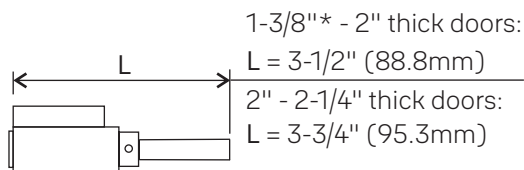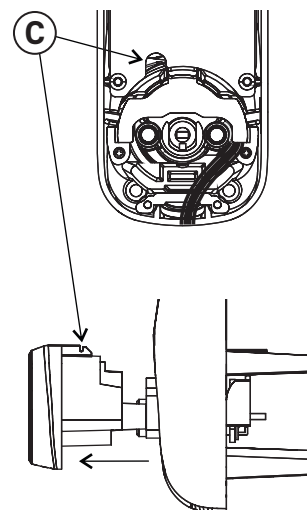

Tailpiece
 $T = .098"$ (2.5mm)
 $W = .2"$ (5.2mm)

*Requires addition of Thin Door Kit.

FCC:

FCC ID : 2ABFG-YRD622BLEV1

Class B Equipment

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful Interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: Changes or modifications to this device, not expressly approved by **Yale Home** could void the user's authority to operate the equipment.

Industry Canada:

IC ID : 11626A-YRD622BLEV1

This Class A digital apparatus meets all requirements of the Canadian Interference Causing Equipment Regulations. Cet appareilage numérique de la classe A répond à toutes les exigences de l'interférence canadienne causant des règlements d'équipement.

Yale Home

24/7 Product Support : 1-855-213-5841 • www.US.YaleHome.com

Yale® and Assure Lock® are registered trademarks of Yale Home. Yale Accentra™ is a trademark of Yale Home. Other products' brand names may be trademarks or registered trademarks of their respective owners and are mentioned for reference purposes only. © Copyright 2020. All rights reserved. Reproduction in whole or in part without the express written permission of Yale Home is prohibited.

Yale Locks

Z-Wave Plus™ System Integrators Guide

Yale Assure Deadbolt Lock

YRD216-ZW2, YRD226-ZW2, YRD256-ZW2, YRC216-ZW2, YRC226-ZW2, YRC256-ZW2,
YRD136-ZW2, YRD137-ZW2, YRD156-ZW2, YRD157-ZW2
NF-YRD612-ZW2, YRD652-ZW2, NF-YRD622-ZW2, YRD622-ZW2, YRD642-ZW2,
NF-YRC612-ZW2, YRC652-ZW2, NF-YRC622-ZW2, YRC622-ZW2, YRC642-ZW2

Contents

Yale Z-Wave Plus Product Info 3

Supported Command Classes 4

Association Table 4

Notifications Table 5

Configurable Parameters 7

* Command Class Requires Security

Yale Z-Wave Plus Product Info

Manufacturer ID: Assa Abloy (0x0129)

Z-Wave Device Type: Door Lock Keypad

Z-Wave Role Type: Listening Sleeping Slave (LSS)

Product ID:

- 0x0600 for older version of Yale Residential Deadbolt Lock
- 0x06D1 for YRD216-ZW2 (Keyed Push Button Deadbolt)
- 0x06D2 for YRD226-ZW2 (Keyed Touch Screen Deadbolt)
- 0x06D5 for YRD256-ZW2 (Keyless Touch Screen Deadbolt)
- 0x06C1 for YRC216-ZW2 (Keyed Interconnected Push Button Deadbolt)
- 0x06C2 for YRC226-ZW2 (Keyed Interconnected Touch Screen Deadbolt)
- 0x06C5 for YRC256-ZW2 (Keyless Interconnected Touch Screen Deadbolt)
- 0x0DD5 for YRD652-ZW2 (2nd Generation Keyless Touch Screen Deadbolt)
- 0x0508 for YRD136-ZW2 and YRD156-ZW2 (Yale Residential PRO SL Deadbolt Lock)
- 0x0DD2 for NF-YRD622-ZW2 (2nd Generation Keyed Touch Screen Deadbolt)
- 0x0DD1 for NF-YRD612-ZW2 (2nd Generation Keyed Push Button Deadbolt)
- 0x0DC5 for YRC652-ZW2 (2nd Generation Keyless Interconnected Touch Screen Deadbolt)
- 0x0DC2 for NF-YRC622-ZW2 (2nd Generation Keyed Interconnected Touch Screen Deadbolt)
- 0x0DC1 for NF-YRC612-ZW2 (2nd Generation Keyed Interconnected Push Button Deadbolt)
- 0x12D2 for YRD622-ZW2 (2nd Generation Fire Rated Keyed Touch Screen Deadbolt)
- 0x12D4 for YRD642-ZW2 (2nd Generation Fire Rated Keyless Touch Screen Deadbolt)
- 0x12C2 for YRC622-ZW2 (2nd Generation Fire Rated Keyed Interconnected Touch Screen Deadbolt)
- 0x12C4 for YRC642-ZW2 (2nd Generation Fire Rated Keyless Interconnected Touch Screen Deadbolt)
- 0x3AD3 for YRD137-ZW2 (2nd Generation Yale Residential PRO SL Push Button Deadbolt Lock)
- 0x3AD5 for YRD157-ZW2 (2nd Generation Yale Residential PRO SL Touch Screen Deadbolt Lock)

Product Type ID:

- 0x8004 for YRC/D216-ZW2 (Push Button Deadbolt)
- 0x8002 for YRC/D226-ZW2 & YRC/D256-ZW2 (Touch Screen Deadbolt)
- 0x803B for YRD136-ZW2 (Push Button PRO SL Deadbolt)
- 0x803A for YRD156-ZW2 (Touch Screen PRO SL Deadbolt)
- 0x8109 for NF-YRC/D622-ZW2 & YRC/D652-ZW2 (2nd Generation Touch Screen Deadbolt)
- 0x810A for NF-YRC/D612-ZW2 (2nd Generation Keyed Push Button Deadbolt)
- 0x8103 for YRC/D622-ZW2 & YRC/D642-ZW2 (2nd Generation Fire Rated Touch Screen Deadbolt)
- 0x810C for YRD137-ZW2 and YRD157-ZW2 (2nd Generation Yale Residential PRO SL Deadbolt Lock)

Supported Command Classes

Command Class Z-Wave Plus Info
Command Class Manufacturer Specific
Command Class Security
Command Class Device Reset Locally
Command Class Power Level
Command Class Version
Command Class Battery*
Command Class Door Lock*
Command Class Door Lock Logging*
Command Class Schedule Entry Lock*
Command Class User Code*
Command Class Time Parameters*
Command Class Time*
Command Class Association*
Command Class Association Group Info*
Command Class Notification*
Command Class Configuration*
Command Class Firmware Update Md*

Association Table

Group ID	Maximum Nodes	Description	Commands
1	1	Lifeline	Command_Class_Battery, Battery_Report ; Command_Class_Notification, Notification_Report; Command_Class_Configuration, Configuration_Report; Command_Class_Device_reset_locally, Device_Reset_locally_notification

Notifications Table

<u>Alarm Reports</u>	<u>Alarm type</u>	<u>Alarm Level</u>	<u>Description</u>
Master Code changed.	0x70	0x00	Master code was changed at keypad
		0xFB	Master code was changed over RF
User added		0x(01-max users)	User added. Alarm level = user slot number
User deleted	0x21	0x(01-max users)	User was deleted. Alarm level = user slot number
Tamper Alarm	0xA1	0x01	keypad attempts exceed code entry limit
		0x02	front escutcheon removed from main
RF Operate Unlock	0x19	0x01	by RF module
Manual Unlock	0x16	0x01	By key cylinder or inside thumb turn
Keypad Unlock	0x13	0x(01-max users)	Where Alarm level represents user slot number (0xFB = Master Code)
Manual Lock	0x15	0x01	by key cylinder or inside thumb-turn
		0x02	by touch function (lock and leave)
		0x03	By inside button
RF Operate Lock	0x18	0x01	by RF module
Keypad Lock	0x12	0x (01 - max users)	Where Alarm level represents user slot number
Non Access	0x26	0x(01-max users)	A Non Access Code was entered at the lock. Where alarm level represents user slot number
Deadbolt Jammed	0x09	0x01	Deadbolt jammed while locking
		0x02	Deadbolt jammed while unlocking
Low Battery Alarms**	0xA9	0x (Current %)	Too Low to operate Starting at 3.8V (0x8002, 0x8004, 0x803B, & 0x803A); 4.2V (0x8109, 0x8103, 0x810A, & 0x810C)
	0xA8	0x (Current %)	Critical Battery Level Starting at 3.9V (0x8002, 0x8004, 0x803B, & 0x803A); 4.4V (0x8109, 0x8103, 0x810A, & 0x810C)
	0xA7	0x (Current %)	Low Battery Starting at 4.0V (0x8002, 0x8004, 0x803B, & 0x803A); 4.6V (0x8109, 0x8103, 0x810A, & 0x810C)
Auto Lock Operate Locked	0x1B	0x01	Auto re-lock cycle complete, locked.

Duplicate Pin-code error	0x71	0x (01-max users)	Where Alarm level represents user slot number Alarm generated in response to add user RF cmd. This alarm is not generated when attempting to add duplicate pin at the keypad. The lock simply denies it and plays the “Denied” . Trying to duplicate the master code will result in a 0x71 0x00 alarm report.
RF Module Power Cycled	0x82	0x00	Power to RFM was restored, sent by RF module. The lock doesn’t send any alarm to the RF module when power is cycled.
Disabled user entered at keypad	0x83	0x(01-max users)	A disabled user pin code was entered at the keypad
Valid user but outside of schedule	0x84	0x(01-max users)	A valid user can be both a normal user and a Non-Access user. If a non-access user is out of schedule this alarm will be sent instead of the non-access alarm.
Daily Repeating Schedule Set/Erased	0x60	0x(01-max users)	Schedule(s) has been set/erased for specified user ID
Daily Repeating Schedule Enabled/Disabled	0x61	0x(01-max users)	Schedule(s) has been enabled/disabled for specified user ID
Year Day Schedule Set/Erased	0x62	0x(01-max users)	Schedule(s) has been set/erased for specified user ID
Year Day Schedule Enabled/Disabled	0x63	0x(01-max users)	Schedule(s) has been enabled/disabled for specified user ID
All Schedule Types Erased	0x64	0x(01-max users)	Schedule(s) has been set/erased for specified user ID
All Schedule Types Enabled/Disabled	0x65	0x(01-max users)	Schedule(s) has been enable/disabled for specified user ID

** - The Yale Assure Deadbolt locks also supports a 3rd low battery alarm, too low to operate. This alarm is sent out as a Battery Report (with value = 0xFF) through the Battery Command Class. This is the last low battery alarm level before the product stops functioning.

Configurable Parameters

<u>Configuration Parameters</u>	<u>Parameter Number</u>	<u>Size</u>	<u>Description</u>
Silent mode on/off	1	1 byte	Level control, 1 = High Volume, 2 = Low Volume, 3 = Silent. Default is 2 or Low Volume
Auto Relock on/off	2	1 byte	0x00 = OFF, 0xFF = ON default is 0x00 or OFF
Auto Relock time	3	1 byte	10 to 180 seconds default is 30 seconds
Wrong Code Entry Limit	4	1 byte	3 to 10 default is 5 times
Language*	5	1 byte	1=English, 2=Spanish, 3=French default is 1= English
Shut down time (after wrong code entries)	7	1 byte	10 to 180 seconds default is 60 seconds
Operating mode	8	1 byte	00 = normal mode (this is the default mode) 01 = vacation mode, keypad lockout 02= privacy mode, no keypad. RF Unlock will work
One Touch Locking	11	1 byte	0x00 = OFF, 0xFF = ON default is 0xFF or ON.
Privacy Button**	12	1 byte	0x00 = OFF, 0xFF = ON default is 0x00 or OFF
Lock Status LED	13	1 byte	0x00 = OFF, 0xFF = ON default is 0x00 or OFF.
Reset To Factory Defaults	15	1 byte	01 = Lock will execute Reset To Factory. No default value
Escape Return Mode***	16	1 byte	0x00 = OFF, 0xFF = ON default is 0x00 or OFF Enables the Escape Return mode of operation for the lock.
Eco Mode On/Off***	21	1 byte	0x00 = OFF, 0xFF = ON default is 0x00 or OFF If supported switches lock to lower power mode of operation with reduced sound and led brightness.

*Only supported by YRC/D226/256/622/642/652 & NF-YRC/D622

**Only supported by YRC/D216/226/256/622/642/652 & NF-YRC/D612/622

***Only supported by YRC/D622/642