


# 650 Series Campus Access Points

## Installation Guide


The Aruba 650 Series Campus access points are high-performance, multi-radio wireless devices that can be deployed in either controller-based (ArubaAOS) or controllerless (InstantOS) network environments. These access points support the 802.11ax standard in the 2.4GHz, 5GHz, and 6GHz bands with a 4x4 MIMO tri-radio Wi-Fi 6E platform. Additionally, 650 Series Campus access points provide dual wired 5Gbps Smart Rate Ethernet network interfaces that enhance their performance and client capacity.

### Hardware Overview


**Figure 1** AP-655 Access Point Front View

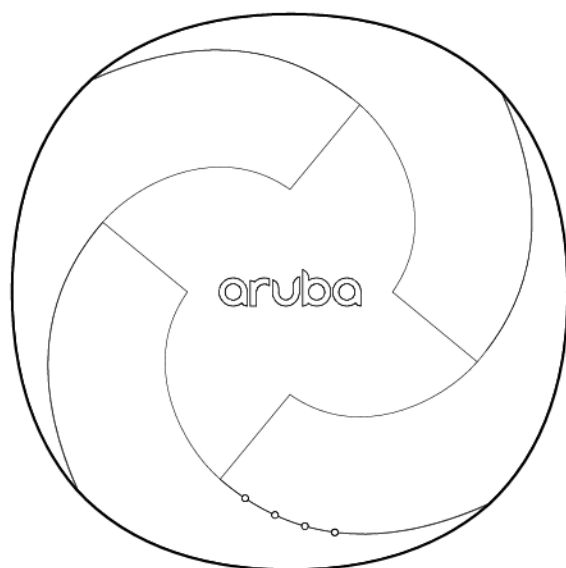

**Figure 2** AP-655 Access Point Side and Rear View

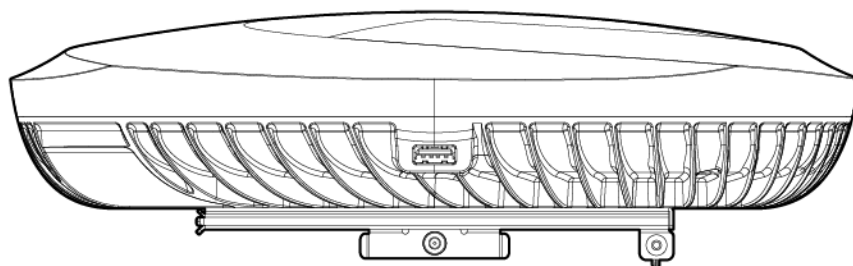

**Figure 3** AP-655 Access Point Bottom View

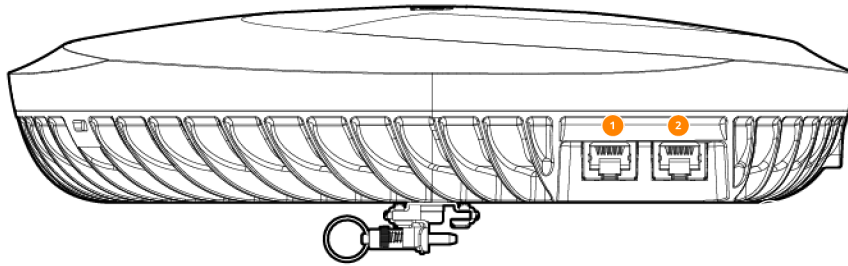

1	E0 Ethernet Port
2	E1 Ethernet Port

## LED

The LED displays located on the front panel of the access point indicate the system status of the access point.

### System Status LED

**Table 1:** System Status LED

Color/State	Meaning
Off	Device Powered off
Green- solid <sup>1</sup>	Device ready, fully functional, no network restrictions
Green- blinking <sup>2</sup>	Device booting, not ready
Green- flashing off <sup>3</sup>	Device ready, fully functional, either uplink negotiated in sub-optimal speed (<1Gbps)
Green- flashing on	Device in deep-sleep mode
Amber- solid	Device ready, restricted power mode (limited PoE power available, or IPM restrictions applied), no network restrictions
Amber- flashing off	Device ready, restricted power mode (limited PoE power available, or IPM restrictions applied), uplink negotiated in sub-optimal speed (<1Gbps)
Red	System error condition - Immediate attention required

1. Blinking: one second on, one second off, 2 seconds cycle.
2. Flashing off: mostly on, fraction of a second off, 2 seconds cycle.
3. Flashing on: mostly off, fraction of a second on, 2 seconds cycle.

### Radio Status LED

**Table 2:** *Radio Status LED*

Color/State	Meaning
Off	Device powered off, or radio disabled
Green- solid	Radio enabled in access (AP) mode
Green- flashing off	Radio enabled in uplink or mesh mode
Amber- solid	Radio enabled in monitor or spectrum analysis mode

## LED Display Settings

The LEDs have three operating modes that can be selected in the system management software:

- Default mode: refer to [Table 1](#) and [Table 2](#).
- Off mode: all LEDs are off
- Blink mode: all LEDs blink green (synchronized)

To force the LEDs into off mode or back to software defined mode, press the reset button for a short duration (less than 10 seconds).

## Bluetooth Low Energy Radios


650 Series access points are equipped with an integrated BLE and 802.15.4 radio that provide the following capabilities:

- location and asset-tracking applications
- wireless console access
- IoT gateway applications

## Console Port

The console port is a Micro-B connector is located on the back of this device. Use the proprietary AP-CBL-SERU cable or AP-MOD-SERU module (sold separately) for direct management of this device when connected to a serial terminal or laptop. For pin-out details, refer to [Figure 4](#).

**Figure 4** *Micro-B Port Pin-out*

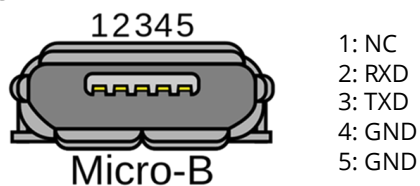


## Ethernet Ports

The 650 Series Campus access points are equipped with two 100/1000/2500/5000 Base-T auto-sensing MDI/MDX wired RJ45 Ethernet ports (E0 and E1). The 2.5 Gbps speed complies with NBase-T and 802.3bz specifications. Both ports are compliant with 802.3ab 1000Base-T Gigabit Ethernet and 802.3az (Energy Efficient Ethernet) standards. Both ports support 802.3af, 802.3at and 802.3bt Power over Ethernet compliance to accept power from a POE source, such as a PoE midspan injector, or a network switch.

The 650 Series access points are equipped with two active Ethernet ports (Eth0 and Eth1) (link to figure). Both ports are 100/1000/2500/5000 Base-T, auto-sensing MDI/MDX, which supports uplink connectivity when linked by an Ethernet cable. Refer to [Figure 5](#) for a detailed port pin-out.

**Figure 5 Ethernet Port Pin-Out**

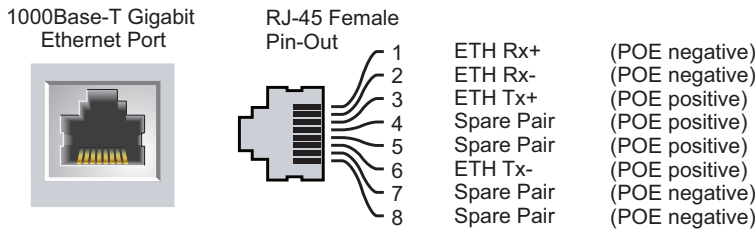

The 650 Series access points are equipped with two Ethernet ports (E0 and E1):

- E0 port: 100/1000/2500Base-T auto-sensing MDI/MDX wired RJ45 network connectivity port
- E1 port: 100/1000Base-T auto-sensing MDI/MDX wired RJ45 network connectivity port


## Kensington Lock Slot

The 650 Series is equipped with a Kensington lock slot for additional physical security.

## USB Interface

The USB 2.0 interface located on the top of the 650 Series is compatible with selected cellular modems and other peripherals. When active, this port can supply up to 5W/1A to a connected device.

**Figure 6 650 Series USB**

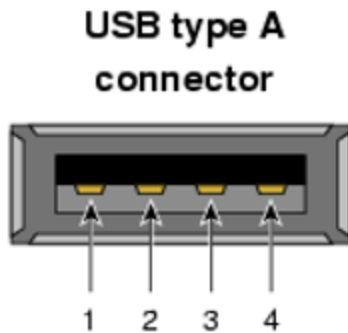

## Reset Button

The reset button located on the bottom of the device can be used to reset the access point to factory default settings or turn off/on the LED display.

Use one of the following methods to reset the access point to factory default settings:

- To reset during normal operation:
  - Hold the reset button for more than 10 seconds while the access point is running.
  - Release the reset button.
- To reset during power up, hold the reset button while the access point is powering up.

The system status LED will flash again within 15 seconds indicating that the reset is completed. The access point will now continue to boot with the factory default settings.

To toggle the LED display between Off and Blinking, during the normal operation of the access point, shortly press and release the reset button using a small, narrow object, such as a paperclip.

## Power

Both Ethernet ports support PoE-in, allowing the AP to draw power from an 802.3at/802.3bt PoE power source. When the AP is powered by both E0 and E1 ports simultaneously, the AP can be configured by management software to source PoE power from either port, or to combine power from both ports.

If PoE is not available, a proprietary AP-AC2-12B power adapter or AP-AC2-48C adapter (sold separately) can be used to power the access point. When both PoE and DC power sources are available, the DC power source takes precedence. In that case, the access point simultaneously draws a minimal current from the PoE source. In the event that the DC source fails, the access point switches to the PoE sources.

The 650 Series access points support the Intelligent Power Monitoring (IPM) feature, to report AP power consumption and enable intelligent management of power-save capabilities.

[Table 3](#) lists operational restrictions when the AP is powered by different power options.

**Table 3: Power Options and Operational Restrictions**

Power Source	IPM	Restrictions
1 x 802.3bt PoE	n/a	No restrictions, all capabilities available.
2 x 802.3at PoE	n/a	No restrictions, all capabilities available.
1 x 802.3at PoE	enabled	AP starts up in unrestricted mode, but may dynamically apply restrictions depending on the PoE budget and actual power.
1 x 802.3at PoE	disabled	Second (other) Ethernet port disabled.
1 x 802.3af PoE	n/a	AP does not start up, red system LED.
DC power	n/a	No restrictions, all capabilities available
PoE 802.3bt	n/a	No restrictions, all capabilities available
PoE 802.3at	disabled	USB disabled (can be overruled in software)
PoE 802.3af	disabled	USB disabled (can be overruled in software), AP in dual radio mode, E1 or E0 disabled (one without PoE or E1), remaining wired port limited to 1Gbps.
PoE 802.3at	enabled	All capabilities available (features may be disabled per IPM configuration)
PoE 802.3af	enabled	All capabilities available (features may be disabled per IPM configuration)

## Before You Begin

Refer to the sections below before beginning the installation process



**FCC Statement:** Improper termination of access points installed in the United States configured to non-US model controllers will be in violation of the FCC grant of equipment authorization. Any such willful or intentional violation may result in a requirement by the FCC for immediate termination of operation and may be subject to forfeiture (47 CFR 1.80).

## Pre-Installation Checklist

Before installing your <series> access points, ensure that you have the following:

- Cat5E or better UTP cable with network access
- A compatible PoE injector with power cord

One of the following network services:

- Aruba Discovery Protocol (ADP)
- DNS server with an "A" record
- DHCP Server with vendor specific options



---

Aruba, in compliance with governmental requirements, has designed the 650 Series access points so that only authorized network administrators can change configuration settings. For more information about AP configuration, refer to the [AP Software Quick Start Guide](#).

---



---

Access points are radio transmission devices and as such are subject to governmental regulation. Network administrators responsible for the configuration and operation of access points must comply with local broadcast regulations. Specifically, access points must use channel assignments appropriate to the location in which the access point will be used.

---

## Identifying Specific Installation Locations

Use the access point placement map generated by Aruba RF Plan software application to determine the proper installation location(s). Each location should be as close as possible to the center of the intended coverage area and should be free from obstructions or obvious sources of interference. These RF absorbers/reflectors/interference sources will impact RF propagation and should be accounted for during the planning phase and adjusted for in RF plan.



---

Use of this equipment adjacent to or stacked with other equipment should be avoided because it could result in improper operation. If such use is necessary, this equipment and the other equipment should be observed to verify that they are operating normally.

---

## Identifying Known RF Absorbers/Reflectors/Interference Sources

Identifying known RF absorbers, reflectors, and interference sources while in the field during the installation phase is critical. Make sure that these sources are taken into consideration when you attach an access point to its fixed location.

RF absorbers include:

- Cement/concrete—Old concrete has high levels of water dissipation, which dries out the concrete, allowing for potential RF propagation. New concrete has high levels of water concentration in the concrete, blocking RF signals.
- Natural Items—Fish tanks, water fountains, ponds, and trees
- Brick

RF reflectors include:

- Metal Objects—Metal pans between floors, rebar, fire doors, air conditioning/heating ducts, mesh windows, blinds, chain link fences (depending on aperture size), refrigerators, racks, shelves, and filing cabinets.
- Do not place an access point between two air conditioning/heating ducts. Make sure that access points are placed below ducts to avoid RF disturbances.

RF interference sources include:

- Microwave ovens and other 2.4 or 5 GHz objects (such as cordless phones)
- Cordless headset such as those used in call centers or lunch rooms

## Access Point Installation



---

All Aruba access points should be professionally installed by an Aruba-Certified Mobility Professional (ACMP). The installer is responsible for ensuring that grounding is available and meets applicable national and electrical codes. Failure to properly install this product may result in physical injury and/or damage to property.

---



---

Tous les points d'accès Aruba doivent impérativement être installés par un professionnel agréé. Ce dernier doit s'assurer que l'appareil est mis à la terre et que le circuit de mise à la terre est conforme aux codes électriques nationaux en vigueur. Le fait de ne pas installer correctement ce produit peut entraîner des blessures corporelles et / ou des dommages matériels.

---



---

For indoor use only. The access point, AC adapter, and all connected cables are not to be installed outdoors. This stationary device is intended for stationary use in partly temperature controlled weather-protected environments (class 3.2 per ETSI 300 019).

---

## Software

Aruba 650 Series requires ArubaOS or Aruba Instant 8.8 or later. For instructions on choosing operating modes and initial software configuration, refer to the [AP Software Quick Start Guide](#).



---

Aruba access points are classified as radio transmission devices, and are subject to government regulations of the host country. The network administrator(s) is/are responsible for ensuring that configuration and operation of this equipment is in compliance with their country's regulations. For a complete list of approved channels in your country, refer to the Aruba Downloadable Regulatory Table at <https://www.arubanetworks.com/techdocs/DRT/Default.htm>.

---

## Verifying Post-Installation Connectivity

The integrated LEDs on the access point can be used to verify that the access point is receiving power and initializing successfully (see Table 1 and Table 2). Refer to the **AP Software Quick Start Guide** for further details on verifying post-installation network connectivity.

## Electrical and Environmental Specifications

### Electrical

- Ethernet
  - E0: 100/1000/2500Base-T auto-sensing Ethernet RJ-45 Interfaces
  - E1: 100/1000Base-T auto-sensing Ethernet RJ-45 Interfaces
  - Power over Ethernet (IEEE 802.3at and 802.3bt compliant)



---

If a power adapter other than the Aruba-approved adapter is used in the US or Canada, it should be NRTL listed, with an output rated 48V DC, minimum 0.75A, marked "LPS" and "Class 2," and suitable for plugging into a standard power receptacle in the US and Canada.

---

### Environmental

- Operating
  - Temperature: 0°C to +50°C (+32°F to +122°F)

- Humidity: 5% to 93% non-condensing
- Storage
  - Temperature: -40°C to 70°C (-40°F to 158°F)
  - Humidity: 5% to 93% non-condensing

## Regulatory Model Number

For the purpose of regulatory compliance certifications and identification, this product has been assigned a unique regulatory model number (RMN). The regulatory model number can be found on the product nameplate label, along with all required approval markings and information. When requesting compliance information for this product, always refer to this regulatory model number. The regulatory model number RMN is not the marketing name or model number of the product.

The following regulatory model numbers apply to the 650 Series

- AP-655 RMN: APIN655

## Safety and Regulatory Compliance




---

**RF Radiation Exposure Statement:** This equipment complies with RF radiation exposure limits. This equipment should be installed and operated with a minimum distance of 13.78 inches (35cm) between the radiator and your body for 2.4 GHz and 5 GHz operations. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

---




---

Déclaration e la concernant l'exposition aux rayonnements à fréquence radioélectrique (FR): Cet appareil est conforme aux limites d'exposition aux rayonnements FR établies par la FCC. Il doit être installé et utilisé à une distance minimale de 35 cm (13,78 pouces) entre le radiateur et votre corps, qu'il opère sur la bande 2,4 GHz ou 5 GHz. Cet émetteur ne doit pas être installé ou utilisé à proximité immédiate d'une autre antenne ni d'un autre transmetteur.

---




---

The device could automatically discontinue transmission in case of absence of information to transmit, or operational failure. Note that this is not intended to prohibit transmission of control or signaling information or the use of repetitive codes where required by the technology.

---




---

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

---




---

Toute modification effectuée sur cet équipement sans l'autorisation expresse de la partie responsable de la conformité est susceptible d'annuler son droit d'utilisation.

---

## United States

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the manufacturer's instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.



- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio or TV technician for help.

Improper termination of access points installed in the United States configured to a non-US model controller is a violation of the FCC grant of equipment authorization. Any such willful or intentional violation may result in a requirement by the FCC for immediate termination of operation and may be subject to forfeiture (47 CFR 1.80).




---

FCC regulations restrict the operation of this device to indoor use only.

---




---

The operation of this device is prohibited on oil platforms, cars, trains, boats, and aircraft, except that operation of this device is permitted in large aircraft while flying above 10,000 feet.

---




---

Operation in the 5.9725-7.125GHz band is prohibited for control of or communication with unmanned aircraft systems

---

## Industry Canada

This Class B digital apparatus meets all of the requirements of the Canadian Interference-Causing Equipment Regulations.

In accordance with Industry Canada regulations, this radio transmitter and receiver may only be used with an antenna, the maximum type and gain of which must be approved by Industry Canada. To reduce potential radio interference, the type of antenna and its gain shall be chosen so that the equivalent isotropic radiated power (EIRP) does not exceed the values necessary for effective communication.

This device complies with Industry Canada's license-exempt RSS regulations. Operation of this device is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation.

When operated in 5.15 to 5.25 GHz frequency range, this device is restricted to indoor use to reduce the potential for harmful interference with co-channel Mobile Satellite Systems.

### Déclaration d'Industrie Canada

Ce périphérique est conforme aux règlements RSS exempts de licence d'Industrie Canada. L'utilisation de ce périphérique est soumise aux deux conditions suivantes : (1) ce périphérique ne doit pas provoquer d'interférences, et (2) ce périphérique doit accepter toute interférence, y compris les interférences susceptibles de provoquer un dysfonctionnement.

En cas d'utilisation dans la plage de fréquences de 5,15 à 5,25 GHz, cet appareil doit uniquement être utilisé en intérieur afin de réduire les risques d'interférence avec les systèmes satellites mobiles partageant le même canal.

## EU Regulatory Conformance

The Declaration of Conformity made under Radio Equipment Directive 2014/53/EU is available for viewing at: [www.hpe.com/eu/certificates](http://www.hpe.com/eu/certificates). Select the document that corresponds to your device's model number as it is indicated on the product label.

Compliance is only assured if the Aruba approved accessories as listed in the ordering guide are used.

[https://www.arubanetworks.com/assets/og/OG\\_650Series.pdf](https://www.arubanetworks.com/assets/og/OG_650Series.pdf).

### Wireless Channel Restrictions

5150-5350MHz band is limited to indoor only in the following countries; Austria (AT), Belgium (BE), Bulgaria (BG), Croatia (HR), Cyprus (CY), Czech Republic (CZ), Denmark (DK), Estonia (EE), Finland (FI), France (FR),

Germany (DE), Greece (GR), Hungary (HU), Iceland (IS), Ireland (IE), Italy (IT), Latvia (LV), Liechtenstein (LI), Lithuania (LT), Luxembourg (LU), Malta (MT), Netherlands (NL), Norway (NO), Poland (PL), Portugal (PT), Romania (RO), Slovakia (SK), Slovenia (SL), Spain (ES), Sweden (SE), Switzerland (CH), Turkey (TR), United Kingdom (UK) (NI).

Radio	Frequency Range MHz	Max EIRP
BLE/Zigbee	2402-2480	9 dBm
	2412-2472	20 dBm
	5150-5250	23 dBm
Wi-Fi	5250-5350	23 dBm
	5470-5725	30 dBm
	5725-5850	14 dBm



---

Lower power radio LAN product operating in 2.4 GHz and 5 GHz bands. Please refer to the ArubaOS User Guide/Instant User Guide for details on restrictions.

---

## Medical

1. Equipment not suitable for use in the presence of flammable mixtures.
2. Connect to only IEC 60950-1 or IEC 60601-1 certified products and power sources. The end user is responsible for the resulting medical system complies with the requirements of IEC 60601-1.
3. Wipe with a dry cloth, no additional maintenance required.
4. No serviceable parts, the unit must be sent back to the manufacturer for repair.
5. No modifications are allowed without Aruba approval.

## Brazil

Este equipamento não tem direito à proteção contra interferência prejudicial e não pode causar interferência em sistemas devidamente autorizados.

## Japan

ご使用になっている装置に VCCI マークが付いていましたら、次の説明文をお読み下さい。

この装置は、クラス B 情報技術装置です。この装置は、家庭環境で使用することを目的としていますが、この装置がラジオやテレビジョン受信機に近接して使用されると、受信障害を引き起こすことがあります。取扱説明書に従って正しい取り扱いをして下さい。

VCCI-B

## México

La operación de este equipo está sujeta a las siguientes dos condiciones: (1) es posible que este equipo o dispositivo no cause interferencia perjudicial y (2) este equipo o dispositivo debe aceptar cualquier interferencia, incluyendo la que pueda causar su operación no deseada.

## Нормативные требования Евразийского Экономического Союза

### Russia



HPE Russia: ООО "Хьюлетт Паккард Энтерпрайз" Российская Федерация, 125171, г. Москва, Ленинградское шоссе, 16А, стр.3, Телефон: +7 499 403 4248 Факс: +7 499 403 4677

'HPE Kazakhstan': ТОО «Хьюлетт-Паккард (К)», Республика Казахстан, 050040, г. Алматы, Бостандыкский район, проспект Аль-Фараби, 77/7, Телефон/факс: + 7 727 355 35 50

### Kazakhstan

ЖШС "Хьюлетт Паккард Энтерпрайз" Ресей Федерациясы, 125171, Мәскеу, Ленинград тас жолы, 16А блок 3, Телефон: +7 499 403 4248 Факс: +7 499 403 4677

ЖШС «Хьюлетт-Паккард (К)», Қазақстан Республикасы, 050040, Алматы қ., Бостандық ауданы, Әл-Фараби даңғылы, 77/7, Телефон/факс: +7 (727) 355 35 50

## Ukraine

Hereby, Hewlett Packard Enterprise Company declares that the radio equipment type [The Regulatory Model Number [RMN] for this device can be found in the [Regulatory Model Number](#) section of this document] is in compliance with Ukrainian Technical Regulation on Radio Equipment, approved by resolution of the CABINET OF MINISTERS OF UKRAINE dated May 24, 2017, No. 355. The full text of the UA declaration of conformity is available at the following internet address: <https://certificates.ext.hpe.com/public/certificates.html>.

Х'ЮЛЕТТ ПАКАРД ЕНТЕРПРАЗ, 6280 АМЕРИКА ЦЕНТР Д-Р, САН-ХОСЕ, КАЛІФОРНІЯ 95002, США

## Taiwan

### 第十二條

經型式認證合格之低功率射頻電機，非經許可，公司，商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

### 第十四條

低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。

前項合法通信，指依電信法規定作業之無線電通信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

1. 應避免影響附近雷達系統之操作。
2. 高增益指向性天線只得應用於固定式點對點系統
3. 電磁波暴露量 MPE 標準值 1 mW/cm<sup>2</sup>, 送測產品實測值為 : 0.97mW/cm<sup>2</sup>

# Contacting Support

**Table 4:** *Contact Information*

Main Site	<a href="https://www.arubanetworks.com">https://www.arubanetworks.com</a>
Support Site	<a href="https://asp.arubanetworks.com">https://asp.arubanetworks.com</a>
Airheads Social Forums and Knowledge Base	<a href="https://community.arubanetworks.com">https://community.arubanetworks.com</a>
North American Telephone	1-800-943-4526 (Toll Free) 1-408-754-1200
International Telephone	<a href="https://arubanetworks.com/support-services/contact-support/">https://arubanetworks.com/support-services/contact-support/</a>
Software Licensing Site	<a href="https://hpe.com/networking/support">https://hpe.com/networking/support</a>
End-of-life Information	<a href="https://www.arubanetworks.com/support-services/end-of-life/">https://www.arubanetworks.com/support-services/end-of-life/</a>
Security Incident Response Team	<a href="https://www.arubanetworks.com/support-services/security-bulletins/">https://www.arubanetworks.com/support-services/security-bulletins/</a> Email: <a href="mailto:sirt@arubanetworks.com">sirt@arubanetworks.com</a>

## Copyright

© Copyright 2021 Hewlett Packard Enterprise Development LP.

## Open Source Code

This product includes code licensed under the GNU General Public License, the GNU Lesser General Public License, and/or certain other open source licenses.

A complete machine-readable copy of the source code corresponding to such code is available upon request. This offer is valid to anyone in receipt of this information and shall expire three years following the date of the final distribution of this product version by Hewlett Packard Enterprise Company.

To obtain such source code, send a check or money order in the amount of US \$10.00 to:

Hewlett Packard Enterprise Company  
Attn: General Counsel  
6280 America Center Drive  
San Jose, CA 94089  
USA

## Warranty

This hardware product is protected by an Aruba warranty. For more details, visit [www.hpe.com/us/en/support.html](http://www.hpe.com/us/en/support.html)