



CERTIFICATION TEST REPORT

Report Number. : 4790541040-E8V2

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-S916B/DS,SM-S916B

FCC ID : A3LSMS916B

EUT Description : GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax,
NFC, WPT and UWB..

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:

2022-11-08

Prepared by:

UL Korea, Ltd.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2022-10-25	Initial issue	Yeonhee Lim
V2	2022-10-25	Updated to address TCB's Question	Yeonhee Lim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	6
4.2. <i>SAMPLE CALCULATION</i>	6
4.3. <i>MEASUREMENT UNCERTAINTY</i>	6
4.4. <i>DECISION RULE</i>	6
5. EQUIPMENT UNDER TEST	7
5.1. <i>DESCRIPTION OF EUT</i>	7
5.2. <i>MAXIMUM E-FIELD STRENGTH</i>	7
5.3. <i>WORST-CASE CONFIGURATION AND MODE</i>	7
5.4. <i>DESCRIPTION OF TEST SETUP</i>	8
6. 20dB BANDWIDTH	10
7. RADIATED EMISSION TEST RESULTS.....	11
7.1. <i>LIMITS AND PROCEDURE</i>	11
7.1.1. <i>FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz)</i>	13
7.1.2. <i>SPURIOUS EMISSION 0.009 TO 30 MHz</i>	14
7.1.3. <i>TX SPURIOUS EMISSION 30 TO 1000 MHz</i>	15
7.1.4. <i>FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz) [EUT with passive TAG mode]</i>	16
7.1.5. <i>SPURIOUS EMISSION 0.09 TO 30 MHz [EUT with passive TAG mode]</i>	17
7.1.6. <i>TX SPURIOUS EMISSION 30 TO 1000 MHz [EUT with passive TAG mode]</i>	18
8. AC MAINS LINE CONDUCTED EMISSIONS.....	19
9. FREQUENCY STABILITY	22

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, NFC, WPT and UWB.
MODEL NUMBER: SM-S916B/DS, SM-S916B
SERIAL NUMBER: R3CT90EY0BV (Radiated),
DATE TESTED: 2022-09-28 ~ 2022-10-24;

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



Seokhwan Hong
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Yeonhee Lim
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. ANSI C63.10-2013.
4. KDB 414788 D01 Radiated Test Site v01r01

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input type="checkbox"/>	Chamber 1(3m semi-anechoic chamber)
<input checked="" type="checkbox"/>	Chamber 2(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 3(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 4(3m Full-anechoic chamber)
<input type="checkbox"/>	Chamber 5(3m Full-anechoic chamber)

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

$$\begin{aligned} \text{Corrected Reading (dBuV)} &= \text{Meter Reading (dBuV)} + \text{External Cable (dB)} + \\ &\text{Cableloss (dB)} \\ 46.62 \text{ dBuV} + 9.8 \text{ dB} + 0.1 \text{ dB} &= 56.52 \text{ dBuV} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.02 dB
Radiated Disturbance, 9 kHz to 30 MHz	1.72 dB
Radiated Disturbance, 30 MHz to 1 GHz	4.05 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedure 2, Clause 4.4.3 in IEC Guide 115:2007.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax and NFC, WPT and UWB. This test report addresses the DXX (NFC) operational mode.

This report covers the Samsung models SM-S916B/DS and SM-S916B. These models are identical in hardware except SM-S916B has single SIM tray. With some pre-scan, model SM-S916B/DS was set for final test.

5.2. MAXIMUM E-FIELD STRENGTH

The testing was performed at 3 meter. The transmitter maximum E-field at 30m distance is 15.76 dBuV/m which convert from 3 meter data.

5.3. WORST-CASE CONFIGURATION AND MODE

The NFC function was tested at its' fundamental and only operational frequency of 13.56 MHz.

The NFC with tag mode's fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that the Z orientation was the worst-case orientation; therefore radiated testing was reported with the EUT in the Z orientation while generating continuous emissions.

The NFC without tag mode's fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that the Z orientation was the worst-case orientation; therefore radiated testing was reported with the EUT in the Z orientation while generating continuous emissions.

The fundamental level of the EUT was investigated each type and bitrate. All test was performed worst case condition(type A and bit rate 106 kbps).

Radiated(fundamental level and spurious emissions) tests were performed both without reading a passive tag condition[test mode] and with reading a passive tag condition.

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37R38J4A28SE3	N/A
Data Cable	SAMSUNG	EP-DN980	GH39-02111ABBE	N/A


I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A

The EUT is a stand-alone device configured and tested in a worst-case setup.

Note: Worst case is using worst case orientation with AC charger attached to the EUT with NFC signal continuously transmitting.

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

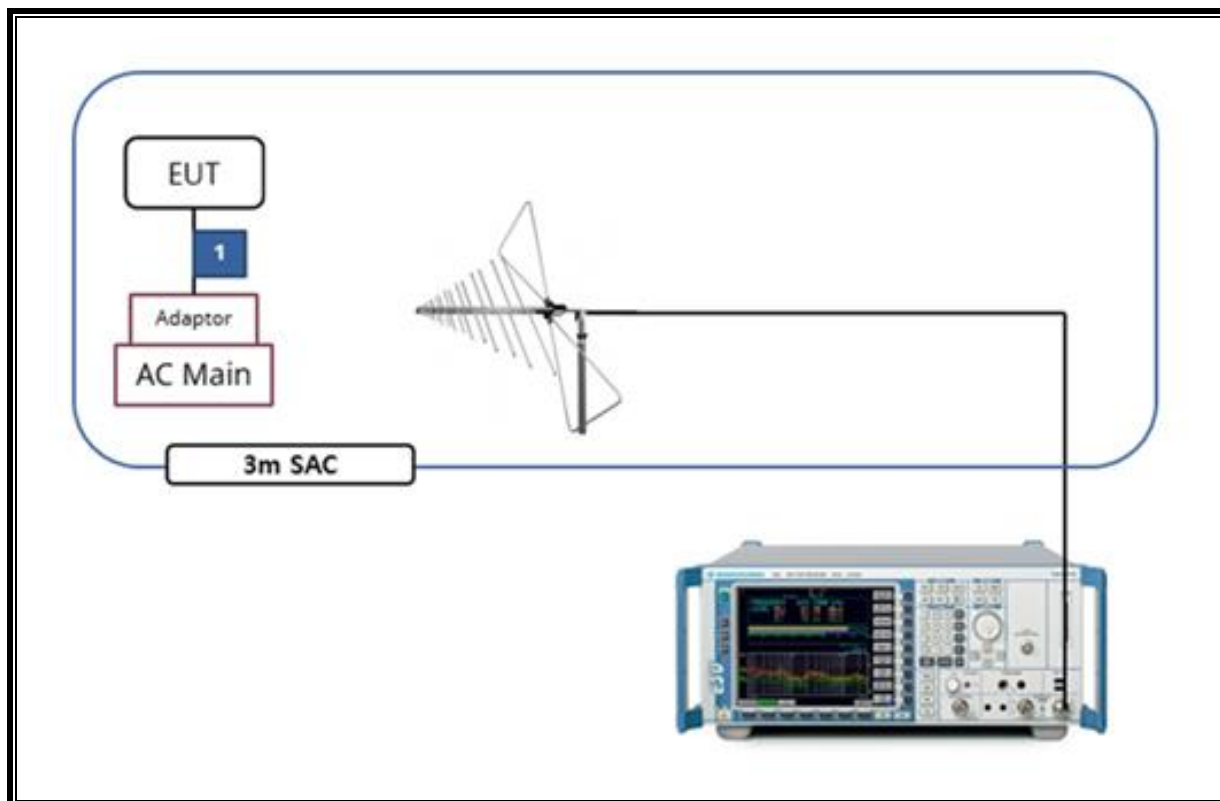

TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	2024-08-15
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	2024-08-15
Preamplifier, 1000 MHz	Sonoma	310N	341282	2023-08-02
Preamplifier, 1000 MHz	Sonoma	310N	351741	2023-08-02
Spectrum Analyzer, 7 GHz	Agilent / HP	N9010A	MY54200580	2023-08-01
EMI Test Receive, 3 GHz	R&S	ESR3	101832	2023-08-01
DC Power Supply	Agilent / HP	E3640A	MY54226395	2023-08-02
Temperature Chamber	ESPEC	SH-642	93001109	2023-08-01
LISN	R&S	ENV216	101837	2023-08-04
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	2023-10-06
Spectrum Analyzer	R&S	FSW50	101538	2023-01-18
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

6. 20dB BANDWIDTH

LIMITS

§15.215

(c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated

§15.225

Operation within the band 13.110 – 14.010MHz


TEST PROCEDURE

The spectrum analyzer connected receive antenna and the EUT placed on near the receive antenna. The RBW is set to 10kHz. The VBW is set to 3 times the RBW. The sweep time is coupled.

RESULTS

Frequency [MHz]	20 dB Bandwidth [kHz]
13.56	437.28

20dB Bandwidth Plot

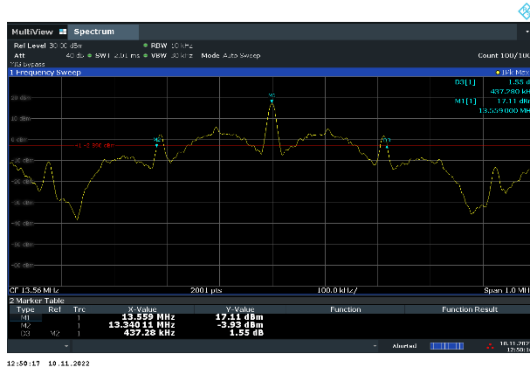

7. RADIATED EMISSION TEST RESULTS

7.1. LIMITS AND PROCEDURE

LIMIT

§15.225

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110– 14.010 MHz and shall not exceed the general radiated emission limits in § 15.209 as follows:

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

Formula for converting the filed strength from uV/m to dBuV/m is:

Limit (dBuV/m) = 20 log limit (uV/m)

In addition:

§15.209 (d) The emission limits shown the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

§15.209 (d) The provisions in §§ 15.225, measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

TEST PROCEDURE


ANSI C63.10-2013

The EUT is an intentional radiator that incorporates a digital device. The highest fundamental frequency generated or used in the device is 13.56 MHz. The frequency range was investigated from 0.15 MHz to the 10th harmonic of the highest fundamental frequency, or 1000 MHz, whichever is greater (1000MHz)

RESULTS

No non-compliance noted:

7.1.1. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz) [EUT without passive TAG mode]

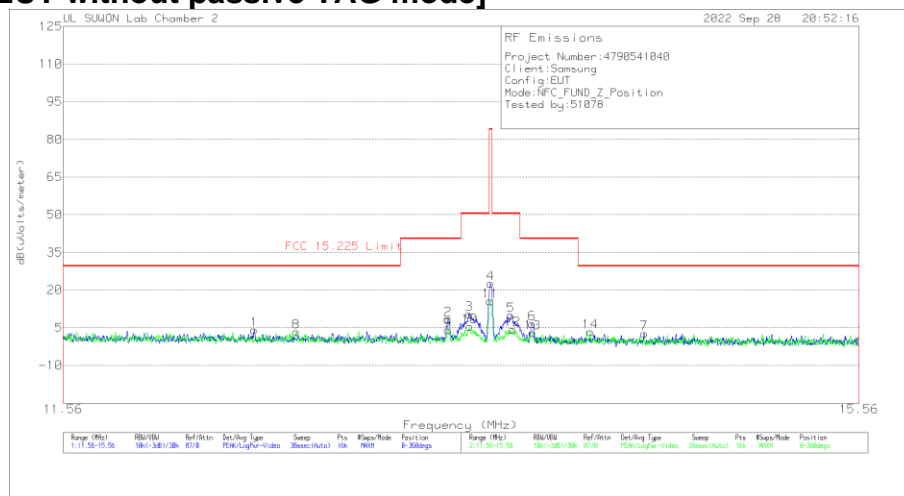

Trace Markers Face on

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Dist Corr 30m	Cable Loss	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	Margin (dB)	Azimuth (Degs)
1	12.41513	23.62	Pk	20	-40	.5	4.12	29.54	-25.42	0-360
2	13.34638	27.72	Pk	20	-40	.5	8.22	40.51	-32.29	0-360
3	13.45363	29.92	Pk	20	-40	.5	10.42	50.5	-40.08	0-360
**4	13.56038	42.09	Pk	20	-40	.5	22.59	84	-61.41	0-360
5	13.66388	29.43	Pk	20	-40	.6	10.03	50.5	-40.47	0-360
6	13.77225	26.05	Pk	20	-40	.6	6.65	40.51	-33.86	0-360
7	14.36063	22.1	Pk	20	-40	.6	2.7	29.54	-26.84	0-360

Face off

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Dist Corr 30m	Cable Loss	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	Margin (dB)	Azimuth (Degs)
8	12.61213	22.91	Pk	20	-40	.5	3.41	29.54	-26.13	0-360
9	13.34713	23.66	Pk	20	-40	.5	4.16	40.51	-36.35	0-360
10	13.45475	24.9	Pk	20	-40	.5	5.4	50.5	-45.1	0-360
**11	13.55913	35.12	Pk	20	-40	.5	15.62	84	-68.38	0-360
12	13.67238	23.68	Pk	20	-40	.6	4.28	50.5	-46.22	0-360
13	13.77563	22.39	Pk	20	-40	.6	2.99	40.51	-37.52	0-360
14	14.07513	22.82	Pk	20	-40	.6	3.42	29.54	-26.12	0-360


Pk - Peak detector
 **Fundamental

Note 1 : Although these tests were performed other than open filed test site, adequate comparison measurements were confirmed against 30 m open are test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

7.1.2. SPURIOUS EMISSION 0.009 TO 30 MHz [EUT without passive TAG mode]

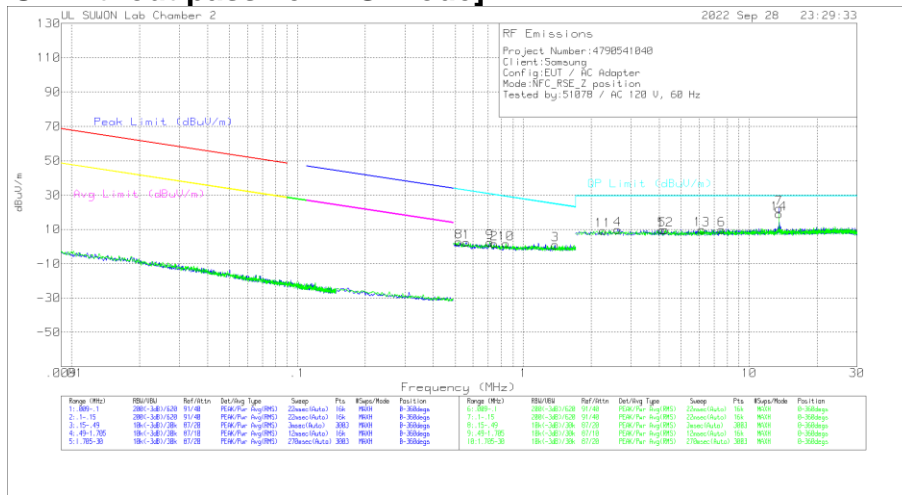

Trace Markers

Face on

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	.55943	22.73	Pk	19.7	.1	-40	2.53	32.65	-30.12	0-360
2	.74357	21.89	Pk	19.7	.1	-40	1.69	30.19	-28.5	0-360
3	1.38304	20.97	Pk	19.8	.2	-40	.97	24.81	-23.84	0-360
4	2.61923	29.77	Pk	19.9	.3	-40	9.97	29.5	-19.53	0-360
5	4.1178	29.56	Pk	19.8	.3	-40	9.66	29.5	-19.84	0-360
6	7.5485	29.51	Pk	19.9	.4	-40	9.81	29.5	-19.69	0-360
**7	13.56165	41.9	Pk	20	.5	-40	22.4	29.5	-7.1	0-360

Face off

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
8	.51801	23	Pk	19.7	.1	-40	2.8	33.32	-30.52	0-360
9	.7112	22.59	Pk	19.7	.1	-40	2.39	30.57	-28.18	0-360
10	.83736	21.7	Pk	19.8	.2	-40	1.7	29.16	-27.46	0-360
11	2.25165	29.17	Pk	19.9	.2	-40	9.27	29.5	-20.23	0-360
12	4.25918	29.62	Pk	19.8	.3	-40	9.72	29.5	-19.78	0-360
13	6.16303	29.8	Pk	19.8	.4	-40	10	29.5	-19.5	0-360
**14	13.56165	38.44	Pk	20	.5	-40	18.94	29.5	-10.56	0-360

Pk - Peak detector

**Fundamental

Note 1: The data for marker number 7 and 14 are the fundamental signal.


Please refer to section 8.1.1 about the fundamental level.

Frequency range 0.009MHz ~ 0.490MHz, only noise floor level and more than 20dB margin.


Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

7.1.3. TX SPURIOUS EMISSION 30 TO 1000 MHz [EUT without passive TAG mode]

HORIZONTAL

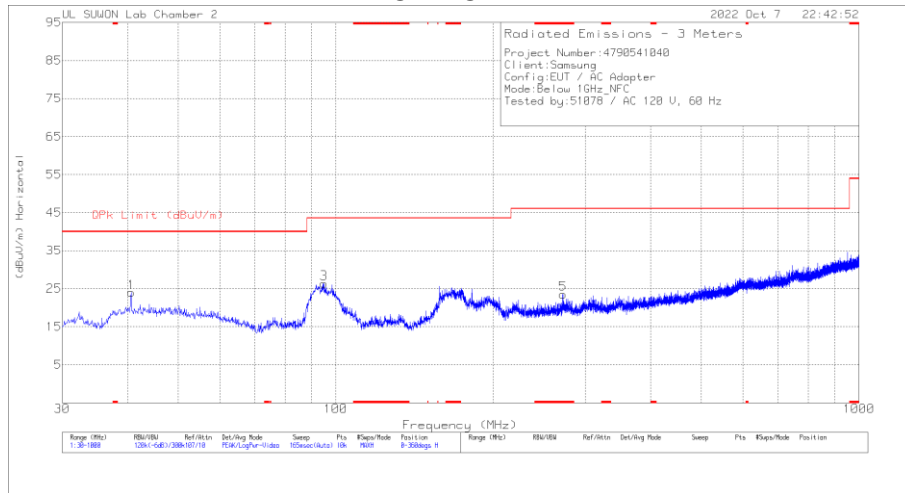

VERTICAL

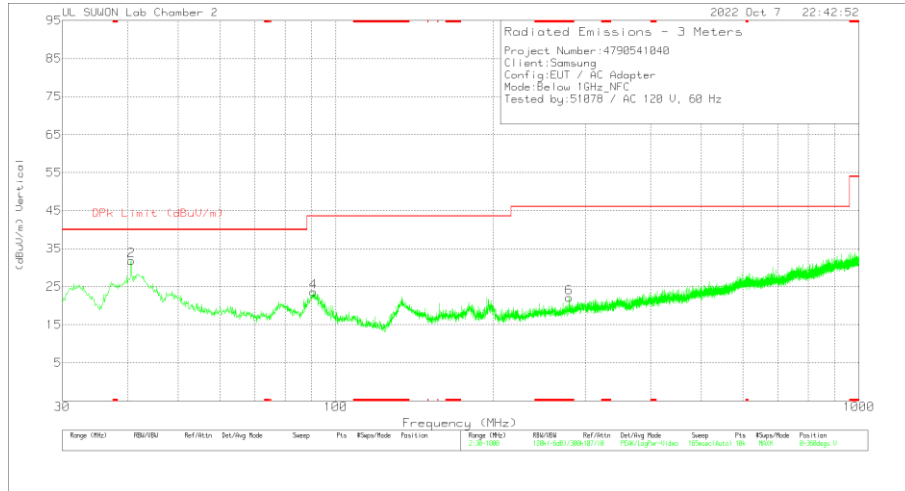


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163_749	Below 1G[dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	40.67	36.51	Pk	18.9	-31.4	24.01	40	-15.99	0-360	200	H
3	94.893	40.42	Pk	16.6	-30.6	26.42	43.52	-17.1	0-360	200	H
5	* 272.112	34.26	Pk	18.4	-29.1	23.56	46.02	-22.46	0-360	100	H
2	40.67	44.35	Pk	18.9	-31.4	31.85	40	-8.15	0-360	100	V
4	90.625	38.29	Pk	16	-30.7	23.59	43.52	-19.93	0-360	100	V
6	* 279.193	32.63	Pk	18.7	-29.2	22.13	46.02	-23.89	0-360	100	V

Pk - Peak detector

7.1.4. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz) [EUT with passive TAG mode]

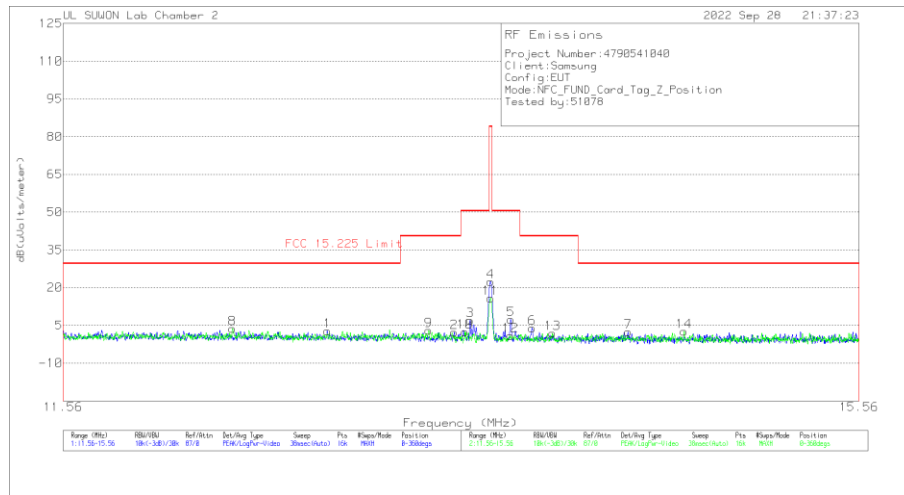

Trace Markers
 Face on

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Dist Corr 30m	Cable Loss	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	Margin (dB)	Azimuth (Degs)
1	12.75788	22.27	Pk	20	-40	.5	2.77	29.54	-26.77	0-360
2	13.37813	21.73	Pk	20	-40	.5	2.23	40.51	-38.28	0-360
3	13.45713	26.47	Pk	20	-40	.5	6.97	50.5	-43.53	0-360
**4	13.56	41.95	Pk	20	-40	.5	22.45	84	-61.55	0-360
5	13.66288	26.68	Pk	20	-40	.6	7.28	50.5	-43.22	0-360
6	13.77163	23.37	Pk	20	-40	.6	3.97	40.51	-36.54	0-360
7	14.27513	21.82	Pk	20	-40	.6	2.42	29.54	-27.12	0-360

Face off

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Dist Corr 30m	Cable Loss	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	Margin (dB)	Azimuth (Degs)
8	12.315	23.2	Pk	20	-40	.5	3.7	29.54	-25.84	0-360
9	13.25088	22.41	Pk	20	-40	.5	2.91	40.51	-37.6	0-360
10	13.43088	21.84	Pk	20	-40	.5	2.34	50.5	-48.16	0-360
**11	13.56063	35.37	Pk	20	-40	.5	15.87	84	-68.13	0-360
12	13.66188	20.28	Pk	20	-40	.6	.88	50.5	-49.62	0-360
13	13.87713	21.17	Pk	20	-40	.6	1.77	40.51	-38.74	0-360
14	14.577	21.97	Pk	20	-40	.6	2.57	29.54	-26.97	0-360


Pk - Peak detector
 **Fundamental

Note 1: Although these tests were performed other than open filed test site, adequate comparison measurements were confirmed against 30 m open are test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

7.1.5. SPURIOUS EMISSION 0.09 TO 30 MHz [EUT with passive TAG mode]

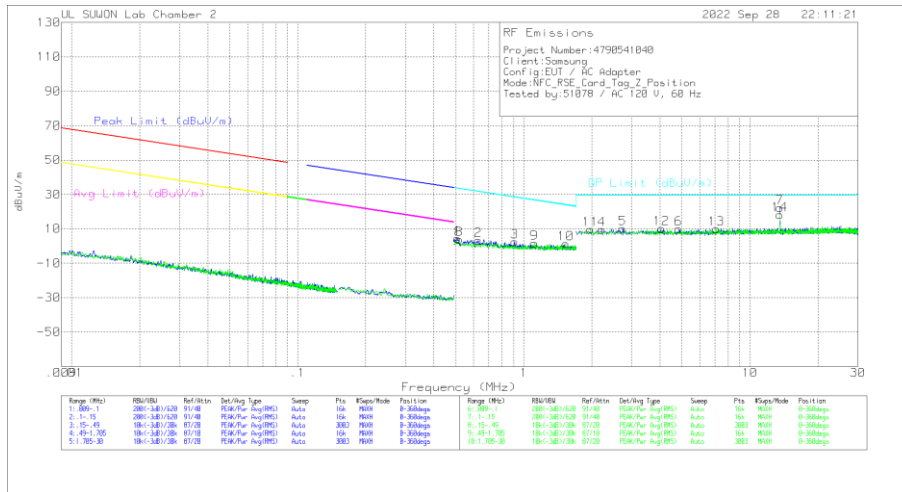

Trace Markers

Face on

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	.50718	24.69	Pk	19.7	.1	-40	4.49	33.5	-29.01	0-360
2	.62859	23.42	Pk	19.7	.1	-40	3.22	31.64	-28.42	0-360
3	.90963	22.46	Pk	19.8	.2	-40	2.46	28.44	-25.98	0-360
4	2.21395	29.67	Pk	19.9	.2	-40	9.77	29.5	-19.73	0-360
5	2.73233	29.94	Pk	19.9	.3	-40	10.14	29.5	-19.36	0-360
6	4.82468	29.71	Pk	19.8	.3	-40	9.81	29.5	-19.69	0-360
**7	13.56165	41.71	Pk	20	.5	-40	22.21	29.5	-7.29	0-360

Face off

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
8	.51694	24.01	Pk	19.7	.1	-40	3.81	33.34	-29.53	0-360
9	1.11233	21.62	Pk	19.8	.2	-40	1.62	26.7	-25.08	0-360
10	1.52991	21.33	Pk	19.8	.2	-40	1.33	23.94	-22.61	0-360
11	1.9689	29.71	Pk	19.8	.2	-40	9.71	29.5	-19.79	0-360
12	4.05183	29.97	Pk	19.8	.3	-40	10.07	29.5	-19.43	0-360
13	7.08668	29.68	Pk	19.9	.4	-40	9.98	29.5	-19.52	0-360
**14	13.56165	37.76	Pk	20	.5	-40	18.26	29.5	-11.24	0-360

Pk - Peak detector

**Fundamental

Note 1: The data for marker number 7 and 14 are the fundamental signal.

Please refer to section 8.1.4 about the fundamental level.

Frequency range 0.009MHz ~ 0.490MHz, only noise floor level and more than 20dB margin.


Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

7.1.6. TX SPURIOUS EMISSION 30 TO 1000 MHz [EUT with passive TAG mode]

HORIZONTAL



VERTICAL

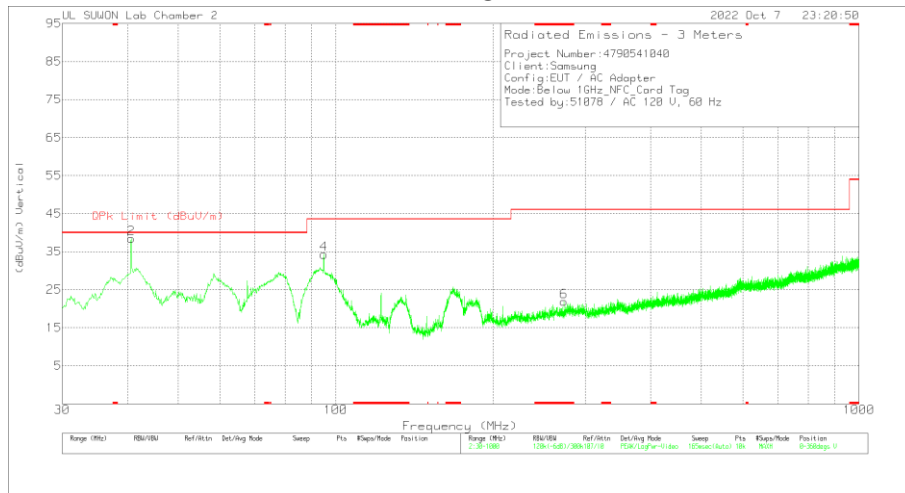

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163_749	Below 1G[dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	40.67	42.46	Pk	18.9	-31.4	29.96	40	-10.04	0-360	300	H
3	94.893	52.97	Pk	16.6	-30.6	38.97	43.52	-4.55	0-360	200	H
5	* 266.001	37.41	Pk	18.3	-29.3	26.41	46.02	-19.61	0-360	100	H
2	40.67	50.91	Pk	18.9	-31.4	38.41	40	-1.59	0-360	100	V
4	94.893	48.28	Pk	16.6	-30.6	34.28	43.52	-9.24	0-360	100	V
6	* 273.179	32.61	Pk	18.5	-29.2	21.91	46.02	-24.11	0-360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector

Radiated Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163_749	Below 1G[dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
94.893	48	Qp	16.6	-30.6	34	43.52	-9.52	334	317	H
40.67	49.42	Qp	18.9	-31.4	36.92	40	-3.08	233	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Qp - Quasi-Peak detector

8. AC MAINS LINE CONDUCTED EMISSIONS

LIMITS

§15.207

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

No non-compliance noted:

WORST EMISSIONS(Terminated)

LINE 1 PLOT

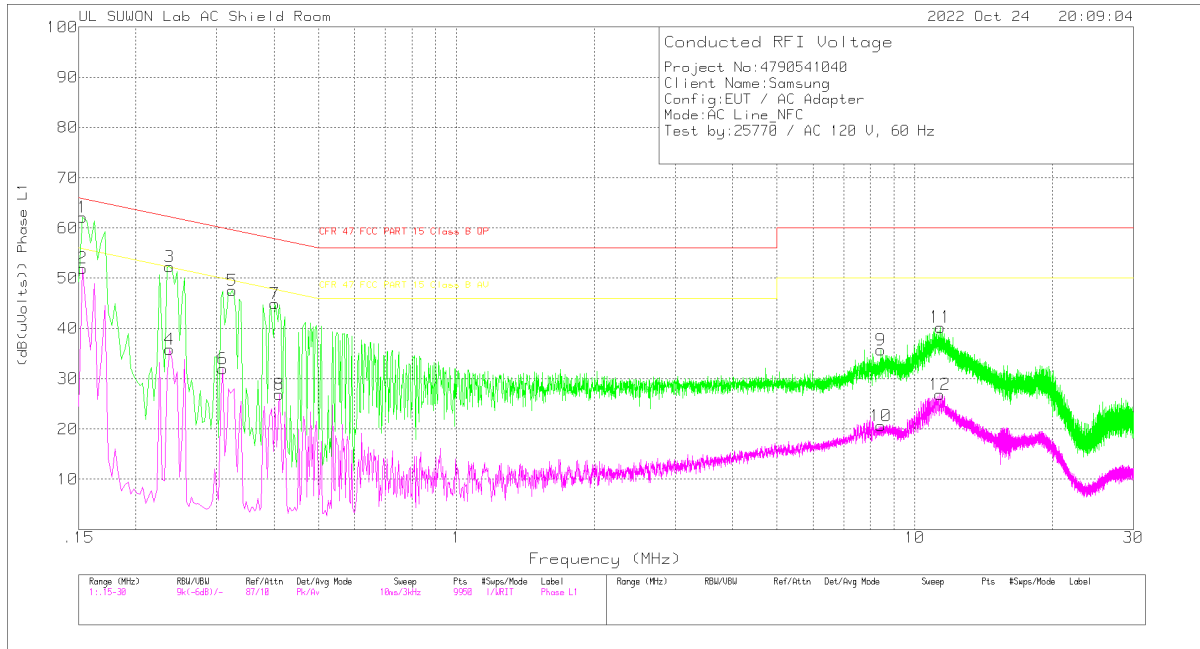

LINE 1 RESULTS

Trace Markers

Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_L1[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
1	.153	52.22	Pk	9.8	.1	62.12	65.84	-3.72	-	-
2	.153	42.09	Av	9.8	.1	51.99	-	-	55.84	-3.85
3	.237	42.35	Pk	9.7	.2	52.25	62.2	-9.95	-	-
4	.237	25.91	Av	9.7	.2	35.81	-	-	52.2	-16.39
5	.324	37.72	Pk	9.7	.2	47.62	59.6	-11.98	-	-
6	.309	22.04	Av	9.7	.2	31.94	-	-	50	-18.06
7	.402	34.9	Pk	9.8	.2	44.9	57.81	-12.91	-	-
8	.411	16.82	Av	9.8	.2	26.82	-	-	47.63	-20.81
9	8.445	25.66	Pk	9.8	.3	35.76	60	-24.24	-	-
10	8.445	10.54	Av	9.8	.3	20.64	-	-	50	-29.36
11	11.376	30.07	Pk	9.9	.3	40.27	60	-19.73	-	-
12	11.337	16.65	Av	9.9	.3	26.85	-	-	50	-23.15

Pk - Peak detector
 Av - Average detection


Quasi-Peak Emissions

Range 1: Phase L1 .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_L1[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
.15375	41.12	Qp	9.8	.1	51.02	65.79	-14.77	-	-
.23625	30.11	Qp	9.7	.2	40.01	62.23	-22.22	-	-

Qp - Quasi-Peak detector

LINE 2 PLOT

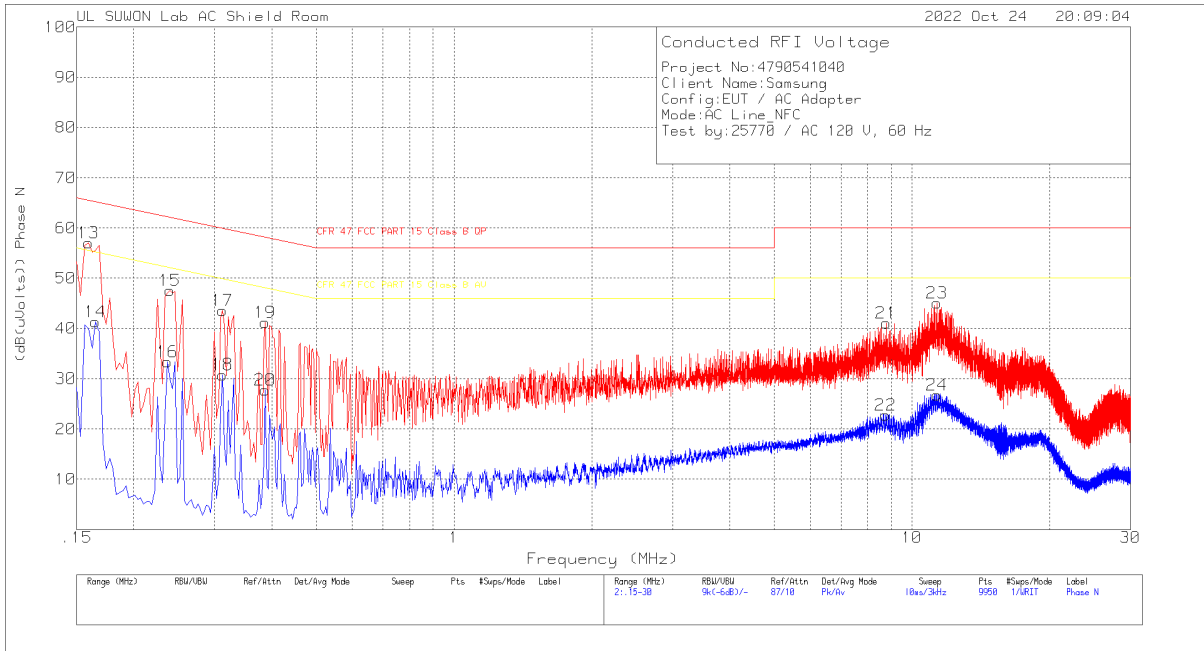

LINE 2 RESULTS

Trace Markers

Range 2: Phase N .15 – 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_N[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
13	.159	47.09	Pk	9.8	.1	56.99	65.52	-8.53	-	-
14	.165	31.35	Av	9.9	.1	41.35	-	-	55.21	-13.86
15	.24	37.7	Pk	9.7	.2	47.6	62.1	-14.5	-	-
16	.237	23.5	Av	9.7	.2	33.4	-	-	52.2	-18.8
17	.312	33.7	Pk	9.7	.2	43.6	59.92	-16.32	-	-
18	.312	20.9	Av	9.7	.2	30.8	-	-	49.92	-19.12
19	.387	31.19	Pk	9.8	.2	41.19	58.13	-16.94	-	-
20	.387	17.7	Av	9.8	.2	27.7	-	-	48.13	-20.43
21	8.793	30.86	Pk	9.8	.4	41.06	60	-18.94	-	-
22	8.763	12.54	Av	9.8	.4	22.74	-	-	50	-27.26
23	11.343	34.85	Pk	9.9	.3	45.05	60	-14.95	-	-
24	11.328	16.52	Av	9.9	.3	26.72	-	-	50	-23.28

Pk - Peak detector

Av - Average detection

Quasi-Peak Emissions

Range 2: Phase N .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_N[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
.15825	40	Qp	9.8	.1	49.9	65.56	-15.66	-	-

Qp - Quasi-Peak detector

9. FREQUENCY STABILITY

LIMIT

§15.225 (e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency, over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

TEST PROCEDURE

ANSI C63.10 §6.8

RESULTS

Test Date	2022-10-11
Test Engineer	51078

Reference Frequency: EUT Channel 13.56 MHz @ 20°C Limit: ± 100 ppm = 1.356 kHz										
Power Supply (Vdc)	Envir. Temp (°C)	Frequency Deviation Measured with Time Elapse								
		Start up (MHz)	Delta (ppm)	@ 2mins (MHz)	Delta (ppm)	@ 5mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.88	50	13.559921870	-5.257	13.559915710	-5.711	13.559911470	-6.024	13.559908420	-6.249	100
3.88	40	13.559955680	-2.763	13.559946640	-3.430	13.559936960	-4.144	13.559934600	-4.318	100
3.88	30	13.559978320	-1.094	13.559972770	-1.503	13.559969250	-1.763	13.559965660	-2.027	100
3.88	20	13.559993150	0	13.559994190	0.077	13.559995370	0.164	13.559996750	0.265	100
3.88	10	13.559984930	-0.606	13.559996110	0.218	13.560010410	1.273	13.560020030	1.982	100
3.88	0	13.560028840	2.632	13.560033640	2.986	13.560039120	3.390	13.560042890	3.668	100
3.88	-10	13.560046200	3.912	13.560046180	3.911	13.560045790	3.882	13.560045180	3.837	100
3.88	-20	13.560038840	3.369	13.560034060	3.017	13.560026850	2.485	13.560021870	2.118	100
3.88	-30	13.560053730	4.468	13.560045690	3.875	13.560033750	2.994	13.560008950	1.165	100

Reference Frequency: EUT Channel 13.56 MHz @ 20°C Limit: ± 100 ppm = 1.356 kHz										
Power Supply (Vdc)	Envir. Temp (°C)	Frequency Deviation Measured with Time Elapse								
		Start up (MHz)	Delta (ppm)	@ 2mins (MHz)	Delta (ppm)	@ 5mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.88	20	13.559993150	0	13.559994190	0.077	13.559995370	0.164	13.559996750	0.265	100
4.40	20	13.559993240	0.007	13.559994260	0.082	13.559995420	0.167	13.559996840	0.272	100
3.70	20	13.559993380	0.017	13.559994380	0.091	13.559995500	0.173	13.559996970	0.282	100

No non-compliance noted.

END OF TEST REPORT