


Standard:	FCC Part 15.247	Power:	DC 60 V
Test item:	Conducted Emission		
Mode:	Transmit Mode		
Description:			

FG-600F_DC PSU(Murata_Left)

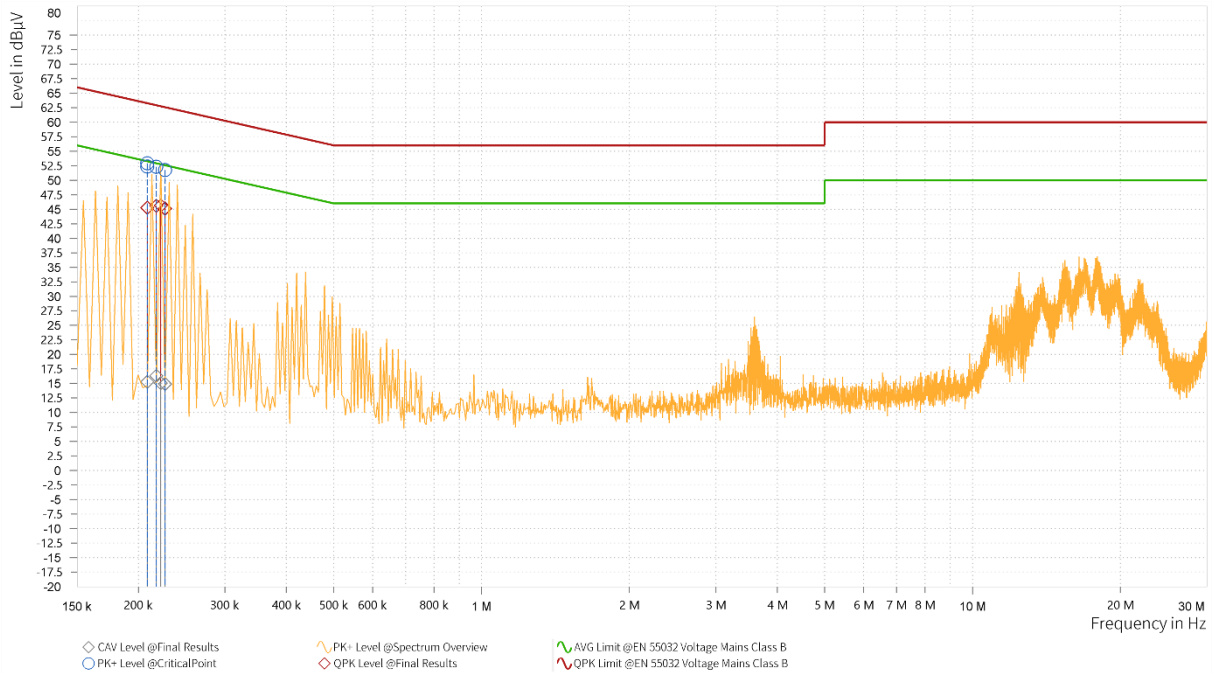


Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.209	45.23	63.26	18.03	15.26	53.26	38.01	9.65	L1
1	0.209	45.27	63.26	18.00	15.26	53.26	38.01	9.65	L1
1	0.218	45.61	62.91	17.30	16.31	52.91	36.60	9.65	L1
1	0.222	45.64	62.74	17.10	15.06	52.74	37.69	9.65	L1
1	0.227	45.09	62.58	17.49	14.87	52.58	37.71	9.65	L1
1	0.227	45.15	62.58	17.43	14.91	52.58	37.67	9.65	L1

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

3.Via turn off the radio function, this digital device emission is from the non transmitter portion of the EUT and it is an harmonic of the digital circuitry. This emission complies with part 15 Subpart B class A limit.

FG-600F_DC PSU(Murata_Left)

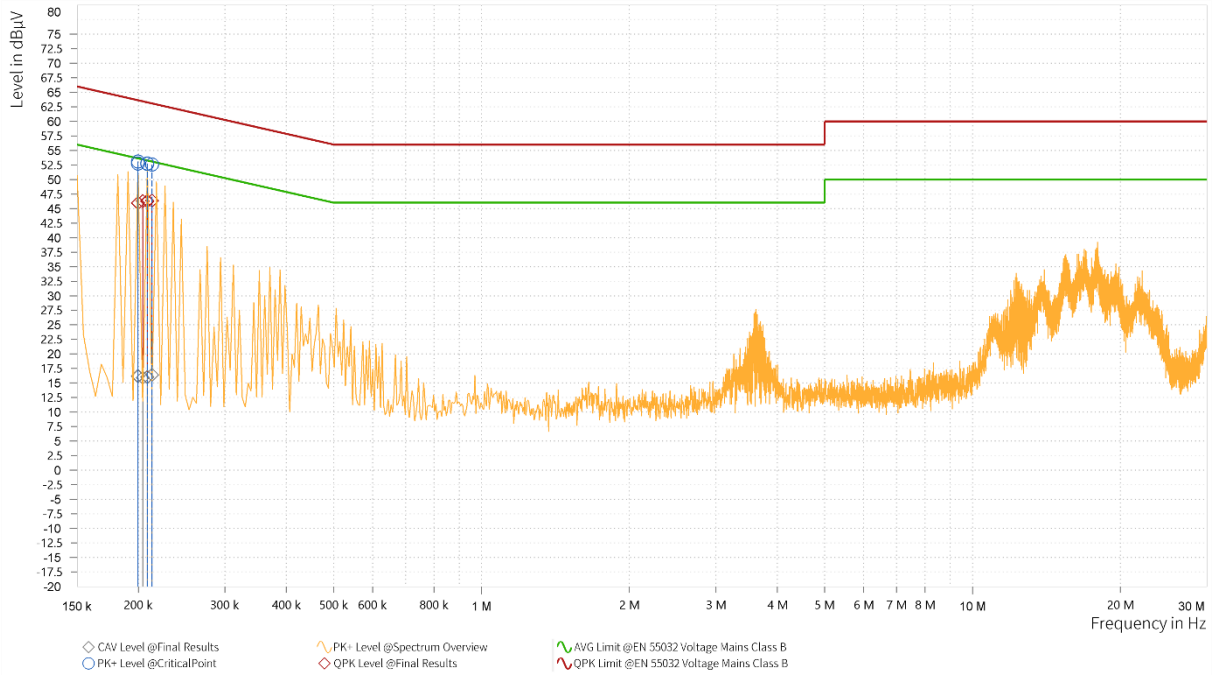


Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.200	45.92	63.63	17.71	16.15	53.63	37.48	9.65	N
1	0.200	45.99	63.63	17.64	16.23	53.63	37.40	9.65	N
1	0.204	46.28	63.45	17.17	15.93	53.45	37.52	9.65	N
1	0.209	46.26	63.26	17.01	16.01	53.26	37.25	9.65	N
1	0.209	46.32	63.26	16.94	16.03	53.26	37.23	9.65	N
1	0.213	46.38	63.09	16.71	16.40	53.09	36.69	9.65	N

Note: 1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

FG-600F_DC PSU(Murata_Right)

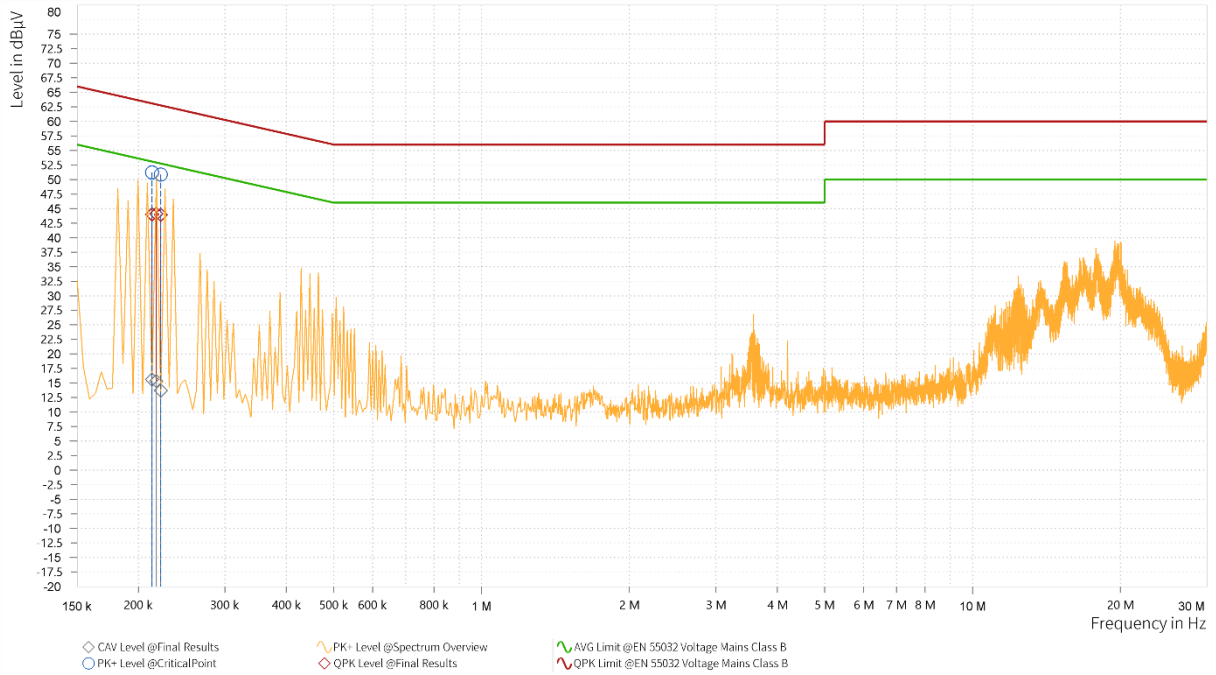


Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.213	43.96	63.09	19.13	15.58	53.09	37.51	9.65	L1
1	0.213	44.04	63.09	19.04	15.62	53.09	37.47	9.65	L1
1	0.218	44.08	62.91	18.84	15.34	52.91	37.57	9.65	L1
1	0.218	44.13	62.91	18.79	15.32	52.91	37.59	9.65	L1
1	0.222	43.89	62.74	18.85	13.67	52.74	39.07	9.65	L1
1	0.222	43.95	62.74	18.80	13.74	52.74	39.01	9.65	L1

Note: 1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

FG-600F_DC PSU(Murata_Right)

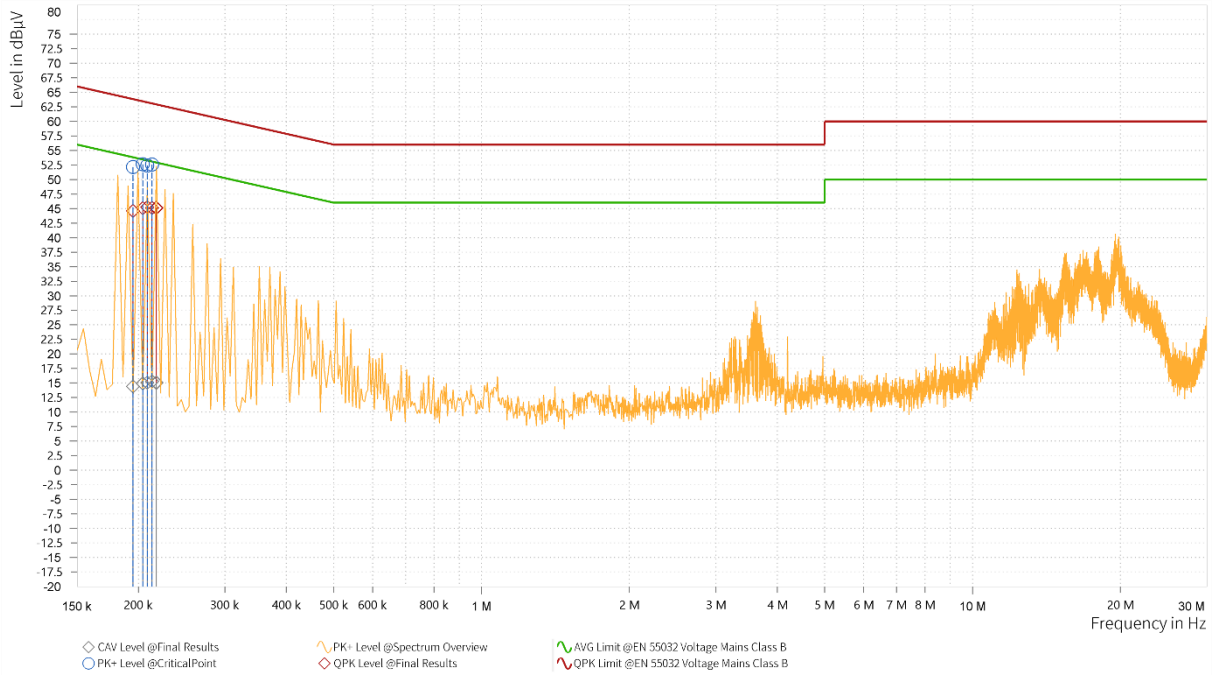


Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.195	44.61	63.82	19.21	14.42	53.82	39.40	9.65	N
1	0.204	45.05	63.45	18.39	14.93	53.45	38.51	9.65	N
1	0.209	45.23	63.26	18.04	15.07	53.26	38.20	9.65	N
1	0.213	45.12	63.09	17.96	15.30	53.09	37.79	9.65	N
1	0.218	45.06	62.91	17.85	15.01	52.91	37.90	9.65	N
1	0.218	45.14	62.91	17.77	15.11	52.91	37.80	9.65	N

Note: 1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

FG-600F_DC PSU(Murata_Left + Right)

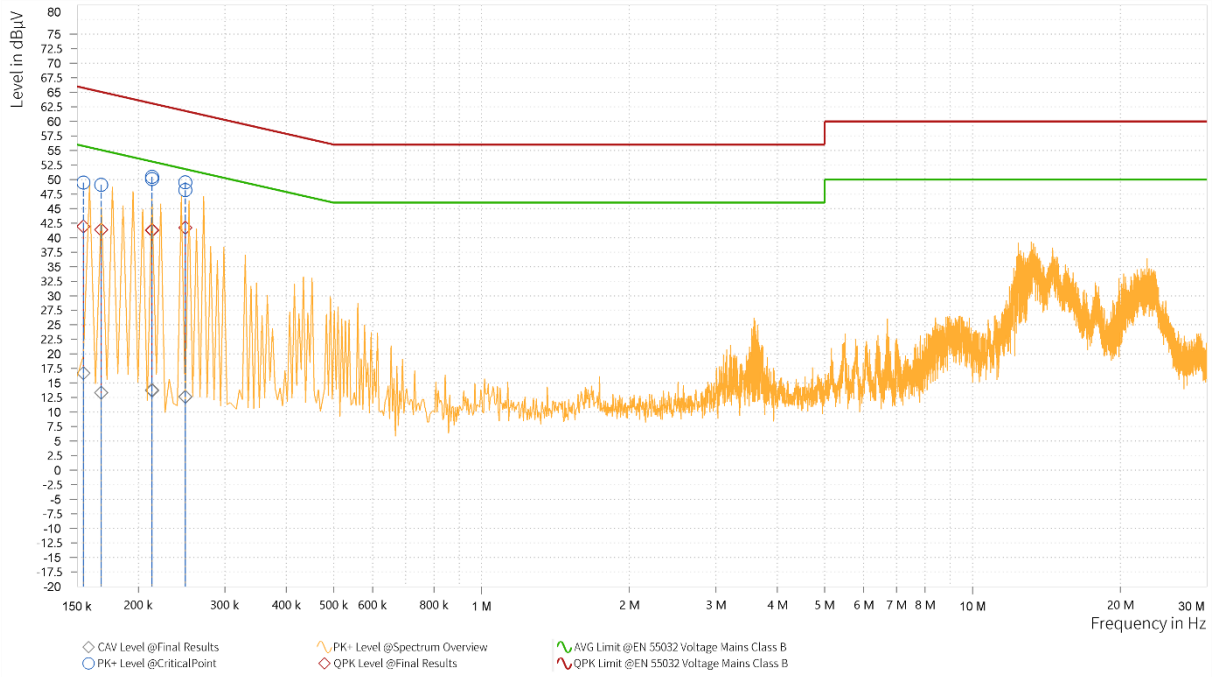


Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.155	41.92	65.75	23.83	16.70	55.75	39.05	9.65	L1
1	0.168	41.38	65.06	23.68	13.32	55.06	41.74	9.65	L1
1	0.213	41.21	63.09	21.87	13.69	53.09	39.39	9.65	L1
1	0.213	41.30	63.09	21.78	13.82	53.09	39.27	9.65	L1
1	0.249	41.73	61.79	20.06	12.65	51.79	39.14	9.65	L1
1	0.249	41.69	61.79	20.10	12.60	51.79	39.19	9.65	L1

Note: 1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

FG-600F_DC PSU(Murata_Left + Right)

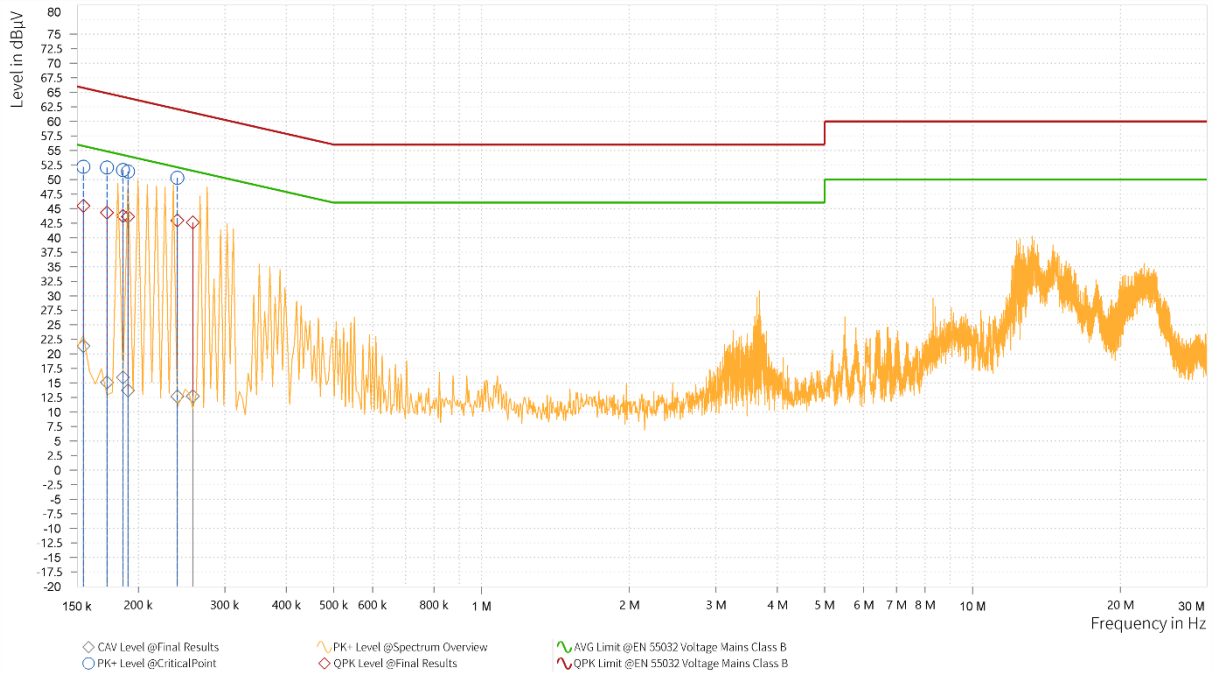


Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.155	45.48	65.75	20.28	21.35	55.75	34.41	9.65	N
1	0.173	44.30	64.84	20.54	15.11	54.84	39.73	9.65	N
1	0.186	43.75	64.21	20.47	15.98	54.21	38.23	9.65	N
1	0.191	43.59	64.01	20.43	13.72	54.01	40.29	9.65	N
1	0.240	42.96	62.10	19.14	12.67	52.10	39.43	9.65	N
1	0.258	42.63	61.50	18.86	12.74	51.50	38.76	9.65	N

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

FG-601F_DC PSU(Delta_Left)

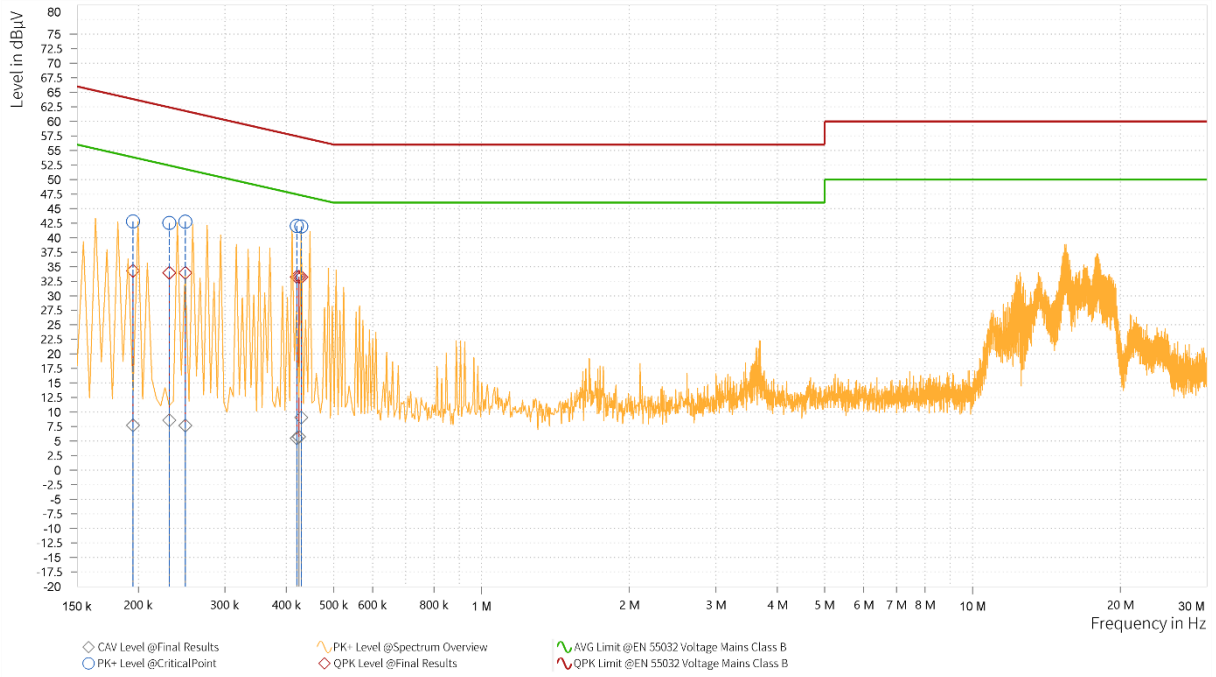


Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.195	34.30	63.82	29.52	7.73	53.82	46.09	9.65	L1
1	0.231	33.96	62.41	28.45	8.58	52.41	43.84	9.65	L1
1	0.249	33.93	61.79	27.86	7.69	51.79	44.10	9.65	L1
1	0.420	33.26	57.45	24.19	5.48	47.45	41.96	9.66	L1
1	0.425	33.27	57.36	24.09	5.73	47.36	41.63	9.66	L1
1	0.429	33.21	57.27	24.06	9.08	47.27	38.19	9.66	L1

Note: 1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

FG-601F_DC PSU(Delta_Left)

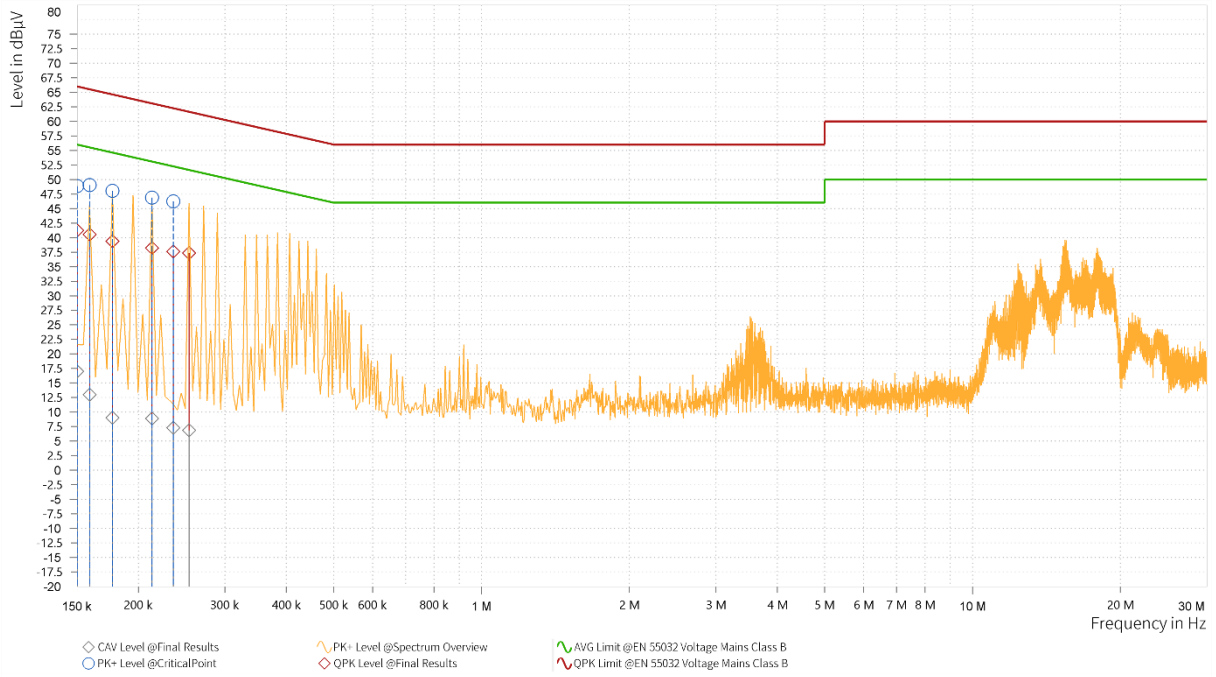


Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.150	41.23	66.00	24.77	17.01	56.00	38.99	9.65	N
1	0.159	40.56	65.52	24.95	13.00	55.52	42.52	9.65	N
1	0.177	39.37	64.63	25.25	9.00	54.63	45.62	9.65	N
1	0.213	38.20	63.09	24.89	8.88	53.09	44.21	9.65	N
1	0.236	37.61	62.25	24.65	7.31	52.25	44.95	9.65	N
1	0.254	37.37	61.64	24.27	6.86	51.64	44.78	9.65	N

Note: 1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

FG-601F_DC PSU(Delta_Right)

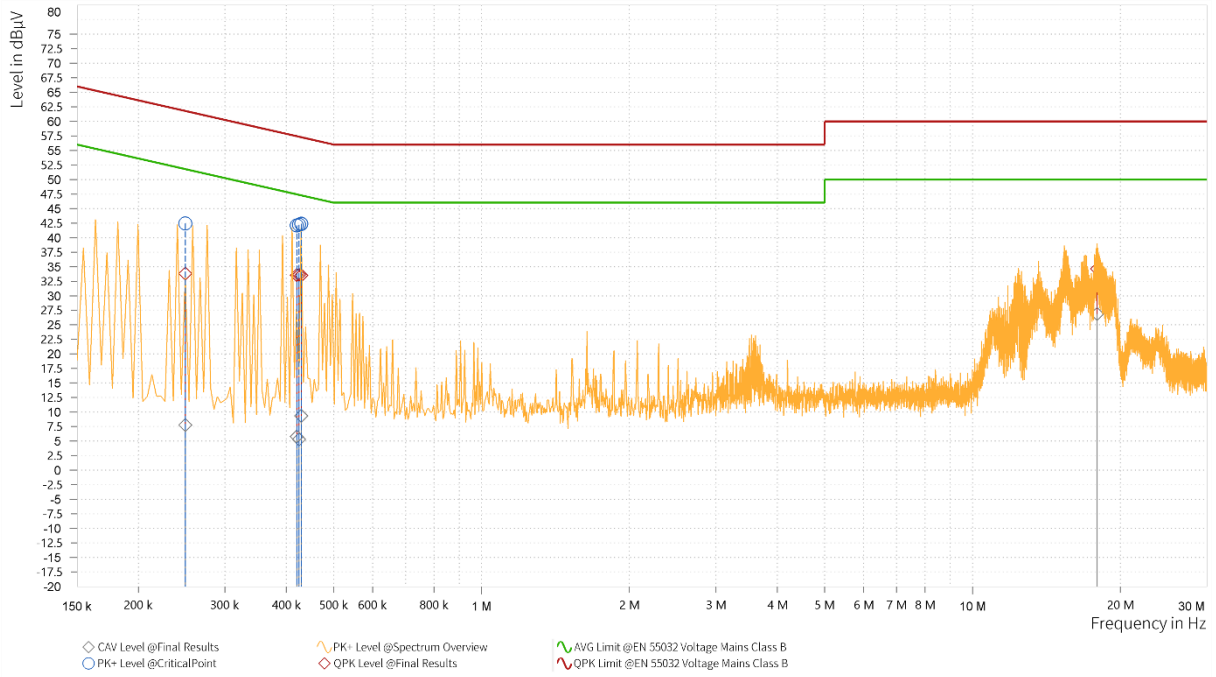


Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.249	33.81	61.79	27.98	7.78	51.79	44.02	9.65	L1
1	0.420	33.56	57.45	23.88	5.79	47.45	41.66	9.66	L1
1	0.425	33.59	57.36	23.77	5.33	47.36	42.03	9.66	L1
1	0.429	33.52	57.27	23.75	9.36	47.27	37.91	9.66	L1
1	0.429	33.51	57.27	23.76	9.30	47.27	37.97	9.66	L1
1	17.943	34.63	60.00	25.37	26.87	50.00	23.13	9.96	L1

Note: 1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

FG-601F_DC PSU(Delta_Right)

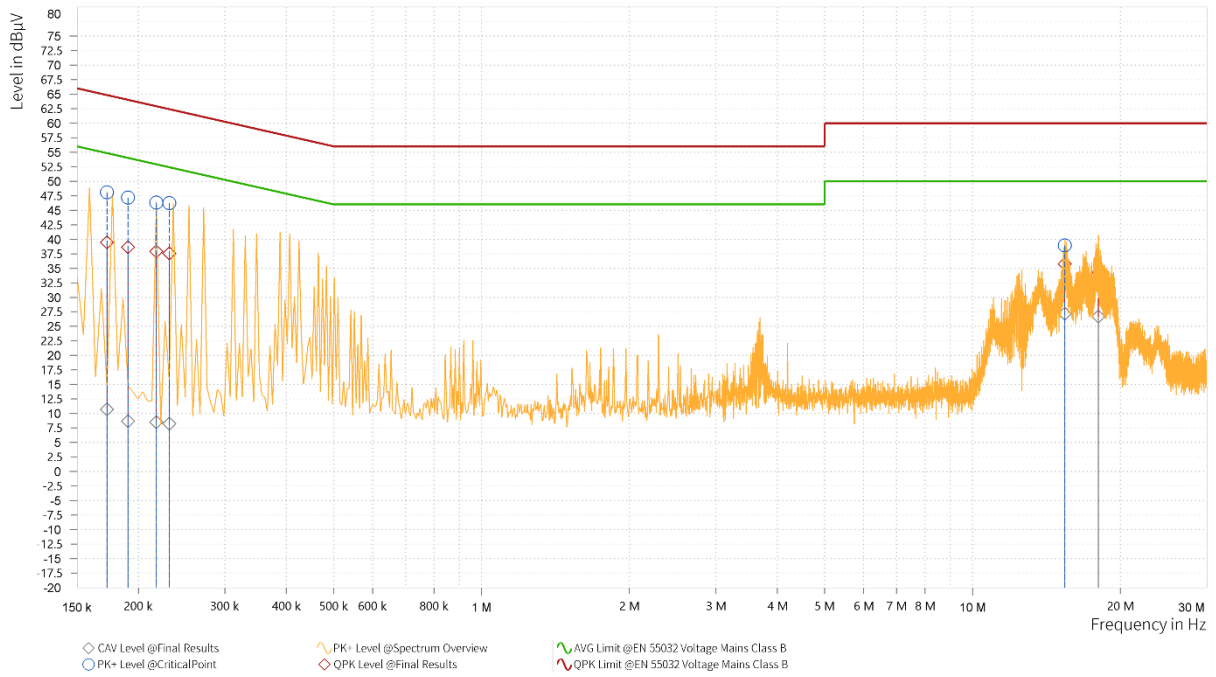


Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.173	39.47	64.84	25.37	10.71	54.84	44.13	9.65	N
1	0.191	38.65	64.01	25.36	8.70	54.01	45.32	9.65	N
1	0.218	37.90	62.91	25.01	8.51	52.91	44.40	9.65	N
1	0.231	37.57	62.41	24.84	8.26	52.41	44.15	9.65	N
1	15.410	35.76	60.00	24.24	27.19	50.00	22.81	9.95	N
1	18.042	34.23	60.00	25.77	26.70	50.00	23.30	9.99	N

Note: 1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

FG-601F_DC PSU(Delta_Left + Right)

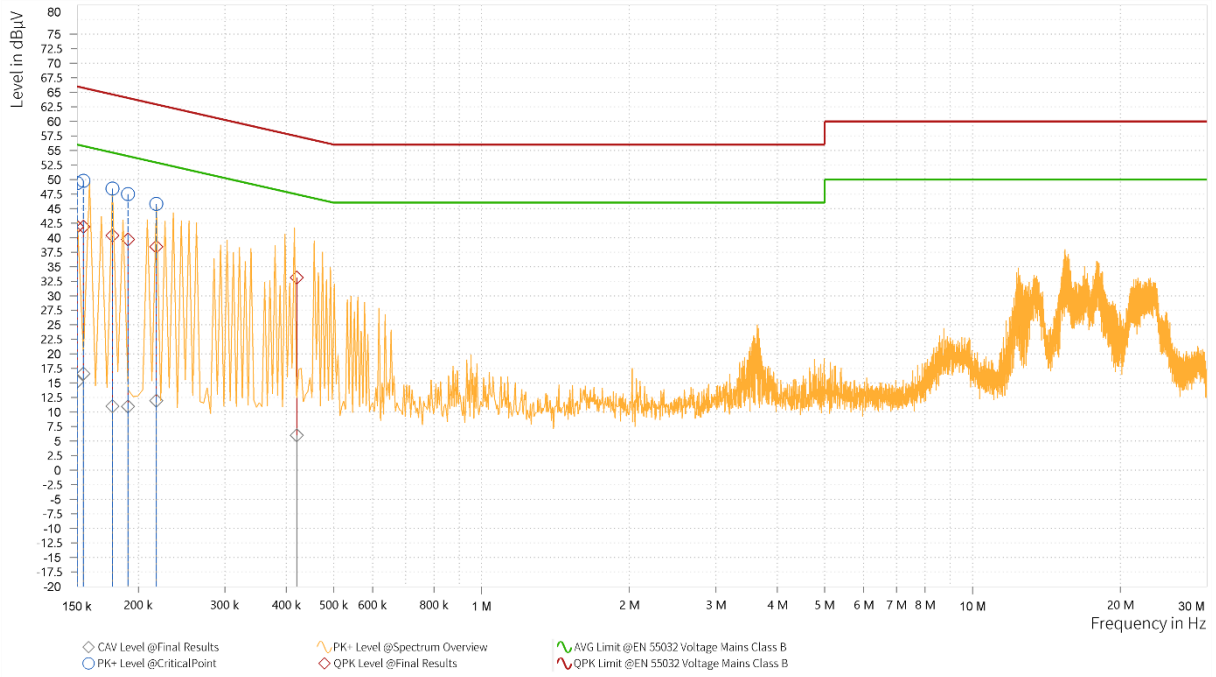


Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.150	41.88	66.00	24.12	15.24	56.00	40.76	9.65	L1
1	0.155	41.88	65.75	23.88	16.62	55.75	39.13	9.65	L1
1	0.177	40.37	64.63	24.25	11.02	54.63	43.60	9.65	L1
1	0.191	39.68	64.01	24.34	10.95	54.01	43.06	9.65	L1
1	0.218	38.42	62.91	24.49	11.96	52.91	40.96	9.65	L1
1	0.420	33.15	57.45	24.30	5.99	47.45	41.46	9.66	L1

Note: 1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

FG-601F_DC PSU(Delta_Left + Right)

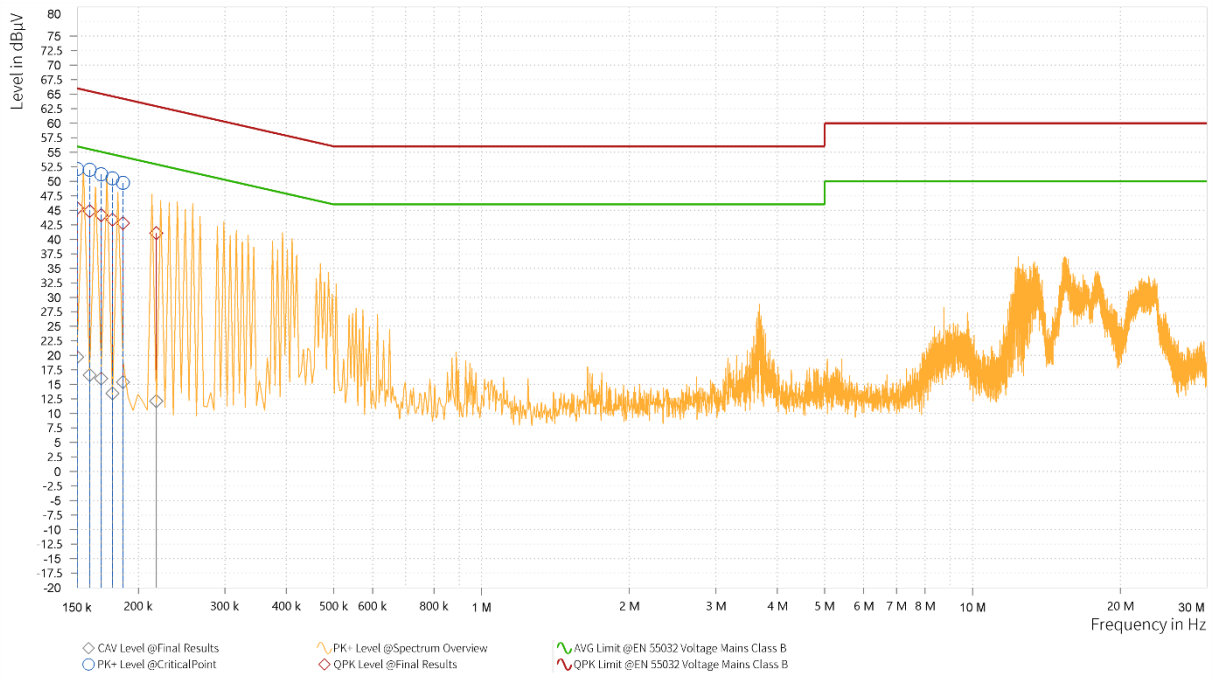


Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.150	45.37	66.00	20.63	19.73	56.00	36.27	9.65	N
1	0.159	44.87	65.52	20.65	16.60	55.52	38.91	9.65	N
1	0.168	44.18	65.06	20.88	16.00	55.06	39.06	9.65	N
1	0.177	43.39	64.63	21.24	13.45	54.63	41.17	9.65	N
1	0.186	42.81	64.21	21.41	15.39	54.21	38.83	9.65	N
1	0.218	41.07	62.91	21.84	12.12	52.91	40.80	9.65	N

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

FG-601F_DC PSU(Murata_Left)

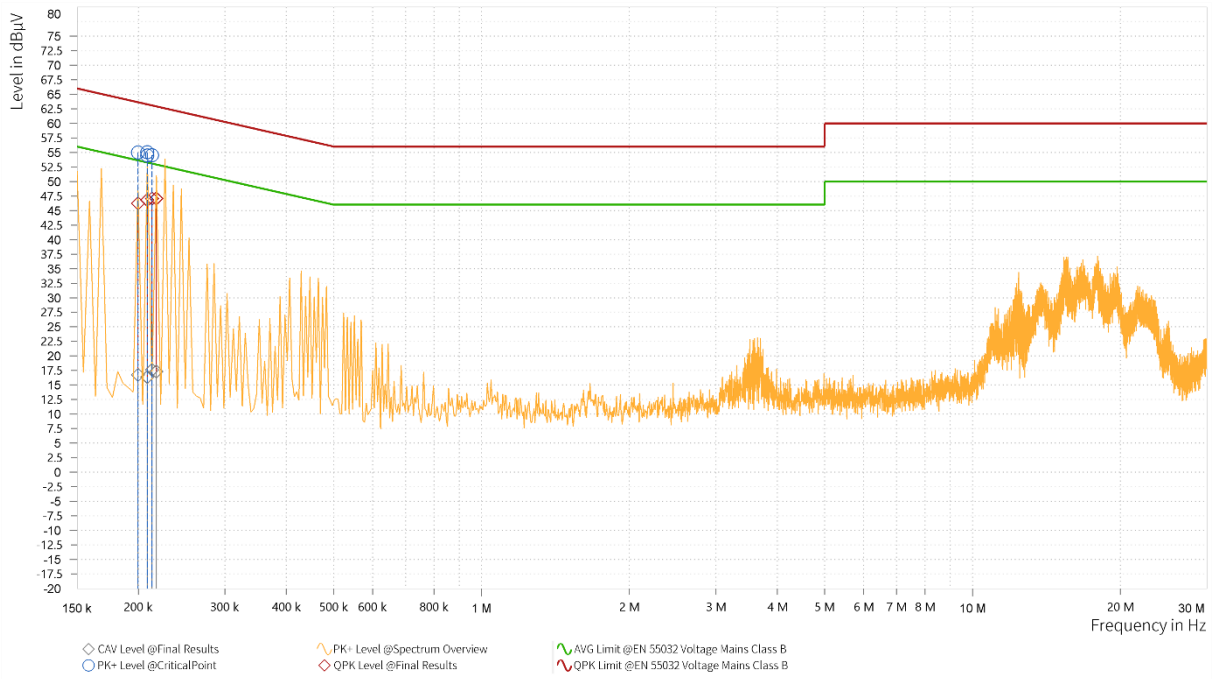


Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.200	46.25	63.63	17.38	16.73	53.63	36.90	9.65	L1
1	0.209	46.80	63.26	16.46	16.33	53.26	36.93	9.65	L1
1	0.209	46.85	63.26	16.42	16.39	53.26	36.88	9.65	L1
1	0.213	47.07	63.09	16.02	17.61	53.09	35.48	9.65	L1
1	0.218	47.07	62.91	15.85	17.32	52.91	35.59	9.65	L1
1	0.218	47.09	62.91	15.82	17.34	52.91	35.58	9.65	L1

Note: 1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

FG-601F_DC PSU(Murata_Left)

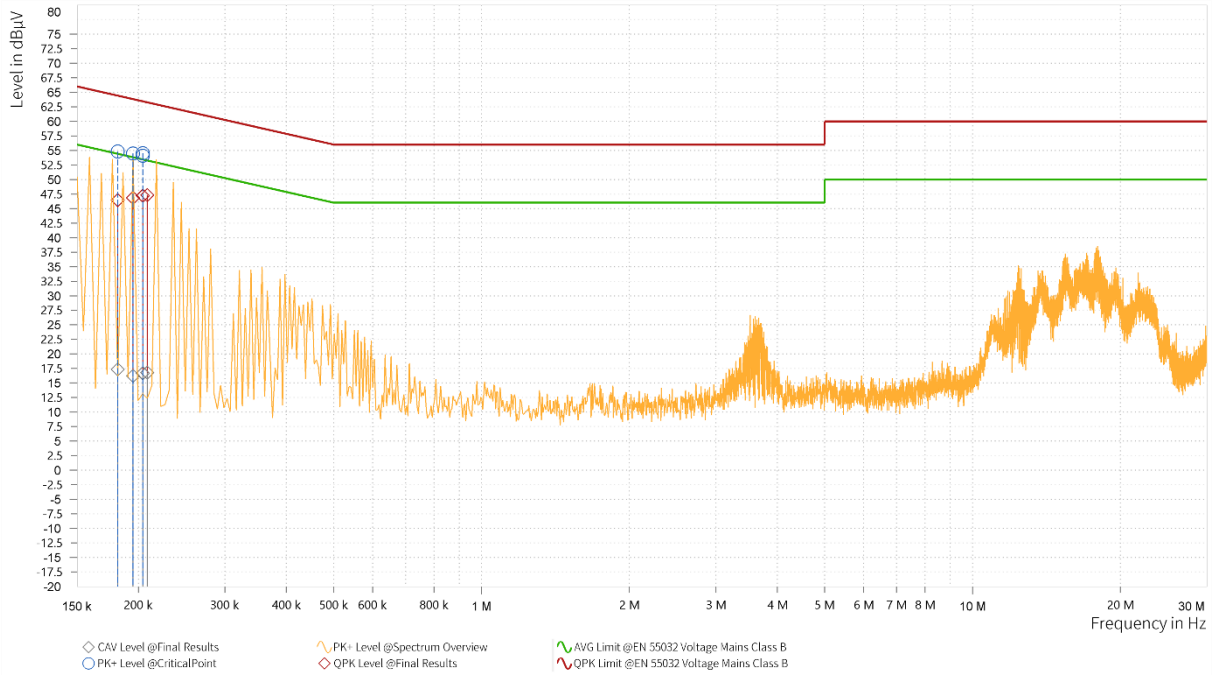


Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.182	46.46	64.42	17.96	17.34	54.42	37.07	9.65	N
1	0.195	46.83	63.82	16.99	16.21	53.82	37.61	9.65	N
1	0.204	47.23	63.45	16.22	16.71	53.45	36.74	9.65	N
1	0.204	47.18	63.45	16.26	16.65	53.45	36.79	9.65	N
1	0.209	47.33	63.26	15.94	16.79	53.26	36.47	9.65	N
1	0.209	47.32	63.26	15.95	16.77	53.26	36.49	9.65	N

Note: 1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

FG-601F_DC PSU(Murata_Right)

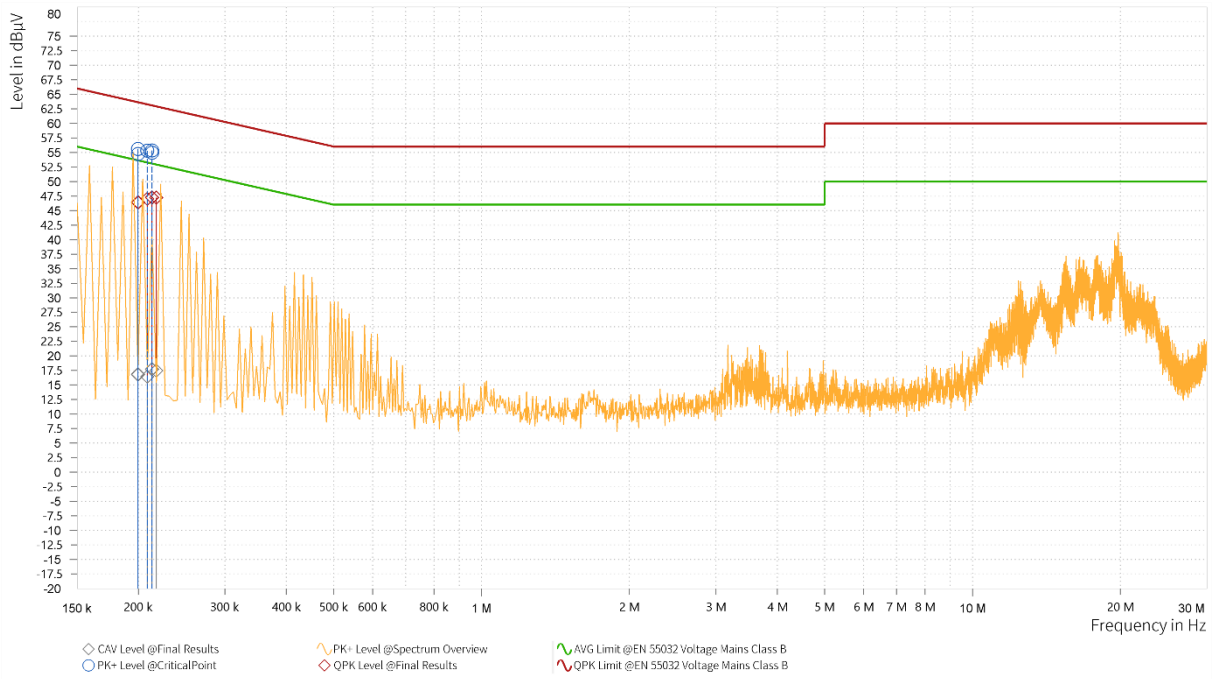


Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.200	46.47	63.63	17.16	16.85	53.63	36.78	9.65	L1
1	0.200	46.38	63.63	17.25	16.79	53.63	36.84	9.65	L1
1	0.209	47.02	63.26	16.25	16.44	53.26	36.82	9.65	L1
1	0.213	47.27	63.09	15.82	17.75	53.09	35.34	9.65	L1
1	0.213	47.22	63.09	15.86	17.70	53.09	35.38	9.65	L1
1	0.218	47.21	62.91	15.70	17.46	52.91	35.46	9.65	L1

Note: 1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

FG-601F_DC PSU(Murata_Right)

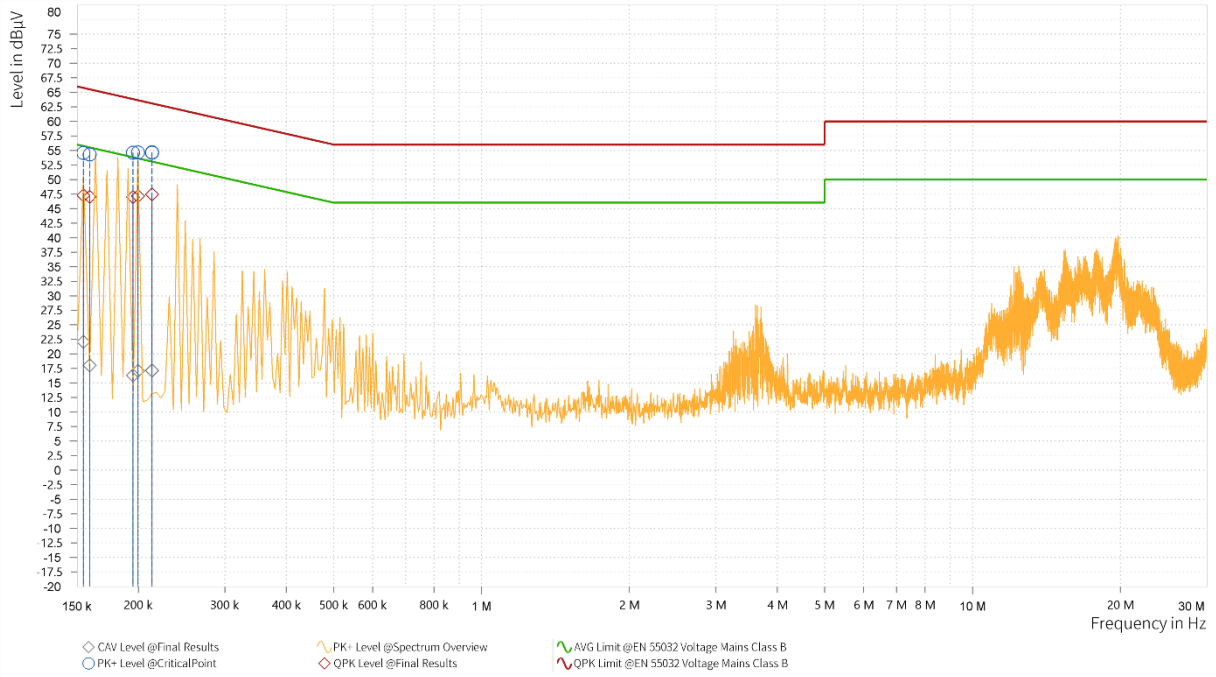


Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.155	47.28	65.75	18.48	22.09	55.75	33.67	9.65	N
1	0.159	47.01	65.52	18.51	18.03	55.52	37.49	9.65	N
1	0.195	46.99	63.82	16.83	16.30	53.82	37.52	9.65	N
1	0.200	47.14	63.63	16.49	17.07	53.63	36.56	9.65	N
1	0.213	47.43	63.09	15.66	17.11	53.09	35.98	9.65	N
1	0.213	47.43	63.09	15.65	17.16	53.09	35.93	9.65	N

Note: 1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

FG-601F_DC PSU(Murata_Left + Right)

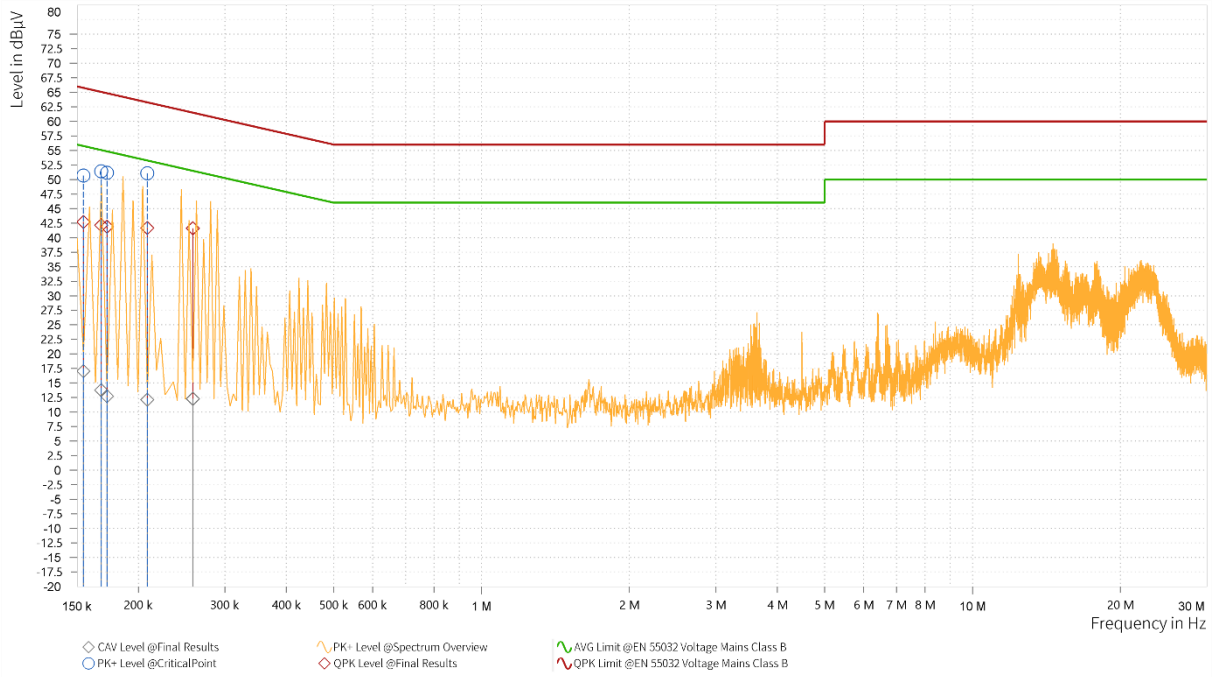


Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.155	42.71	65.75	23.04	17.03	55.75	38.73	9.65	L1
1	0.168	42.13	65.06	22.92	13.75	55.06	41.30	9.65	L1
1	0.173	41.89	64.84	22.95	12.75	54.84	42.09	9.65	L1
1	0.209	41.66	63.26	21.61	12.13	53.26	41.14	9.65	L1
1	0.258	41.59	61.50	19.91	12.25	51.50	39.24	9.65	L1
1	0.258	41.64	61.50	19.86	12.31	51.50	39.18	9.65	L1

Note: 1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

FG-601F_DC PSU(Murata_Left + Right)

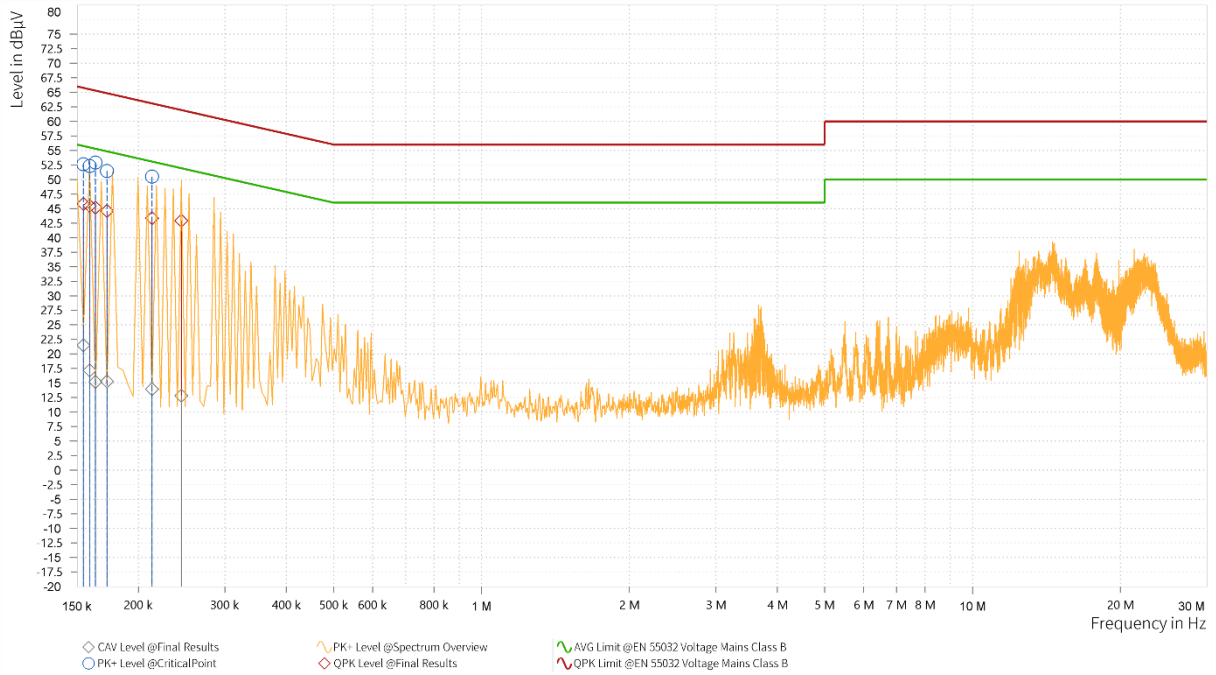


Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.155	45.81	65.75	19.95	21.50	55.75	34.26	9.65	N
1	0.159	45.46	65.52	20.05	17.17	55.52	38.35	9.65	N
1	0.164	45.17	65.28	20.11	15.18	55.28	40.11	9.65	N
1	0.173	44.60	64.84	20.23	15.29	54.84	39.55	9.65	N
1	0.213	43.36	63.09	19.72	13.93	53.09	39.16	9.65	N
1	0.245	42.92	61.94	19.02	12.80	51.94	39.14	9.65	N

Note: 1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

FG-600F_DC PSU(Delta_Left)

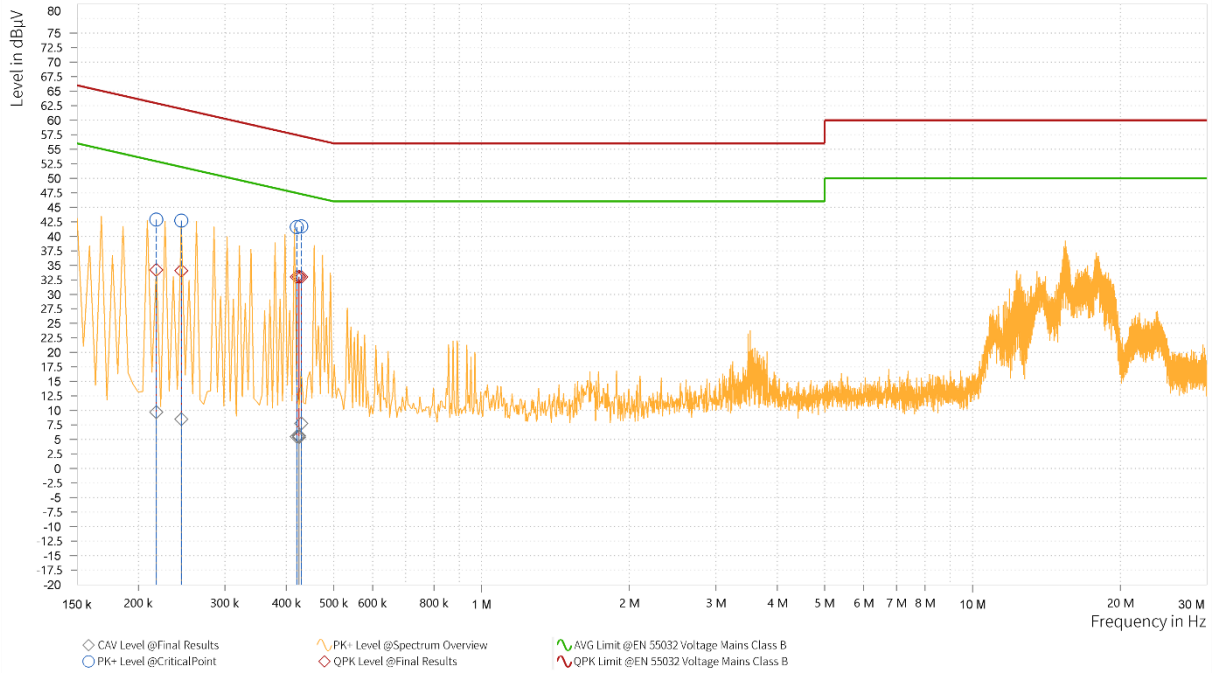


Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.218	34.20	62.91	28.71	9.72	52.91	43.19	9.65	L1
1	0.245	34.06	61.94	27.88	8.51	51.94	43.43	9.65	L1
1	0.420	33.01	57.45	24.44	5.47	47.45	41.97	9.66	L1
1	0.425	33.00	57.36	24.36	5.39	47.36	41.97	9.66	L1
1	0.425	33.02	57.36	24.34	5.60	47.36	41.76	9.66	L1
1	0.429	32.98	57.27	24.29	7.78	47.27	39.49	9.66	L1

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

FG-600F_DC PSU(Delta_Left)

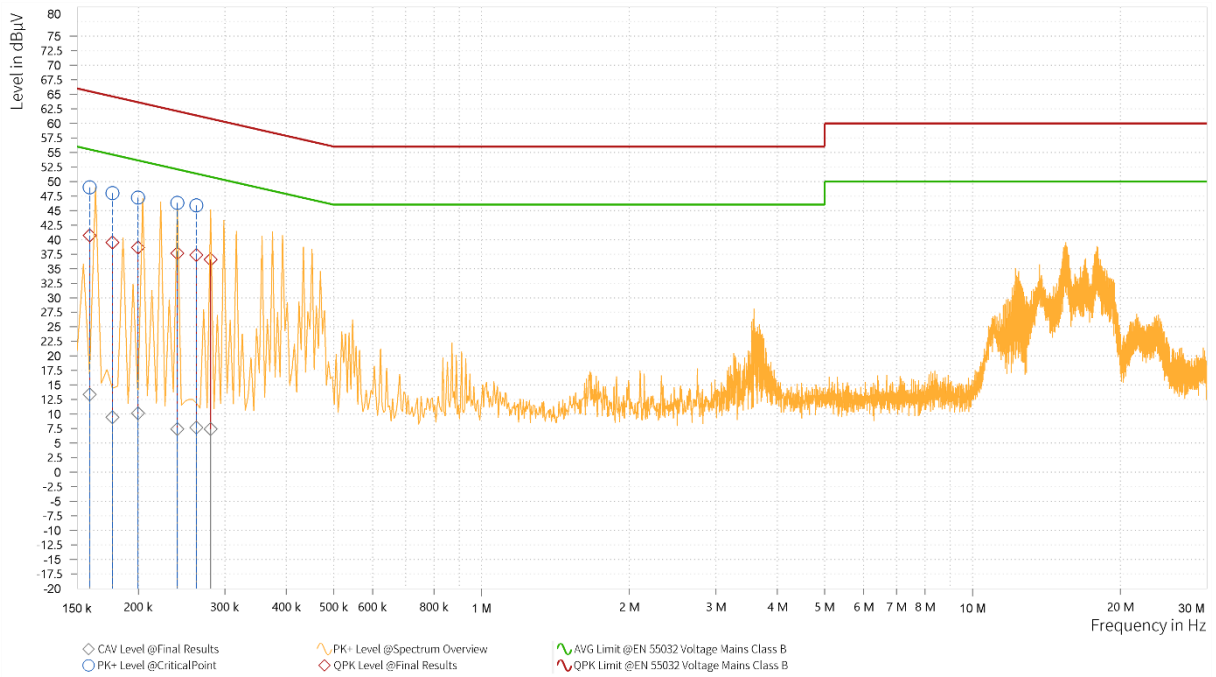


Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.159	40.70	65.52	24.82	13.38	55.52	42.14	9.65	N
1	0.177	39.50	64.63	25.13	9.47	54.63	45.16	9.65	N
1	0.200	38.66	63.63	24.97	10.15	53.63	43.48	9.65	N
1	0.240	37.67	62.10	24.43	7.41	52.10	44.69	9.65	N
1	0.263	37.36	61.35	23.99	7.70	51.35	43.65	9.65	N
1	0.281	36.58	60.80	24.22	7.45	50.80	43.36	9.65	N

Note: 1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

FG-600F_DC PSU(Delta_Right)

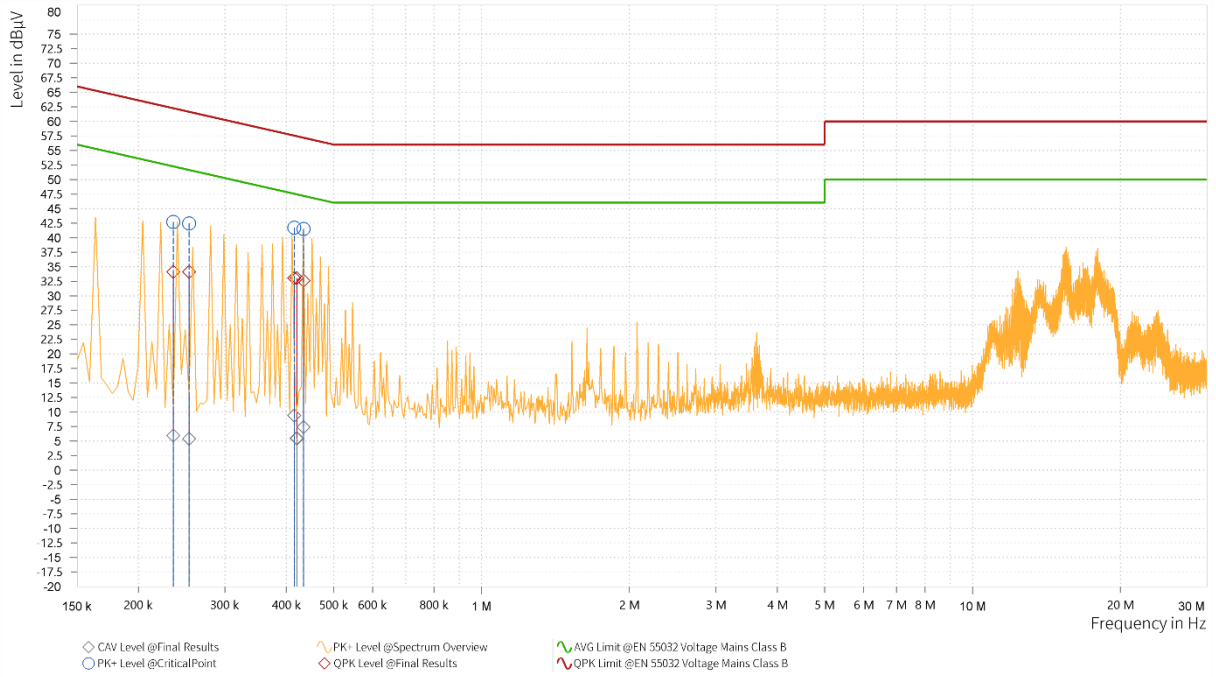


Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.236	34.12	62.25	28.14	5.97	52.25	46.29	9.65	L1
1	0.254	34.12	61.64	27.52	5.39	51.64	46.25	9.65	L1
1	0.416	33.05	57.54	24.49	9.42	47.54	38.12	9.66	L1
1	0.420	33.04	57.45	24.41	5.42	47.45	42.03	9.66	L1
1	0.420	33.04	57.45	24.41	5.53	47.45	41.92	9.66	L1
1	0.434	32.62	57.19	24.56	7.42	47.19	39.77	9.66	L1

Note: 1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

FG-600F_DC PSU(Delta_Right)

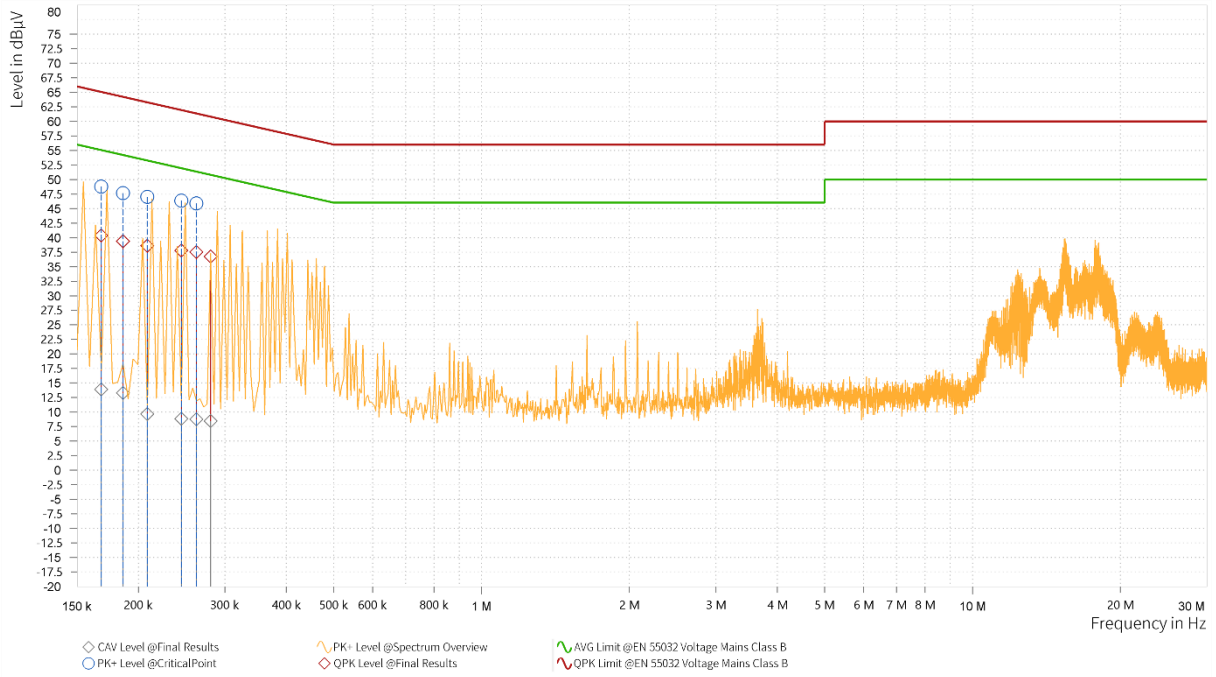


Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.168	40.38	65.06	24.68	13.87	55.06	41.18	9.65	N
1	0.186	39.36	64.21	24.86	13.31	54.21	40.90	9.65	N
1	0.209	38.60	63.26	24.66	9.68	53.26	43.59	9.65	N
1	0.245	37.77	61.94	24.17	8.85	51.94	43.10	9.65	N
1	0.263	37.53	61.35	23.82	8.76	51.35	42.60	9.65	N
1	0.281	36.74	60.80	24.06	8.47	50.80	42.33	9.65	N

Note: 1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

FG-600F_DC PSU(Delta_Left + Right)

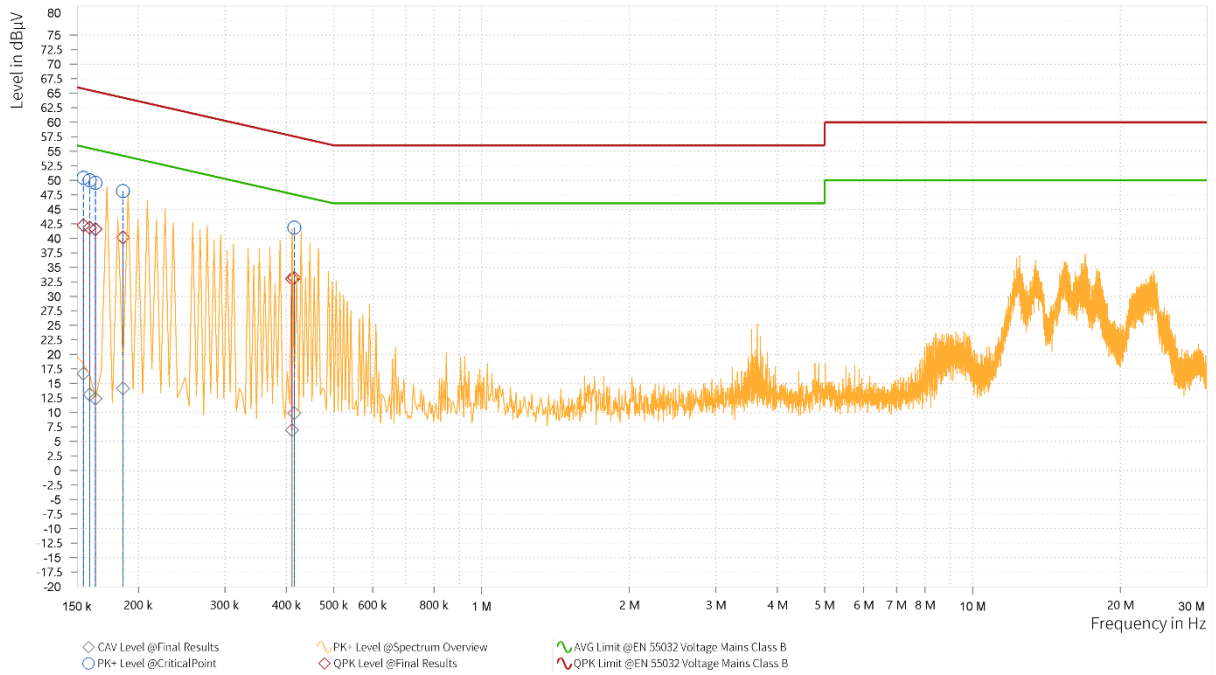


Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.155	42.23	65.75	23.52	16.70	55.75	39.06	9.65	L1
1	0.159	41.84	65.52	23.67	13.07	55.52	42.44	9.65	L1
1	0.164	41.56	65.28	23.73	12.40	55.28	42.88	9.65	L1
1	0.186	40.16	64.21	24.05	14.14	54.21	40.07	9.65	L1
1	0.411	33.06	57.63	24.57	6.94	47.63	40.69	9.66	L1
1	0.416	33.18	57.54	24.35	9.90	47.54	37.63	9.66	L1

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

FG-600F_DC PSU(Delta_Left + Right)

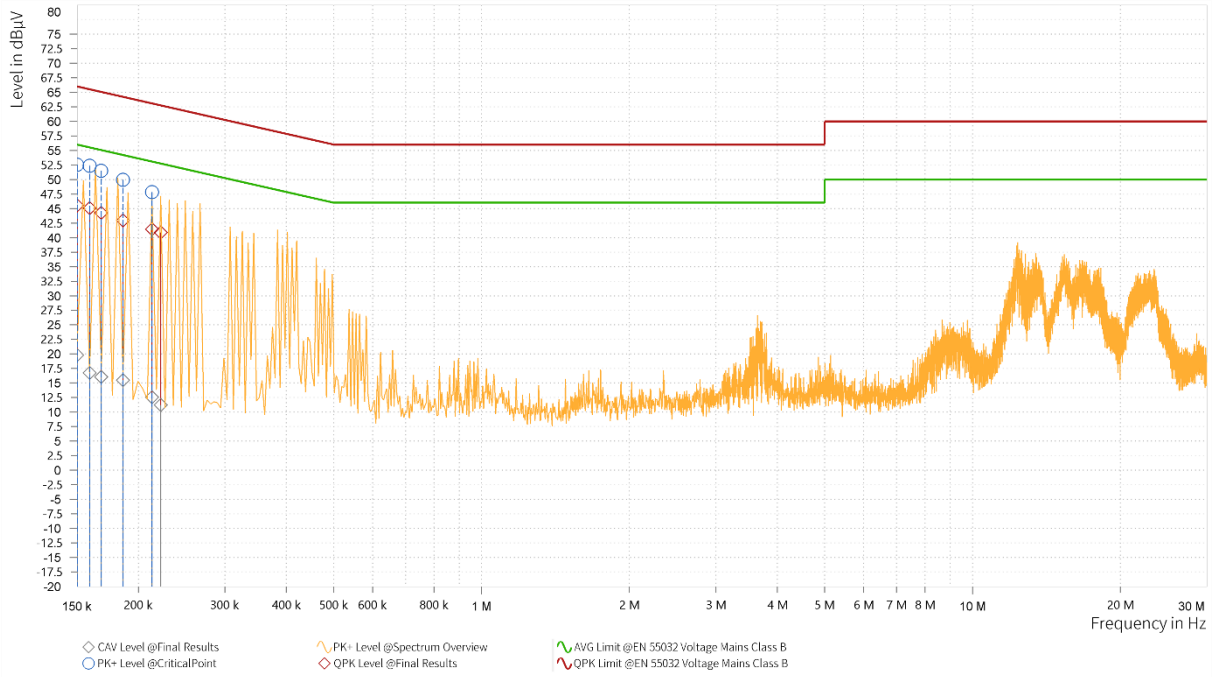

Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line
1	0.150	45.54	66.00	20.46	19.80	56.00	36.20	9.65	N
1	0.159	45.06	65.52	20.46	16.75	55.52	38.76	9.65	N
1	0.168	44.27	65.06	20.79	16.05	55.06	39.01	9.65	N
1	0.186	42.95	64.21	21.27	15.48	54.21	38.74	9.65	N
1	0.213	41.46	63.09	21.63	12.56	53.09	40.53	9.65	N
1	0.222	40.89	62.74	21.85	11.23	52.74	41.52	9.65	N

Note: 1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).


5.2. Conducted Test Results

Reference Appendix A / Appendix B

5.3. Radiated Emission Measurement

Below 1 GHz

Standard:	Part 15.247	Test Site:	96602 - WG
Polarization:	Vertical		
Test Mode	Transmit Mode		
ReMark:	FG-601F_AC PSU(Delta_Left)		

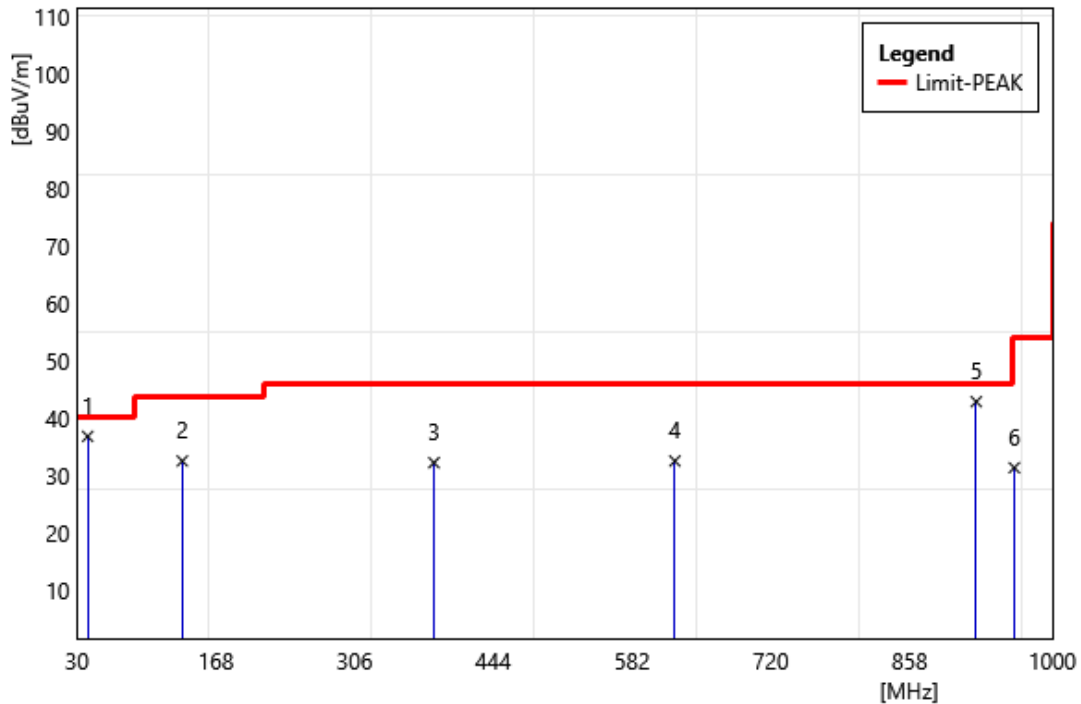


No.	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	ReMark
1	40.67	49.13	-12.41	36.72	40	-3.28	PEAK
2	134.76	45.38	-12.95	32.43	43.5	-11.07	PEAK
3	385.02	41.06	-8.94	32.12	46	-13.88	PEAK
4	624.61	36.69	-4.26	32.43	46	-13.57	PEAK
5	924.34	43.01	-0.23	42.78	46	-3.22	PEAK
6	962.17	31.53	-0.29	31.24	54	-22.76	PEAK

Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

Standard:	Part 15.247	Test Site:	96602 - WG
Polarization:	Horizontal		
Test Mode	Transmit Mode		
ReMark:	FG-601F_AC PSU(Delta_Left)		

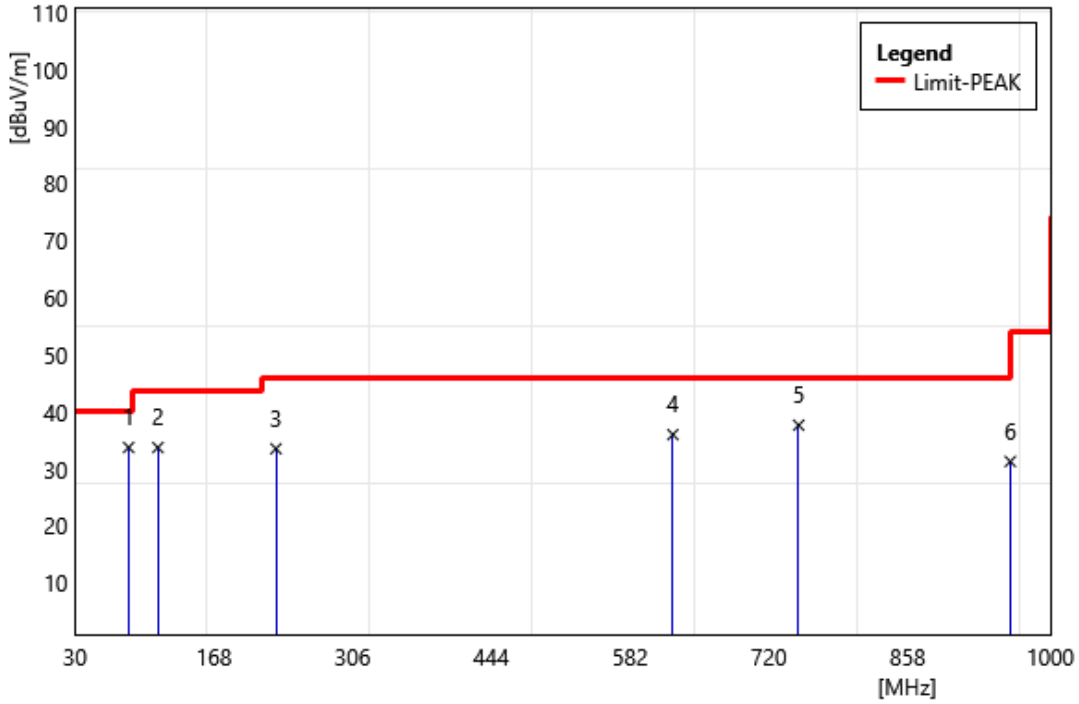


No.	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	ReMark
1	83.35	51.05	-17.31	33.74	40	-6.26	PEAK
2	112.45	48.44	-14.71	33.73	43.5	-9.77	PEAK
3	229.82	48.23	-14.71	33.52	46	-12.48	PEAK
4	624.61	40.26	-4.26	36	46	-10	PEAK
5	749.74	39.93	-2.28	37.65	46	-8.35	PEAK
6	960.23	31.6	-0.31	31.29	54	-22.71	PEAK

Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

Standard:	Part 15.247	Test Site:	96602 - WG
Polarization:	Vertical		
Test Mode	Transmit Mode		
ReMark:	FG-601F_AC PSU(Delta_Right)		

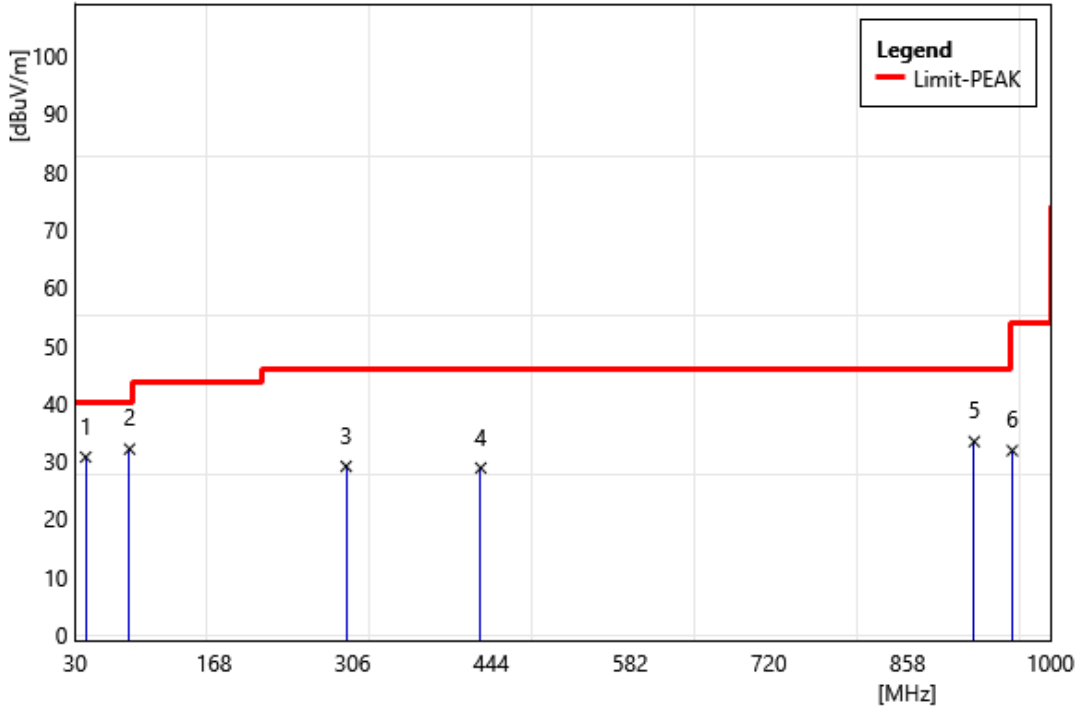


No.	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	ReMark
1	40.67	43.11	-12.41	30.7	40	-9.3	QP
2	84.32	49.61	-17.53	32.08	40	-7.92	PEAK
3	299.66	40.32	-11.22	29.1	46	-16.9	PEAK
4	433.52	36.58	-7.75	28.83	46	-17.17	PEAK
5	924.34	33.61	-0.23	33.38	46	-12.62	PEAK
6	962.17	32.12	-0.29	31.83	54	-22.17	PEAK

Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

Standard:	Part 15.247	Test Site:	96602 - WG
Polarization:	Horizontal		
Test Mode	Transmit Mode		
ReMark:	FG-601F_AC PSU(Delta_Right)		

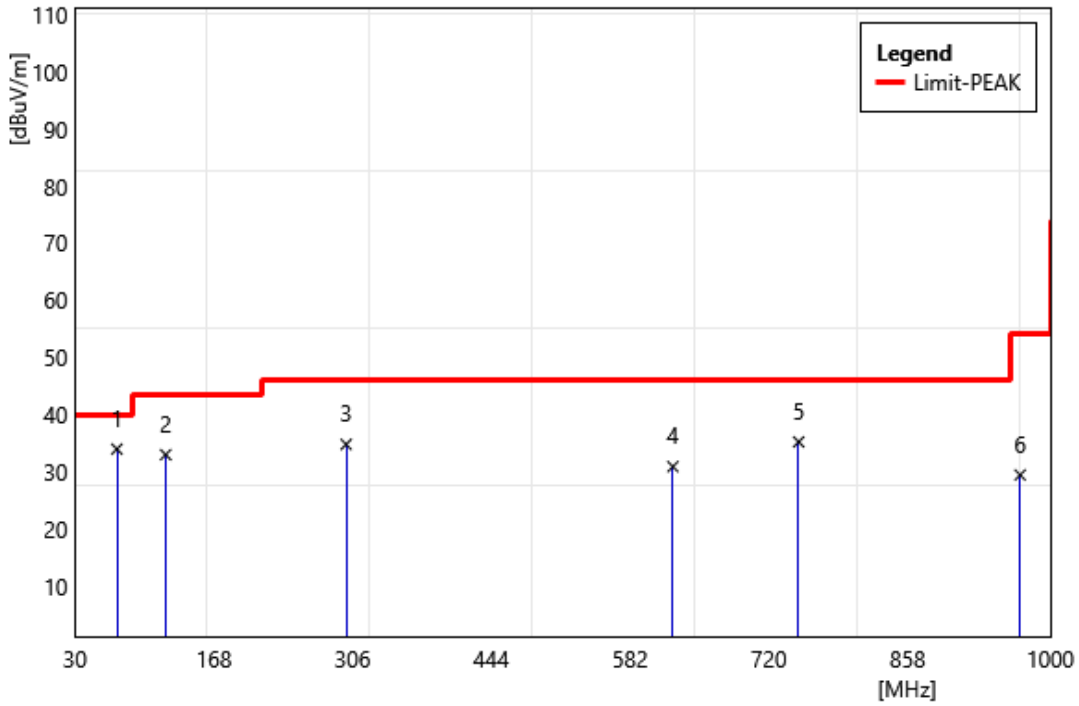


No.	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	ReMark
1	71.71	48.28	-14.35	33.93	40	-6.07	PEAK
2	120.21	47.21	-14.26	32.95	43.5	-10.55	PEAK
3	299.66	45.97	-11.22	34.75	46	-11.25	PEAK
4	624.61	35.13	-4.26	30.87	46	-15.13	PEAK
5	749.74	37.47	-2.28	35.19	46	-10.81	PEAK
6	969.93	29.55	-0.14	29.41	54	-24.59	PEAK

Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

Standard:	Part 15.247	Test Site:	96602 - WG
Polarization:	Vertical		
Test Mode	Transmit Mode		
ReMark:	FG-601F_AC PSU(Delta_Left + Right)		

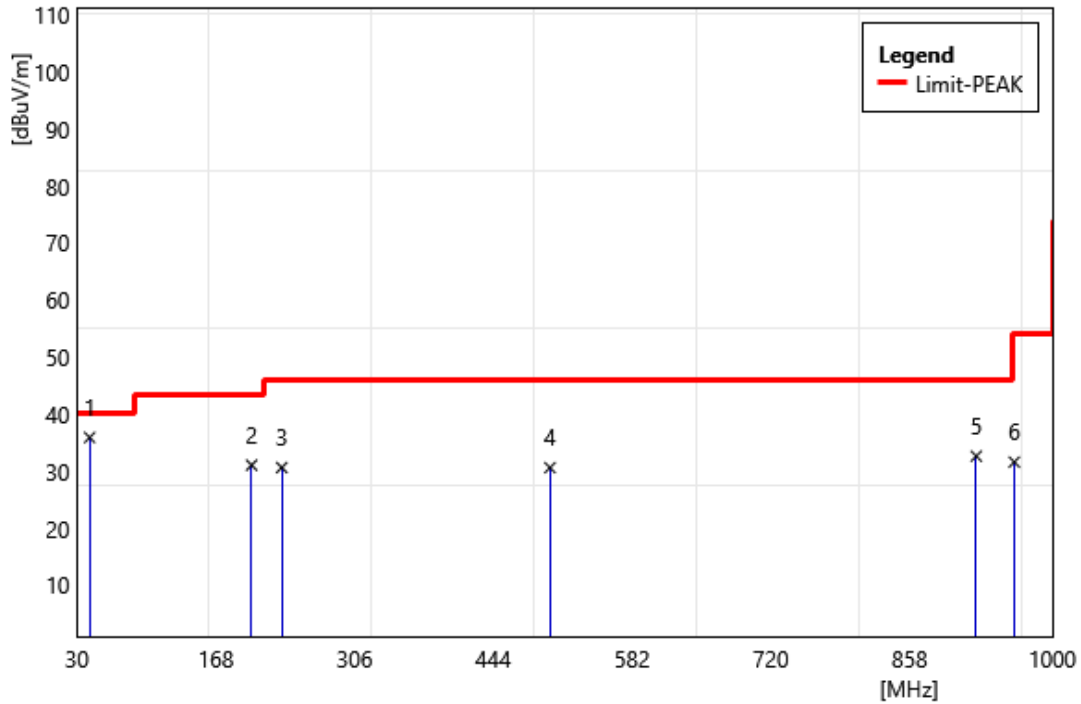


No.	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	ReMark
1	42.61	48	-12.08	35.92	40	-4.08	PEAK
2	203.63	46.23	-15.16	31.07	43.5	-12.43	PEAK
3	233.7	44.67	-14.03	30.64	46	-15.36	PEAK
4	500.45	37.41	-6.78	30.63	46	-15.37	PEAK
5	924.34	32.88	-0.23	32.65	46	-13.35	PEAK
6	962.17	31.89	-0.29	31.6	54	-22.4	PEAK

Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

Standard:	Part 15.247	Test Site:	96602 - WG
Polarization:	Horizontal		
Test Mode	Transmit Mode		
ReMark:	FG-601F_AC PSU(Delta_Left + Right)		

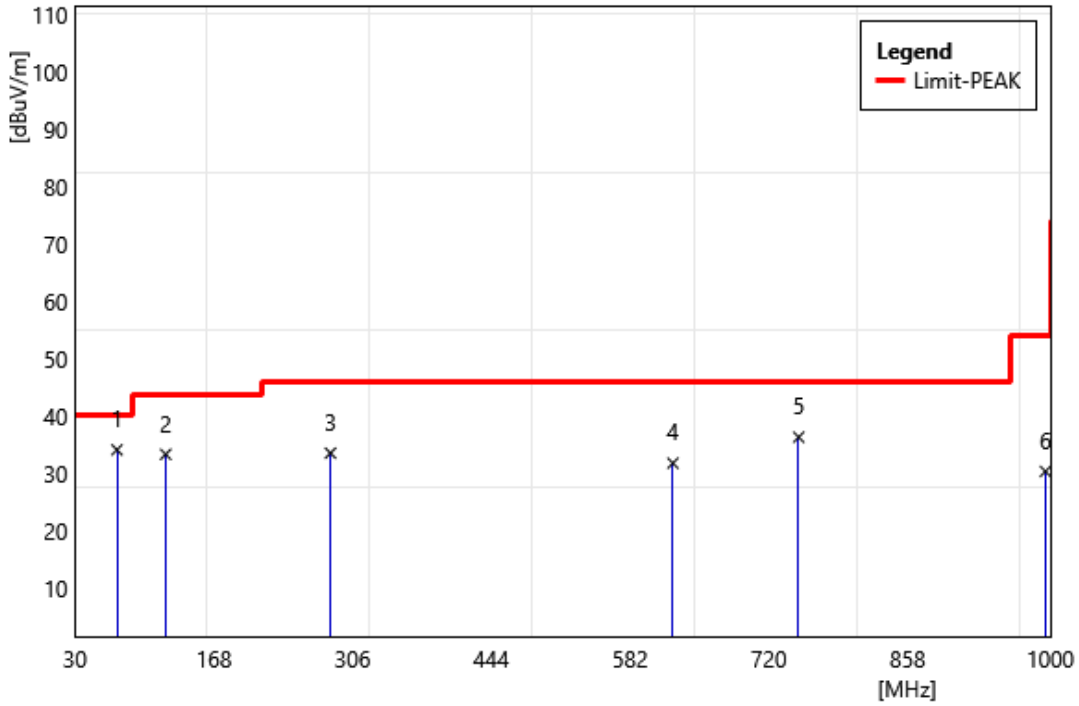


No.	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	ReMark
1	71.71	48.41	-14.35	34.06	40	-5.94	PEAK
2	120.21	47.52	-14.26	33.26	43.5	-10.24	PEAK
3	284.14	45.04	-11.56	33.48	46	-12.52	PEAK
4	624.61	35.98	-4.26	31.72	46	-14.28	PEAK
5	749.74	38.54	-2.28	36.26	46	-9.74	PEAK
6	995.15	30.1	0.18	30.28	54	-23.72	PEAK

Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

Standard:	Part 15.247	Test Site:	96602 - WG
Polarization:	Vertical		
Test Mode	Transmit Mode		
ReMark:	FG-600F_AC PSU(Delta_Left)		

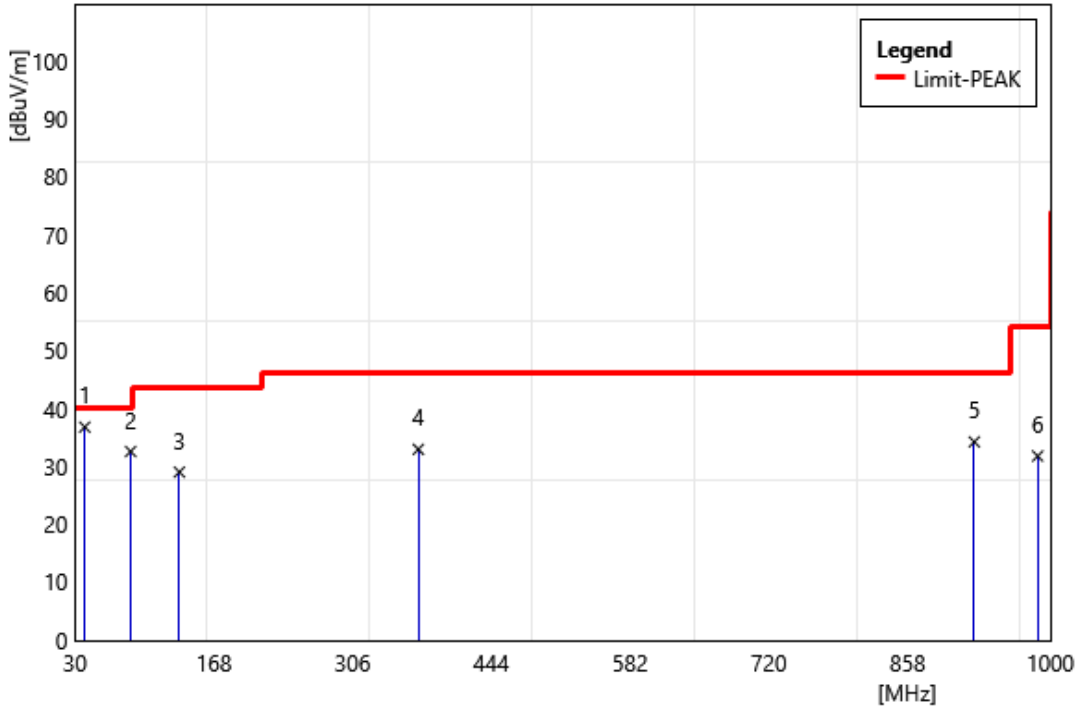


No.	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	ReMark
1	39.7	49.13	-12.4	36.73	40	-3.27	PEAK
2	85.29	50.06	-17.54	32.52	40	-7.48	PEAK
3	133.79	41.88	-12.92	28.96	43.5	-14.54	PEAK
4	371.44	42.29	-9.4	32.89	46	-13.11	PEAK
5	924.34	34.41	-0.23	34.18	46	-11.82	PEAK
6	987.39	31.66	0.08	31.74	54	-22.26	PEAK

Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

Standard:	Part 15.247	Test Site:	96602 - WG
Polarization:	Horizontal		
Test Mode	Transmit Mode		
ReMark:	FG-600F_AC PSU(Delta_Left)		

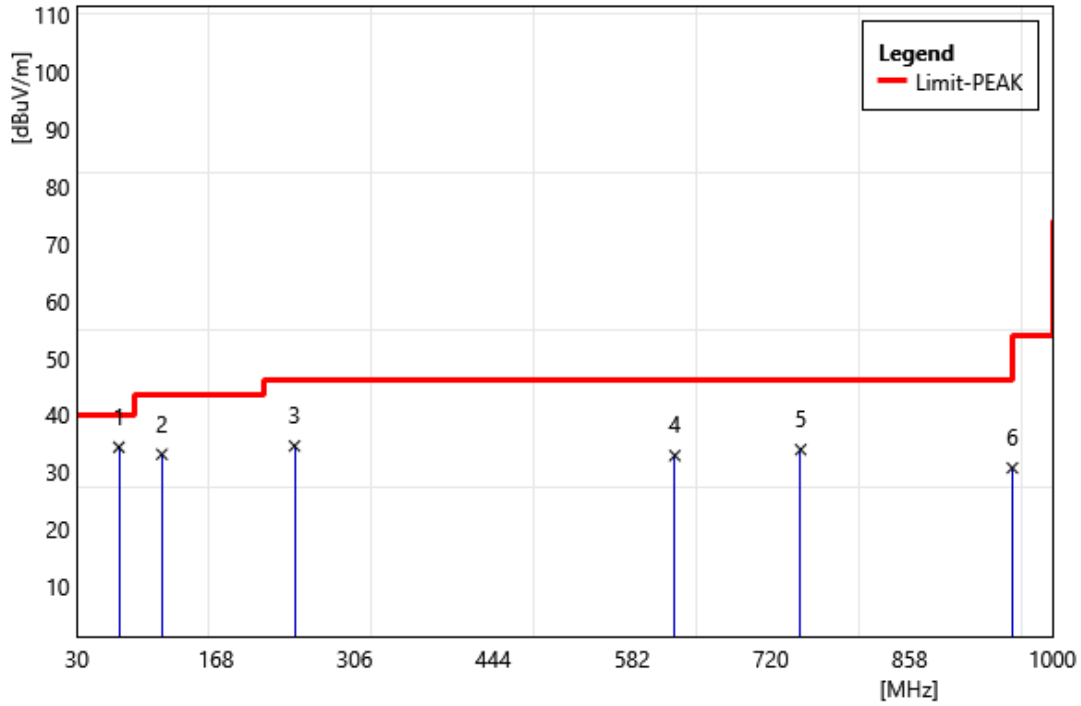


No.	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	ReMark
1	71.71	48.76	-14.35	34.41	40	-5.59	PEAK
2	114.39	47.86	-14.68	33.18	43.5	-10.32	PEAK
3	246.31	47.67	-13.04	34.63	46	-11.37	PEAK
4	624.61	37.2	-4.26	32.94	46	-13.06	PEAK
5	749.74	36.27	-2.28	33.99	46	-12.01	PEAK
6	960.23	31.1	-0.31	30.79	54	-23.21	PEAK

Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

Standard:	Part 15.247	Test Site:	96602 - WG
Polarization:	Vertical		
Test Mode	Transmit Mode		
ReMark:	FG-600_AC PSU(Delta_ Right)		

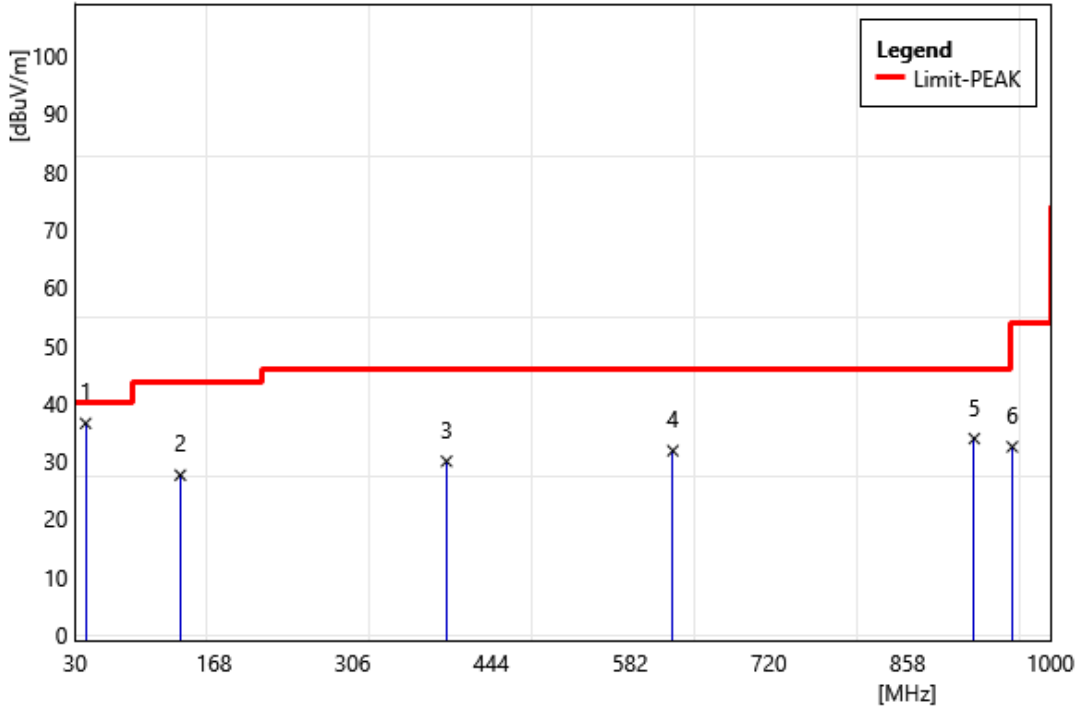


No.	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	ReMark
1	40.67	48.96	-12.41	36.55	40	-3.45	PEAK
2	134.76	40.54	-12.95	27.59	43.5	-15.91	PEAK
3	399.57	38.67	-8.68	29.99	46	-16.01	PEAK
4	624.61	36.08	-4.26	31.82	46	-14.18	PEAK
5	924.34	34.14	-0.23	33.91	46	-12.09	PEAK
6	962.17	32.78	-0.29	32.49	54	-21.51	PEAK

Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

Standard:	Part 15.247	Test Site:	96602 - WG
Polarization:	Horizontal		
Test Mode	Transmit Mode		
ReMark:	FG-600_AC PSU(Delta_ Right)		

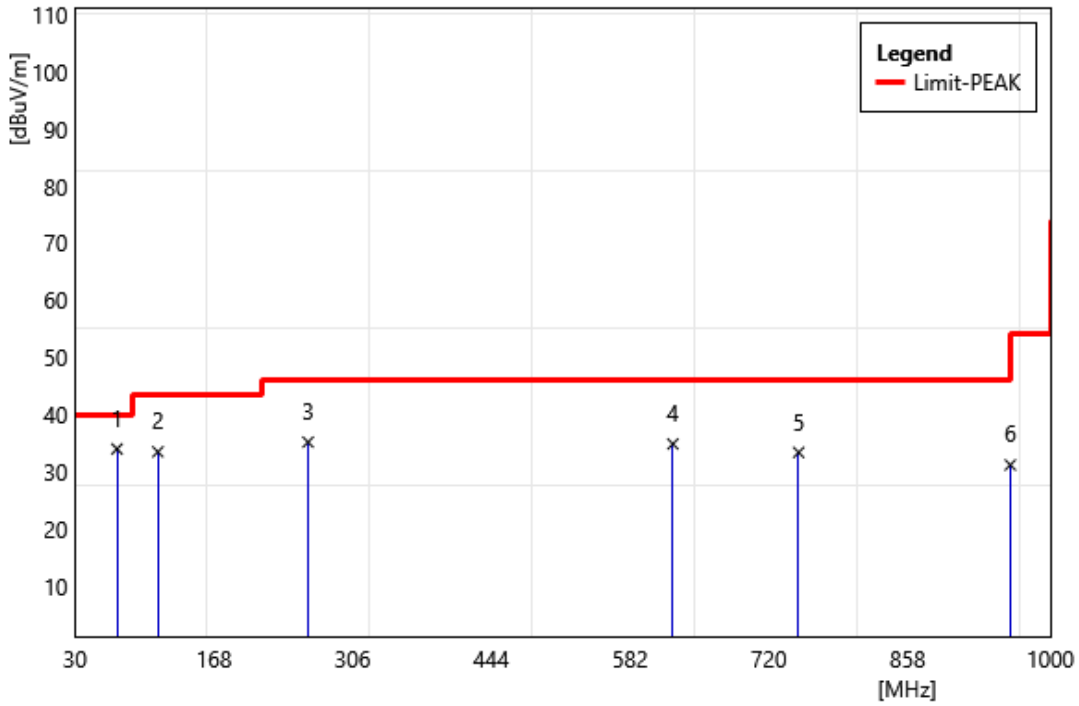


No.	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	ReMark
1	71.71	48.32	-14.35	33.97	40	-6.03	PEAK
2	112.45	48.18	-14.71	33.47	43.5	-10.03	PEAK
3	261.83	47.88	-12.71	35.17	46	-10.83	PEAK
4	624.61	39.11	-4.26	34.85	46	-11.15	PEAK
5	749.74	35.65	-2.28	33.37	46	-12.63	PEAK
6	960.23	31.47	-0.31	31.16	54	-22.84	PEAK

Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

Standard:	Part 15.247	Test Site:	96602 - WG
Polarization:	Vertical		
Test Mode	Transmit Mode		
ReMark:	FG-600F_AC PSU(Delta_Left + Right)		

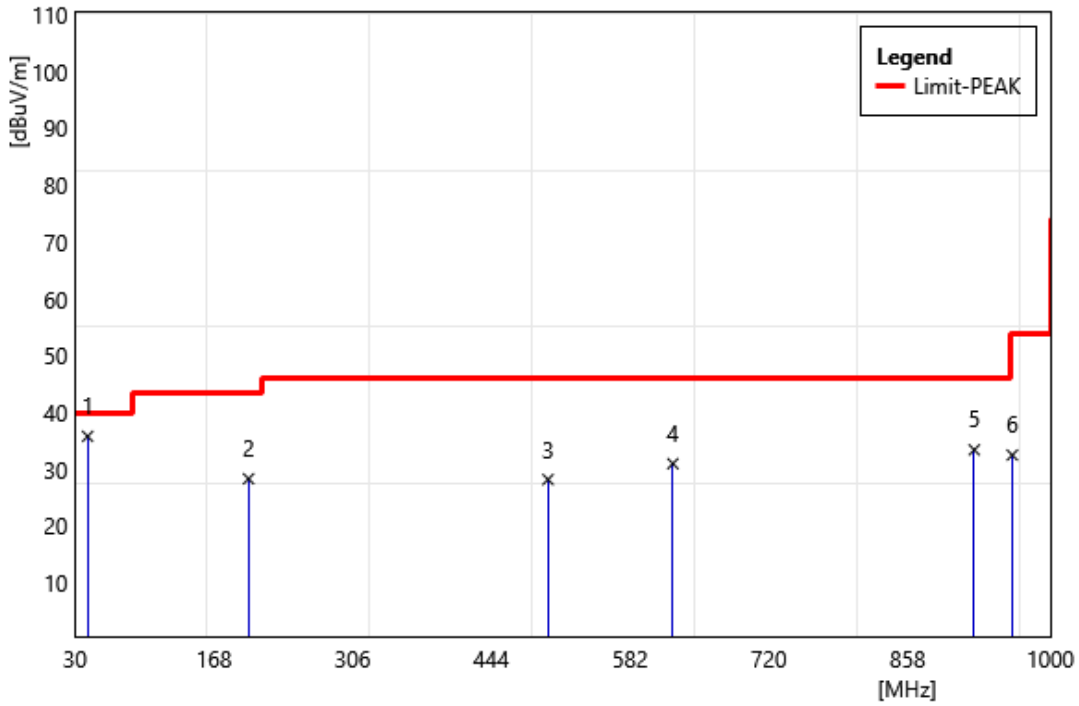


No.	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	ReMark
1	42.61	47.89	-12.08	35.81	40	-4.19	PEAK
2	202.66	43.48	-15.14	28.34	43.5	-15.16	PEAK
3	500.45	34.97	-6.78	28.19	46	-17.81	PEAK
4	624.61	35.24	-4.26	30.98	46	-15.02	PEAK
5	924.34	33.66	-0.23	33.43	46	-12.57	PEAK
6	962.17	32.8	-0.29	32.51	54	-21.49	PEAK

Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

Standard:	Part 15.247	Test Site:	96602 - WG
Polarization:	Horizontal		
Test Mode	Transmit Mode		
ReMark:	FG-600F_AC PSU(Delta_Left + Right)		

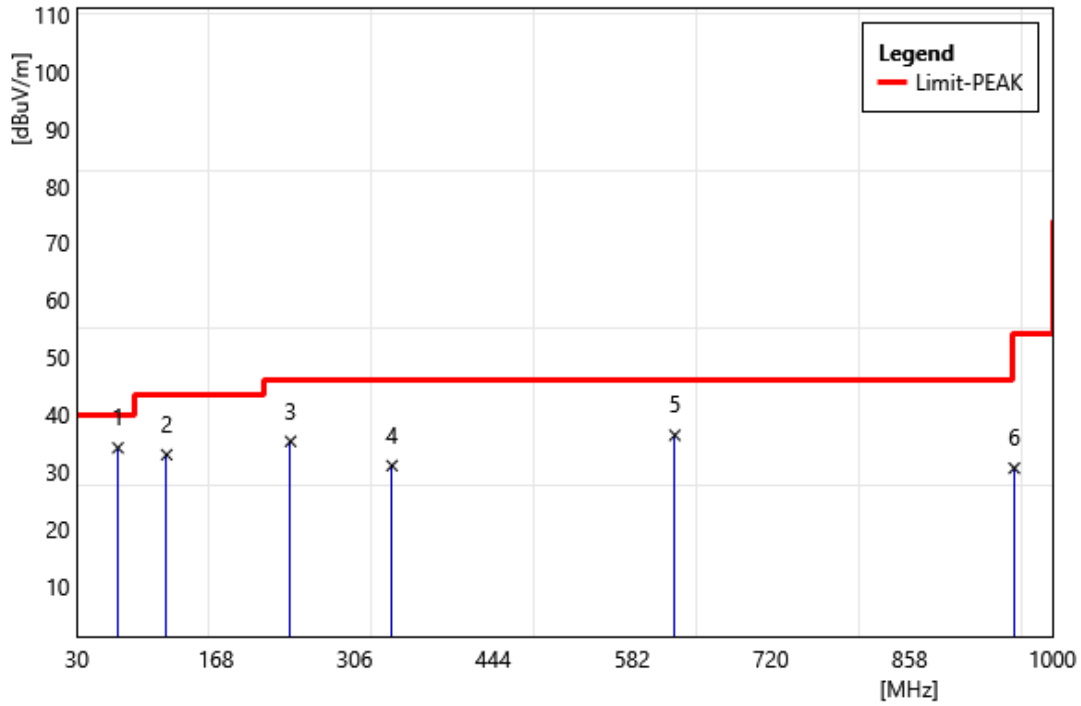

No.	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	ReMark
1	70.74	48.31	-14.15	34.16	40	-5.84	PEAK
2	119.24	47.44	-14.47	32.97	43.5	-10.53	PEAK
3	242.43	48.45	-13.16	35.29	46	-10.71	PEAK
4	343.31	41.24	-10.2	31.04	46	-14.96	PEAK
5	624.61	40.63	-4.26	36.37	46	-9.63	PEAK
6	962.17	30.9	-0.29	30.61	54	-23.39	PEAK

Note:1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).