

UTC-315

15.6" Ubiquitous Touch Computer
UTC-315D with Intel® Celeron® J1900
UTC-315F with Intel® Core™ i5-6300U
UTC-315G with Intel® Pentium® N4200E
UTC-315H with Intel® Core™ i5-8365UE



DeviceOn/iService

Features

- Low power and fanless system design
- Built in Intel Celeron® J1900 (UTC-315D), Core™ i5-6300U (UTC-315F), Pentium® N4200E (UTC-315G) and Intel® Core™ i5-8365UE (UTC-315H)
- 15.6" monitor with 16:9 widescreen display
- IP65-rated front panel for water and dust resistance
- Supports both landscape and portrait screen orientations
- VESA 75 mm standard mounting holes for varied mounting demands
- Detachable frame design for panel mount applications
- Support DeviceOn/iService software for remote device management (UTC-315D/F only)
- Support TPM 2.0 (UTC-315F&H)



Introduction

UTC-315 is the multi-purpose all-in-one computing system which equipped with wide format, touch based LCD panel. It is easy to integrate key peripherals and display systems for diversified self-service and interactive signage deploy in different application areas. With the removable frame, the system also could fulfill industries or control system applications with panel mounting design. UTC series touch panel computers are the best investments to enhance user satisfaction, further brand equity, and maximize business profits.

Moreover, UTC-315 is equipped with Advantech's DeviceOn/iService software, which is a next-generation unified device management solution based on the WISE-DeviceOn platform. With support for batch operations and multi-device control, DeviceOn/iService enables easy device configuration and deployment for convenient remote device management.


Specifications

Model	UTC-315D		UTC-315F		UTC-315G		UTC-315H		
Processor System	CPU	Intel® Celeron® J1900	Intel® Core™ i5-6300U (Default)	Intel® Core™ i3-6100U (Available)	Intel® Pentium® N4200E (Default)	Intel® Celeron® N3350 (Available)	Intel® Core™ i5-8365UE (Default)	Intel® Core™ i3-8145UE (Available)	
	Basic Frequency	2.0 GHz (Quad-Core)	2.4GHz (Duo Core)	2.4GHz (Duo Core)	1.10 GHz (Quad-Core)	1.6GHz(Quad-Core)	1.6GHz(Quad-Core)	1.6GHz(Quad-Core)	
	L2 Cache MB	2MB	L3 Cache 3MB	L3 Cache 3MB	L2 Cache 2MB	L2 Cache 2MB	L3 Cache 3MB	L3 Cache 3MB	
	Memory	1 x 204pin SO-DIMM DDR3L 1333 MHz up to 8 GB	1 x 260pin SO-DIMM DDR4 2133 MHz up to 16 GB	1 x 260pin SO-DIMM DDR4 2133 MHz up to 16 GB	1 x 204pin SO-DIMM DDR3L 1866 MHz up to 8GB	1 x 204pin SO-DIMM DDR3L 1866 MHz up to 8GB	1x 260pin SO-DIMM DDR4 2400 MHz up to 32GB	1x 260pin SO-DIMM DDR4 2400 MHz up to 32GB	1x 260pin SO-DIMM DDR4 2400 MHz up to 32GB
	HDD	1 x 2.5 internal SATA HDD bay							
	Network	2 x Gigabit Ethernet ports (RJ-45)							
	I/O ports	1 x RS-232 1 x RS-232 / 422 / 485 5 x USB 2.0 / 1 x USB 3.0 2 x Gigabit Ethernet (RJ-45) 1 x HDMI 1 x RJ11 (12V output only) Audio Line-out x 1, Mic-in x 1	1 x RS-232 1 x RS-232/422/485 2 x USB 2.0 / 4 x USB 3.0 2 x Gigabit Ethernet (RJ-45) 1 x HDMI 1 x RJ11 (12V output only) Audio Line-out x 1, Mic-in x 1	1 x RS-232 1 x RS-232/422/485 2 x USB 2.0 / 4 x USB 3.0 2 x Gigabit Ethernet (RJ-45) 1 x HDMI 1 x RJ11 (12V output only) Audio Line-out x 1, Mic-in x 1	1 x RS-232 1 x RS-232 / 422 / 485 2 x USB 2.0 / 4 x USB 3.0 2 x Gigabit Ethernet (RJ-45) 1 x HDMI 1 x RJ11 (12V output only) Audio Line-out x 1, Mic-in x 1	1 x RS-232 1 x RS-232 / 422 / 485 2 x USB 2.0 / 4 x USB 3.0 2 x Gigabit Ethernet (RJ-45) 1 x HDMI 1 x RJ11 (12V output only) Audio Line-out x 1, Mic-in x 1	1 x RS-232 1 x RS-232 / 422 / 485 2 x USB 2.0 / 4 x USB 3.0 2 x Gigabit Ethernet (RJ-45) 1 x HDMI 1 x DP Audio Line-out x 1, Mic-in x 1	1 x RS-232 1 x RS-232 / 422 / 485 2 x USB 2.0 / 4 x USB 3.0 2 x Gigabit Ethernet (RJ-45) 1 x HDMI 1 x DP Audio Line-out x 1, Mic-in x 1	
	Stereo Speaker	2Wx2							
	BUS expansion	Full-size MiniPCIe/mSATA				1x Full-size MiniPCIe for mSATA SSD 1x M.2 2230 E-Key		1x M.2 2280/2242 M-Key for NVMe/ SATA SSD 1x M.2 2230 E-Key	
	Mounting Dimension (W x H x D)	VESA 75 x 75; crew Size: M4, 10mm 402 x 260 x 39.7 mm							
Weight	3.5 kg								
Security	TPM2.0		Support		Optional		Support		
OS support	WES 7P 32bit WES 7E 32bit Windows Pro Embedded 7 SP1 64bit WES8 64bit Windows Embedded 8.1 Industry Pro 64bit Win 10 IoT Enterprise 64bit Linux Android 6.0		WES 7P 32bit WES 7E 32bit Windows Pro Embedded 7 SP1 64bit WES8 64bit Windows Embedded 8.1 Industry Pro 64bit Win 10 IoT Enterprise 64bit Linux		Win 10 IoT Enterprise 64bit Android 10.0 Linux		Win 10 IoT Enterprise 64bit Linux		
Environmental Specifications	Operating Temperature 0 ~ 40° C (32 ~ 104° F) Relative Humidity 10 ~ 95% @ 40° C non-condensing Vibration 0.5G Shock 10 G peak acceleration (11 msec. duration) EMC/ Safety CE, FCC, UL, CCC CB,BSMI Front Panel Protection IP65/NEMA4 Compliant								
Power Supply	Input Voltage 12Voc *12-30Voc Optional Power Consumption Typical 32W, Max. 70W Adapter 12V == 7A, 84W or 12V == 8A, 96W ITE adapter (dependent on stock)		12-30Voc		12Voc *12-30Voc Optional		12-30Voc		
LCD Display	Size 15.6" TFT LCD Max Resolution 1366 x 768 (FHD 1920 x 1080 Optional) Max Color 262K Pixel Pitch (um) 252(H) x 252(V) Brightness (cd/m²) 220 (Typical) View Angle 90° /60°(170°) /170° Optional)				15.6" TFT LCD 1920 x 1080 262K 252(H) x 252(V) 220 (Typical) 170°/170°				
Touch Screen	Type Analog Resistive 5-wires (Res. Flat Glass) / Projected Capacitive Touch Panel (Pcap. Flat Glass) / Glass Panel Light Transmission Res. Touch : 80% ± 5% / P-Cap Touch : 90% ± 2% Controller COM interface / USB interface								

Specifications (Cont.)


DeviceOn/iService Remote Device Management	Operating System	Windows 10
	Common Controls (Reboot, Shutdown)	✓
	Remote desktop	✓ (VNC)
	Audio Controls	✓*
	Connection Status	✓
	Hardware Status	✓*
	Hard Disk Status	✓*
	Batch Operation Support	✓
	OTA Storage Management	FTP
	OTA Software Updates	✓
	Software Watchlist	✓
	Software Start/Stop	✓*
Dependant on device model	Peripherals Watchlist	✓

Note: DeviceOn/iService software must be downloaded from the Advantech website at <https://www.advantech.com/search/?q=DeviceOn%2FiService&st=support&sst=Utility>

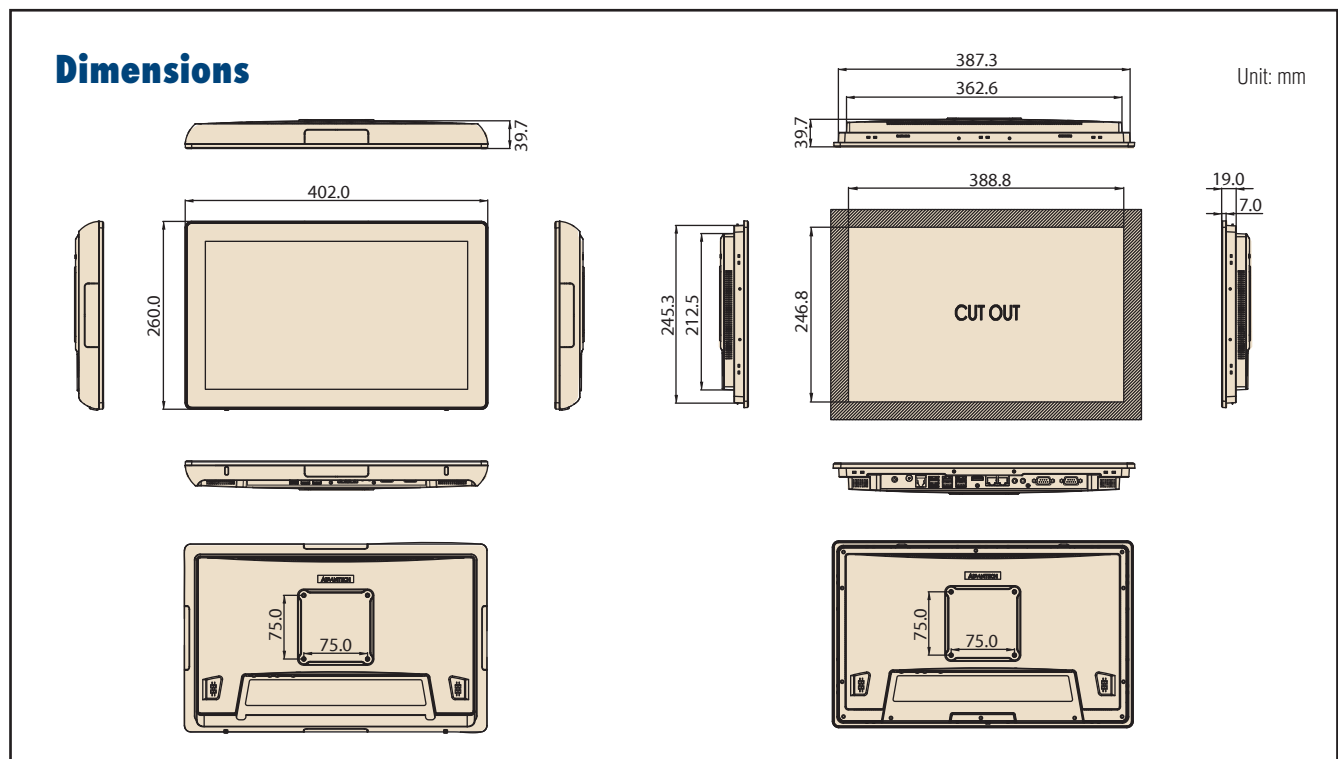


Fully- Integrated I/O

UTC-315D/F/G

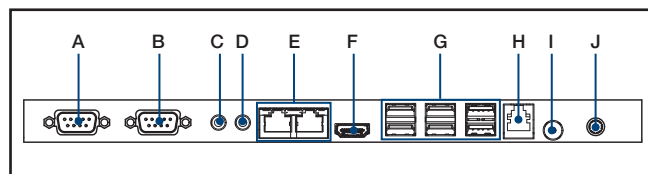

- A. COM1
- B. COM2
- C. Line-out (UTC-315D)
- C. Mic in (UTC-315F/UTC-315G)
- D. Mic in (UTC-315D)
- D. Line-Out (UTC-315F/UTC-315G)
- E. LAN ports x 2
- F. HDMI
- G. USB 2.0 x 5 / USB 3.0 x 1 (UTC-315D)
USB 2.0 x 2 / USB 3.0 x 4 (UTC-315F/
UTC-315G)
- H. RJ11 (12V output only)
- I. Power button
- J. DC input 12V (UTC-315D/UTC-315G)
12-30V (UTC-315F)

UTC-315H

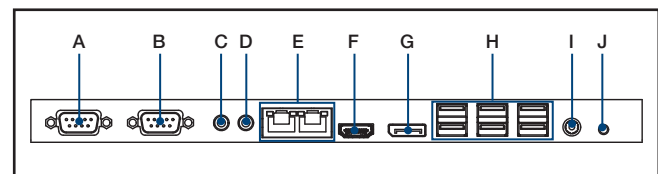

- A. COM1
- B. COM2
- C. Mic in
- D. Line-out
- E. LAN ports x 2
- F. HDMI
- G. DP
- H. USB 3.1 x 6
- I. DC input 12-30V
- J. Power button

Ordering Information

Part No.	US only P/N	Description
UTC-315DR-ATW0E	UTC-315DR-USW0E	15.6" White, Intel® Celeron® J1900, Res T/S, 4 GB RAM, IT Adapter
UTC-315DR-ATB0E	UTC-315DR-USB0E	15.6" Black, Intel® Celeron® J1900, Res T/S, 4 GB RAM, IT Adapter
UTC-315DP-ATW0E	UTC-315DP-USW0E	15.6" White, Intel® Celeron® J1900, PCap T/S, 4 GB RAM, IT Adapter
UTC-315DP-ATB0E	UTC-315DP-USB0E	15.6" Black, Intel® Celeron® J1900, PCap T/S, 4 GB RAM, IT Adapter
UTC-315FR-ATW0E	UTC-315FR-USW0E	15.6" White, Intel® Core™ i5-6300U, Res T/S 4GB RAM, IT Adapter
UTC-315FR-ATB0E	UTC-315FR-USB0E	15.6" Black, Intel® Core™ i5-6300U, Res T/S 4GB RAM, IT Adapter
UTC-315FP-ATW0E	UTC-315FP-USW0E	15.6" White, Intel® Core™ i5-6300U, PCap T/S 4GB RAM, IT Adapter
UTC-315FP-ATB0E	UTC-315FP-USB0E	15.6" Black, Intel® Core™ i5-6300U, PCap T/S 4GB RAM, IT Adapter
UTC-315GR-ATW0E	UTC-315GR-USW0E	15.6" White, Intel® Pentium® N4200E, Res T/S, 4 GB RAM, IT Adapter
UTC-315GR-ATB0E	UTC-315GR-USB0E	15.6" Black, Intel® Pentium® N4200E, Res T/S, 4 GB RAM, IT Adapter
UTC-315GP-ATW0E	UTC-315GP-USW0E	15.6" White, Intel® Pentium® N4200E, PCap T/S, 4 GB RAM, IT Adapter
UTC-315GP-ATB0E	UTC-315GP-USB0E	15.6" Black, Intel® Pentium® N4200E, PCap T/S, 4 GB RAM, IT Adapter
UTC-315HR-ATW0E	UTC-315HR-USW0E	15.6" White, Intel® Core™ i5-8365UE, Res T/S 8GB RAM, IT Adapter
UTC-315HR-ATB0E	UTC-315HR-USB0E	15.6" Black, Intel® Core™ i5-8365UE, Res T/S 8GB RAM, IT Adapter
UTC-315HP-ATW0E	UTC-315HP-USW0E	15.6" White, Intel® Core™ i5-8365UE, PCap T/S 8GB RAM, IT Adapter
UTC-315HP-ATB0E	UTC-315HP-USB0E	15.6" Black, Intel® Core™ i5-8365UE, PCap T/S 8GB RAM, IT Adapter

*White Touch Bezel could be customized by customer request with MOQ

UTC-315 WiFi Ordering Information

Part No.	US only P/N	Description
UTC-300P-W10E	UTC-300P-W10U	WiFi Kit for UTC-315D/E/F (MiniPCIe, WiFi only)
UTC-300P-W11E	UTC-300P-W11U	WiFi Kit for UTC-315D/E/F (MiniPCIe, WiFi and Bluetooth)
UTC-300P-W12E	UTC-300P-W12U	WiFi Kit for UTC-315G/H (M.2 2230, WiFi and Bluetooth)

Installation Accessory

Part No.	US only P/N	Description
UTC-300P-D10E	UTC-300P-D10U	Desk Stand, Single Color-Silver (UTC-315 series)
UTC-T01-STANDE	Not applicable	Triangle shape floor stand (UTC-315/UTC-318/UTC-320 series)
UTC-H01-STANDE	Not applicable	H-shaped floor stand (UTC-315/UTC-318/UTC-320 series)
UTC-PANEL-MOUNT6E	UTC-PANEL-MOUNT6U	Panel mount Kit (UTC-315 series)
ARES-12240-AR01100	Not Applicable	Wall Mount Kit, support 2-10kg, VESA 75/100mm (Tilttable)
ARES-12250-L101000	Not applicable	Wall Mount Kit, Max. support 25kg, VESA 75/100mm (Fixed)

Peripherals for UTC-300 series

Part No.	US only P/N	Description
UTC-300P-C20E	UTC-300P-C20U	5M Camera Module, White, for UTC-300 series
UTC-300P-C21E	UTC-300P-C21U	5M Camera Module, Black, for UTC-300 series
UTC-300P-M20E	UTC-300P-M20U	Magnet Strip Reader, White, for UTC-300 series
UTC-300P-M21E	UTC-300P-M21U	Magnet Strip Reader, Black, for UTC-300 series
UTC-300P-R20E	UTC-300P-R20U	RFID Reader, White, for UTC-300 series
UTC-300P-R21E	UTC-300P-R21U	RFID Reader, Black, for UTC-300 series
UTC-300P-S20E	UTC-300P-S20U	Smart Card Reader, White, for UTC-300 series
UTC-300P-S21E	UTC-300P-S21U	Smart Card Reader, Black, for UTC-300 series
UTC-300P-B60E	UTC-300P-B60U	2D Barcode Reader, White for UTC-300 series
UTC-300P-B61E	UTC-300P-B61U	2D Barcode Reader, Black for UTC-300 series
UTC-300P-FP11E	UTC-300P-FP11U	Fingerprint Reader (black) for UTC-300 series

Power Cord Ordering Information

Part No.	Description
1702002605	Power cord 2P FRANCE 10A/16A 220V 1.83M 90D
1702002600	Power Cord 3P UL/CSA(USA) 125V 10A 1.83M 180D
1700000596-11	Power Cord (China) CCC,10A 250V, 3P 1830mm
1700018704	Power Cord UK BSI 2P 10A 250V 180cm 18AWG
1700000237	Power Cord PSE 3P 12A 125V 183cm
1700001714	Power Cord BSMI 3P 7A 125V 183cm

DeviceOn/iService

Unified Remote Device Management Software



Features

- Supports Advantech devices equipped with Windows, Android, and Linux OS
- Flexible device, location, user, and permissions management
- Enables remote monitoring and control of hardware, software, and peripherals
- Supports over-the-air (OTA) firmware and software updates
- Ensures quick, easy, and secure device onboarding
- RESTful APIs for third-party system integration

Introduction

Advantech's DeviceOn/iService is a next-generation unified device management solution based on the WISE-DeviceOn platform. Designed to enable centralized monitoring and remote management, DeviceOn/iService supports Advantech devices equipped with Windows, Linux, or Android operating systems. The software also supports the management of applications and integrated peripherals, such as a barcode scanner, card reader, camera, and printer. Users can remotely access and control connected devices, take screenshots, rollout OTA upgrades, and use remote desktop capabilities for troubleshooting from any location at any time. Moreover, DeviceOn/iService supports batch operations to facilitate the management of multiple devices simultaneously for easy and convenient device configuration and deployment.

Total Management



Devices & Hardware

- Windows, Linux, Android
- Hardware, storage, battery



Software & Peripherals

- Software monitoring & access
- Screens, USB devices, printers



Open for Expansion

- Peripheral integration
- Open APIs for integration

Remote Access



Real-Time Monitoring

- Connection/hardware status
- Software/peripheral status
- Failure notifications



Remote Controls

- Power controls
- Audio, backlight controls
- Software controls



Troubleshooting

- Screenshots
- Remote desktop support

Operational Efficiency



OTA updates

- System/software updates
- File repository management
- App store



Batch Controls

- 1-to-many batch reboot, etc.
- Time-saving tasks



Setup Booster

- Software/peripheral watchlist
- Roles, rule templates

Note: Some functions may vary according to the product

System Architecture

