


Product specification

Quick Reference Date

Antenna Layout & module on the system board	
Frequency Range	5135-5250MHz / 5725 ~ 5850MHz
Ant. Port Input Pwr. (dBm)	10
(dBi)	0 (all direction antenna)
Efficiency (dB)	62.67 %
Gain (dBi)	0.5 (peak Gain XY-plane)
Input Impedence(ohm)	50
Polarization Type	Vertical & Horizontal
VSWR	< 2

Antenna Layout & module on the system board

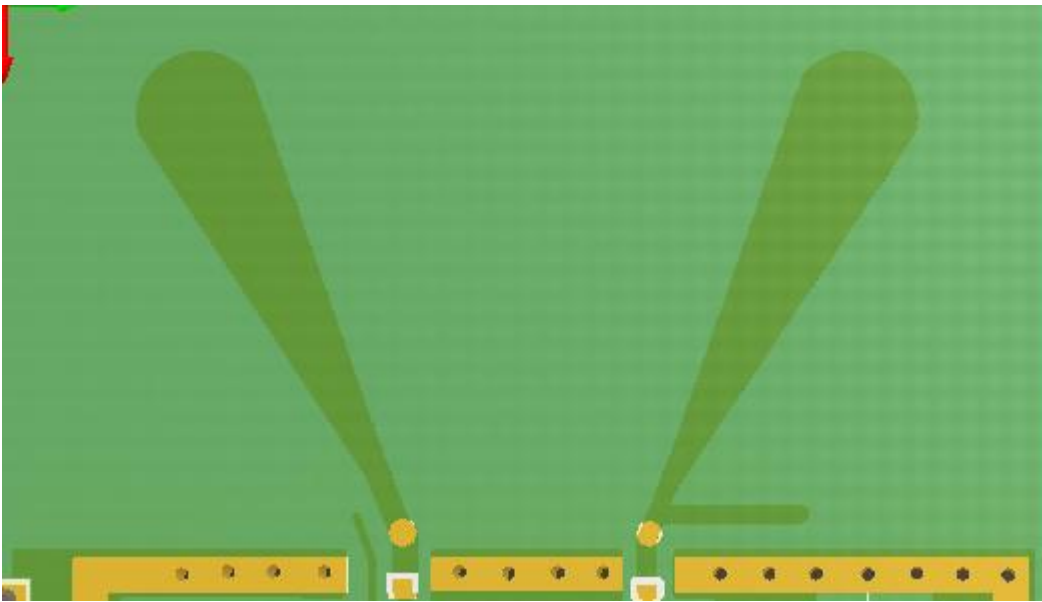



深圳市光明新区凤凰街道塘尾社区第三工业区永盛发工业园A栋二楼B区
Zone B, Second Floor, Building A, Yongshengfa Industrial Park, the Third
Industrial Zone, Tangwei Community, Fenghuang Street, Guangming
New District, Shenzhen

Antenna Gain

Freq.[MHZ]	5725	5800	5850
Eff.[%]	59.08%	62.67%	60.14%
Peak Gain [dBi]	0.1	0.2	0.26





The Environment of Antenna Radiation Pattern

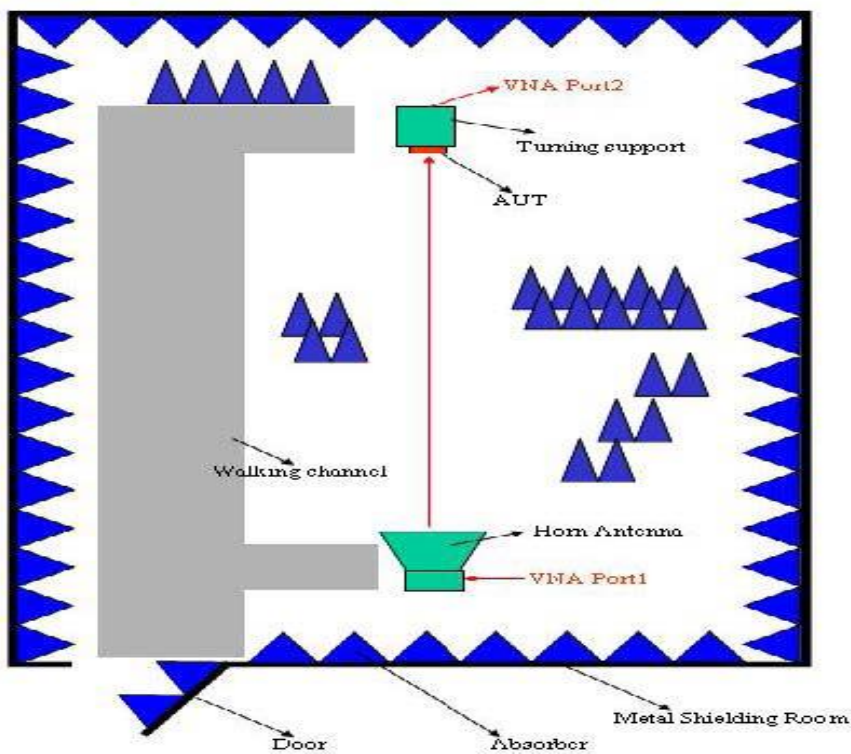

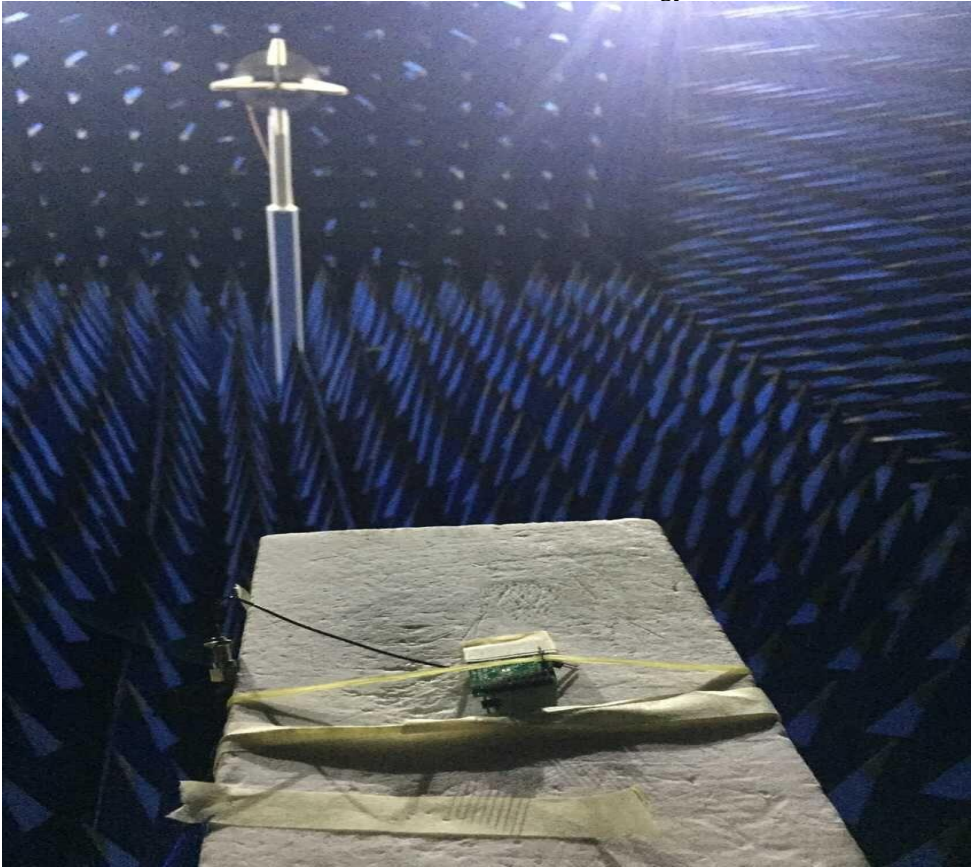

3D radiation pattern diagram

5135Mhz-5250Mhz : < 0.48dBi

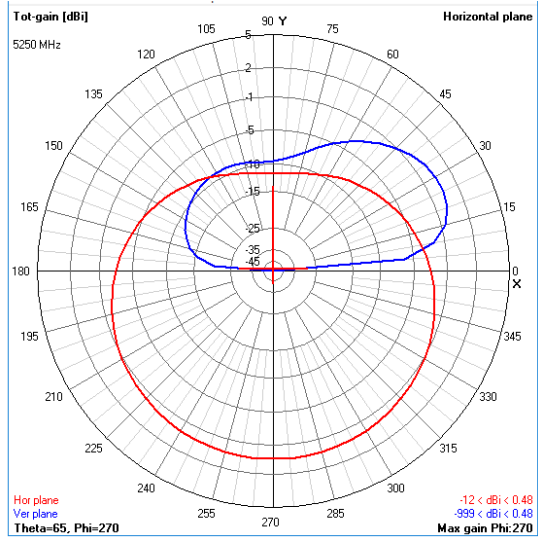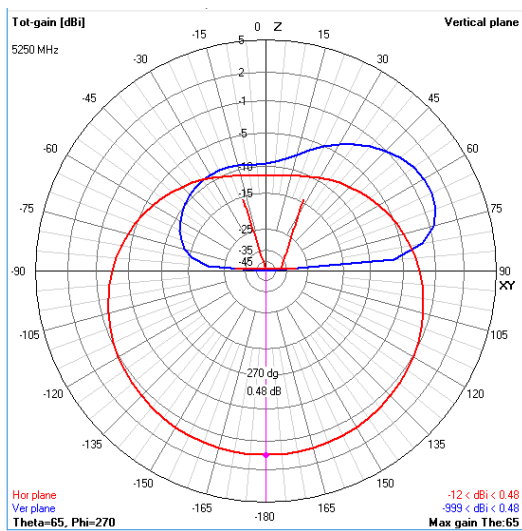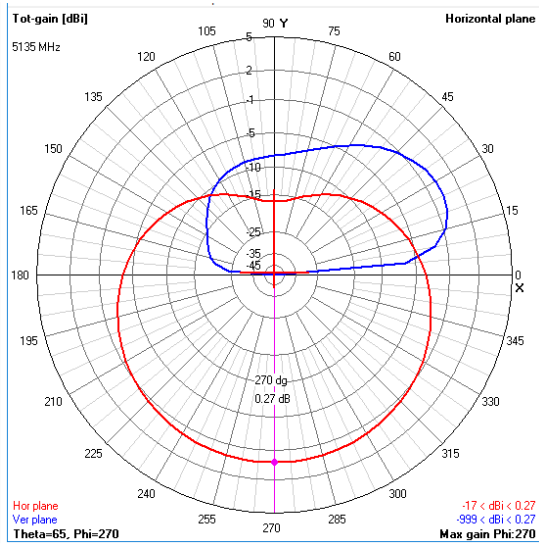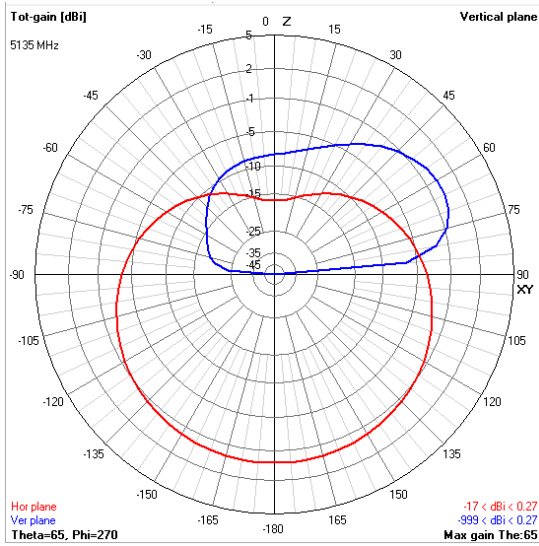

深圳市优智创新科技有限公司

Wisvation Technology Co.,Ltd

5725Mhz - 5850Mhz : < 0.26dBi

