



LED LAMPS

ProLED[®] **Omnidirectional A-Shape Series**



Dimmable



Omnidirectional



Enclosed Rated



ENERGY STAR[®]

ProLED[®] Omnidirectional A-Shape Series dimmable lamps feature superior thermal construction for long life and energy efficient illumination



Omnidirectional Optical Design Provides 230° Light Distribution

UL Listed for Damp Location & Enclosed Fixtures

ENERGY STAR[®] Certified

Backed by a 3-Year Warranty

Applications:

- Home
- Education
- Healthcare
- Hospitality
- Retail

Markets:

- Residential
- Commercial



Contact Your Customer Care Specialist For Pricing, Orders And Technical Support.

800.677.3334 www.halcolighting.com


ProLED[®]

Omnidirectional A-Shape Series


Product #: _____ Type: _____
 Project: _____ Date: _____
 Comments: _____ Initials: _____

Specifications

- Available in 2700K, 3000K, 4000K or 5000K CCT
- UL Listed for damp location
- Dimmable to 10% for design flexibility (excludes 3-way lamps)
- 220° degree beam angle creates uniform distribution of light
- 3-year warranty
- 80196, 80197, 80198, 80199: This product is warranted for 5 years from date of purchase
- Rated for ICAT fixtures

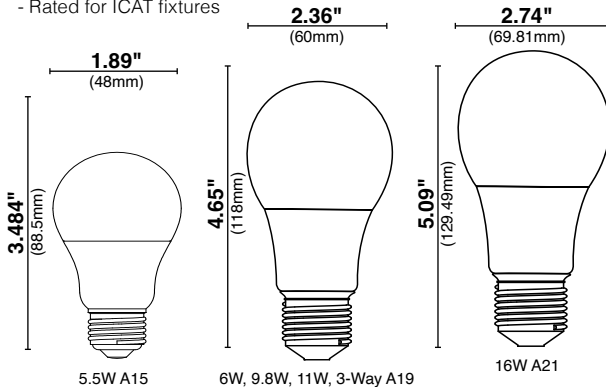

Savings Comparison

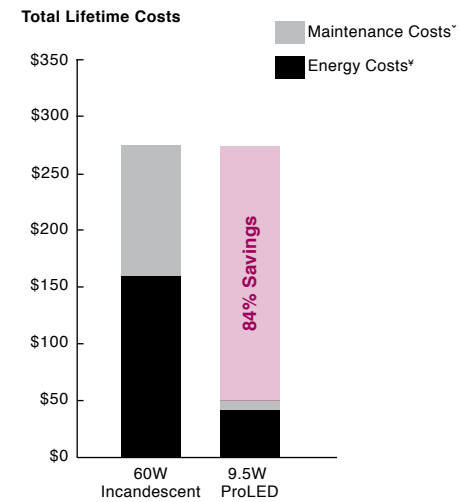

* Maintenance costs based on 15 minutes at \$40 per/hr
 † Energy costs based on \$0.11 kWh



Ordering Information

Watt	Base	Product #	Product Code	Volts	Color Temp.	CRI	Lumens	Useful Life*	Beam Angle	Pkg. Qty.	MOL	Equivalent Wattage	Certification
A15													
5.5W	E26	88008	A15FR5-827-DIM-LED4	120	2700K	80	450	25,000	220°	1/48	3.26"	40W	UL, ES
5.5W	E26	80197	A15FR5/830/OMNI2/LED	120	3000K	82	450	25,000	230°	1/6	3.48"	40W	UL, ES
5.5W	E26	88010	A15FR5-840-DIM-LED4	120	4000K	80	450	25,000	220°		3.26"	40W	UL, ES
5.5W	E26	88011	A15FR5-850-DIM-LED4	120	5000K	80	450	25,000	220°		3.26"	40W	UL, ES
A19													
6W	E26	84965	A19FR6/827/OMNI3/LED	120	2700K	82	480	15,000	220°	1/6	4.33"	40W	UL, ES
6W	E26	84966	A15FR6/830/OMNI3/LED	120	3000K	82	480	15,000	220°	1/6	4.33"	40W	UL, ES
5.5W	E26	88014	A19FR6-840-DIM-LED4	120	4000K	80	450	15,000	220°		4.33"	40W	ETL, ES
5.5W	E26	88015	A19FR6-850-DIM-LED4	120	5000K	80	450	15,000	220°		4.33"	40W	ETL, ES
9W	E26	88016	A19FR9-827-DIM-LED4	120	2700K	80	800	15,000	220°	1/6	4.33"	60W	UL, ES
9.8W	E26	84968	A15FR9/830/OMNI3/LED	120	3000K	82	800	15,000	220°	1/6	4.33"	60	UL, ES
9W	E26	88017	A15FR9-830-DIM-LED4	120	3000K	80	800	15,000	220°	1/6	4.33"	60W	UL, ES
9W	E26	88018	A19FR9-840-DIM-LED4	120	4000K	80	800	15,000	220°		4.33"	60W	ETL, ES
9W	E26	88019	A19FR9-850-DIM-LED4	120	5000K	80	800	15,000	220°		4.33"	60W	ETL, ES
11W	E26	84971	A19FR11/827/OMNI3/LED	120	2700K	82	1100	15,000	220°	1/6	4.33"	75W	UL, ES
11W	E26	84972	A19FR11/830/OMNI3/LED	120	3000K	82	1100	15,000	220°	1/6	4.33"	75W	UL, ES
11W	E26	88022	A19FR11-840-DIM-LED4	120	4000K	80	1100	15,000	220°		4.56"	75W	UL, ES
11W	E26	88023	A19FR11-850-DIM-LED4	120	5000K	80	1100	15,000	220°		4.56"	75W	UL, ES
A21													
17W	E26	88048	A21FR17-827-DIM-LED4	120	2700K	80	2000	15,000	220°		4.92"	125W	UL, ES
17W	E26	88049	A21FR17-830-DIM-LED4	120	3000K	80	2000	15,000	220°		4.92"	125W	UL, ES
16W	E26	84975	A21FR16/840/OMNI3/LED	120	4000K	82	1600	15,000	220°	1/6	5.09"	100W	UL, ES
16W	E26	84976	A21FR16/850/OMNI3/LED	120	5000K	82	1600	15,000	220°	1/6	5.09"	100W	UL, ES
3-Way													
3/9/12	Medium	83191	A19FR3/9/12/830/3-WAY/LED	120	3000K	82	280/950/1200	15,000	220°	1/6	4.646"	30/70/100W	

⊕ NEW ITEM!

* Not rated for enclosed fixtures.

† Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Represents lamps that are ENERGY STAR[®] certified.

Warranty – Commercial / Industrial: This product is warranted for 3 years from the date of purchase.

May not be compatible with all dimming systems, dimming performance may vary by system, please check the website www.halcolighting.com/ProLEDdim for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life. 25,000 hour useful life rating is based on a maximum ambient temperature of 45°C. Exceeding this ambient temperature rating may result in reduced life.