

Find your product and get support



**Europe**  
<https://eu.aoc.com/en/support>

**Россия**  
<https://eu.aoc.com/ru/support>

**Australia**  
[https://au.aoc.com/user\\_manual](https://au.aoc.com/user_manual)

**Hong Kong S.A.R.**  
[https://hk.aoc.com/user\\_manual](https://hk.aoc.com/user_manual)

**中國台灣**  
[https://tw.aoc.com/user\\_manual](https://tw.aoc.com/user_manual)

**Indonesia**  
[https://id.aoc.com/user\\_manual](https://id.aoc.com/user_manual)

**日本**  
[https://jp.aoc.com/user\\_manual](https://jp.aoc.com/user_manual)

**한국**  
[https://kr.aoc.com/user\\_manual](https://kr.aoc.com/user_manual)

**Malaysia**  
[https://my.aoc.com/user\\_manual](https://my.aoc.com/user_manual)

**Myanmar**  
[https://mm.aoc.com/user\\_manual](https://mm.aoc.com/user_manual)

**New Zealand**  
[https://nz.aoc.com/user\\_manual](https://nz.aoc.com/user_manual)

**Philippines**  
[https://ph.aoc.com/user\\_manual](https://ph.aoc.com/user_manual)

**Singapore**  
[https://sg.aoc.com/user\\_manual](https://sg.aoc.com/user_manual)

**ประเทศไทย**  
[https://th.aoc.com/user\\_manual](https://th.aoc.com/user_manual)

**Việt Nam**  
[https://vn.aoc.com/user\\_manual](https://vn.aoc.com/user_manual)

**Middle East**  
[https://me.aoc.com/user\\_manual](https://me.aoc.com/user_manual)

**South Africa**  
[https://za.aoc.com/user\\_manual](https://za.aoc.com/user_manual)

**Brasil**  
<https://aoc.portaltpv.com.br/>

**India**  
[https://www.aocindia.com/download\\_manuals.php](https://www.aocindia.com/download_manuals.php)

**US/Canada**  
<https://us.aoc.com/en-US/downloads>

Printed in China

XXXXXXXXXX

**AGON**  
PRO

**Quick Start**  
AG274QZM



**AOC**

**HDMI**



[www.aoc.com](http://www.aoc.com)  
©2022 AOC.All Rights Reserved

\*Different according to countries/regions  
Display design may differ from that illustrated


1

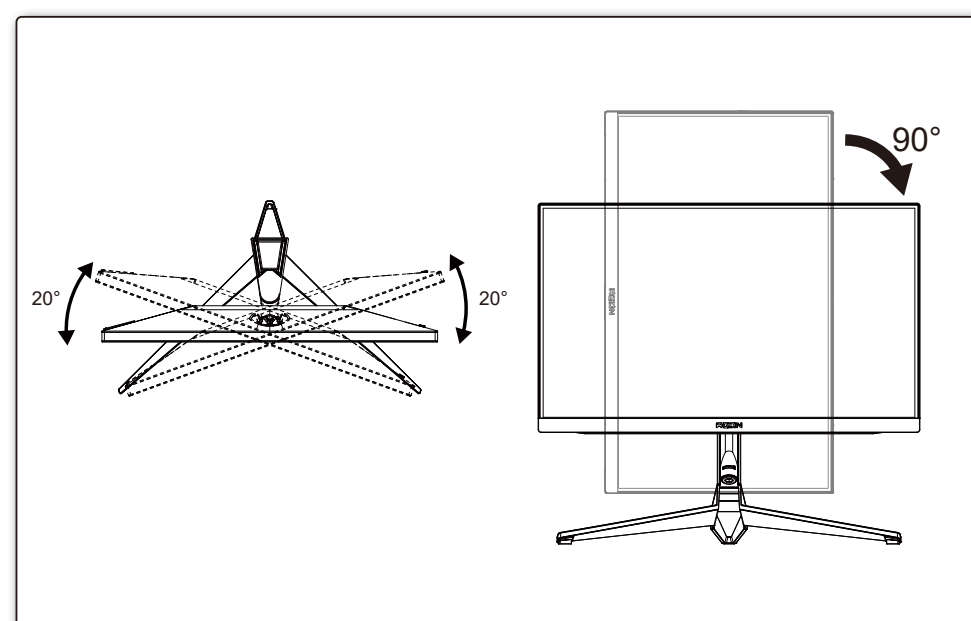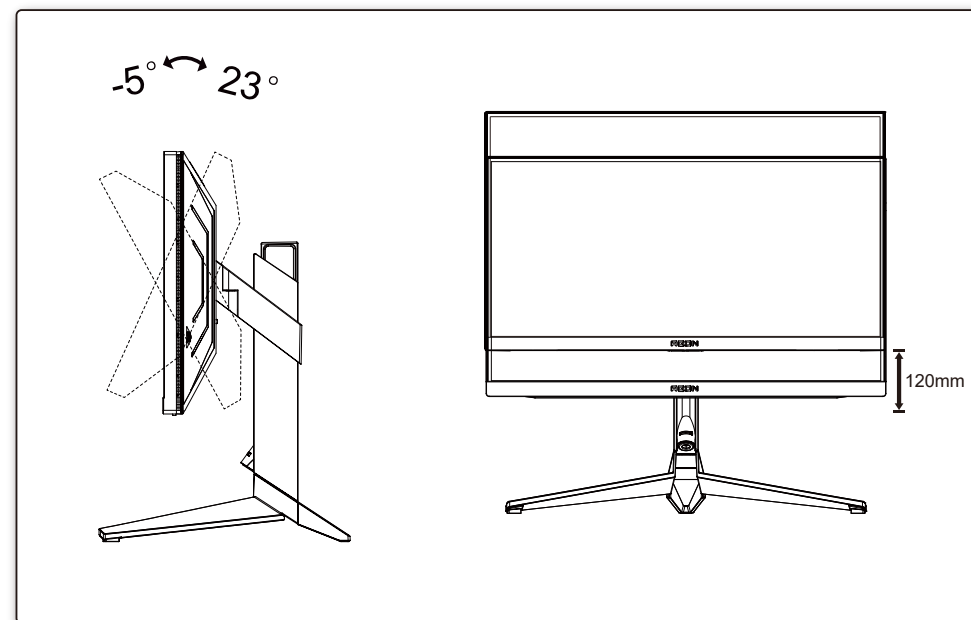

2

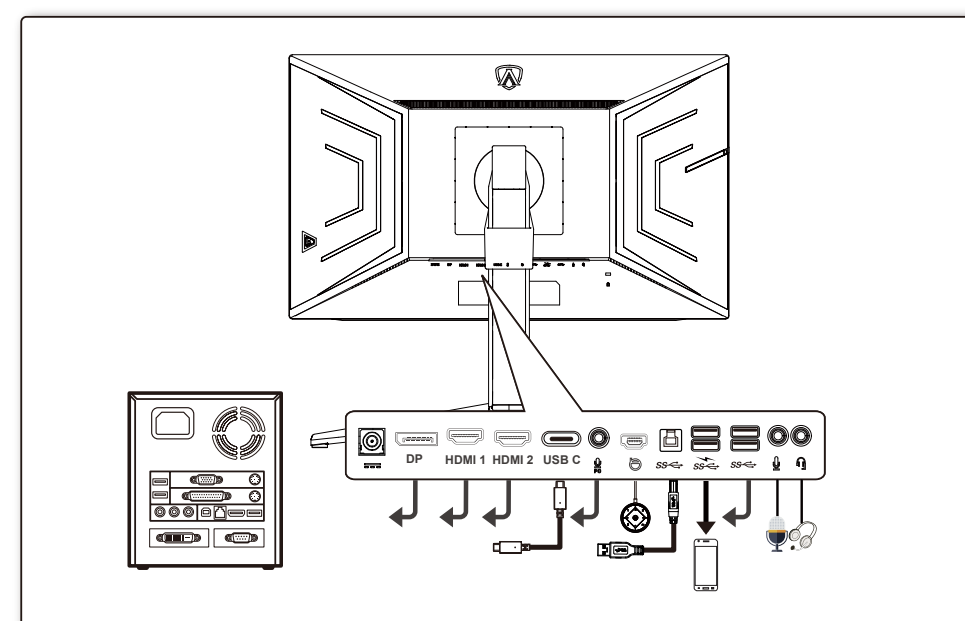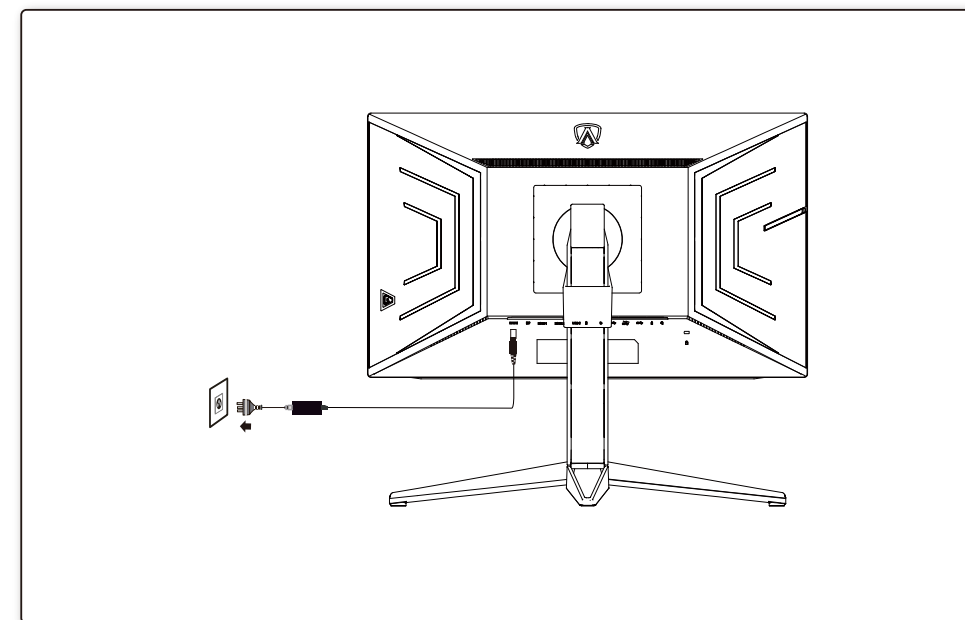

3

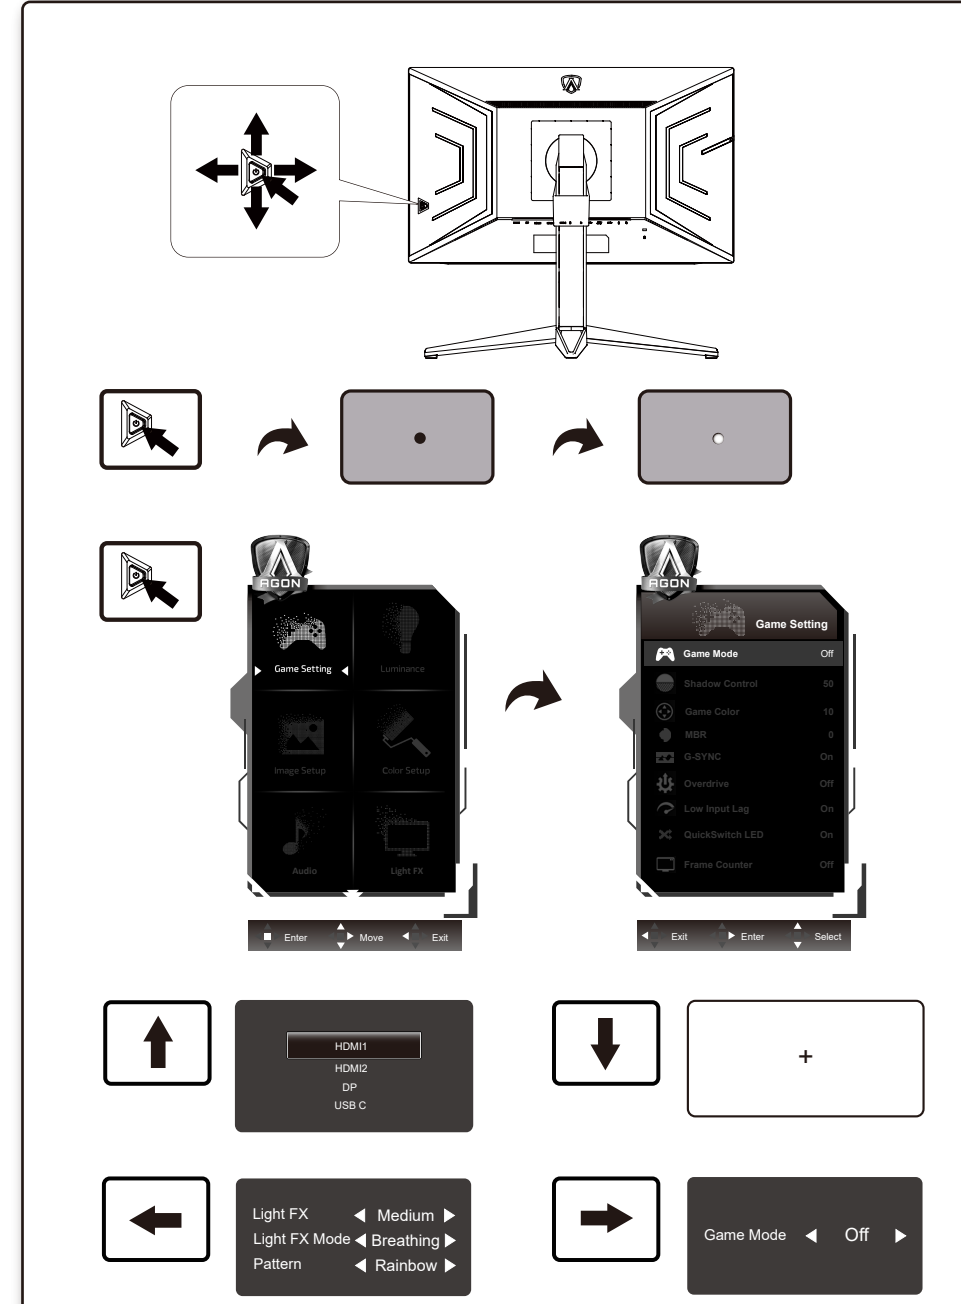

4

**General Specification**

Panel	Model name	AG274QZM	
	Driving system	TFT Color LCD	
	Viewable image size	68.5 cm diagonal	
	Pixel pitch	0.2331mm(H) x 0.2331mm(V)	
Others	Horizontal scan range	30k~360kHz	
	Horizontal scan size(Maximum)	596.736mm	
	Vertical scan range	48-240Hz	
	Vertical scan size(Maximum)	335.664mm	
	Max resolution	2560x1440@240Hz(HDMI/DP/USB C)	
	Plug & Play	VESA DDC2B/CI	
	Power source	19.5Vdc, 16.9A or 20Vdc, 14A	
Power consumption	Typical (default brightness and contrast)	58W	
	Max. (brightness =100, contrast =100)	≤ 250W	
	Standby mode	≤ 0.5W	
Dimensions(with stand)	612.9x(427.3~547.3)x352.1mm(WxHxD)		
Net weight	8.35kg		
Physical characteristics	Connector type	HDMI/ DP/ USB/ Earphone out/ Microphone In/Out	
	Signal cable type	Detachable	
Environmental	Temperature	Operating	0°C~ 40°C
		Non-operating	-25°C~ 55°C
	Humidity	Operating	10% ~ 85% (non-condensing)
		Non-operating	5% ~ 93% (non-condensing)
	Altitude	Operating	0~ 5000 m (0~ 16404ft )
Non-operating		0~ 12192m (0~ 40000ft )	