




FCC RF Test Report

APPLICANT : DZS Inc.
EQUIPMENT : XGSPON ONT
BRAND NAME : 
MODEL NAME : 5228XG
FCC ID : PJZ5228XG
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Apr. 24, 2023 ~ Jul. 05, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test 6

 1.5 Modification of EUT 7

 1.6 Testing Location 7

 1.7 Test Software 7

 1.8 Applicable Standards 8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9

 2.1 Carrier Frequency and Channel 9

 2.2 Test Mode 10

 2.3 Connection Diagram of Test System 12

 2.4 Support Unit used in test configuration and system 13

 2.5 EUT Operation Test Setup 13

 2.6 Measurement Results Explanation Example 13

3 TEST RESULT 14

 3.1 26dB & 99% Occupied Bandwidth Measurement 14

 3.2 Maximum Conducted Output Power Measurement 15

 3.3 Power Spectral Density Measurement 18

 3.4 Unwanted Emissions Measurement 20

 3.5 AC Conducted Emission Measurement 25

 3.6 Antenna Requirements 27

4 LIST OF MEASURING EQUIPMENT 29

5 MEASUREMENT UNCERTAINTY 30

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR332120-01	Rev. 01	Initial issue of report	Jul. 24, 2023



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	Report only	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	Pass	Under limit 0.58 dB at 5459.44 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 15.41 dB at 0.329 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	Pass	-

Conformity Assessment Condition:
1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"
Disclaimer:
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

DZS Inc.
5700 Tennyson Parkway, Plano, TX 75024 USA

1.2 Manufacturer

DZS Inc.
5700 Tennyson Parkway, Plano, TX 75024 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	XGSPON ONT
Brand Name	
Model Name	5228XG
FCC ID	PJZ5228XG
SN Code	Conducted: 501445600 Conduction: 501282550 Radiation: 501282548
HW Version	V02
SW Version	S7.0.025
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification					
Tx/Rx Frequency Range	5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz				
Maximum Output Power to Antenna	MIMO <Ant. 0+1+2+3> <5260 MHz ~ 5320 MHz> 802.11a : 18.06 dBm / 0.0640 W 802.11ax HE20: 18.74 dBm / 0.0748 W 802.11ax HE40: 21.53 dBm / 0.1422 W 802.11ax HE80: 18.69 dBm / 0.0740 W 802.11ax HE160: 17.18 dBm / 0.0522 W <5500 MHz ~ 5720 MHz > 802.11a : 17.94 dBm / 0.0622 W 802.11ax HE20: 18.51 dBm / 0.0710 W 802.11ax HE40: 21.41 dBm / 0.1384 W 802.11ax HE80: 23.67 dBm / 0.2328 W				
99% Occupied Bandwidth	<5260 MHz ~ 5320 MHz> 802.11a : 19.461 MHz 802.11ax HE20: 19.500 MHz 802.11ax HE40: 38.202 MHz 802.11ax HE80: 78.002 MHz 802.11ax HE160: 157.922 MHz <5500 MHz ~ 5720 MHz > 802.11a : 18.142 MHz 802.11ax HE20: 19.500 MHz 802.11ax HE40: 38.202 MHz 802.11ax HE80: 78.162 MHz				
Antenna Type / Gain	<5260 MHz ~ 5320 MHz> <Ant. 0> : PCB Antenna with gain 4.50 dBi <Ant. 1> : PCB Antenna with gain 4.61 dBi <Ant. 2> : PCB Antenna with gain 4.55 dBi <Ant. 3> : PCB Antenna with gain 4.44 dBi <5500 MHz ~ 5720 MHz> <Ant. 0> : PCB Antenna with gain 4.52 dBi <Ant. 1> : PCB Antenna with gain 4.61 dBi <Ant. 2> : PCB Antenna with gain 4.57 dBi <Ant. 3> : PCB Antenna with gain 4.53 dBi				
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)				
Antenna Function Description		Ant. 0	Ant. 1	Ant. 2	Ant. 3
	802.11 a/n/ac/ax SISO	V	V	V	V
	802.11 a/n/ac/ax CDD 1S4T	V	V	V	V
	802.11 n/ac/ax Tx Beamforming 1S4T	V	V	V	V

Note:

1. WLAN operation in 5600 MHz ~ 5650 MHz is notched.



2. For SISO&MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power.
3. For 802.11n 20/40MHz and 802.11 ac/ax 20/40/80/160 MHz mode, the power setting of 802.11n 20/40MHz, 802.11ac 20/40/80/160MHz mode are the same or lower than 802.11ax 20/40/80/160MHz mode. Therefore, the whole testing have assessed only 802.11ax HE20/HE40/HE80/HE160 mode.
4. The device does not support partial RU tone for 802.11ax mode
5. 802.11ax support Tx Beamforming mode, and the Tx Beamforming power/EIRP is not greater than CDD mode, so we only evaluate CDD mode by referring to their maximum conducted power.
6. The device supports multiple spatial streams, the worst case directional gain will occur when NSS = 1, therefore, the 1S4T(CDD&TXBF) mode is the worst; 1S4T: NSS=1, MIMO 4Tx.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24
2.	CO01-KS	AUDIX	E3	6.2009-8-24



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290	50 ²	5250

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5500- 5720 MHz MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710		

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.
3. The above Frequency and Channel in "²" were 802.11ac VHT160 and 802.11ax HE160.



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Mode

Modulation	Data Rate
802.11a CDD 1S4T	6 Mbps
802.11ax HE20 CDD 1S4T	MCS0
802.11ax HE40 CDD 1S4T	MCS0
802.11ax HE80 CDD 1S4T	MCS0
802.11ax HE160 CDD 1S4T	MCS0

AC Conducted Emission	Mode 1 : WIFI link (5G) + POST Port Link + LAN Link + Gpon Loading with OLT + Power from adapter + with bracket
Remark: For Radiated Test Cases, The tests were performed with Adapter.	

Ch. #		U-NII-2A	U-NII-2C
		802.11a	802.11a
L	Low	52	100
M	Middle	60	116
H	High	64	140
Straddle		-	144

Ch. #		U-NII-2A	U-NII-2C
		802.11ax HE20	802.11ax HE20
L	Low	52	100
M	Middle	60	116
H	High	64	140
Straddle		-	144

Ch. #		U-NII-2A	U-NII-2C
		802.11ax HE40	802.11ax HE40
L	Low	54	102
M	Middle	-	110
H	High	62	134
Straddle		-	142




Ch. #		U-NII-2A	U-NII-2C
		802.11ax HE80	802.11ax HE80
L	Low	-	106
M	Middle	58	-
H	High	-	-
Straddle		-	138


Ch. #		U-NII-2A
		802.11ax HE160
M	Middle	50

2.3 Connection Diagram of Test System

For Conducted Emission:

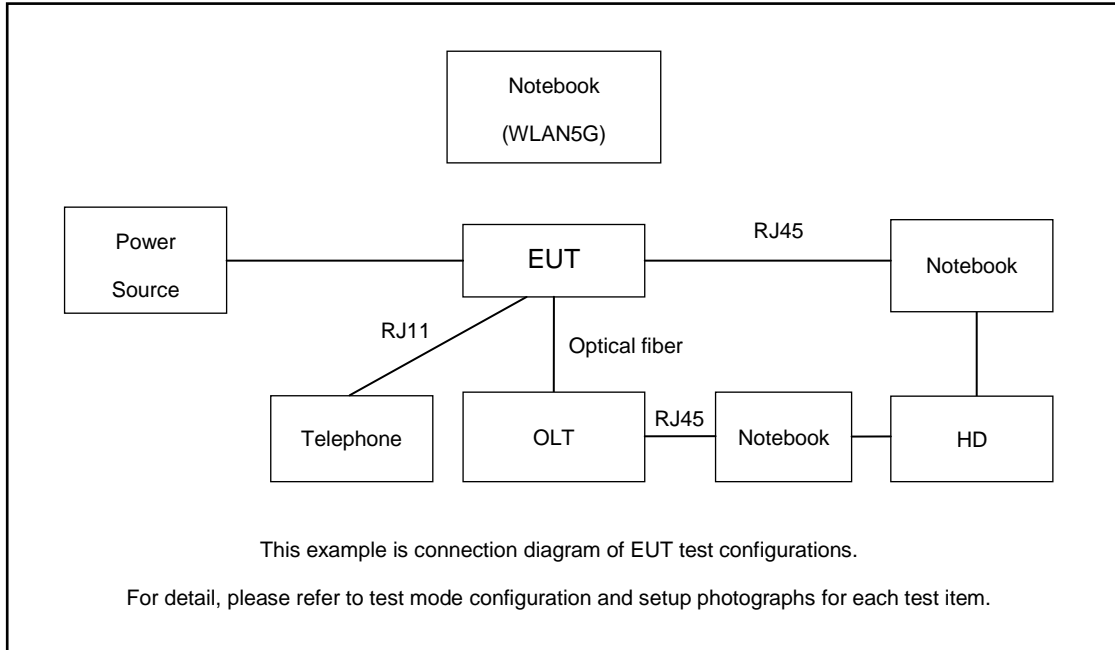

For Radiated Emission:

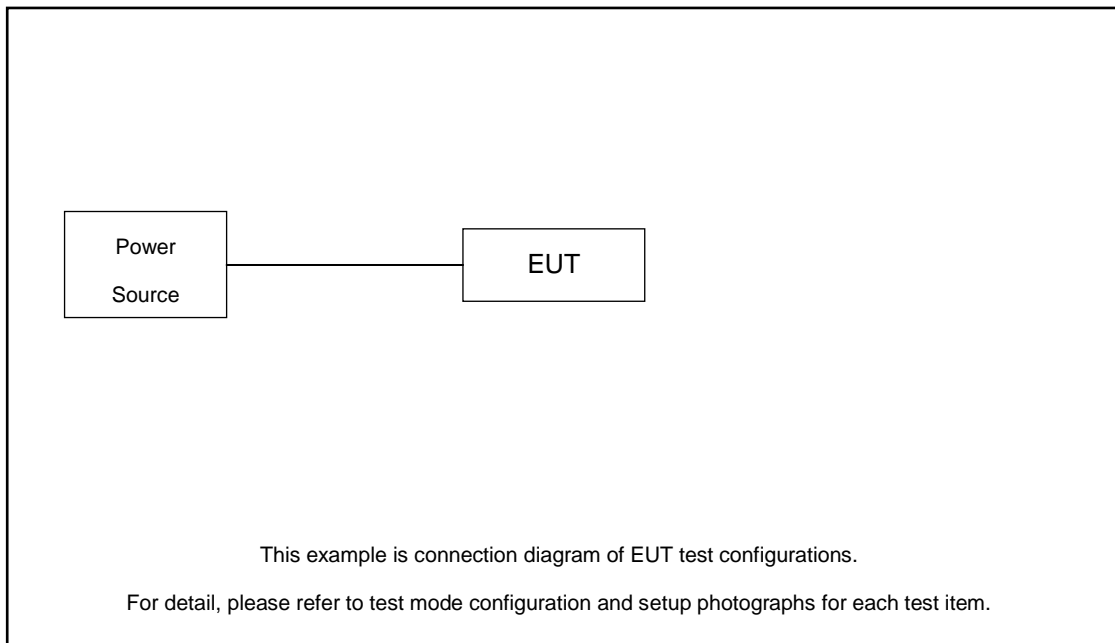



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook*2	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
2.	PC	Lenovo	YangtianM4900c	Fcc DoC	N/A	Unshielded,1.8m
3.	(USB)Mouse	Lenovo	OEUUOA	Fcc DoC	Shielded, 1.8m	N/A
4.	(USB)Keyboard	Lenovo	SK-8821	Fcc DoC	Shielded, 1.8m	N/A
5.	Monitor	Lenovo	LS2033wA	Fcc DoC	N/A	Unshielded,1.8m
6.	Hard Disk*2	WD	C6B	N/A	N/A	N/A
7.	Telephone*2	bubugao	HCD007(6082)TSD	N/A	N/A	N/A
8.	OLT	DZS	N/A	N/A	N/A	N/A
9.	RJ45	N/A	N/A	N/A	N/A	N/A
10.	RJ11	N/A	N/A	N/A	N/A	N/A
11.	Optical fiber	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$Offset = RF\ cable\ loss + attenuator\ factor.$$

Following shows an offset computation example with cable loss 6.2 dB and 10dB attenuator.

$$\begin{aligned}
Offset(dB) &= RF\ cable\ loss(dB) + attenuator\ factor(dB). \\
&= 6.2 + 10 = 16.2\ (dB)
\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the OBW and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

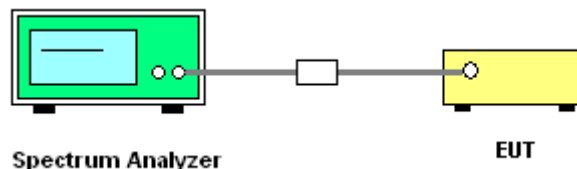

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm +10 log 10 B, where B is the 26 dB emission bandwidth in megahertz.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

<TXBF Modes>


The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 for TXBF modes.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

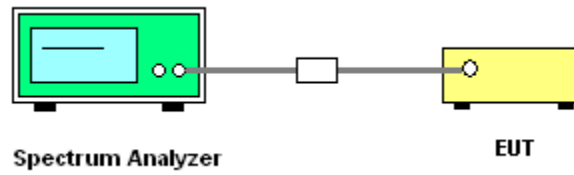

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW \geq 3 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is the bin-by-bin summation to obtain the combined spectrum. For the device with 4 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.


Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

Method (c): Measure and add $10 \log(N_{\text{ANT}})$ dB, where N_{ANT} is the number of outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The quantity $10 \log(N_{\text{ANT}})$ dB is added to each spectrum value before comparing to the emission limit.

3.3.4 Test Setup

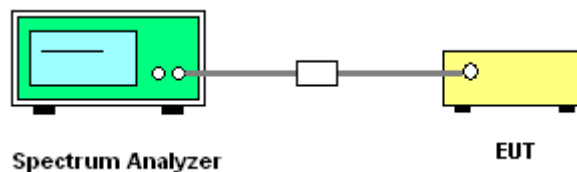

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5725 MHz band: all emissions outside of the 5470-5725 MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log(d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBµV/m

d_{Meas} is the measurement distance, in m



(3) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.

3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.

4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.

5. For each suspected emission, the EUT was arranged to its worst case and then adjust the




antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.


6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

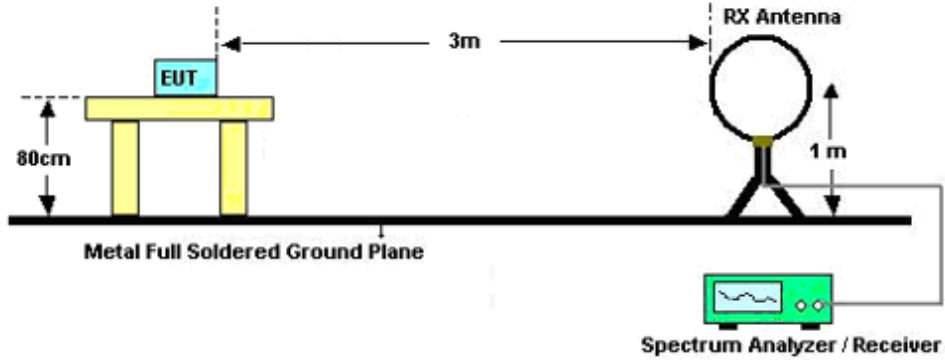

For radiated emissions from 30MHz to 1GHz

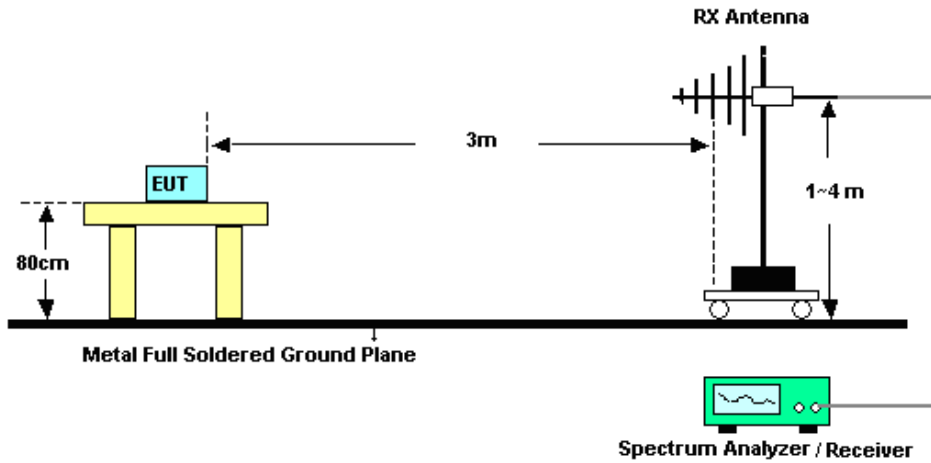

For radiated emissions above 1GHz

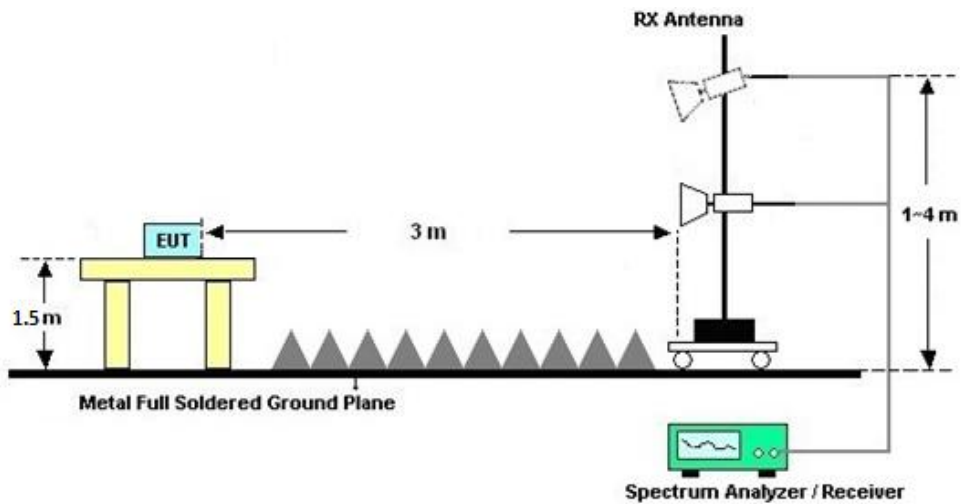



3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

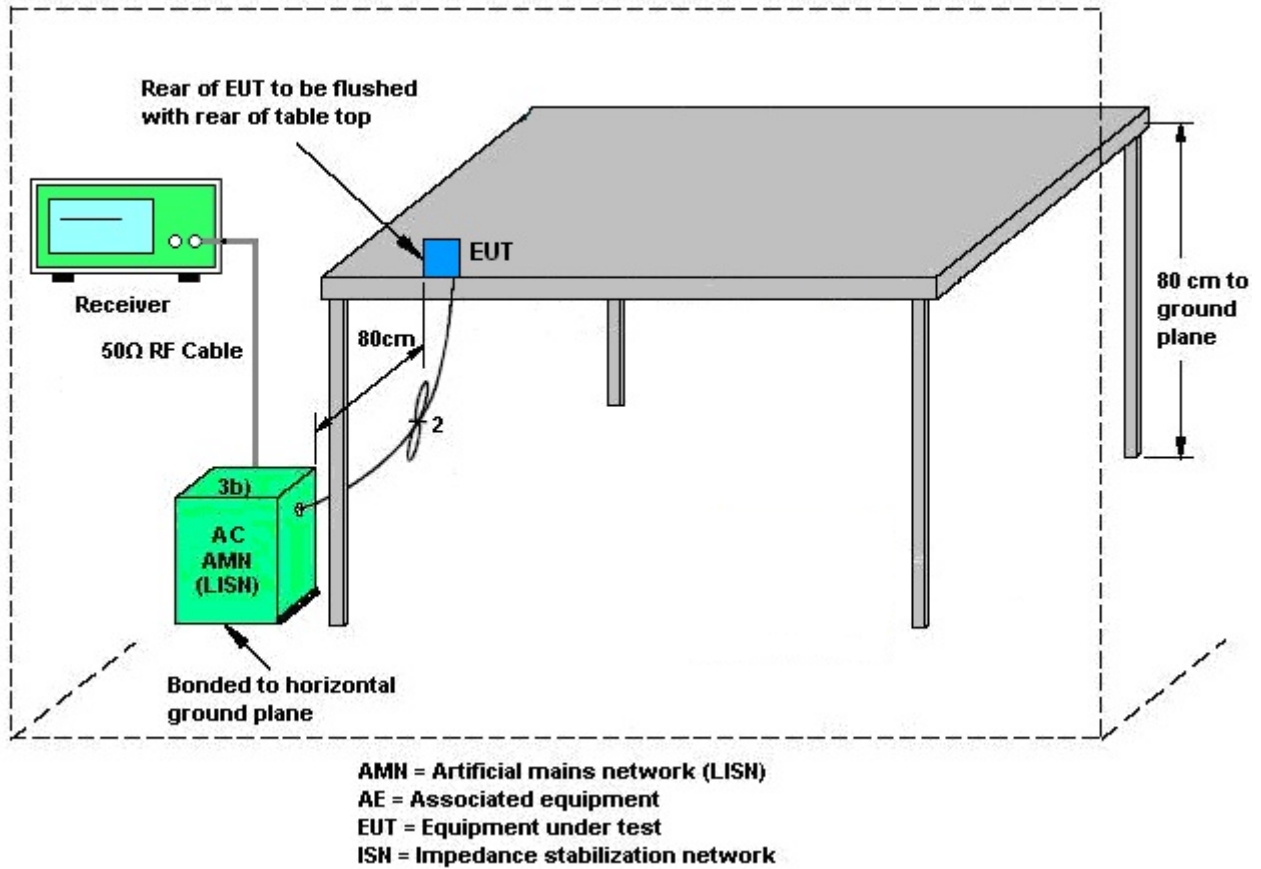

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For 802.11b/g/n/ax mode, directional gain is calculated as

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e.,

Directional gain = GANT MAX(Ant.1 Gain, Ant.2 Gain,...) + Array Gain, as following table for Power, where Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4;

For PSD, the directional gain calculation is following,

Directional gain = 10 log[(10^{G1/20} + 10^{G2/20} + ... + 10^{Gn/20})² / NANT] dBi, as following table for PSD.

NANT = number of transmit antennas

NSS = number of spatial streams. (The worst case directional gain will occur when NSS = 1)

The directional gain "DG" is calculated as following table.

<CDD Modes>								
					DG for Power	DG for PSD	Power Limit Reduction	PSD Limit Reduction
	Ant. 0 (dBi)	Ant. 1 (dBi)	Ant. 2 (dBi)	Ant. 3 (dBi)	(dBi)	(dBi)	(dB)	(dB)
U-NII-2A	4.50	4.61	4.55	4.44	4.61	10.55	0.00	4.55
U-NII-2C	4.52	4.61	4.57	4.53	4.61	10.58	0.00	4.58



TXBF modes

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For 802.11ax mode, directional gain is calculated as

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

The directional gain calculation is following F)2)e)ii) of KDB 662911 D01 v02r01.

The directional gain “DG” is calculated as following table.

					DG	DG	Power	PSD
					for	for	Limit	Limit
	Ant 0	Ant 1	Ant 2	Ant 3	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
U-NII-2A	4.50	4.61	4.55	4.44	10.55	10.55	4.55	4.55
U-NII-2C	4.52	4.61	4.57	4.53	10.58	10.58	4.58	4.58



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Jun. 30, 2023~Jul. 05, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2023	Jun. 30, 2023~Jul. 05, 2023	Jan. 04, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2023	Jun. 30, 2023~Jul. 05, 2023	Jan. 04, 2024	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max x 30dBm	Oct. 13, 2022	Jun. 29, 2023	Oct. 12, 2023	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44G,MAX 30dB	Mar. 24, 2023	Jun. 29, 2023	Mar. 23, 2024	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Jun. 29, 2023	Oct. 15, 2023	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	Apr. 09, 2023	Jun. 29, 2023	Apr. 08, 2024	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 06, 2023	Jun. 29, 2023	Apr. 05, 2024	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 08, 2023	Jun. 29, 2023	Jan. 07, 2024	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380826	9KHz~1GHz	Jul. 11, 2022	Jun. 29, 2023	Jul. 10, 2023	Radiation (03CH05-KS)
Amplifier	EM	EM18G40GA	060852	18~40GHz	Jan. 05, 2023	Jun. 29, 2023	Jan. 04, 2024	Radiation (03CH05-KS)
high gain Amplifier	EM	EM01G18GA	060839	1Ghz~18Ghz	Oct. 12, 2022	Jun. 29, 2023	Oct. 11, 2023	Radiation (03CH05-KS)
Amplifier	EM	EM01G18GA	060833	1Ghz~18Ghz	Jan. 05, 2023	Jun. 29, 2023	Jan. 04, 2024	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jun. 29, 2023	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jun. 29, 2023	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jun. 29, 2023	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 24, 2022	Apr. 24, 2023	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Apr. 24, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	Apr. 24, 2023	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Apr. 24, 2023	Oct. 11, 2023	Conduction (CO01-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±2.26 dB
Occupied Channel Bandwidth	±0.1 %
Conducted Power Spectral Density	±0.88 dB

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94 dB
---------------------------------------------------------------------	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.28 dB
---------------------------------------------------------------------	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.88 dB
---------------------------------------------------------------------	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26 dB
---------------------------------------------------------------------	---------

----- THE END -----



Appendix A. Conducted Test Results

Report Number : FR332120-01

Test Engineer:	Jiang Jun	Temperature:	21~25	°C
Test Date:	2023.6.30~2023.7.5	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Power Table
CDD 1S4T mode

FCC U-NII-2A																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Ant	Average Conducted Power with Duty Factor (dB)					FCC Power Limit (dBm)	DG (dBi)	FCC EIRP Power (dBm)	FCC EIRP Power Limit (dBm)	Pass/Fail	Power Setting
						Ant 0	Ant 1	Ant 2	Ant 3	SUM						
11a	6Mbps	4	52	5260	0+1+2+3	11.67	12.19	11.77	12.43	18.04	23.98	4.61	22.65	30.00	Pass	50
11a	6Mbps	4	60	5300	0+1+2+3	11.38	11.73	11.52	12.24	17.75	23.98	4.61	22.36	30.00	Pass	49
11a	6Mbps	4	64	5320	0+1+2+3	11.70	12.13	11.72	12.55	18.06	23.98	4.61	22.67	30.00	Pass	50
HE20	MCS0	4	52	5260	0+1+2+3	12.01	12.69	12.14	12.89	18.47	23.98	4.61	23.08	30.00	Pass	51
HE20	MCS0	4	60	5300	0+1+2+3	11.75	12.40	11.91	12.62	18.21	23.98	4.61	22.82	30.00	Pass	50
HE20	MCS0	4	64	5320	0+1+2+3	12.16	13.02	12.41	13.20	18.74	23.98	4.61	23.35	30.00	Pass	52
HE40	MCS0	4	54	5270	0+1+2+3	15.00	15.46	15.49	16.00	21.53	23.98	4.61	26.14	30.00	Pass	59
HE40	MCS0	4	62	5310	0+1+2+3	15.11	15.49	15.54	15.83	21.52	23.98	4.61	26.13	30.00	Pass	59
HE80	MCS0	4	58	5290	0+1+2+3	12.33	12.55	12.78	12.98	18.69	23.98	4.61	23.30	30.00	Pass	48
HE160	MCS0	4	50	5250	0+1+2+3	11.21	10.02	11.30	11.88	17.18	23.98	4.61	21.79	30.00	Pass	38

TEST RESULTS DATA
Average Power Table
CDD 1S4T mode

FCC U-NII-2C																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Ant	Average Conducted Power with Duty Factor (dB)					FCC Power Limit (dBm)	DG (dBi)	FCC EIRP Power (dBm)	FCC EIRP Power Limit (dBm)	Pass/Fail	Power Setting
						Ant 0	Ant 1	Ant 2	Ant 3	SUM						
11a	6Mbps	4	100	5500	0+1+2+3	11.17	11.04	11.00	12.58	17.52	23.98	4.61	22.13	30.00	Pass	46
11a	6Mbps	4	116	5580	0+1+2+3	11.49	11.12	11.29	13.04	17.83	23.98	4.61	22.44	30.00	Pass	47
11a	6Mbps	4	140	5700	0+1+2+3	11.42	11.37	11.79	12.92	17.94	23.98	4.61	22.55	30.00	Pass	43
11a	6Mbps	4	144	5720	0+1+2+3	11.20	11.09	11.46	12.84	17.73	23.98	4.61	22.34	30.00	Pass	45
HE20	MCS0	4	100	5500	0+1+2+3	11.82	11.40	11.42	12.89	17.95	23.98	4.61	22.56	30.00	Pass	47
HE20	MCS0	4	116	5580	0+1+2+3	12.14	11.94	12.06	13.54	18.50	23.98	4.61	23.11	30.00	Pass	49
HE20	MCS0	4	140	5700	0+1+2+3	12.10	11.97	12.19	13.51	18.51	23.98	4.61	23.12	30.00	Pass	44
HE20	MCS0	4	144	5720	0+1+2+3	12.06	11.95	12.17	13.46	18.48	23.98	4.61	23.09	30.00	Pass	47
HE40	MCS0	4	102	5510	0+1+2+3	14.68	14.90	14.96	16.18	21.25	23.98	4.61	25.86	30.00	Pass	57
HE40	MCS0	4	110	5550	0+1+2+3	14.72	14.68	15.05	16.10	21.20	23.98	4.61	25.81	30.00	Pass	57
HE40	MCS0	4	134	5670	0+1+2+3	14.73	14.70	15.14	16.21	21.26	23.98	4.61	25.87	30.00	Pass	55
HE40	MCS0	4	142	5710	0+1+2+3	14.78	14.86	15.49	16.26	21.41	23.98	4.61	26.02	30.00	Pass	57
HE80	MCS0	4	106	5530	0+1+2+3	14.29	14.46	14.70	15.21	20.70	23.98	4.61	25.31	30.00	Pass	54
HE80	MCS0	4	138	5690	0+1+2+3	17.15	17.20	17.65	18.46	23.67	23.98	4.61	28.28	30.00	Pass	64

TEST RESULTS DATA
Average Power Table

Tx Beamforming 1S4T mode

FCC U-NII-2A																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Ant	Average Conducted Power with Duty Factor (dB)					FCC Power Limit (dBm)	DG (dBi)	FCC EIRP Power (dBm)	FCC EIRP Power Limit (dBm)	Pass/Fail	Power Setting
						Ant 0	Ant 1	Ant 2	Ant 3	SUM						
HE20	MCS0	4	52	5260	0+1+2+3	6.79	5.47	6.86	4.52	12.04	19.43	10.55	22.59	30.00	Pass	18
HE20	MCS0	4	60	5300	0+1+2+3	6.60	5.23	6.64	4.43	11.85	19.43	10.55	22.39	30.00	Pass	17
HE20	MCS0	4	64	5320	0+1+2+3	7.09	5.74	7.21	4.99	12.38	19.43	10.55	22.93	30.00	Pass	18
HE40	MCS0	4	54	5270	0+1+2+3	10.09	8.78	10.03	7.82	15.30	19.43	10.55	25.85	30.00	Pass	32
HE40	MCS0	4	62	5310	0+1+2+3	9.81	8.48	9.82	7.71	15.07	19.43	10.55	25.62	30.00	Pass	31
HE80	MCS0	4	58	5290	0+1+2+3	7.30	6.17	7.39	5.25	12.64	19.43	10.55	23.18	30.00	Pass	22
HE160	MCS0	4	50	5250	0+1+2+3	4.24	4.41	4.84	5.53	10.81	19.43	10.55	21.35	30.00	Pass	14

TEST RESULTS DATA
Average Power Table

Tx Beamforming 1S4T mode

FCC U-NII-2C																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Ant	Average Conducted Power with Duty Factor (dB)					FCC Power Limit (dBm)	DG (dBi)	FCC EIRP Power (dBm)	FCC EIRP Power Limit (dBm)	Pass/Fail	Power Setting
						Ant 0	Ant 1	Ant 2	Ant 3	SUM						
HE20	MCS0	4	100	5500	0+1+2+3	6.41	4.85	6.47	4.00	11.58	19.40	10.58	22.16	30.00	Pass	15
HE20	MCS0	4	116	5580	0+1+2+3	7.10	5.63	7.05	4.47	12.22	19.40	10.58	22.80	30.00	Pass	20
HE20	MCS0	4	140	5700	0+1+2+3	7.07	6.26	7.41	4.22	12.43	19.40	10.58	23.00	30.00	Pass	18
HE20	MCS0	4	144	5720	0+1+2+3	6.80	6.16	7.21	3.79	12.20	19.40	10.58	22.78	30.00	Pass	18
HE40	MCS0	4	102	5510	0+1+2+3	9.72	8.26	9.65	7.32	14.87	19.40	10.58	25.45	30.00	Pass	30
HE40	MCS0	4	110	5550	0+1+2+3	9.96	8.48	9.82	7.39	15.06	19.40	10.58	25.64	30.00	Pass	32
HE40	MCS0	4	134	5670	0+1+2+3	9.24	8.54	9.85	6.85	14.78	19.40	10.58	25.36	30.00	Pass	30
HE40	MCS0	4	142	5710	0+1+2+3	9.62	9.06	10.28	7.29	15.22	19.40	10.58	25.80	30.00	Pass	31
HE80	MCS0	4	106	5530	0+1+2+3	9.18	7.74	9.28	6.94	14.42	19.40	10.58	25.00	30.00	Pass	30
HE80	MCS0	4	138	5690	0+1+2+3	10.93	10.98	11.44	12.01	17.39	19.40	10.58	27.97	30.00	Pass	40



Emission Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]	---	---
11A-CDD	Ant0	5260	21.76	5248.92	5270.68	---	---
	Ant1	5260	22.08	5248.92	5271.00	---	---
	Ant2	5260	22.24	5249.00	5271.24	---	---
	Ant3	5260	21.84	5249.08	5270.92	---	---
	Ant0	5300	22.08	5289.04	5311.12	---	---
	Ant1	5300	21.92	5289.00	5310.92	---	---
	Ant2	5300	21.72	5289.20	5310.92	---	---
	Ant3	5300	22.12	5288.68	5310.80	---	---
	Ant0	5320	25.64	5308.36	5334.00	---	---
	Ant1	5320	25.60	5305.68	5331.28	---	---
	Ant2	5320	22.04	5308.92	5330.96	---	---
	Ant3	5320	27.68	5305.80	5333.48	---	---
	Ant0	5500	21.64	5489.24	5510.88	---	---
	Ant1	5500	21.68	5489.00	5510.68	---	---
	Ant2	5500	21.88	5489.12	5511.00	---	---
	Ant3	5500	22.20	5488.72	5510.92	---	---
	Ant0	5580	21.88	5569.04	5590.92	---	---
	Ant1	5580	21.96	5568.96	5590.92	---	---
	Ant2	5580	21.68	5569.20	5590.88	---	---
	Ant3	5580	22.32	5568.64	5590.96	---	---
	Ant0	5700	20.96	5689.56	5710.52	---	---
	Ant1	5700	21.16	5689.44	5710.60	---	---
	Ant2	5700	21.00	5689.56	5710.56	---	---
	Ant3	5700	21.08	5689.52	5710.60	---	---
Ant0	5720	21.64	5709.24	5730.88	---	---	
Ant1	5720	22.04	5708.96	5731.00	---	---	
Ant2	5720	21.84	5709.00	5730.84	---	---	
Ant3	5720	21.96	5709.28	5731.24	---	---	
11AX20MIMO	Ant0	5260	28.16	5246.64	5274.80	---	---
	Ant1	5260	22.92	5248.24	5271.16	---	---
	Ant2	5260	22.96	5248.84	5271.80	---	---
	Ant3	5260	23.68	5247.80	5271.48	---	---





	Ant0	5300	26.28	5287.76	5314.04	---	---
	Ant1	5300	23.12	5287.84	5310.96	---	---
	Ant2	5300	22.60	5288.80	5311.40	---	---
	Ant3	5300	23.16	5287.96	5311.12	---	---
	Ant0	5320	22.68	5308.48	5331.16	---	---
	Ant1	5320	22.44	5308.44	5330.88	---	---
	Ant2	5320	27.28	5307.64	5334.92	---	---
	Ant3	5320	23.72	5307.96	5331.68	---	---
	Ant0	5500	24.72	5487.88	5512.60	---	---
	Ant1	5500	22.84	5488.44	5511.28	---	---
	Ant2	5500	22.84	5488.52	5511.36	---	---
	Ant3	5500	22.96	5488.92	5511.88	---	---
	Ant0	5580	23.52	5568.60	5592.12	---	---
	Ant1	5580	23.60	5568.80	5592.40	---	---
	Ant2	5580	24.20	5568.72	5592.92	---	---
	Ant3	5580	22.00	5568.80	5590.80	---	---
	Ant0	5700	21.68	5689.16	5710.84	---	---
	Ant1	5700	21.52	5689.28	5710.80	---	---
	Ant2	5700	21.24	5689.36	5710.60	---	---
	Ant3	5700	21.28	5689.40	5710.68	---	---
	Ant0	5720	22.60	5709.08	5731.68	---	---
	Ant1	5720	22.16	5708.80	5730.96	---	---
	Ant2	5720	24.32	5706.68	5731.00	---	---
	Ant3	5720	24.52	5707.96	5732.48	---	---
11AX40MIMO	Ant0	5270	43.36	5248.64	5292.00	---	---
	Ant1	5270	43.36	5249.04	5292.40	---	---
	Ant2	5270	48.88	5247.28	5296.16	---	---
	Ant3	5270	43.36	5249.20	5292.56	---	---
	Ant0	5310	44.88	5287.84	5332.72	---	---
	Ant1	5310	44.88	5287.36	5332.24	---	---
	Ant2	5310	52.32	5283.44	5335.76	---	---
	Ant3	5310	46.80	5287.04	5333.84	---	---
	Ant0	5510	53.76	5482.56	5536.32	---	---
	Ant1	5510	43.36	5488.32	5531.68	---	---
	Ant2	5510	44.56	5488.16	5532.72	---	---
	Ant3	5510	46.24	5486.08	5532.32	---	---
	Ant0	5550	43.44	5528.24	5571.68	---	---
	Ant1	5550	42.00	5529.20	5571.20	---	---
Ant2	5550	42.88	5528.40	5571.28	---	---	



	Ant3	5550	42.72	5528.40	5571.12	---	---
	Ant0	5670	44.96	5646.16	5691.12	---	---
	Ant1	5670	43.84	5648.64	5692.48	---	---
	Ant2	5670	43.60	5648.48	5692.08	---	---
	Ant3	5670	42.72	5649.04	5691.76	---	---
	Ant0	5710	44.48	5688.48	5732.96	---	---
	Ant1	5710	43.52	5688.88	5732.40	---	---
	Ant2	5710	42.64	5688.88	5731.52	---	---
	Ant3	5710	43.12	5687.92	5731.04	---	---
11AX80MIMO	Ant0	5290	87.84	5245.20	5333.04	---	---
	Ant1	5290	87.04	5245.68	5332.72	---	---
	Ant2	5290	87.36	5245.04	5332.40	---	---
	Ant3	5290	89.12	5245.68	5334.80	---	---
	Ant0	5530	85.12	5487.44	5572.56	---	---
	Ant1	5530	88.32	5486.80	5575.12	---	---
	Ant2	5530	85.28	5487.92	5573.20	---	---
	Ant3	5530	85.60	5487.12	5572.72	---	---
	Ant0	5690	85.44	5647.44	5732.88	---	---
	Ant1	5690	85.12	5647.60	5732.72	---	---
	Ant2	5690	88.80	5648.72	5737.52	---	---
Ant3	5690	85.60	5646.80	5732.40	---	---	
11AX160MIMO	Ant0	5250	165.44	5167.76	5333.20	---	---
	Ant1	5250	165.44	5168.08	5333.52	---	---
	Ant2	5250	164.80	5168.08	5332.88	---	---
	Ant3	5250	165.12	5168.08	5333.20	---	---




Test Graphs

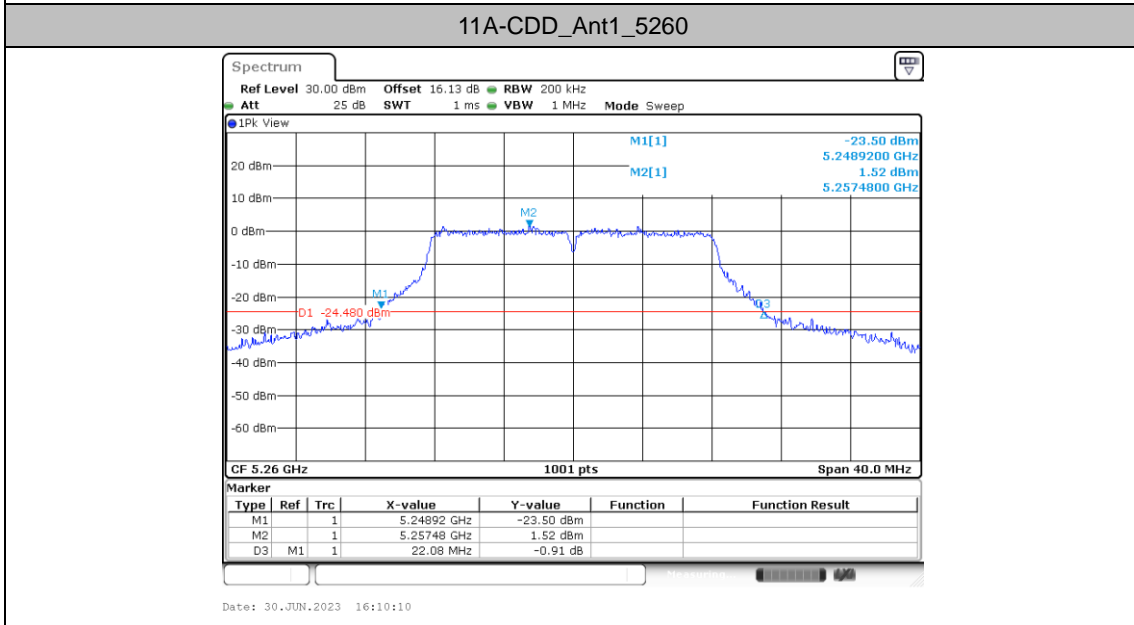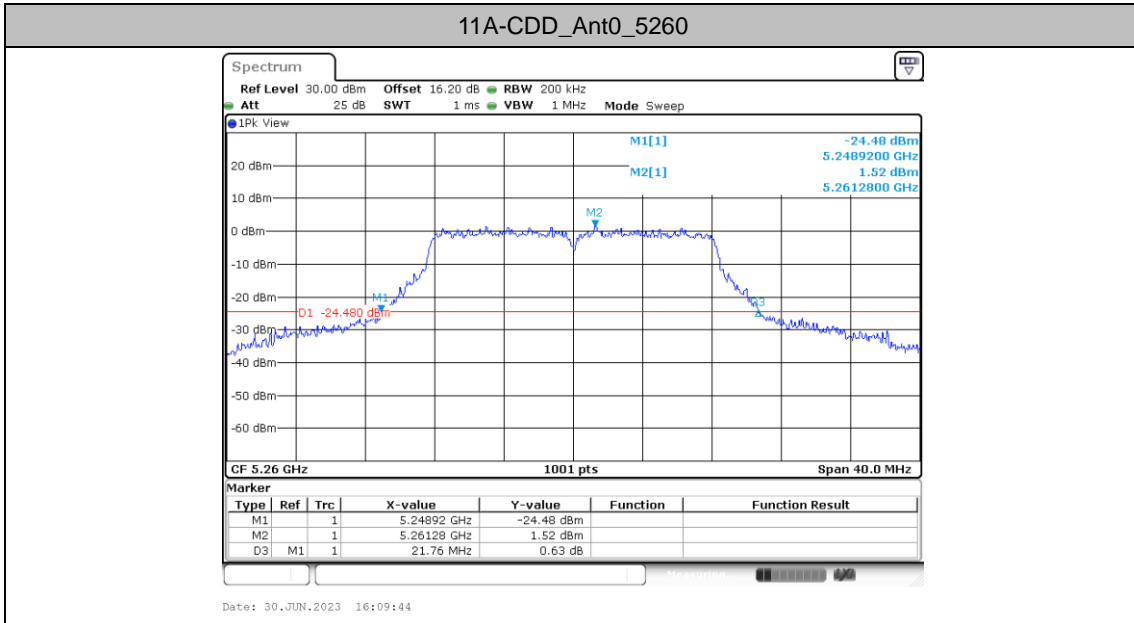




11A-CDD_Ant2_5260

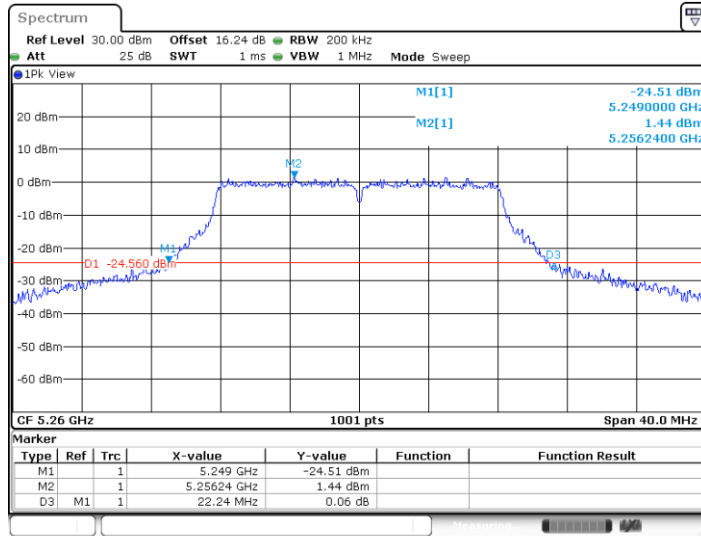

Date: 30.JUN.2023 16:10:38


11A-CDD_Ant3_5260

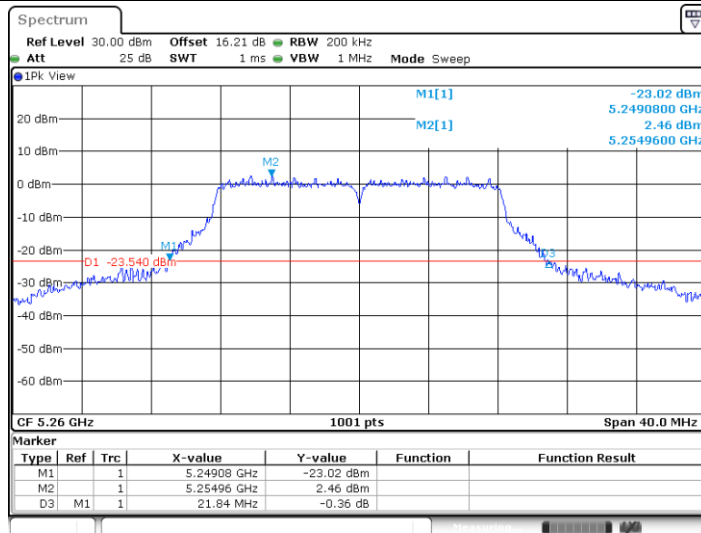


Date: 30.JUN.2023 16:11:13



11A-CDD_Ant0_5300

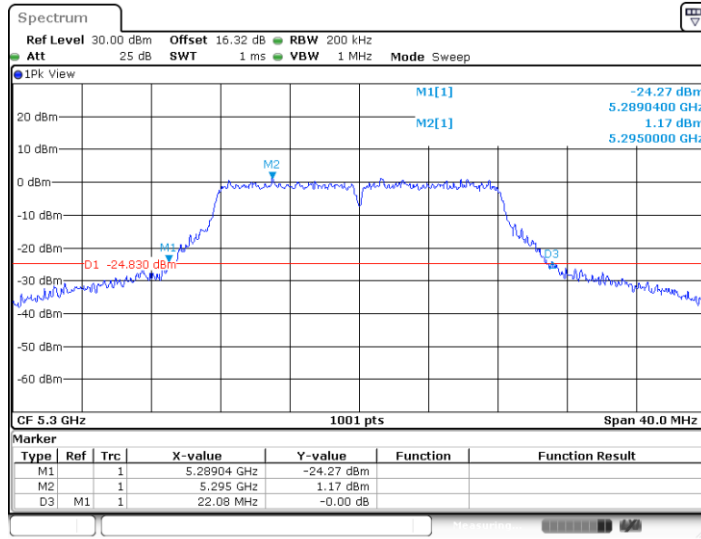


11A-CDD_Ant1_5300

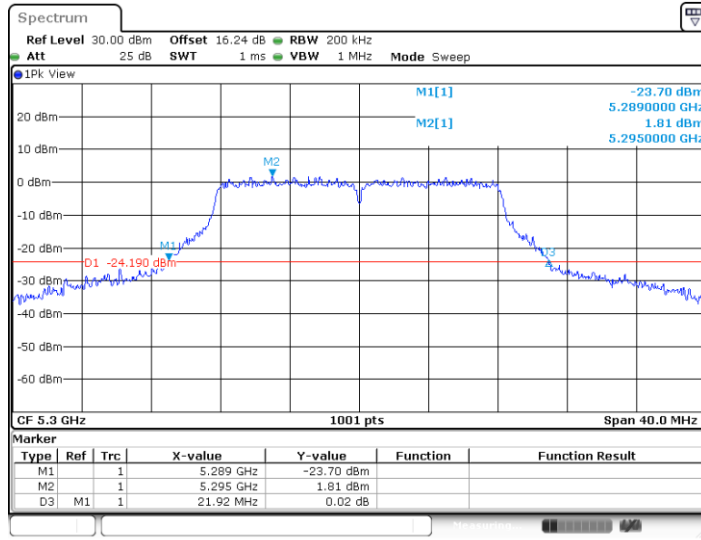




11A-CDD_Ant2_5300

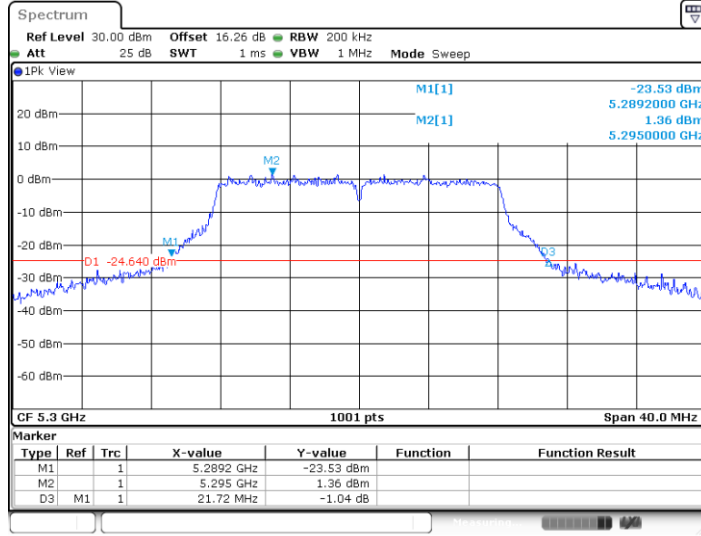

Date: 30 JUN 2023 16:29:27


11A-CDD_Ant3_5300

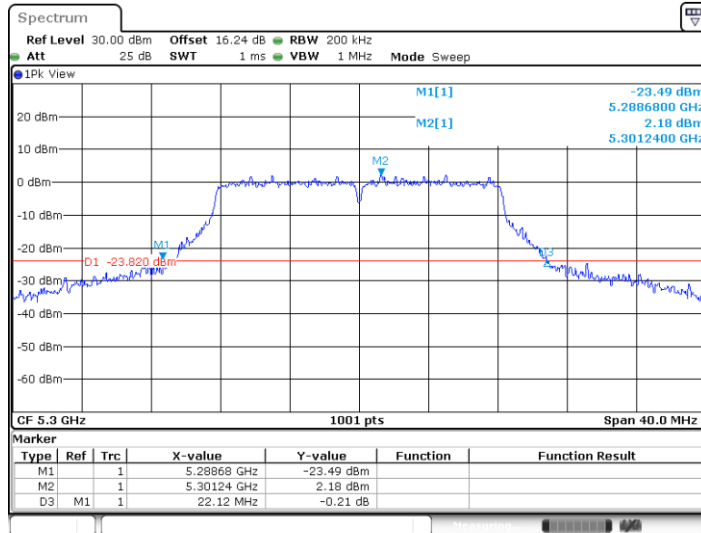

Date: 30 JUN 2023 16:30:13




11A-CDD_Ant0_5320

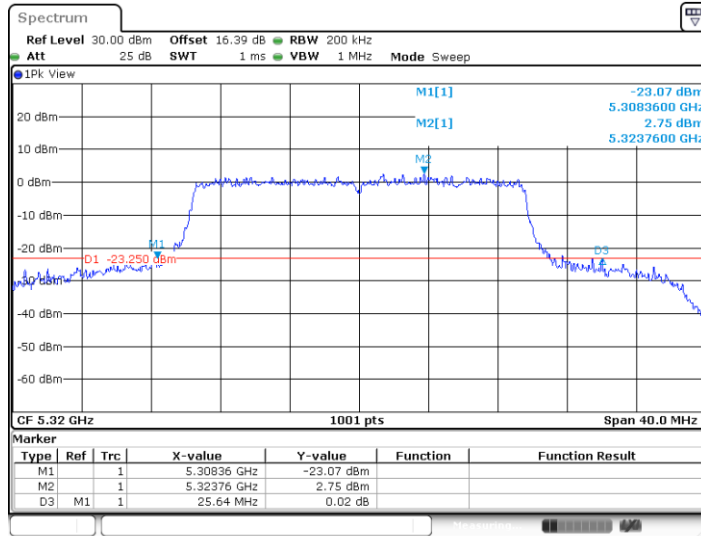

Date: 30 JUN 2023 16:40:11


11A-CDD_Ant1_5320

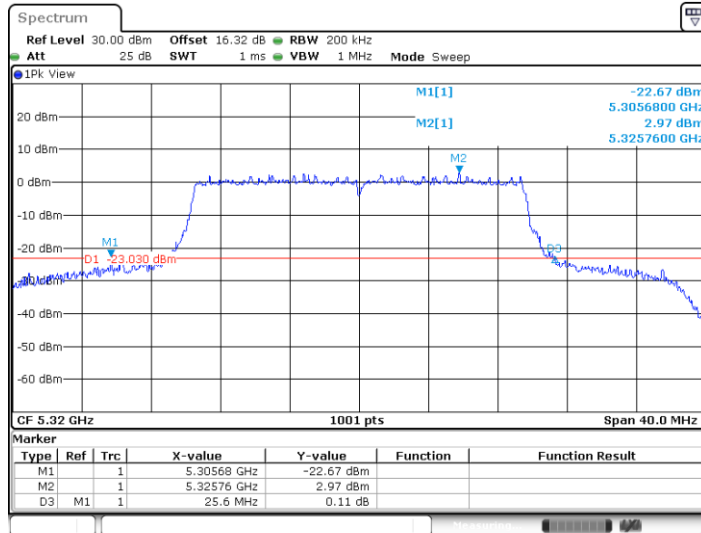


Date: 30 JUN 2023 16:40:50



11A-CDD_Ant2_5320

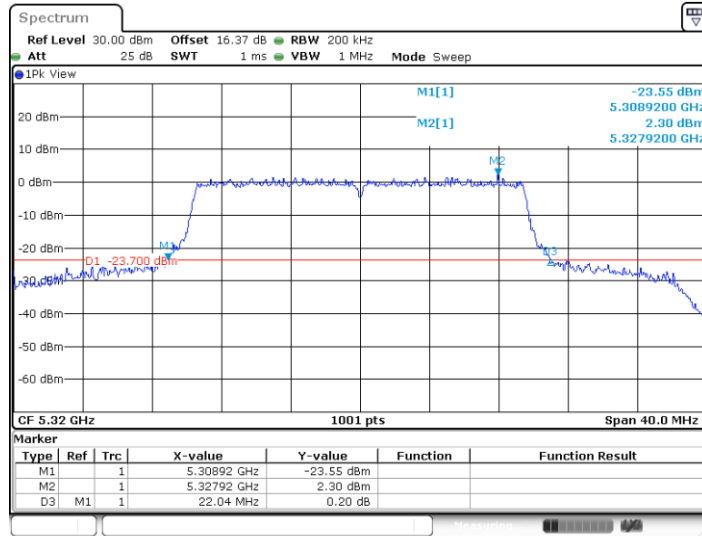


11A-CDD_Ant3_5320

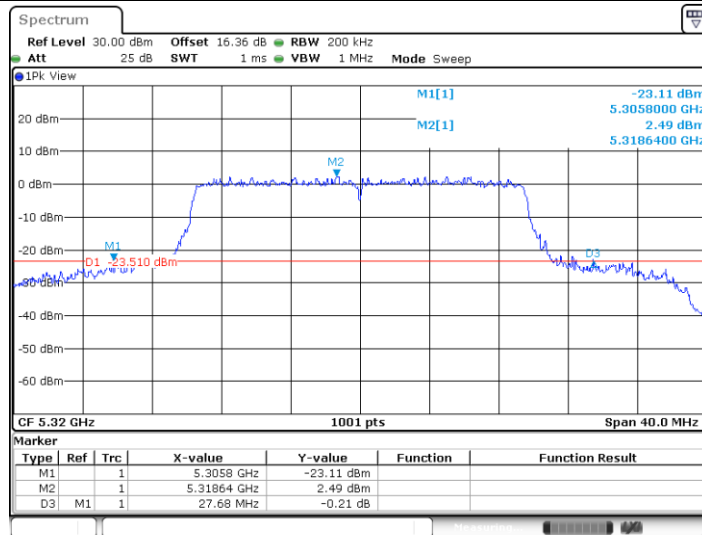




11A-CDD_Ant0_5500

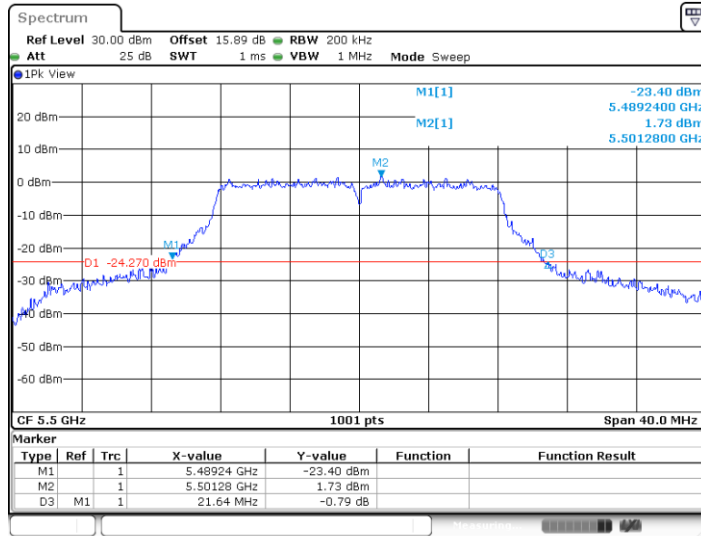

Date: 30 JUN 2023 16:53:05


11A-CDD_Ant1_5500

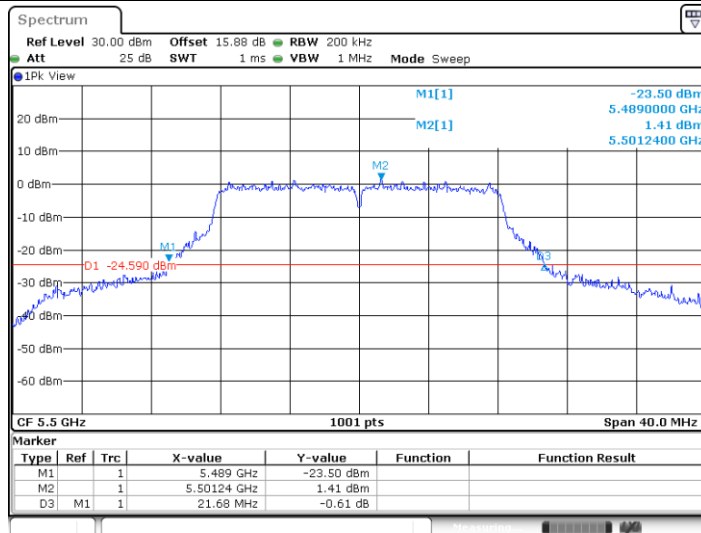

Date: 30 JUN 2023 16:53:28




11A-CDD_Ant2_5500

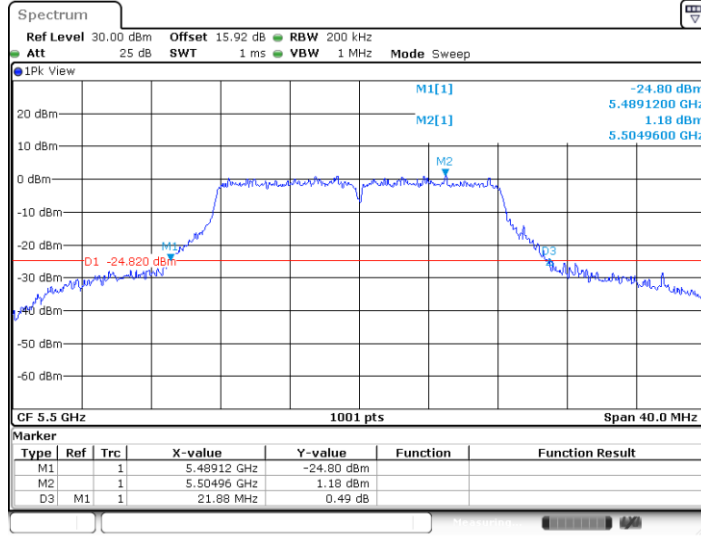

Date: 30 JUN, 2023 16:53:56


11A-CDD_Ant3_5500

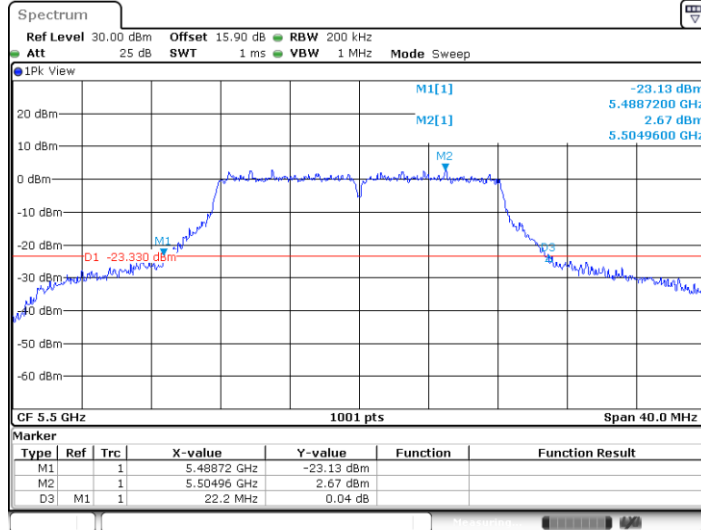


Date: 30 JUN, 2023 16:54:28



11A-CDD_Ant0_5580

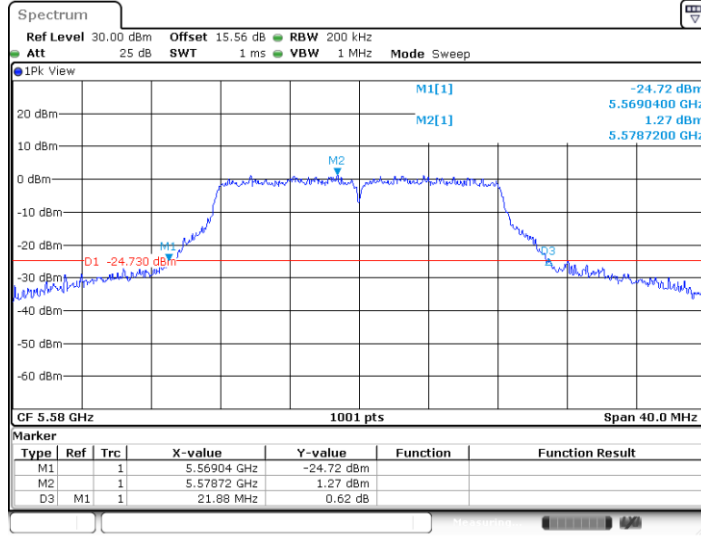


11A-CDD_Ant1_5580

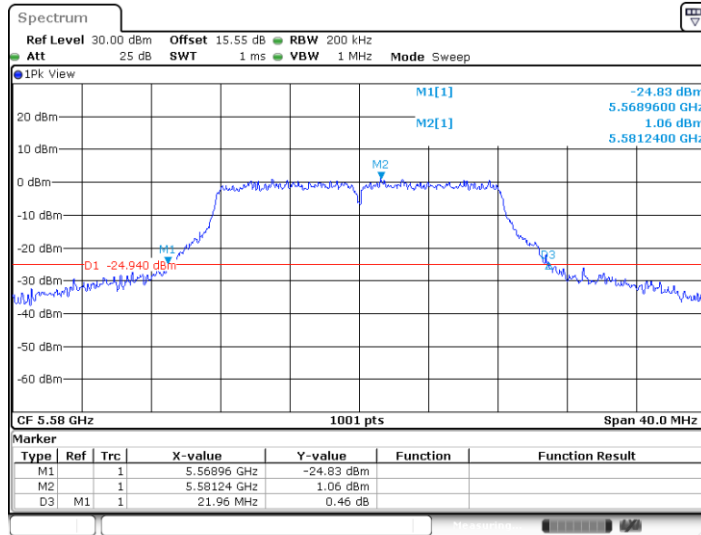




11A-CDD_Ant2_5580

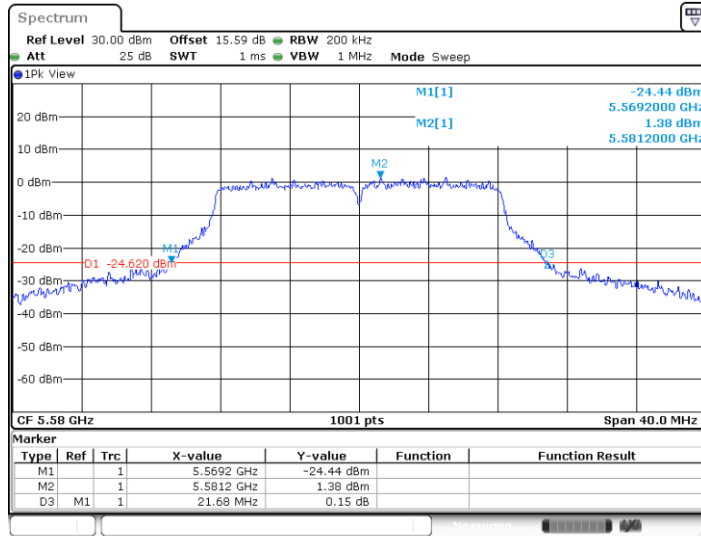

Date: 30 JUN 2023 17:02:00


11A-CDD_Ant3_5580

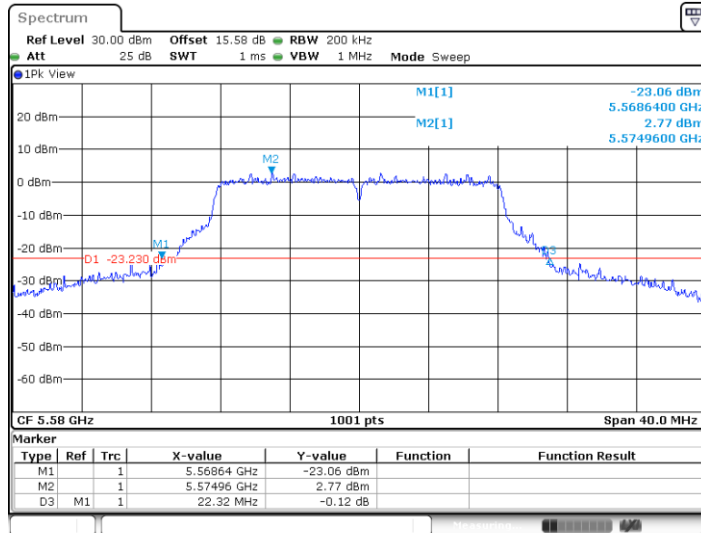

Date: 30 JUN 2023 17:02:50




11A-CDD_Ant0_5700

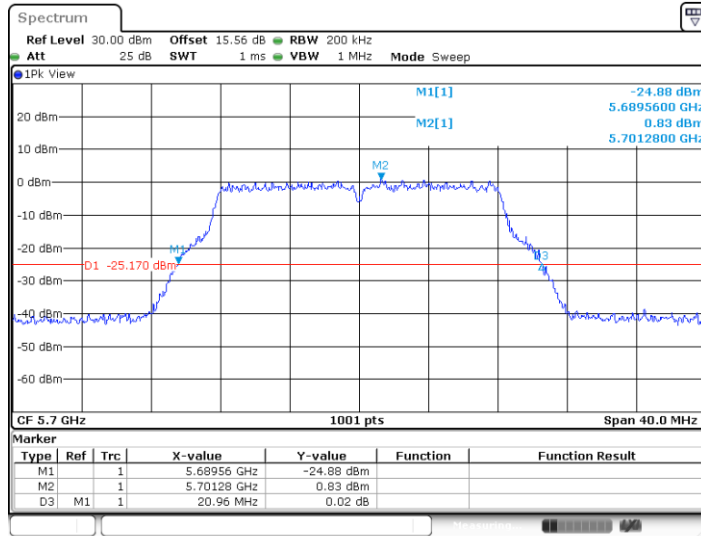

Date: 30.JUN.2023 17:16:41


11A-CDD_Ant1_5700

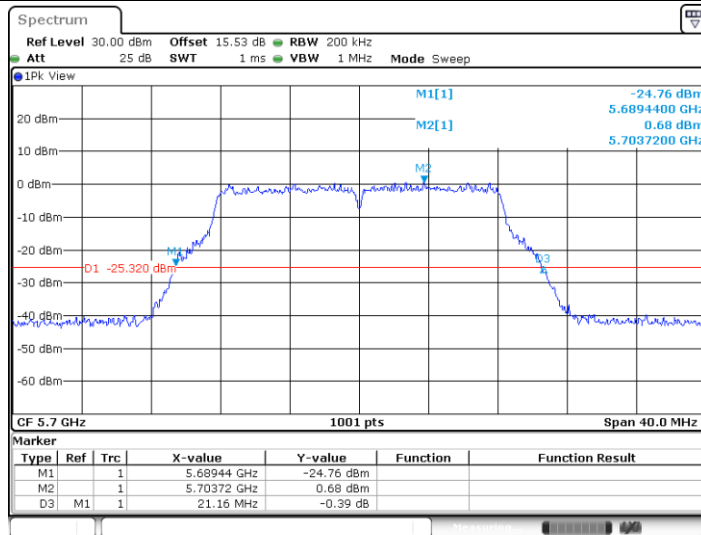

Date: 30.JUN.2023 17:17:04




11A-CDD_Ant2_5700

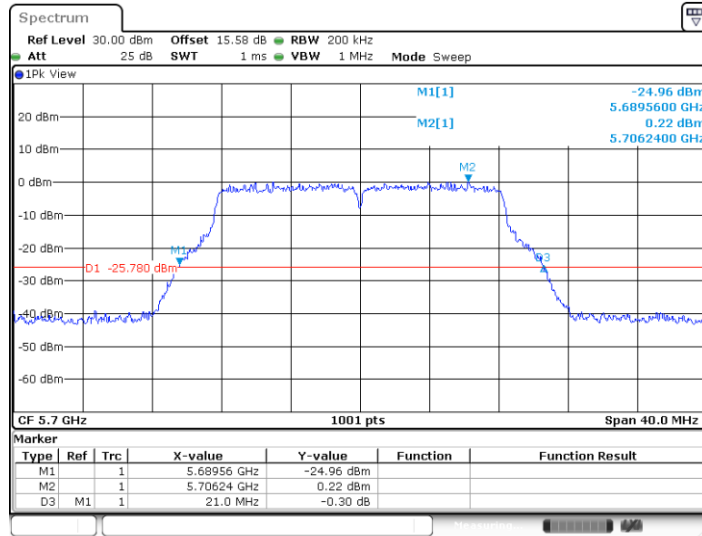

Date: 30.JUN.2023 17:17:35


11A-CDD_Ant3_5700

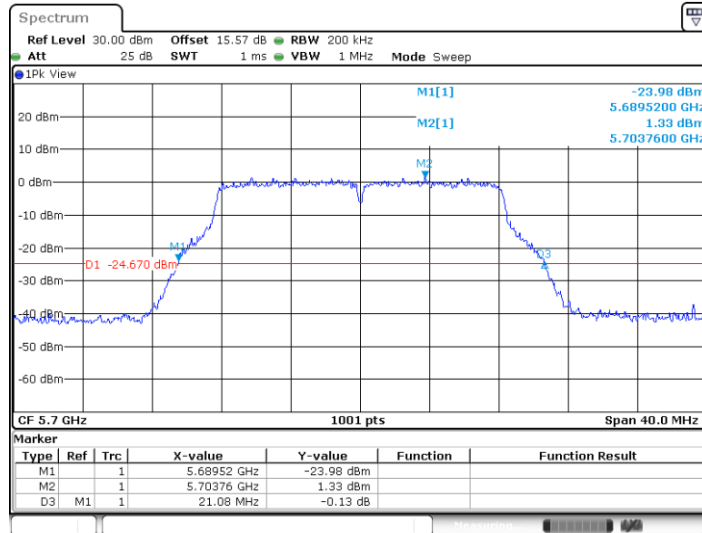

Date: 30.JUN.2023 17:18:04




11A-CDD_Ant0_5720

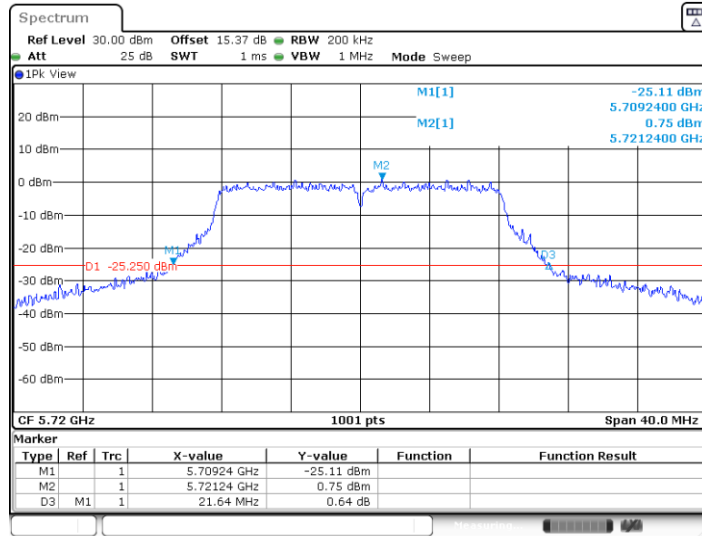

Date: 5.JUL.2023 10:38:12


11A-CDD_Ant1_5720

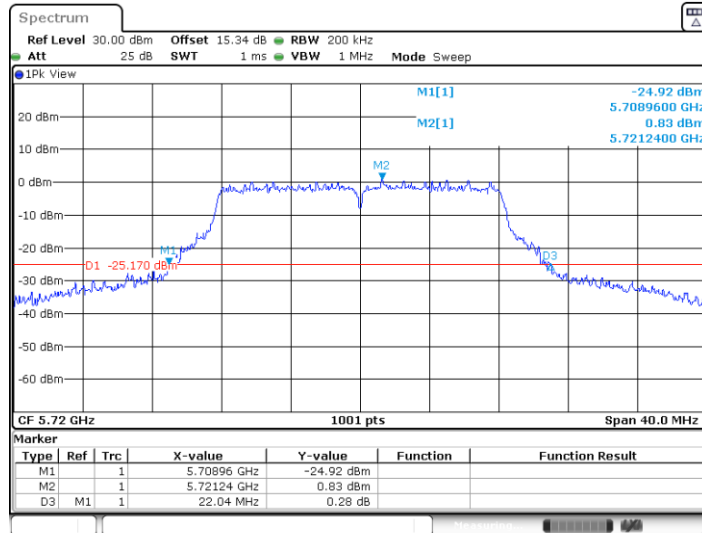

Date: 5.JUL.2023 10:39:04




11A-CDD_Ant2_5720

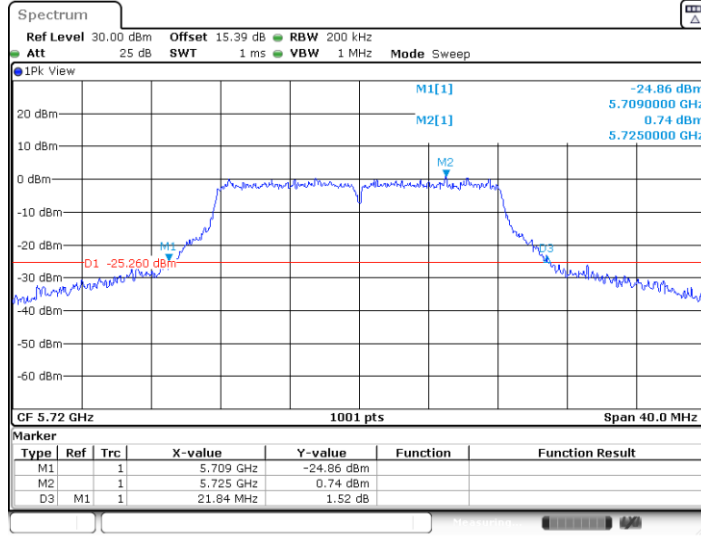

Date: 5.JUL.2023 10:40:06


11A-CDD_Ant3_5720

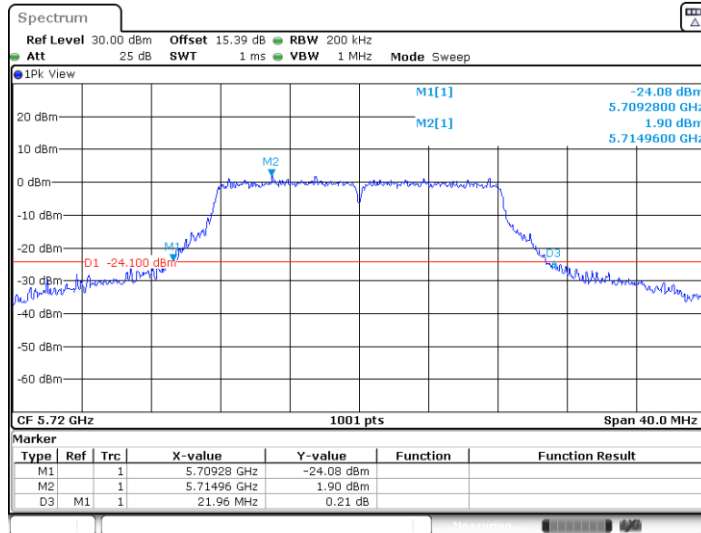


Date: 5.JUL.2023 10:41:08



11AX20MIMO_Ant0_5260

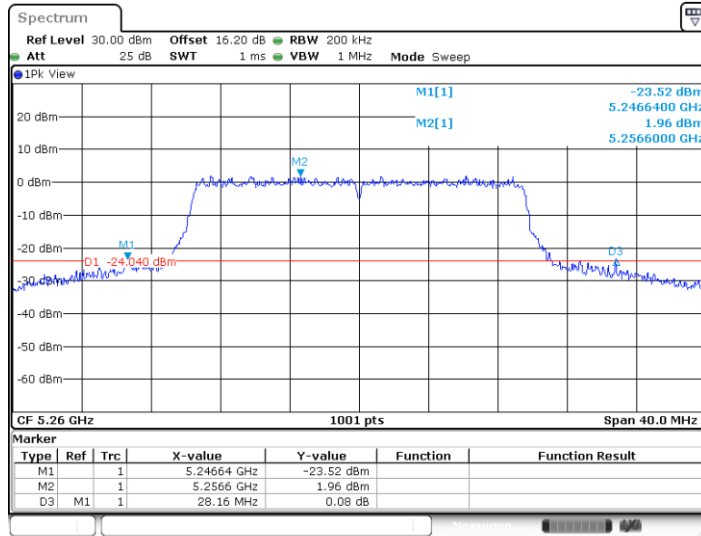


11AX20MIMO_Ant1_5260

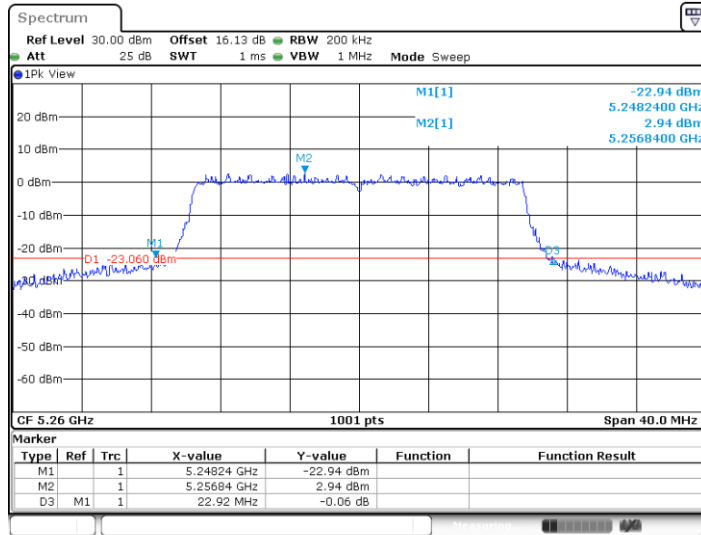




11AX20MIMO_Ant2_5260

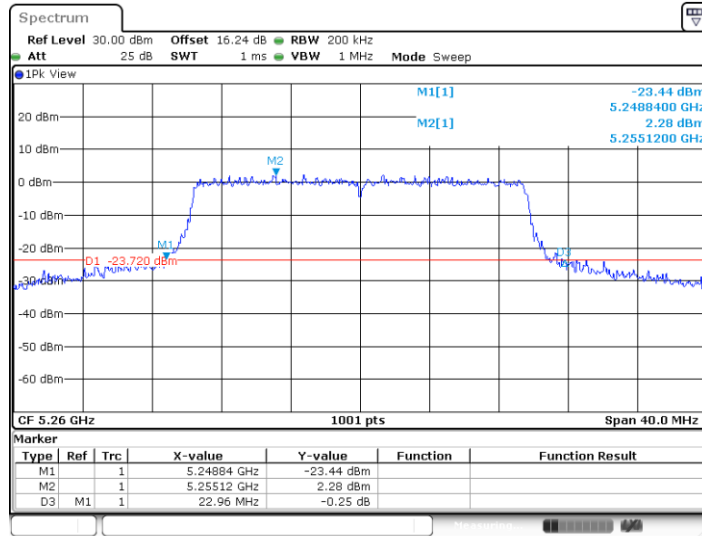


11AX20MIMO_Ant3_5260

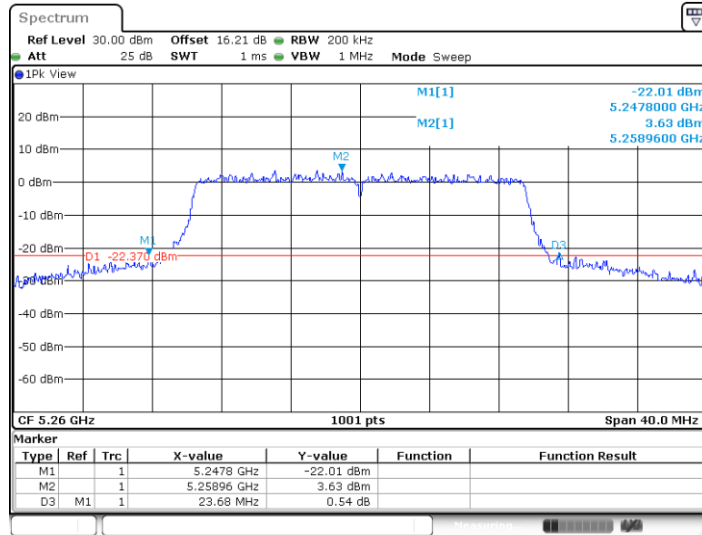




11AX20MIMO_Ant0_5300

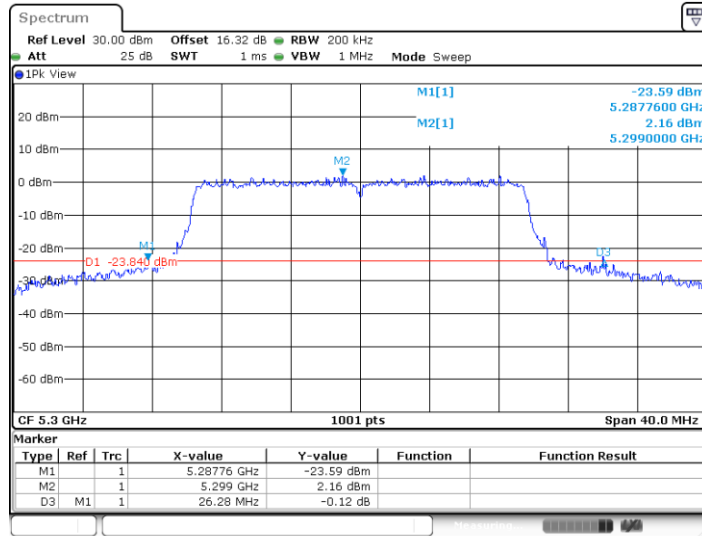


11AX20MIMO_Ant1_5300

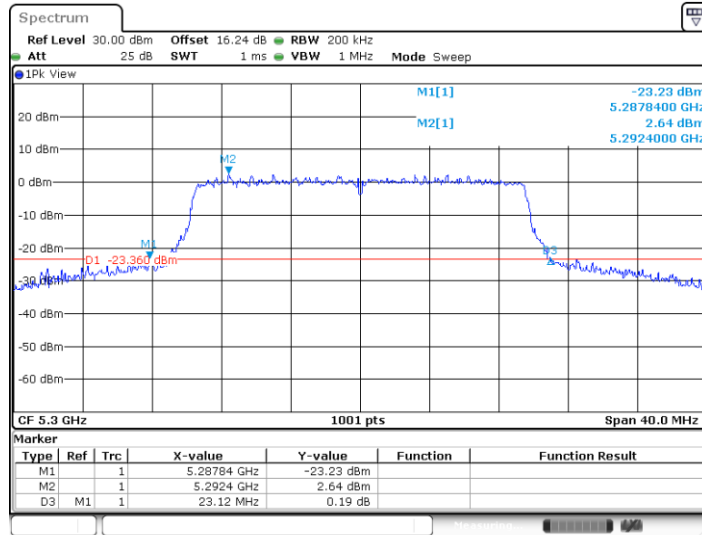




11AX20MIMO_Ant2_5300

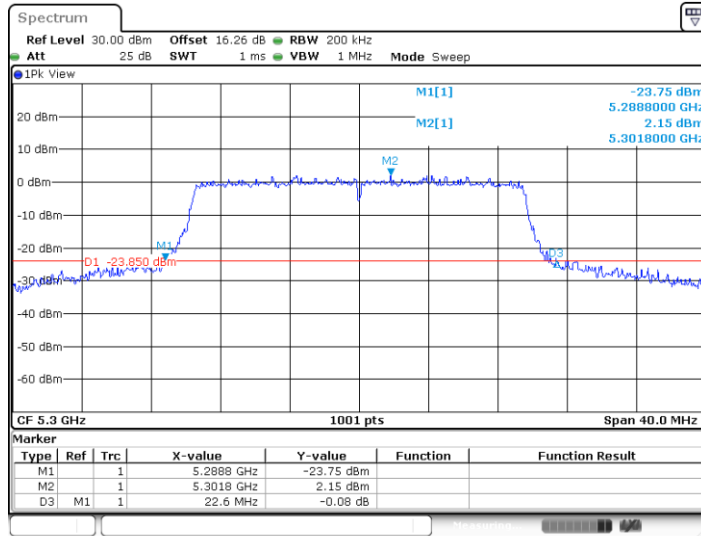

Date: 30 JUN 2023 17:31:29


11AX20MIMO_Ant3_5300

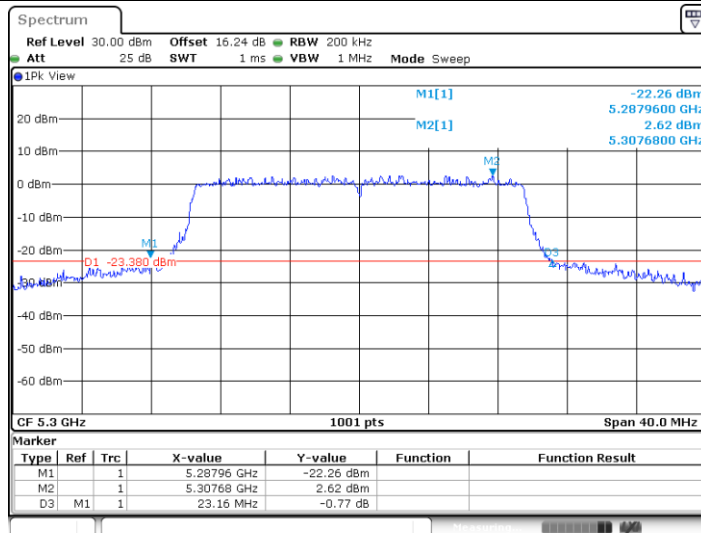

Date: 30 JUN 2023 17:32:03




11AX20MIMO_Ant0_5320

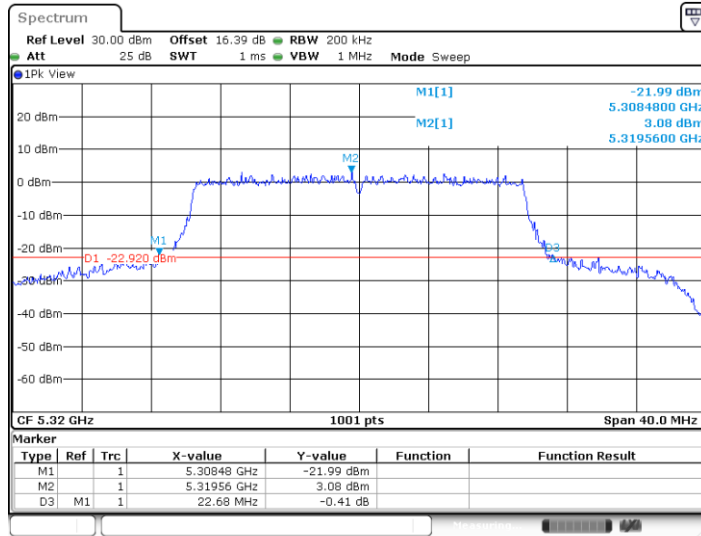

Date: 30 JUN 2023 17:35:33


11AX20MIMO_Ant1_5320

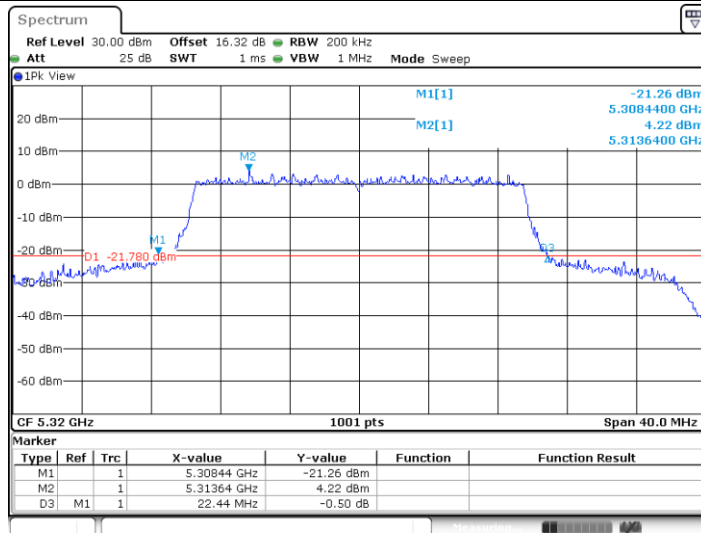

Date: 30 JUN 2023 17:35:58




11AX20MIMO_Ant2_5320

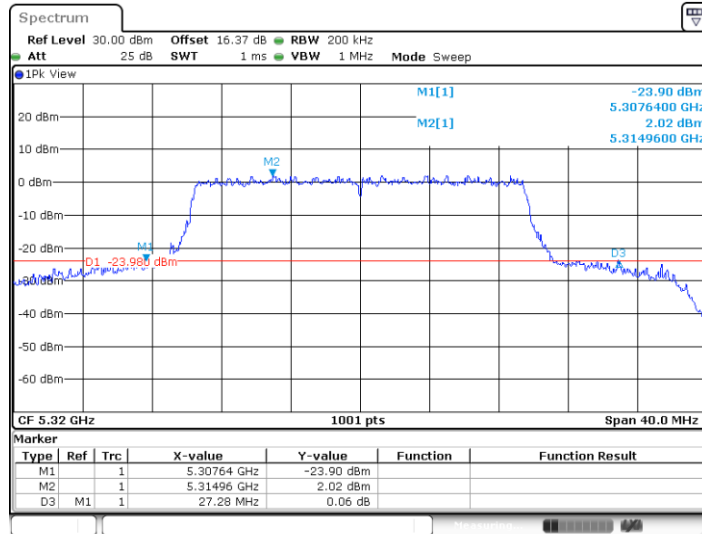

Date: 30 JUN, 2023 17:36:27


11AX20MIMO_Ant3_5320

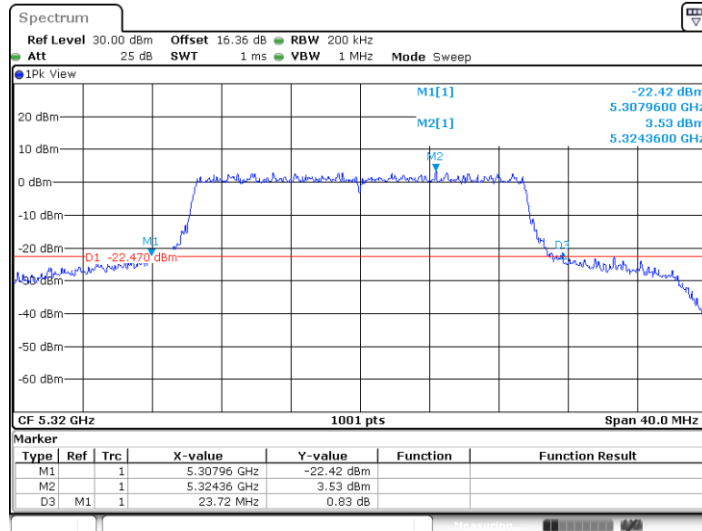


Date: 30 JUN, 2023 17:36:55



11AX20MIMO_Ant0_5500

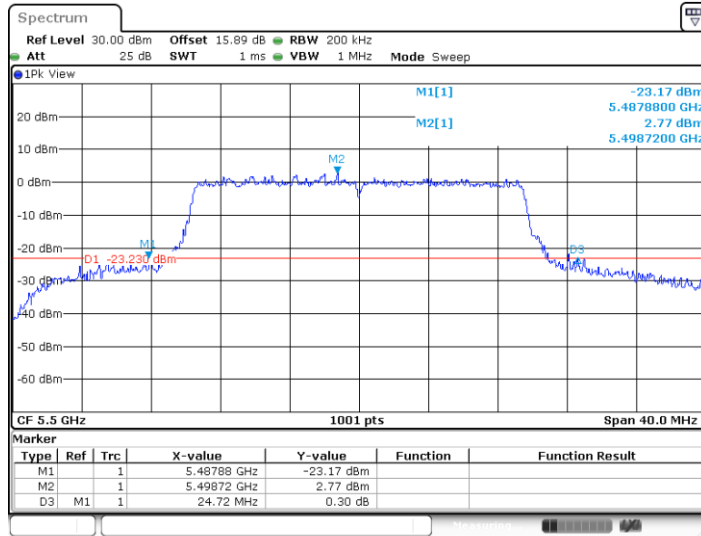


11AX20MIMO_Ant1_5500

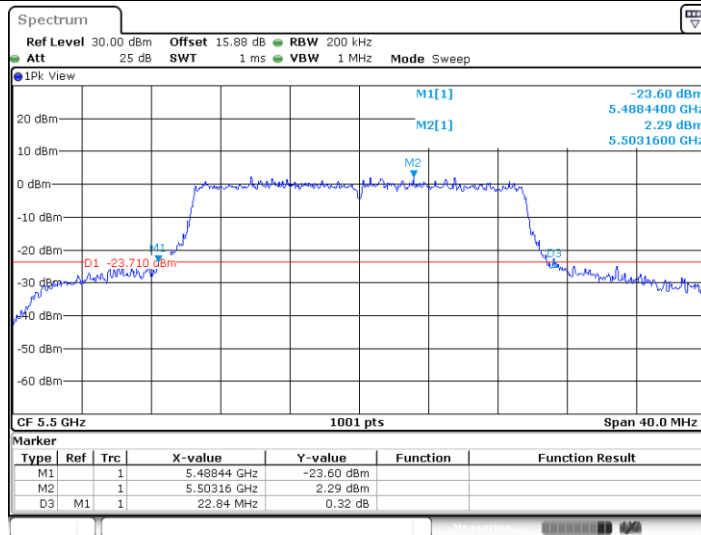




11AX20MIMO_Ant2_5500

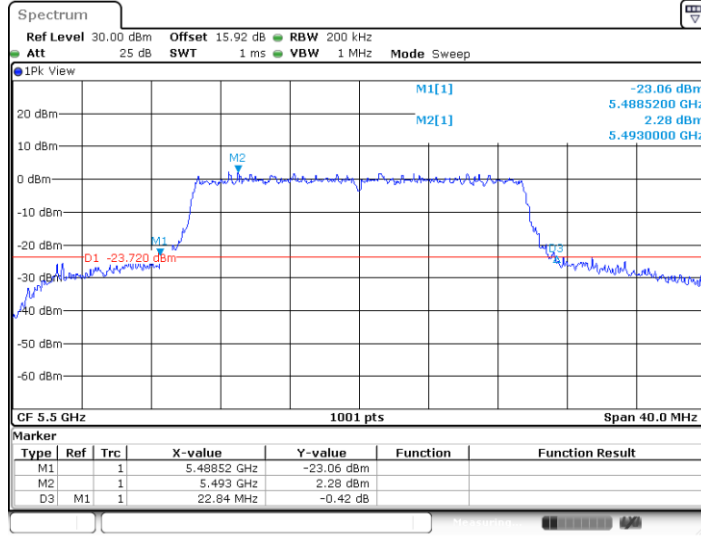


11AX20MIMO_Ant3_5500

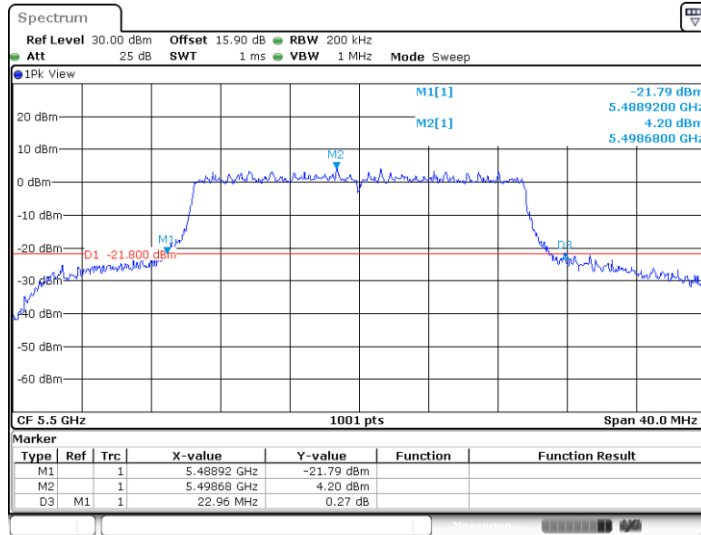




11AX20MIMO_Ant0_5580

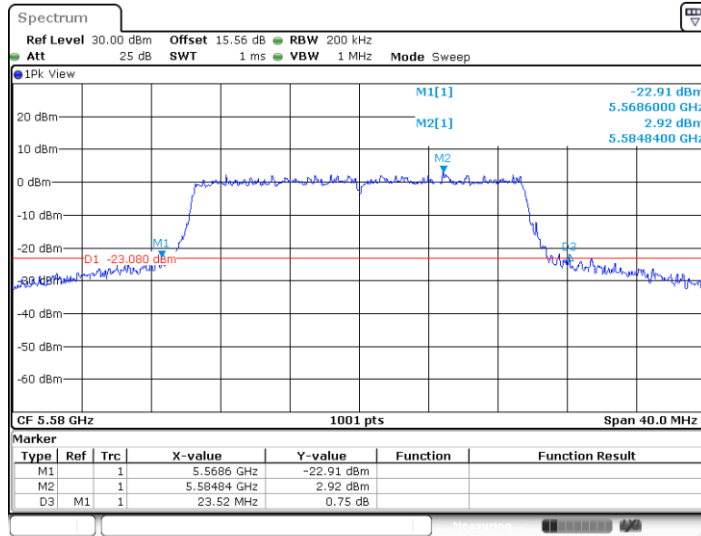

Date: 30 JUN, 2023 17:44:33


11AX20MIMO_Ant1_5580

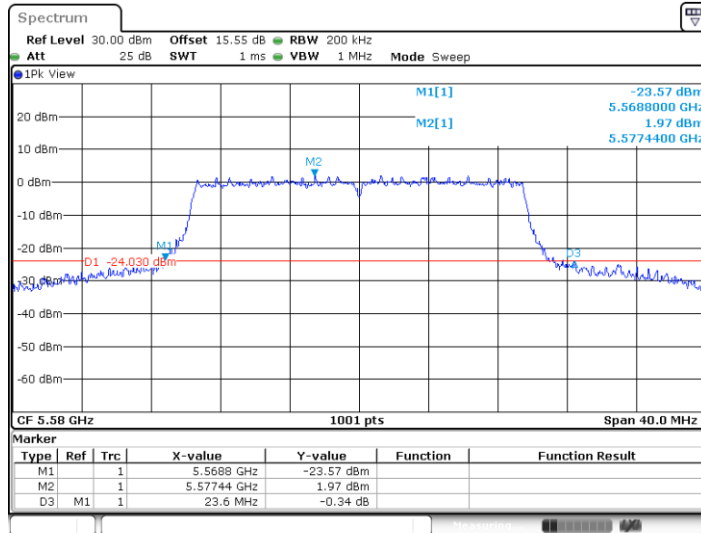

Date: 30 JUN, 2023 17:45:13




11AX20MIMO_Ant2_5580

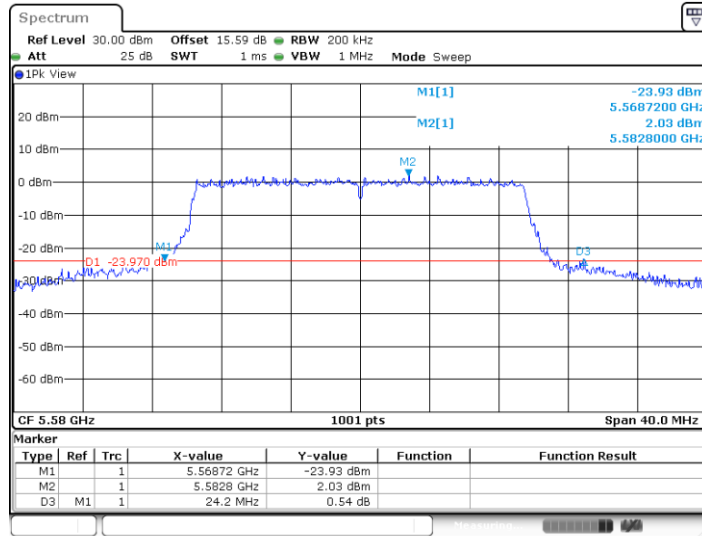

Date: 30 JUN 2023 17:46:02


11AX20MIMO_Ant3_5580

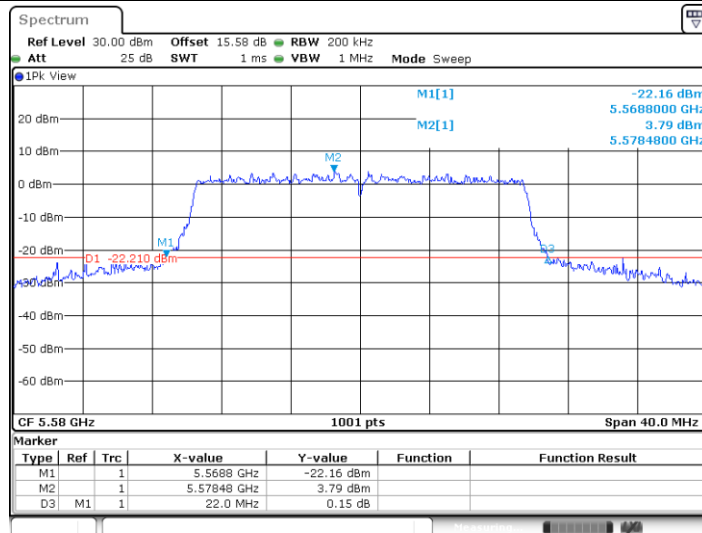

Date: 30 JUN 2023 17:46:48




11AX20MIMO_Ant0_5700

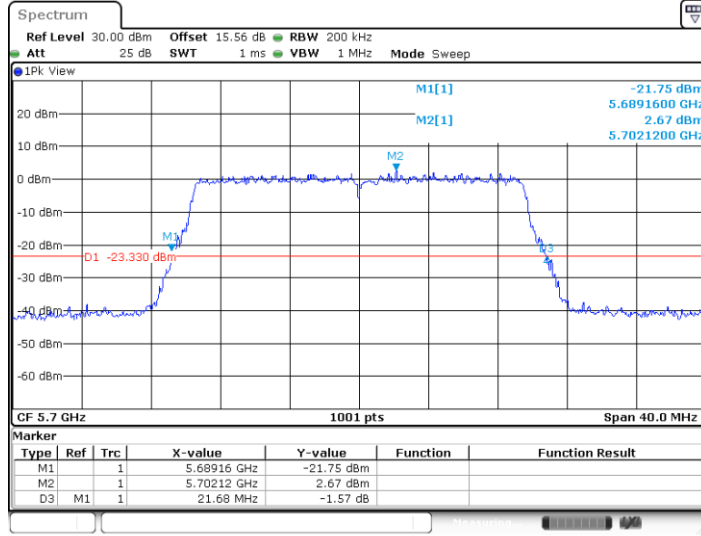

Date: 30 JUN 2023 17:49:19


11AX20MIMO_Ant1_5700

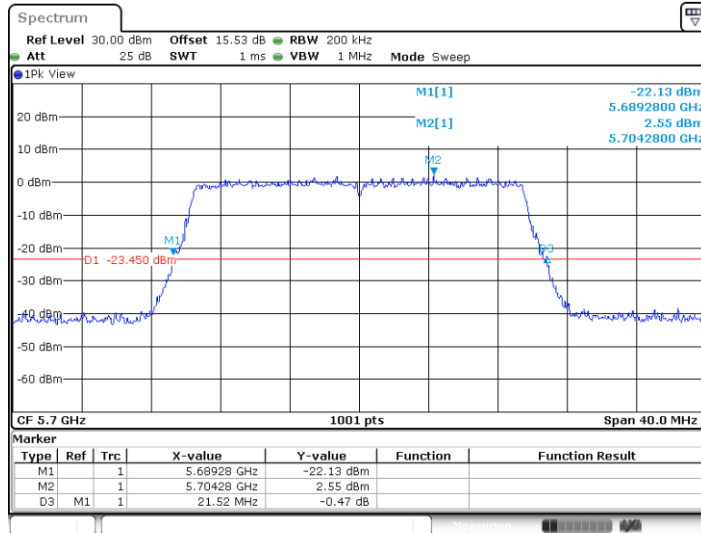

Date: 30 JUN 2023 17:49:45




11AX20MIMO_Ant2_5700

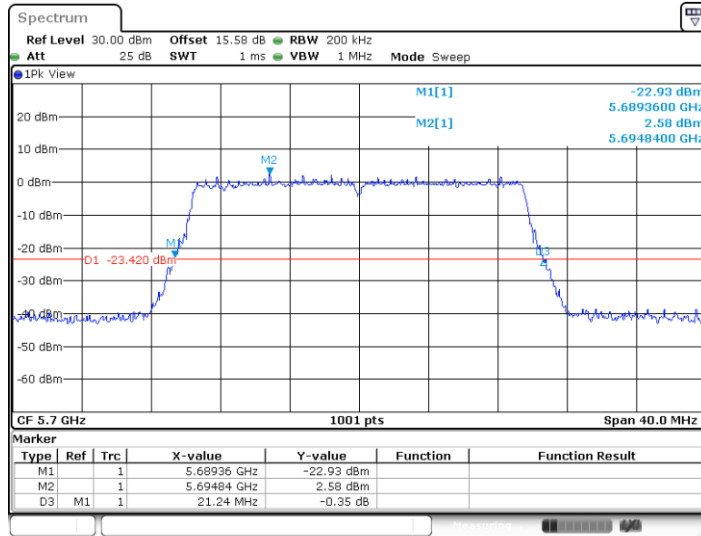

Date: 30 JUN, 2023 17:50:13


11AX20MIMO_Ant3_5700

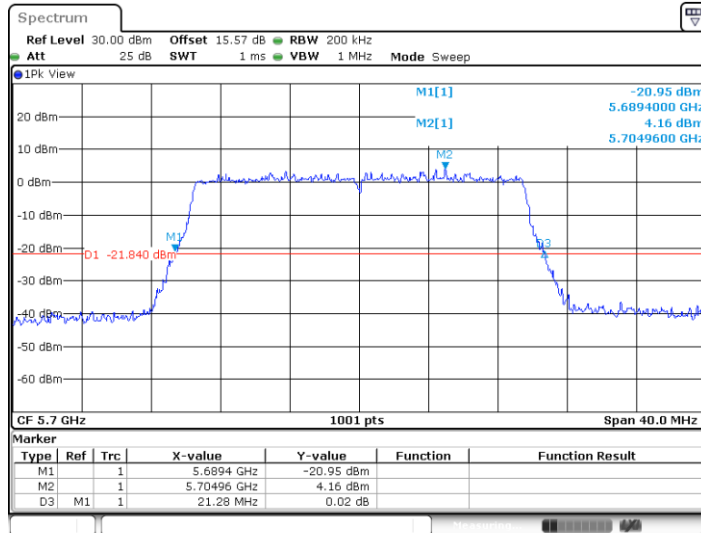

Date: 30 JUN, 2023 17:50:48




11AX20MIMO_Ant0_5720

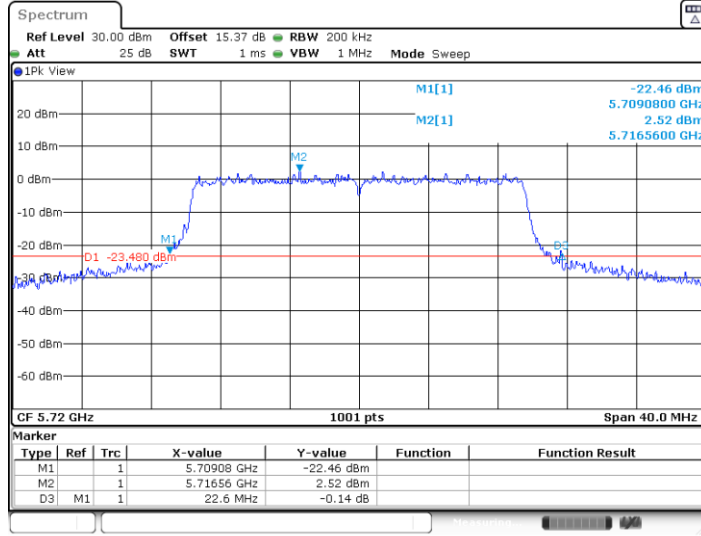

Date: 5.JUL.2023 10:45:31


11AX20MIMO_Ant1_5720

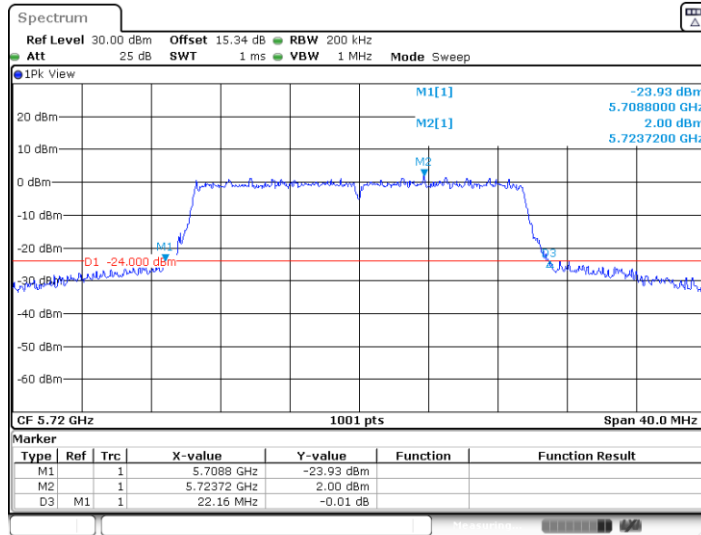

Date: 5.JUL.2023 10:46:32




11AX20MIMO_Ant2_5720

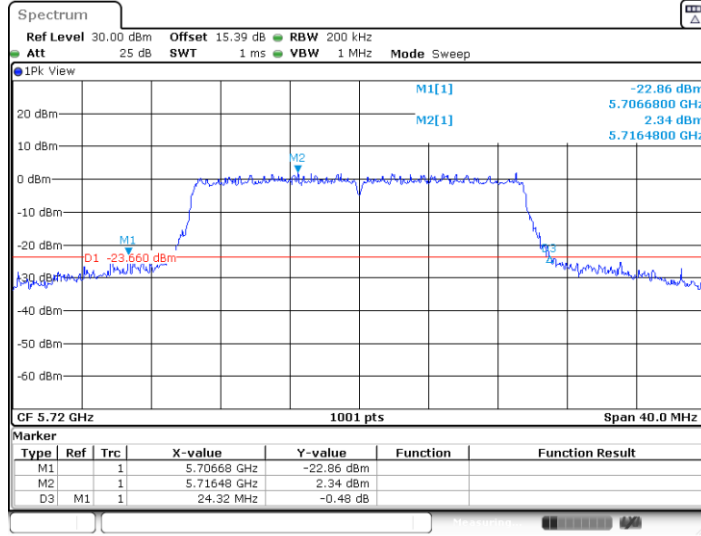

Date: 5.JUL.2023 10:47:34


11AX20MIMO_Ant3_5720

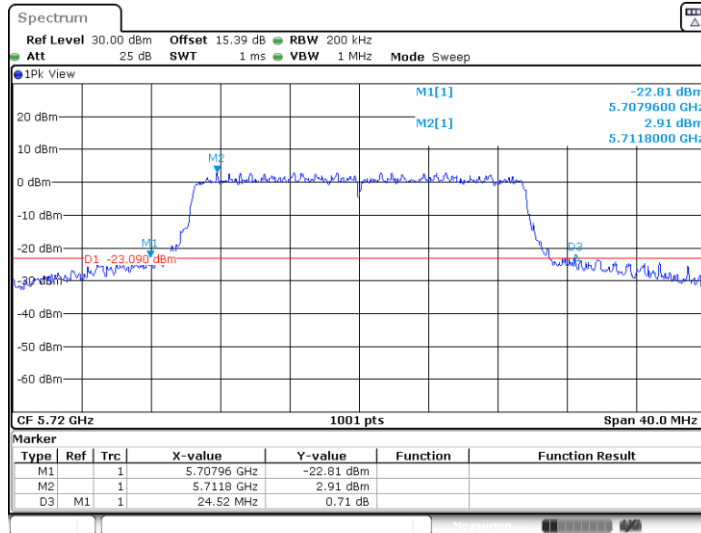


Date: 5.JUL.2023 10:48:36



11AX40MIMO_Ant0_5270

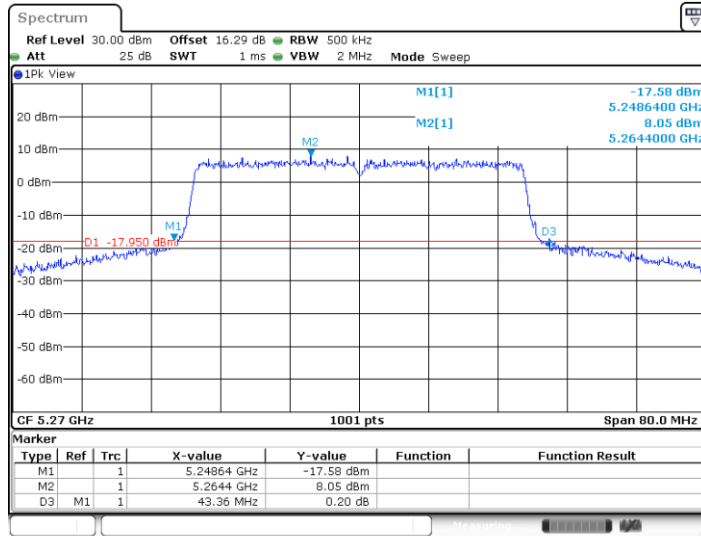


11AX40MIMO_Ant1_5270

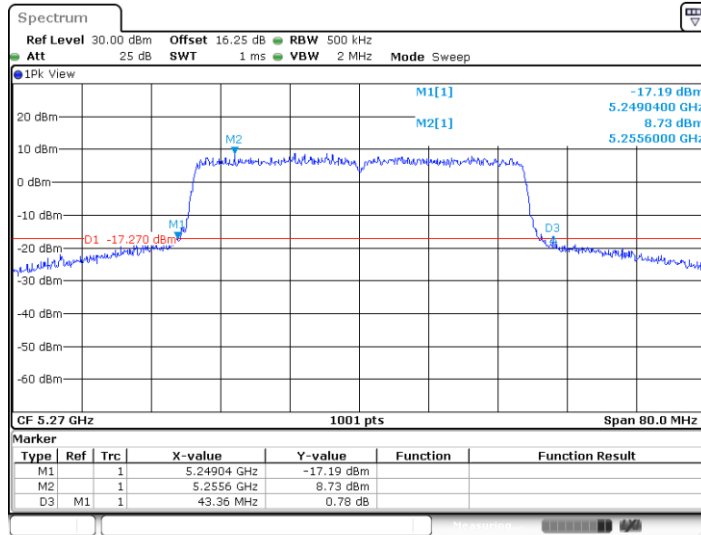





11AX40MIMO_Ant2_5270

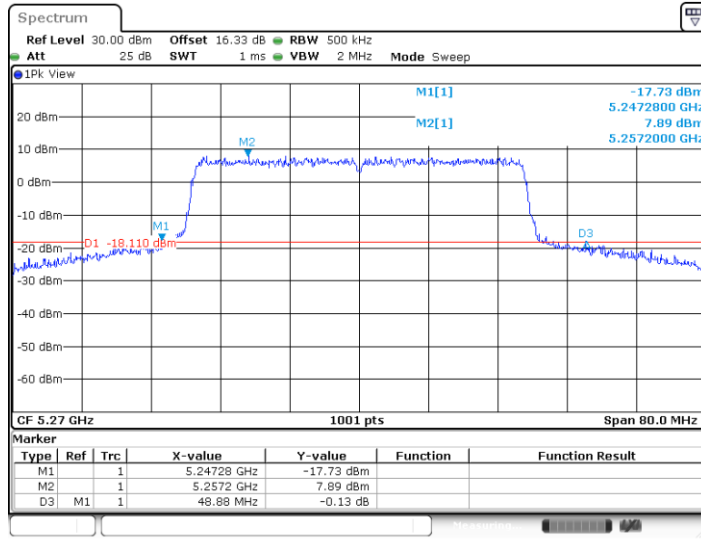


11AX40MIMO_Ant3_5270

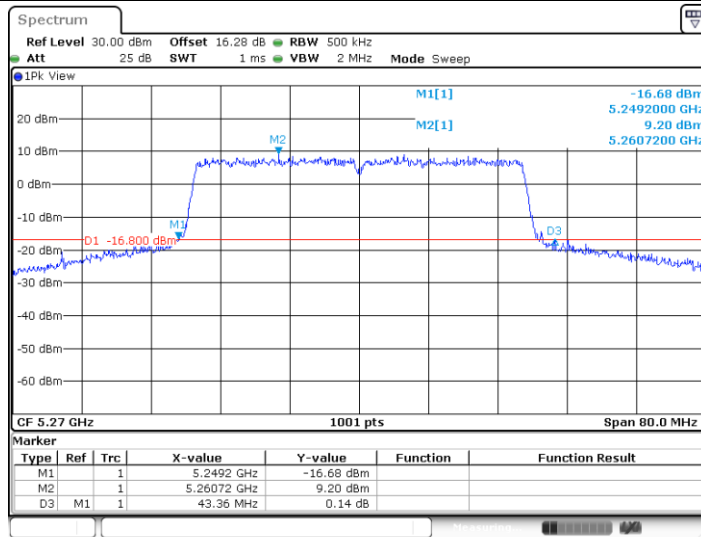

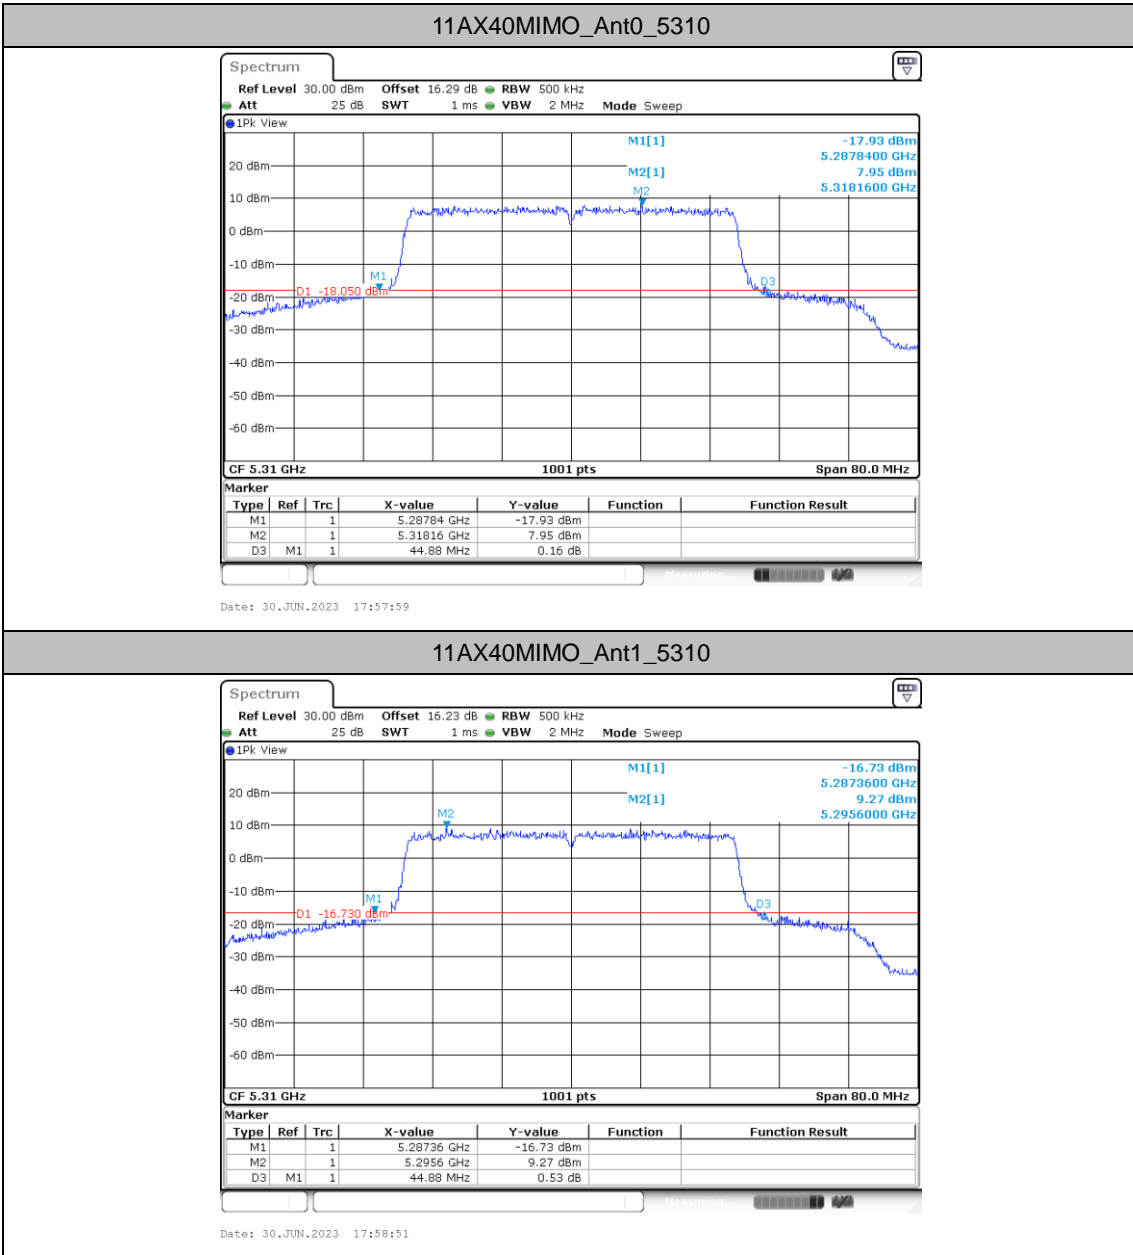




11AX40MIMO_Ant2_5310

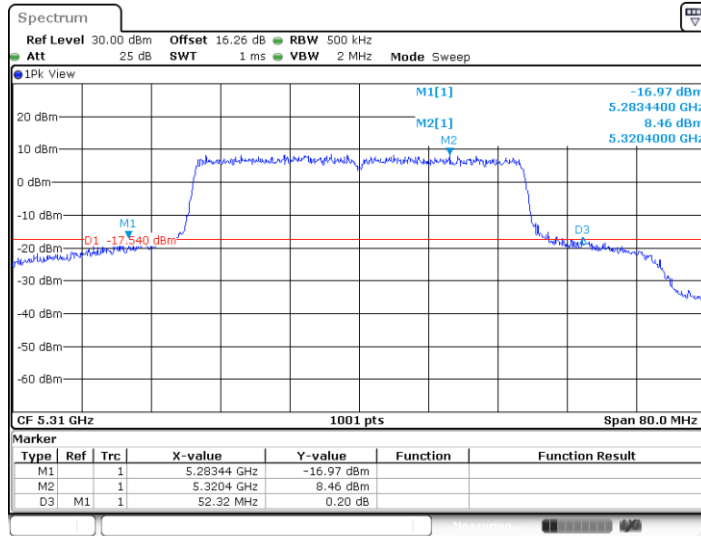


11AX40MIMO_Ant3_5310

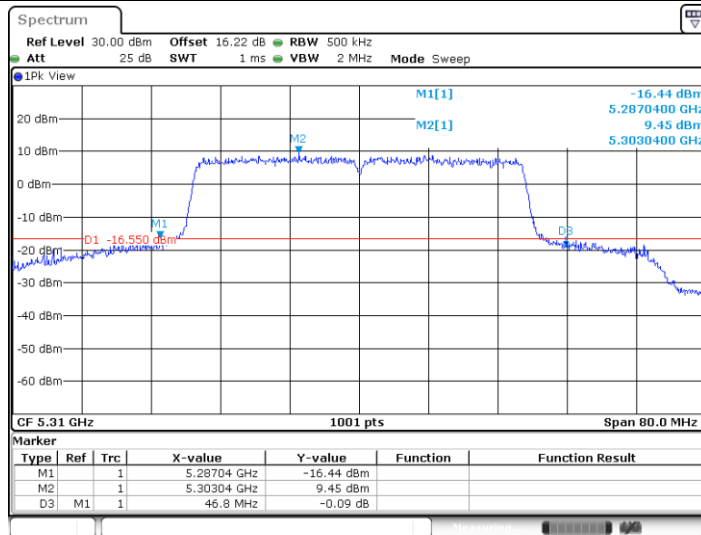




11AX40MIMO_Ant0_5510

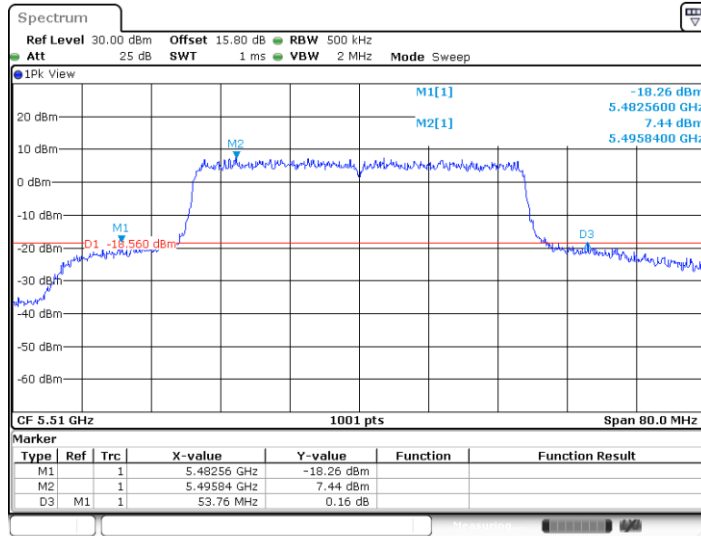

Date: 30 JUN 2023 18:06:57


11AX40MIMO_Ant1_5510

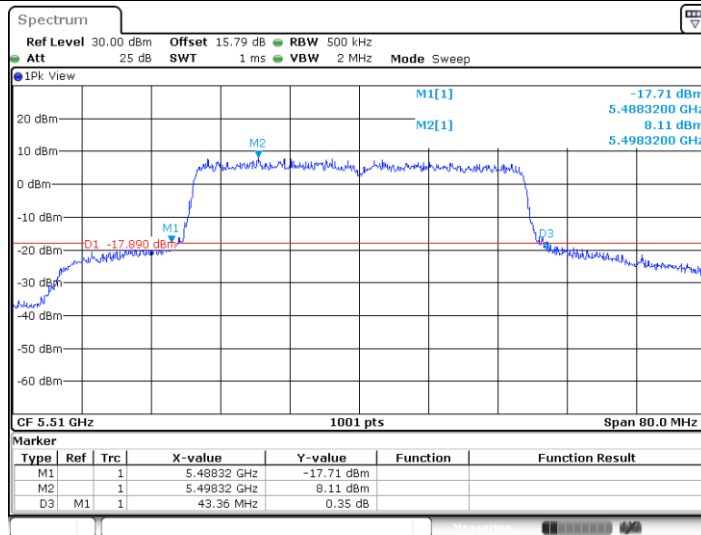

Date: 30 JUN 2023 18:07:42




11AX40MIMO_Ant2_5510

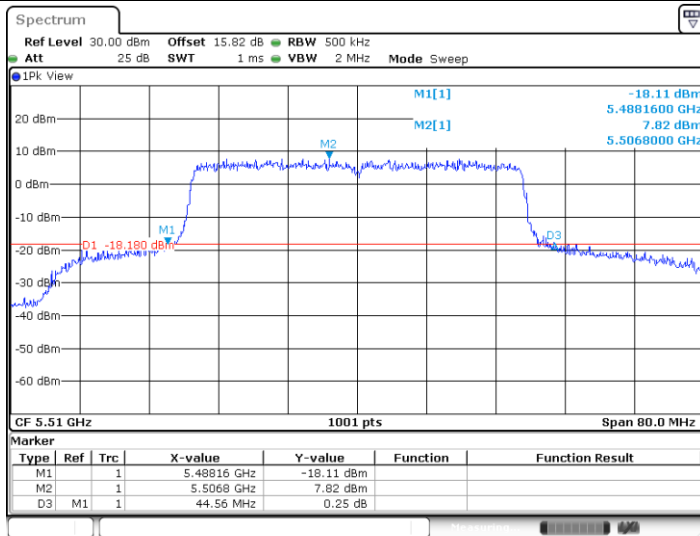

Date: 30 JUN 2023 18:08:33


11AX40MIMO_Ant3_5510

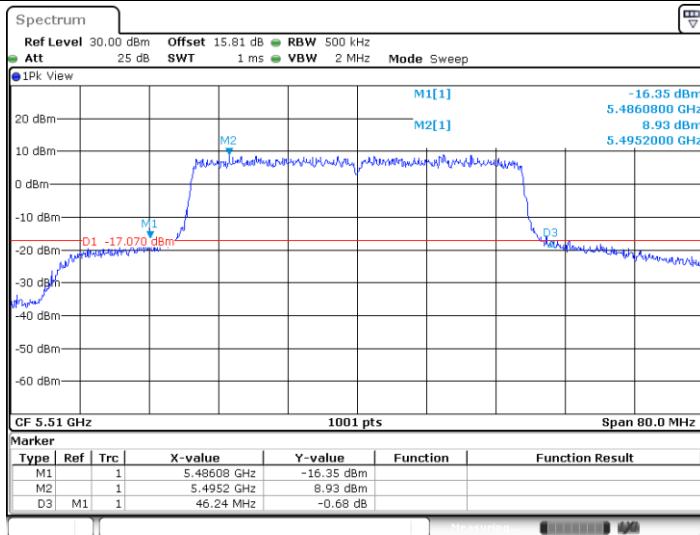

Date: 30 JUN 2023 18:09:24




11AX40MIMO_Ant0_5550

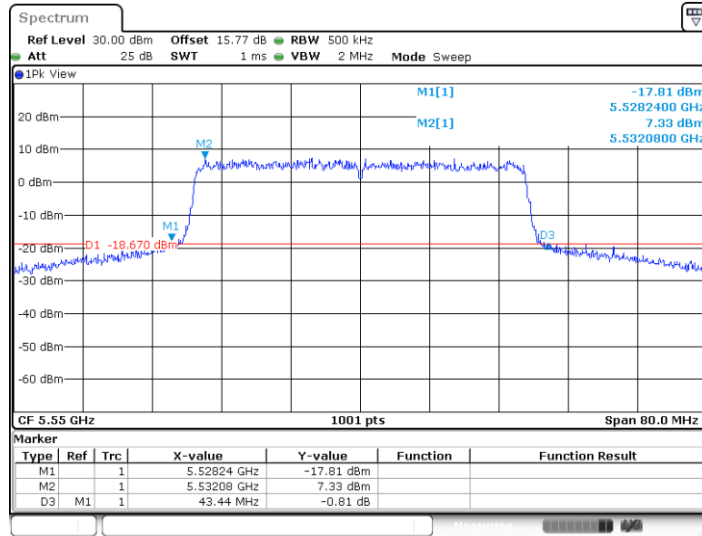

Date: 30 JUN 2023 18:12:59


11AX40MIMO_Ant1_5550

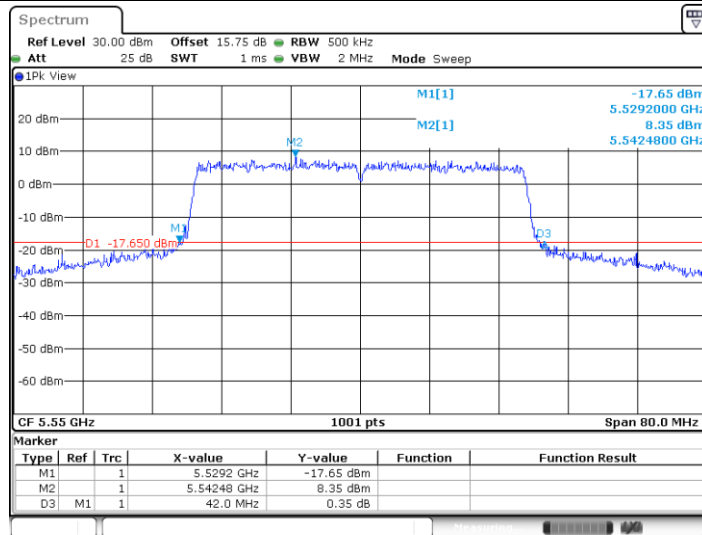

Date: 30 JUN 2023 18:13:25



11AX40MIMO_Ant2_5550

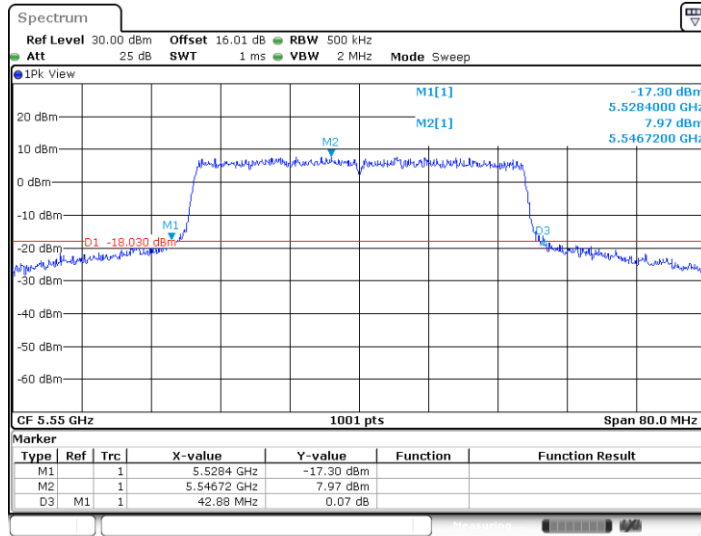

11AX40MIMO_Ant3_5550

