

SUPERVISED BY:

Morton Flom, P. Eng.

*M. Flom P. Eng.*

October 21, 1998

DATE OF REPORT

AS PER LABEL DRAWING(S)

LOCATION

ATTACHED, EXHIBIT 1.

NAME/PLATE DRAWING

FCC ID: B5DH211

EQUIPMENT IDENTIFICATION

Sub-part  
2.1033(c) :

**M. Flom Associates, Inc. - Global Compliance Center**  
3356 North San Marcos Place, Suite 107, Chandler, Arizona 85224-1571  
www.goodnet.com/~mflom, (602) 926-3100, FAX: 926-3598

FCC ID: B5DH211

**MFA**

THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

TABLE OF CONTENTS

<u>RULE</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c) (14)	Rule Summary	4
	Standard Test Conditions and Engineering Practices	5
2.1046(a)	Carrier Output Power (Radiated)	6
2.1051	Unwanted Emissions (Transmitter Conducted)	8
2.1053(a)	Field Strength of Spurious Radiation	11
2.1049(c) (1)	Emission Masks (Occupied Bandwidth)	15
2.1047(a)	Audio Frequency Response	20
2.1047(b)	Modulation Limiting	22
2.1055(a) (1)	Frequency Stability (Temperature Variation)	25
2.1055(b) (1)	Frequency Stability (Voltage Variation)	28
2.202(g)	Necessary Bandwidth and Emission Bandwidth	29

PAGE NO. 1 of 29.

*Required information per ISO/IEC Guide 25-1990, paragraph 13.2:*

a) TEST REPORT

b) Laboratory: M. Flom Associates, Inc.  
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107  
(Canada: IC 2044) Chandler, AZ 85224

c) Report Number: d98a0043

d) Client: Telex Communications, Inc.  
8601 E. Cornhusker Highway  
P.O. Box 5579  
Lincoln, NE 68505-5579

e) Identification: Electro-Voice HTU  
FCC ID: B5DH211  
Description: UHF FM Handheld Transmitter

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: October 21, 1998  
EUT Received: October 14, 1998

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with MFA internal quality manual.

m) Supervised by:



Morton Flom, P. Eng.

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO.

2 of 29.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATIONIN ACCORDANCE WITH FCC RULES AND REGULATIONS,  
VOLUME II, PART 2 AND TO74H, 74.861, 74.802, 74.861(d)(2), 74.861(d)(3), 74.861(e)(1)(ii),  
74.861(e)(3), 74.861(e)(4), 74.861(e)(5), 74.861(e)(6)Sub-part 2.1033(c)(1): NAME AND ADDRESS OF APPLICANT:Telex Communications, Inc.  
8601 E. Cornhusker Highway  
P.O. Box 5579  
Lincoln, NE 68505-5579VENDOR:

Applicant

(c)(2): FCC ID: B5DH211MODEL NO: Electro-Voice HTU(c)(3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c)(4): TYPE OF EMISSION: 182KF3E(c)(5): FREQUENCY RANGE, MHz: 690 to 725(c)(6): POWER RATING, Watts: 0.05, 0.004 (Radiated)  
Switchable Variable x N/A(c)(7): MAXIMUM POWER RATING, Watts: 0.250

PAGE NO.

3 of 29.

Subpart 2.1033 (continued)

(c) (8): VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE,  
INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = per manual  
COLLECTOR VOLTAGE, Vdc = per manual  
SUPPLY VOLTAGE, Vdc = 9

(c) (9): TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(c) (10): CIRCUIT DIAGRAM/CIRCUIT DESCRIPTION:  
Including description of circuitry & devices provided for  
determining and stabilizing frequency, for suppression of  
spurious radiation, for limiting modulation and limiting  
power.

PLEASE SEE ATTACHED EXHIBITS

(c) (11): LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

(c) (12): PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

(c) (13): DIGITAL MODULATION DESCRIPTION:

     ATTACHED EXHIBITS  
  x   N/A

(c) (14): TEST AND MEASUREMENT DATA:

FOLLOWS

PAGE NO.

4 of 29.

Sub-part  
2.1033(c) (14):TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- \_\_\_ 21 - Domestic Public Fixed Radio Services
- \_\_\_ 22 - Public Mobile Services
- \_\_\_ 22 Subpart H - Cellular Radiotelephone Service
- \_\_\_ 22.901(d) - Alternative technologies and auxiliary services
- \_\_\_ 23 - International Fixed Public Radiocommunication services
- \_\_\_ 24 - Personal Communications Services
- x 74 Subpart H - Low Power Auxiliary Stations
- \_\_\_ 80 - Stations in the Maritime Services
- \_\_\_ 80 Subpart E - General Technical Standards
- \_\_\_ 80 Subpart F - Equipment Authorization for Compulsory Ships
- \_\_\_ 80 Subpart K - Private Coast Stations and Marine Utility Stations
- \_\_\_ 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- \_\_\_ 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- \_\_\_ 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- \_\_\_ 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- \_\_\_ 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- \_\_\_ 80 Subpart X - Voluntary Radio Installations
- \_\_\_ 87 - Aviation Services
- \_\_\_ 90 - Private Land Mobile Radio Services
- \_\_\_ 94 - Private Operational-Fixed Microwave Service
- \_\_\_ 95 Subpart A - General Mobile Radio Service (GMRS)
- \_\_\_ 95 Subpart C - Radio Control (R/C) Radio Service
- \_\_\_ 95 Subpart D - Citizens Band (CB) Radio Service
- \_\_\_ 95 Subpart E - Family Radio Service
- \_\_\_ 95 Subpart F - Interactive Video and Data Service (IVDS)
- \_\_\_ 101 - Fixed Microwave Services

PAGE NO.

5 of 29.

STANDARD TEST CONDITIONS  
and  
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.



PAGE NO. 6 of 29.

NAME OF TEST: Carrier Output Power (Radiated)

SPECIFICATION: 47 CFR 2.1046(a)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.1

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE (RADIATED)

1. The EUT was placed on an open-field site and its radiated field strength at a known distance was measured by means of a spectrum analyzer. Equivalent loading of a dipole was calculated from the equation  $P_t = ((E \times R)^2 / 49.2)$  watts, where  $R = 3m$ .
2. Measurement accuracy is  $\pm 1.5$  dB.

MEASUREMENT RESULTS

FREQUENCY OF CARRIER, MHz = 714.7

POWER SETTING	R. F. POWER, ERP, WATTS
High	0.050
Radiated	0.004


SUPERVISED BY:

*Morton Flom P. Eng.*

Morton Flom, P. Eng.

PAGE NO.

7 of 29.

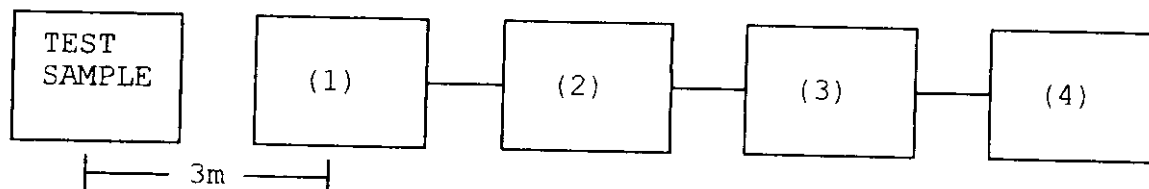TRANSMITTER RADIATED MEASUREMENTS

Asset Description

s/n

(1) TRANSDUCER

<u>x</u>	i00091	Emco 3115	001469
<u>x</u>	i00089	Aprel Log Periodic	001500

(2) HIGH PASS FILTER

<u>x</u>	i00	Narda $\mu$ PAD (In-Band Only)
<u>x</u>	i00	Trilithic
—		(Out-Of-Band Only)

(3) PREAMP

<u>x</u>	i00028	HP 8449 (+30 dB)	2749A00121
----------	--------	------------------	------------

(4) SPECTRUM ANALYZER

<u>x</u>	i00048	HP 8566B	2511A01467
—	i00043	HP 8558B	2004A02076
—	i00057	HP 8557A	1531A00191
<u>x</u>	i00029	HP 8563E	3213A00104

PAGE NO. 8 of 29.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

SPECIFICATION: 47 CFR 2.1051

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.13

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The emissions were measured for the worst case as follows:
  - (a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
  - (b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.
2. The magnitude of spurious emissions that are attenuated more than 20 dB below the permissible value need not be specified.

3. MEASUREMENT RESULTS: ATTACHED FOR WORST CASE

FREQUENCY OF CARRIER, MHz = 714.7


SPECTRUM SEARCHED, GHz = 0 to  $10 \times F_c$

MAXIMUM RESPONSE, Hz = 17800

ALL OTHER EMISSIONS =  $\geq 20$  dB BELOW LIMIT

LIMIT(S), dBc  
 $-(43+10 \times \log P) = -30$  (0.05 Watts)

SUPERVISED BY:


  
 Morton Flom, P. Eng.

PAGE NO.

9 of 29.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)  
 TEST B. OUT-OF-BAND SPURIOUS

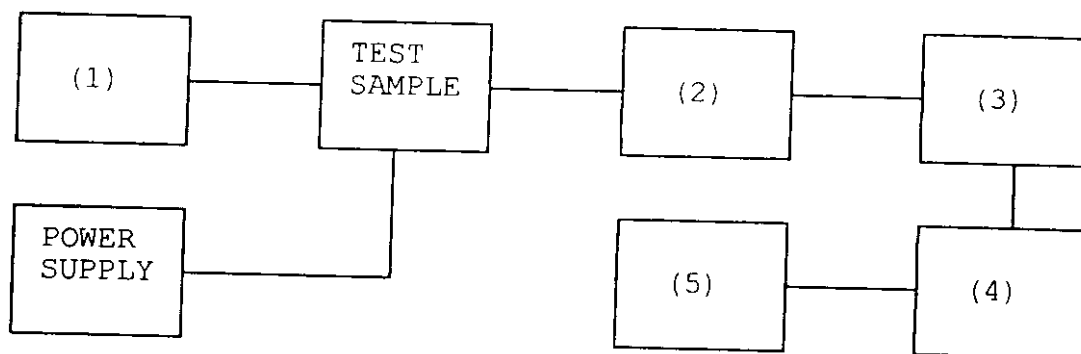

Asset Description

s/n

(1) AUDIO OSCILLATOR/GENERATOR

_____	i00010	HP 204D	1105A04683
_____	i00017	HP 8903A	2216A01753
<u>x</u>	i00012	HP 3312A	1432A11250

(2) COAXIAL ATTENUATOR

_____	i00122	Narda 766-10	7802
_____	i00123	Narda 766-10	7802A
<u>x</u>	i00069	Bird 8329 (30 dB)	1006
<u>x</u>	i00113	Sierra 661A-3D	1059

(3) FILTERS; NOTCH, HP, LP, BP

<u>x</u>	i00126	Eagle TNF-1	100-250
<u>x</u>	i00125	Eagle TNF-1	50-60
<u>x</u>	i00124	Eagle TNF-1	250-850

(4) SPECTRUM ANALYZER

<u>x</u>	i00048	HP 8566B	2511A01467
_____	i00029	HP 8563E	3213A00104

(5) SCOPE

_____	i00058	HP 1741A	2251A09356
_____	i00030	HP 54502A	2927A00209
_____	i00071	Tektronix 935	1935-B011343

PAGE NO.

10 of 29.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)  
 g98a0081: 1998-Oct-15 Thu 13:34:00  
 STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
714.700000	178.850000	-34.5	-51.4	-21.5
714.700000	893.540000	-32.9	-49.8	-19.9
714.700000	1429.529000	-30.6	-47.5	-17.6
714.700000	1608.340000	-25.4	-42.3	-12.4
714.700000	2144.293000	-32.2	-49.1	-19.2
714.700000	2858.510000	-43.4	-60.3	-30.4
714.700000	3573.802000	-54.3	-71.2	-41.3
714.700000	4287.854000	-55.9	-72.8	-42.9
714.700000	5002.468000	-55.5	-72.4	-42.5
714.700000	5717.413000	-55.6	-72.5	-42.6
714.700000	6432.620000	-49.7	-66.6	-36.7
714.700000	7147.494000	-46.9	-63.8	-33.9
714.700000	7861.254000	-49.5	-66.4	-36.5
714.700000	8576.357000	-49.7	-66.6	-36.7
714.700000	9291.496000	-50.4	-67.3	-37.4
714.700000	10005.419000	-49.8	-66.7	-36.8
714.700000	10720.498000	-47.7	-64.6	-34.7

PAGE NO. 11 of 29.  
NAME OF TEST: Field Strength of Spurious Radiation  
SPECIFICATION: 47 CFR 2.1053(a)  
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.12  
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE


1. A description of the measurement facilities was filed with the FCC and was found to be in compliance with the requirements of Section 15.38, by letter from the FCC dated March 3, 1997, FILE 31040/SIT. All pertinent changes will be reported to the Commission by up-date prior to March 2000.
2. At first, in order to locate all spurious frequencies and approximate amplitudes, and to determine proper equipment functioning, the test sample was set up at a distance of three meters from the test instrument. Valid spurious signals were determined by switching the power on and off.
3. In the field, the test sample was placed on a wooden turntable above ground at three (or thirty) meters away from the search antenna. Excess power leads were coiled near the power supply.  
  
The cables were oriented in order to obtain the maximum response. At each emission frequency, the turntable was rotated and the search antennas were raised and lowered vertically.
4. Step 3 was repeated, using a horizontally polarized search antenna. The higher of the two observations was noted.
5. The worst case for all channels is shown.
6. Measurement Summary:

FREQUENCY OF CARRIER, MHz = 714.7  
SPECTRUM SEARCHED, GHz = 0 to  $10 \times F_c$   
ALL OTHER EMISSIONS =  $\geq 20$  dB BELOW LIMIT

7. Measurement Results: ATTACHED FOR WORST CASE

PAGE NO.

12 of 29.

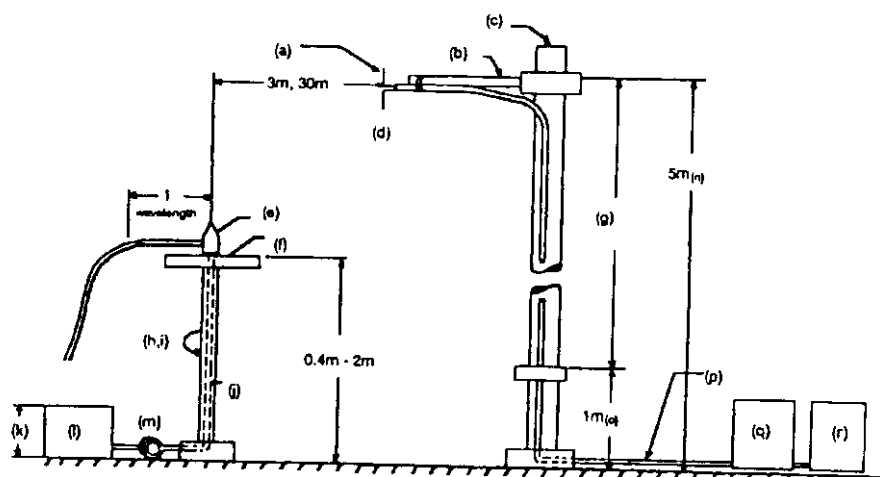RADIATED TEST SETUP

## NOTES:

- (a) Search Antenna - Rotatable on boom  
 (b) Non-metallic boom  
 (c) Non-metallic mast  
 (d) Adjustable horizontally  
 (e) Equipment Under Test  
 (f) Turntable  
 (g) Boom adjustable in height.  
 (h) External control cables routed horizontally at least one wavelength.  
 (i) Rotatable  
 (j) Cables routed through hollow turntable center  
 (k) 30 cm or less  
 (l) External power source  
 (m) 10 cm diameter coil of excess cable  
 (n) 25 cm (V), 1 m-7 m (V, H)  
 (o) 25 cm from bottom end of 'V', 1m normally  
 (p) Calibrated Cable at least 10m in length  
 (q) Amplifier (optional)  
 (r) Spectrum Analyzer

Asset Description

s/n

Cycle Last Cal

Per ANSI C63.4-1992, 10.1.4

TRANSDUCER

—	i00065	EMCO 3109B 100Hz-50MHz	2336	12 mo.	
—	i00033	Singer 94593-1 10kHz-32MHz	0219	12 mo.	
x	i00088	EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Oct-98
x	i00089	Apral 2001 200MHz-1GHz	001500	12 mo.	Oct-98
x	i00103	EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Oct-98
—	i00085	EMCO 3116 10GHz-40GHz	2076	12 mo.	

AMPLIFIER

—	i00028	HP 8449A	2749A00121	12 mo.	Mar-98
---	--------	----------	------------	--------	--------

SPECTRUM ANALYZER

—	i00029	HP 8563E	3213A00104	12 mo.	
x	i00033	HP 85462A	3625A00357	12 mo.	Dec-97
—	i00048	HP 8566B	2511AD1467	6 mo.	Mar-98

PAGE NO. 13 of 29.

NAME OF TEST: Field Strength of Spurious Radiation

ALL OTHER EMISSIONS =  $\geq 20$  dB BELOW LIMIT

<u>EMISSION, MHz/HARMONIC</u>	<u>SPURIOUS LEVEL, dBc</u>
	High
2nd to 10th	<-45

SUPERVISED BY:

*M. Flom P. Eng.*

Morton Flom, P. Eng.



PAGE NO.

14 of 29.

NAME OF TEST: Field Strength of Spurious Radiation  
 g98a0097: 1998-Oct-16 Fri 11:26:00  
 STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	METER, dBuV	CF, dB	uV/m @ 3m	ERP, dBm	MARGIN, dB
714.700000	1429.393000	37.52	37.38	5559.04	-22.45	-9.5
714.700000	2144.141666	68	14	12589.25	-15.35	-2.4
714.700000	2858.761666	62	20.86	13899.53	-14.55	-1.5
714.700000	3573.498332	62.17	10.19	4149.54	-25.05	-12
714.700000	4288.201665	48.67	11.28	994.26	-37.45	-24.5
714.700000	5002.921665	59.5	13.41	4420.79	-24.45	-11.5
714.700000	5717.574998	52.17	15.46	2407.13	-29.75	-16.8
714.700000	6432.178331	44.33	16.41	1088.93	-36.65	-23.7
714.700000	7146.881664	43.17	18.44	1203.65	-35.75	-22.8

PAGE NO. 15 of 29.  
NAME OF TEST: Emission Masks (Occupied Bandwidth)  
SPECIFICATION: 47 CFR 2.1049(c)(1)  
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.11  
TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for  $\pm 6.0$  kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

16 of 29.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
g98a0074: 1998-Oct-15 Thu 10:08:00  
STATE: 2:High Power

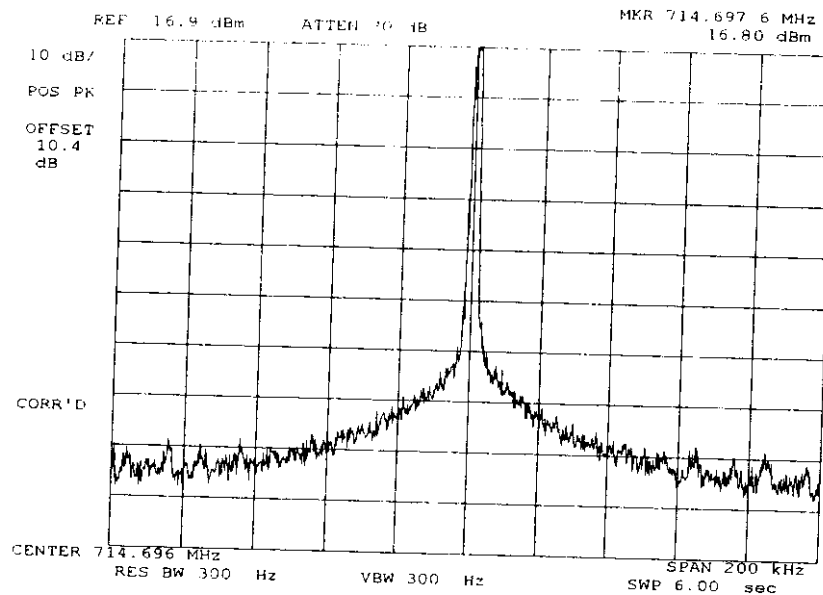

POWER:

HIGH

MODULATION:

NONE

SUPERVISED BY:


*M. Flom P. Eng.*

Morton Flom, P. Eng.

PAGE NO.

17 of 29.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
g98a0078: 1998-Oct-15 Thu 11:43:00  
STATE: 2:High Power

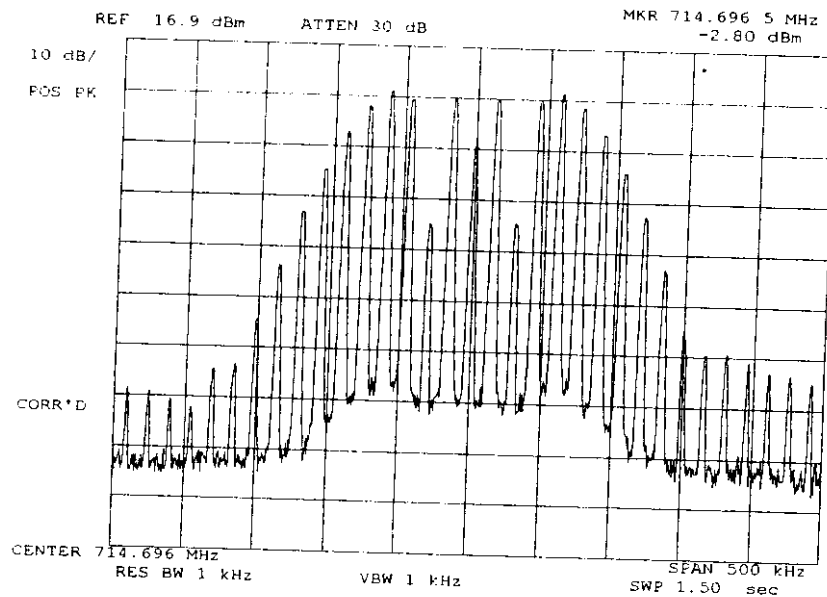

POWER:

MODULATION:

HIGH

15KHZ TONE 20DB ABOVE  
REFERENCE


SUPERVISED BY:

Morton Flom, P. Eng.

PAGE NO.

18 of 29.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
g98a0079: 1998-Oct-15 Thu 12:20:00  
STATE: 2:High Power

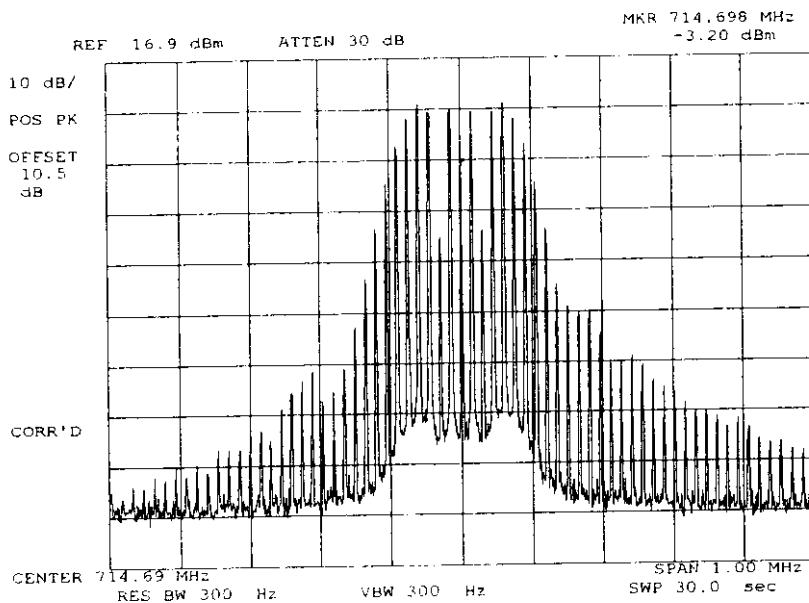

POWER:  
MODULATION:

HIGH  
15KHZ TONE 20DB ABOVE  
REFERENCE


SUPERVISED BY:

*Morton Flom P. Eng.*  
Morton Flom, P. Eng.

PAGE NO.

19 of 29.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
g98a0080: 1998-Oct-15 Thu 12:29:00  
STATE: 2:High Power

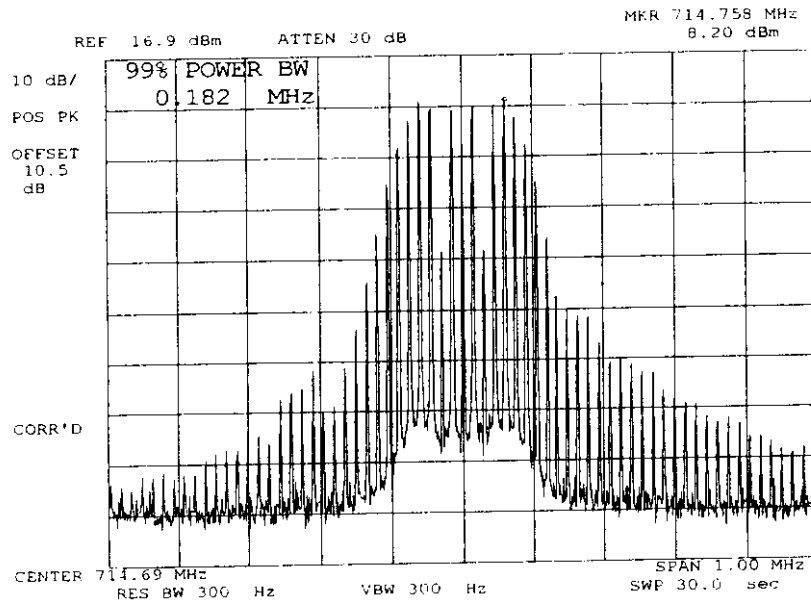

POWER:  
MODULATION:

HIGH  
15KHZ TONE 20DB ABOVE  
REFERENCE  
99% POWER BANDWIDTH

SUPERVISED BY:

*Morton Flom P. Eng.*  
Morton Flom, P. Eng.

PAGE NO. 20 of 29.  
NAME OF TEST: Audio Frequency Response  
SPECIFICATION: 47 CFR 2.1047(a)  
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.6  
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
4. With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
5. The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
6. MEASUREMENT RESULTS: ATTACHED


PAGE 21 of 29.

TRANSMITTER AUDIO FREQUENCY RESPONSE

TELEX, Electro-Voice HTU

15 OCT 1998, 13:59

FCC ID: B5DH211

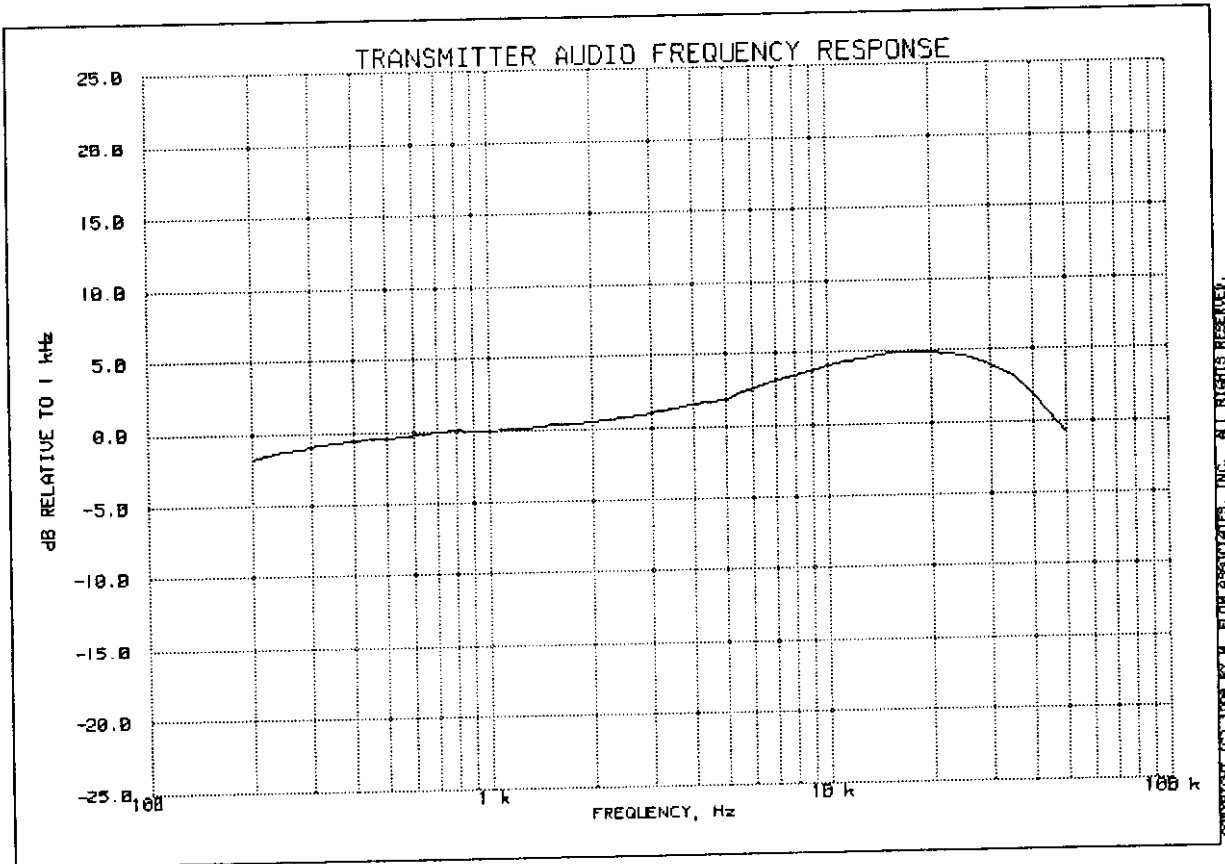

PEAK AUDIO FREQUENCY, Hz: 17800

TABLE VALUES:


FREQUENCY, Hz	LEVEL, dB	FREQUENCY, Hz	LEVEL, dB	FREQUENCY, Hz	LEVEL, dB
300	-1.9	30000	4.0		
20000	4.9	50000	-1.9		




PAGE NO. 22 of 29.  
NAME OF TEST: Modulation Limiting  
SPECIFICATION: 47 CFR 2.1047(b)  
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.3  
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The signal generator was connected to the input of the EUT as for "Frequency Response of the Modulating Circuit."
2. The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an HP 8901A Modulation Analyzer.
3. The input level was varied from 30% modulation ( $\pm 3.6$  kHz deviation) to at least 20 dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.
5. MEASUREMENT RESULTS: ATTACHED

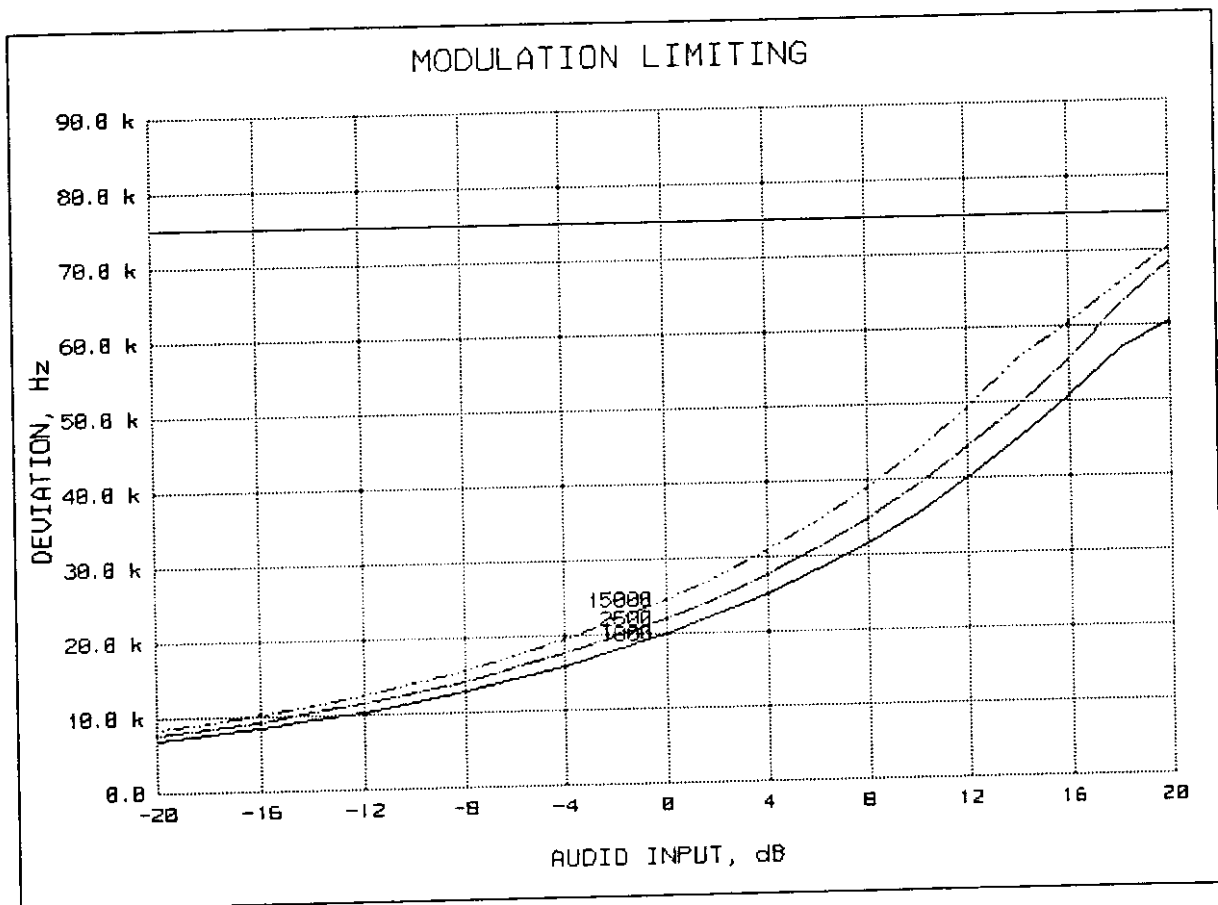

COMMENT	= LIMIT 75 kHz
REFERENCE DEVIATION, kHz	= 20
REFERENCE MODULATION, Hz	= 1000
PEAKS	= POSITIVE
AUDIO AMPLITUDE, mV	= 11.72

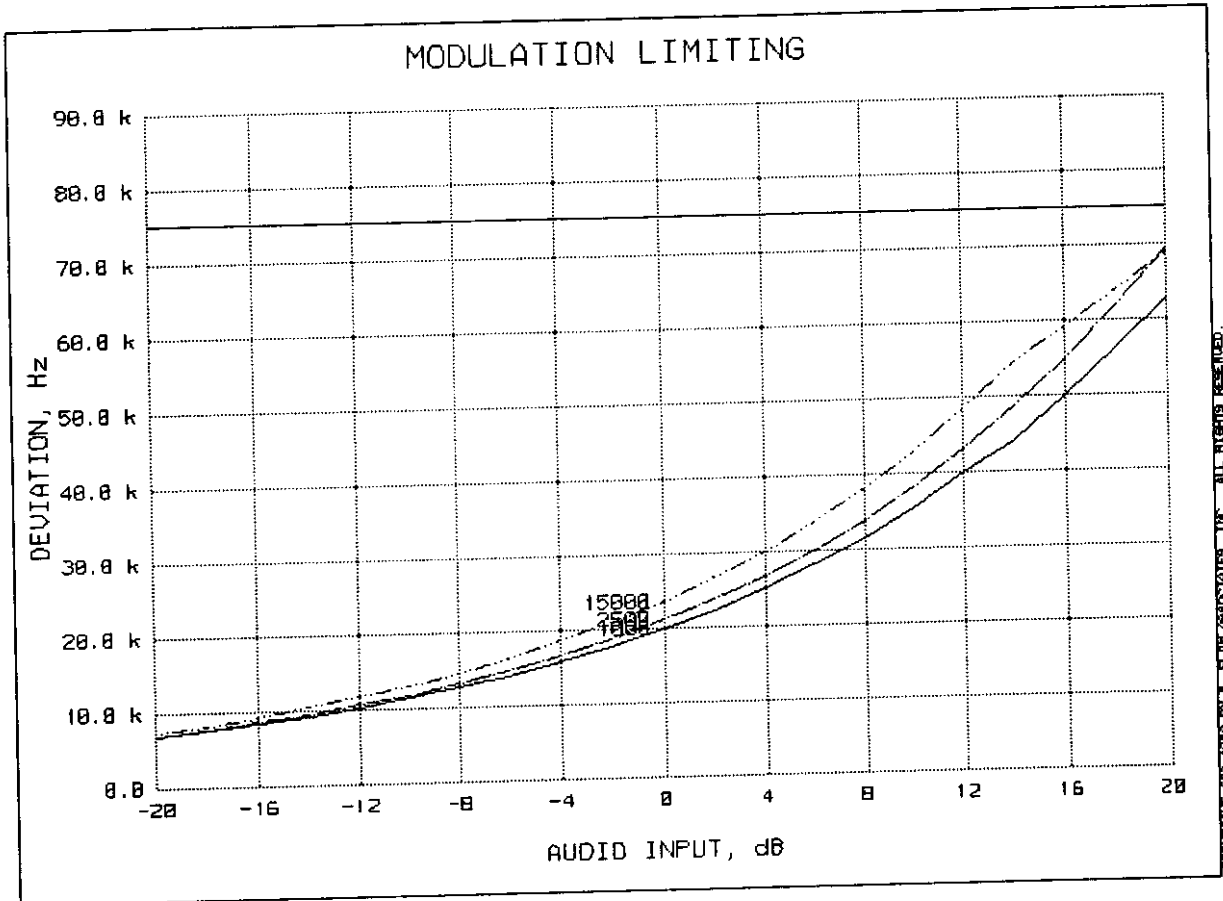

COMMENT	= LIMIT 75 kHz
REFERENCE DEVIATION, kHz	= 20
REFERENCE MODULATION, Hz	= 1000
PEAKS	= NEGATIVE
AUDIO AMPLITUDE, mV	= 11.72

PAGE NO. 25 of 29.

NAME OF TEST: Frequency Stability (Temperature Variation)

SPECIFICATION: 47 CFR 2.1055(a)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST CONDITIONS: As Indicated

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

26 of 29.

TRANSMITTER TEST SET-UP

TEST A. OPERATIONAL STABILITY  
 TEST B. CARRIER FREQUENCY STABILITY  
 TEST C. OPERATIONAL PERFORMANCE STABILITY  
 TEST D. HUMIDITY  
 TEST E. VIBRATION  
 TEST F. ENVIRONMENTAL TEMPERATURE  
 TEST G. FREQUENCY STABILITY: TEMPERATURE VARIATION  
 TEST H. FREQUENCY STABILITY: VOLTAGE VARIATION

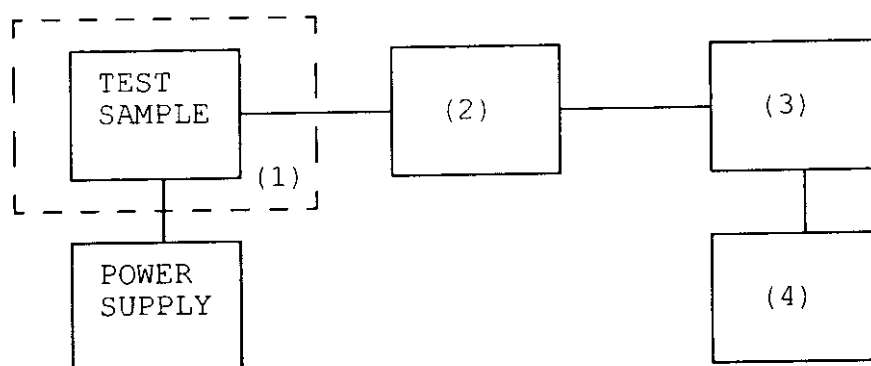

Asset Description

s/n

(1) TEMPERATURE, HUMIDITY, VIBRATION

<u>x</u>	i00027	Tenny Temp. Chamber	9083-765-234
—	i00	Weber Humidity Chamber	
—	i00	L.A.B. RVH 18-100	

(2) COAXIAL ATTENUATOR

—	i00122	NARDA 766-10	7802
—	i00123	NARDA 766-10	7802A
<u>x</u>	i00113	SIERRA 661A-3D	1059
—	i00069	BIRD 8329 (30 dB)	10066

(3) R.F. POWER

—	i00014	HP 435A POWER METER	1733A05839
<u>x</u>	i00039	HP 436A POWER METER	2709A26776
<u>x</u>	i00020	HP 8901A POWER MODE	2105A01087

(4) FREQUENCY COUNTER


—	i00042	HP 5383A	1628A00959
<u>x</u>	i00019	HP 5334B	2704A00347
<u>x</u>	i00020	HP 8901A	2105A01087

PAGE 27 of 29.

TRANSMITTER FREQUENCY STABILITY

TELEX, Electro-Voice HTU

15 OCT 1998, 16:20

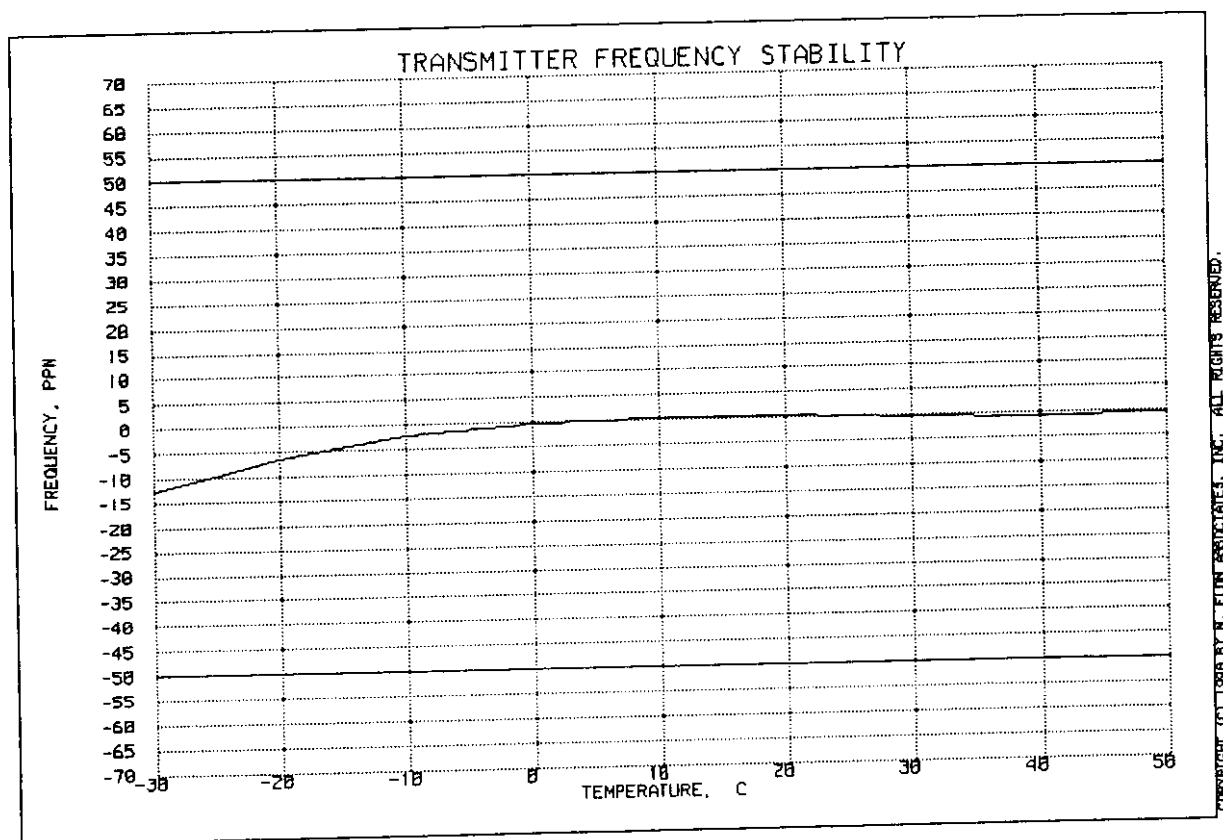

FREQUENCY OF CARRIER, MHz = 714.69729

LIMIT, ppm = 50

LIMIT, Hz = 35735

PAGE NO. 28 of 29.

NAME OF TEST: Frequency Stability (Voltage Variation)

SPECIFICATION: 47 CFR 2.1055(b)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT was placed in a temperature chamber at  $25 \pm 5^{\circ}\text{C}$  and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

RESULTS: Frequency Stability (Voltage Variation)  
g98a0090: 1998-Oct-15 Thu 14:57:30  
STATE: 0:General

LIMIT, ppm = 50  
LIMIT, Hz = 35735  
BATTERY END POINT (Voltage) = 7

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
85	7.65	714.696640	-360	-0.50
100	9	714.697000	0	0.00
115	10.35	714.697070	70	0.10
78	7	714.696410	-590	-0.83

SUPERVISED BY:

*M. Flom P. Eng.*

Morton Flom, P. Eng.

PAGE NO. 29 of 29.

NAME OF TEST: Necessary Bandwidth and Emission Bandwidth

SPECIFICATION: 47 CFR 2.202(g)

Rule 2.202(g)

MAXIMUM MODULATION (M), kHz	=	15
MAXIMUM DEVIATION (D), kHz	=	75
CONSTANT FACTOR (K)	=	1
NECESSARY BANDWIDTH ( $B_N$ ), kHz	=	$(2 \times M) + (2 \times D \times K)$
	=	180

Rule 74.861(I)(3), Limit =  $\leq \pm 75$  kHz

NECESSARY BANDWIDTH ( $B_N$ ), kHz	=	180
TEMPERATURE VARIATION, kHz	=	8.6
VOLTAGE VARIATION, kHz	=	0.3
EMISSION BANDWIDTH ( $B_N$ ), kHz	=	SUM OF ABOVE
	=	189

SUPERVISED BY:

Morton Flom, P. Eng.



TESTIMONIAL  
AND  
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:

A handwritten signature in black ink, appearing to read "M. Flom P. Eng.", with a horizontal line drawn underneath the signature.

Morton Flom, P. Eng.

## STATEMENT OF QUALIFICATIONS

### EDUCATION:

1. B. ENG. in ENGINEERING PHYSICS, 1949, McGill University, Montreal, Canada.
2. Post Graduate Studies, McGill University & Sir George Williams University, Montreal.

### PROFESSIONAL AFFILIATIONS:

1. ARIZONA SOCIETY OF PROFESSIONAL ENGINEERS (NSPE), #026 031 821.
2. ORDER OF ENGINEERS (QUEBEC) 1949. #4534.
3. ASSOCIATION OF PROFESSIONAL ENGINEERS, GEOPHYSICISTS & GEOLOGISTS OF ALBERTA #5916.
4. REGISTERED ENGINEERING CONSULTANT - GOVERNMENT OF CANADA, DEPARTMENT OF COMMUNICATIONS. Radio Equipment Approvals.
5. IEEE, Lifetime Member No. 0417204 (member since 1947).

### EXPERIENCE:

1. Research/Development/Senior Project Engineer, R.C.A. LIMITED (4 years).
2. Owner/Chief Engineer of Electronics. Design/Manufacturing & Cable TV Companies (10 years).
3. CONSULTING ENGINEER (over 25 years).

  
MORTON FLOM, P. Eng.