



Use Raritan's Intelligent Rack PDUs to Efficiently Power Cisco's Nexus 7710

Cisco Nexus® 7700 Series Switches combine high levels of scalability with operational flexibility. The Cisco Nexus 7710 is an 10-slot chassis with 10 front-accessible horizontal module slots and front-to-back airflow and an integrated cable management system.

Cisco Nexus 7710 Power Supply Options

You can install up to eight power supplies in each Cisco Nexus 7710 Series chassis. If you leave any power supply slots empty, you must install a blank filler plate in those slots to maintain the designed airflow. For the Nexus 7710, up to (8) 3kW power supplies can be installed.

The 3.0-kW AC power supply module (**Figure 1**) for the Cisco Nexus 7700 Switches is a single 20A AC input power supply with 1 x C20 input connector. When the input is at high line nominal voltage (220 VAC), the power output is 3000W. You will need to order appropriate power cords depending on the type of intelligent rack power unit you want to connect to. In most cases, it will either be Cabinet Jumper Power Cord, 250V AC, C20-C19 connector (Cisco p/n CAB-C19-CBN) or a Power Cord, 250VAC, 16A, twist lock NEMA L6-20 plug, United States (Cisco p/n CAB-AC-C6K-TWLK).

The smaller power supply configuration provides more flexibility and greater control in power provisioning. The 8 power supply bays are designed for future growth, and most common configurations do not require the use of all power supply units for redundant power configurations.



Figure 1
Cisco Nexus 7700 3.0-kW
AC Power Supply Module

The Cisco Nexus 7700 chassis supports multiple load-sharing, fault-tolerant, and hot-swappable power supplies. As few as just one power supply can be used to operate a switch chassis. Use of multiple power supplies provides additional power capacity and resilience after failure of the power supply, the generating supply itself, or a facility component such as an uninterruptible power supply (UPS) or a circuit breaker.

For more information on power supply redundancy, please visit:


http://www.cisco.com/c/en/us/products/collateral/switches/nexus-7000-series-switches/data_sheet_c78-728187.html
http://www.cisco.com/c/en/us/products/collateral/switches/catalyst-4900m-switch/data_sheet_c78-729141.html

Cisco's Nexus 7710 With 8 3.0 KW Power Supplies

208V Setup Details

The Cisco Nexus 7710 chassis supports multiple load-sharing, fault-tolerant, and hot-swappable power supplies. As few as just one power supply can be used to operate a switch chassis. Use of multiple power supplies provides additional power capacity and resilience after failure of the power supply, the generating supply itself, or a facility component such as an uninterruptible power supply (UPS) or a circuit breaker. For the 7710 with 8 x 3kW power supplies, Raritan recommends Qty 2 PX2-5122R-F5V2 intelligent rack PDU's with 50A 208V 3 phase input feeds. Each rack PDU should get a separate dedicated feed to provide redundancy in case of circuit failure. Each rack PDU will provide 6 x C19 outlets for your Cisco power supplies connected via C19 to C20 power cords that you will need to source. To maintain a more fail-safe connection, you may use Raritan's SecureLock plug cords.

See the diagram for more details on wiring the chassis power supplies to the rack PDU.

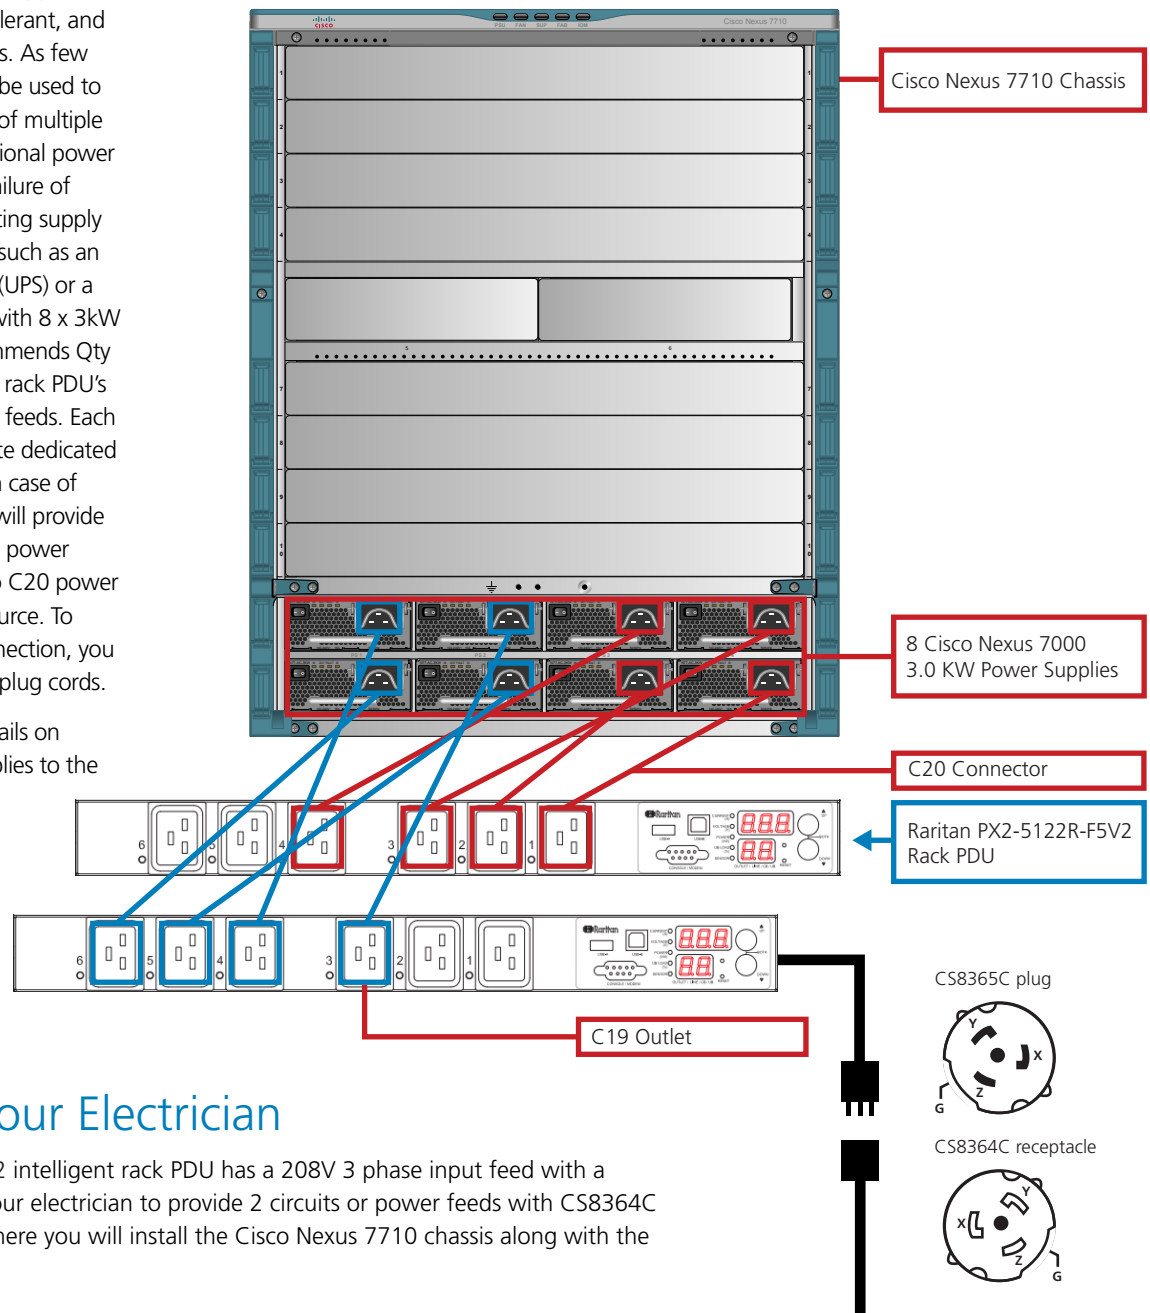

What to Tell Your Electrician

The Raritan PX2-5122R-F5V2 intelligent rack PDU has a 208V 3 phase input feed with a CS8365C plug. Please tell your electrician to provide 2 circuits or power feeds with CS8364C receptacle at the location where you will install the Cisco Nexus 7710 chassis along with the Raritan intelligent rack PDU.

Sources:

http://www.cisco.com/c/en/us/td/docs/switches/datacenter/hw/nexus7000/installation/guide/b_n7718_hardware_install_guide.pdf


http://www.cisco.com/c/en/us/products/collateral/switches/nexus-7000-series-switches/Data_Sheet_C78-437761.html

Cisco's Nexus 7710 With 8 3.0 KW Power Supplies

400V Setup Details

The Cisco Nexus 7010 chassis supports multiple load-sharing, fault-tolerant, and hot-swappable power supplies. As few as just one power supply can be used to operate a switch chassis. Use of multiple power supplies provides additional power capacity and resilience after failure of the power supply, the generating supply itself, or a facility component such as an uninterruptible power supply (UPS) or a circuit breaker. For the 7710 with 8 x 3kW power supplies, Raritan recommends Qty 2 PX2-5114R-F5V2 intelligent rack PDU's with 30A 400V 3 phase input feeds. Each rack PDU should get a separate dedicated feed to provide redundancy in case of circuit failure. Each rack PDU will provide 6 x C19 receptacles for your Cisco 3.0kW power supplies.

See the diagram for more details on wiring the chassis power supplies to the rack PDU.

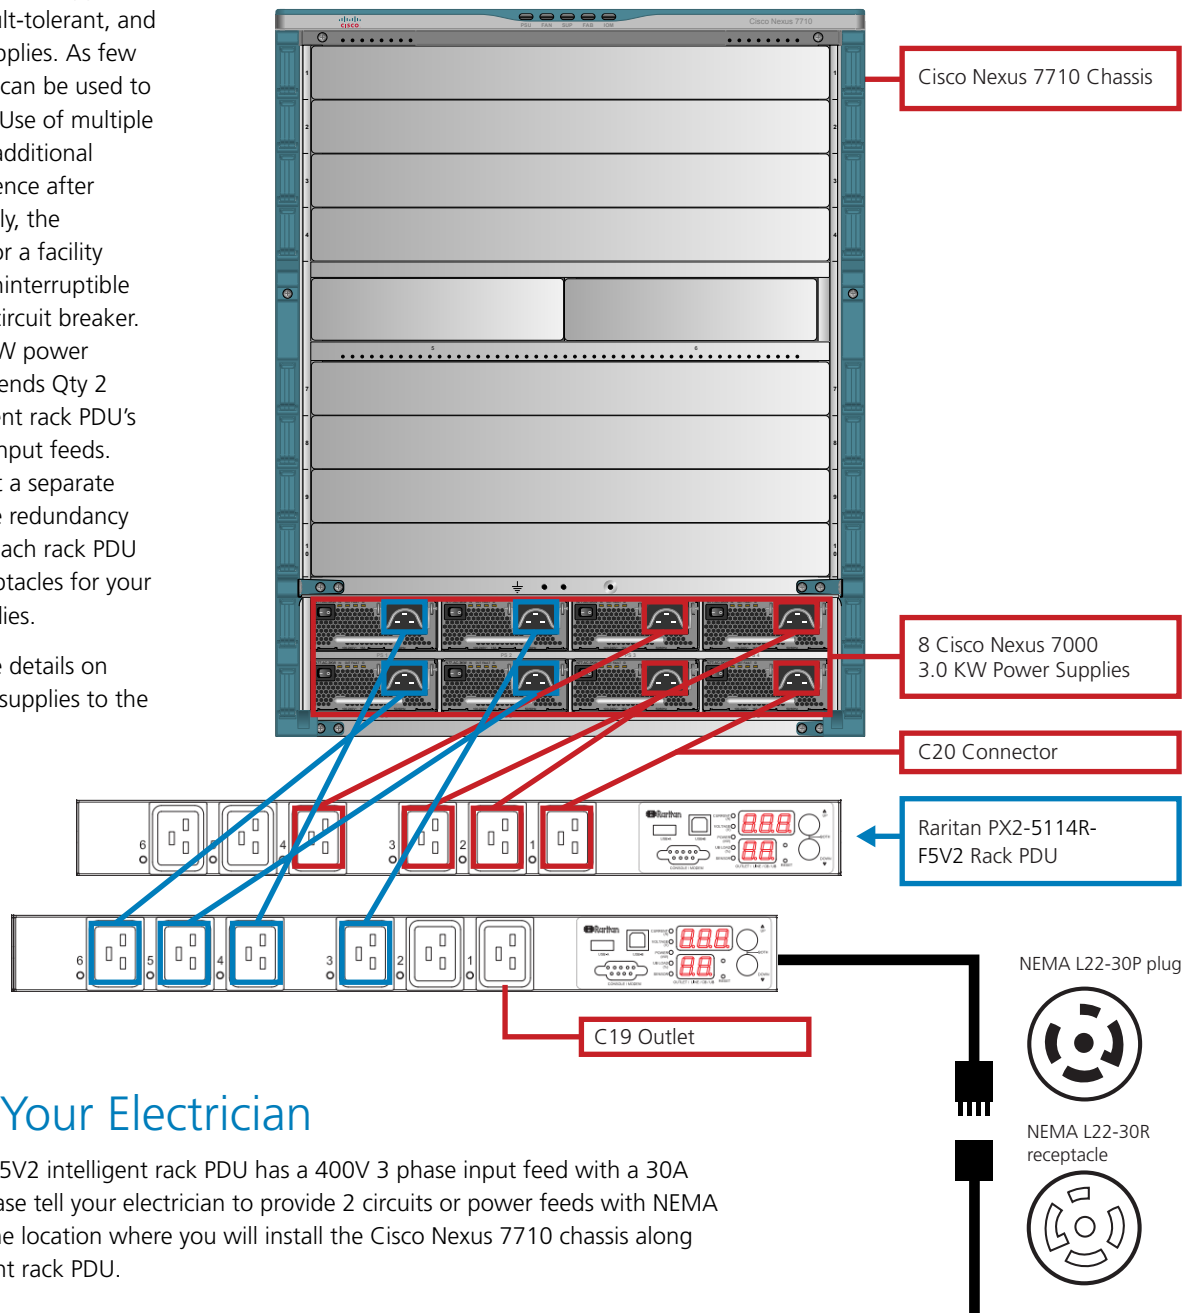

What to Tell Your Electrician

The Raritan PX2-5114R-F5V2 intelligent rack PDU has a 400V 3 phase input feed with a 30A NEMA L22-30P plug. Please tell your electrician to provide 2 circuits or power feeds with NEMA L22-30R receptacles at the location where you will install the Cisco Nexus 7710 chassis along with the Raritan intelligent rack PDU.

TIP:

Use Raritan's un-balanced load feature in our intelligent rack PDU's to help with load balancing your 3 phase lines. Also consider Power IQ DCIM Monitoring software for power trending, energy management, and event management/alerts.

A List of Raritan Products

| Raritan Rack PDU Part Number | Remote Outlet Switching | Form Factor | Input Voltage | Input Current per phase | Input Phase | Input Plug Type | Outlet Count | Outlet Type | Output Voltage | KVA |
|------------------------------|-------------------------|-------------|---------------|-------------------------|-------------|-----------------|--------------|-------------|----------------|------|
| PX2-5122R-F5V2 | Yes | 1U | 208 - 240 | 35 | 3 | CS8365C | 6 | C19(6) | 208 - 240 | 12.6 |
| PX2-5114R-F5V2 | Yes | 1U | 208 - 240 | 24 | 3 | NEMA L22-30P | 6 | C19(6) | 208 - 240 | 8.6 |



Powerful Smart Controller

Built-in connectivity for environment sensors, serial, KVM, USB, wired or wireless network, and asset management tagging makes this the smartest iPDU controller available today.




Accurate Rack Metering

Check power on PDUs, lines, circuit breakers and individual outlets and make informed capacity planning decisions and efficiently utilize power resources with 1% billing grade accuracy.

400V

High Power & 60C Models

400V 3 phase high power models supporting up to 55kW per rack PDU, plus 60C for high-heat environments such as hot aisle containment and blade racks.



Circuit Breaker Monitoring

Monitor voltage and current of breakers within the PDU to understand status (open or closed) and real-time loads to improve uptime and capacity planning.




Receive Advanced Alerts

Users can define thresholds and receive alerts via SNMP, email, and syslog when thresholds are crossed for both power and environmental events.



Sensors to Optimize Your Environment

Optional sensor ports for plug-and-play environmental sensors that allow you to monitor temperature, humidity, airflow and other environmental conditions.



Easy Power Cord Dressing

Special V2 3-phase models with sequenced line pairs of outlets simplify load balancing and dramatically improves cord management.




Certified and UL Listed

Certifications include FCC Part 15, A; UL Listed and cUL, CE, PSE, SAA, RoHS/WEEE compliant.



Secure and Encrypted

Directory services support providing advanced authorization options, including permissions, LDAP/S, RADIUS and Active Directory®. 256-bit AES encryption and strong passwords keep you safe.



Choice of iPDU Colors

Available in eleven colors that help reduce errors and make it easier to identify power feeds, and perform troubleshooting to minimize downtime.



SecureLock Outlets and Cables

Ensure that IEC power cords don't accidentally come unplugged from servers when technicians are working on racks.



Industry's Most Flexible USB Port

The PX series comes equipped with USB ports to support Wi-Fi networking, PDU to PDU cascading, webcams, quick setup and iPad integration.

Raritan is a proven innovator of power management solutions, DCIM software, and KVM-over-IP for data centers of all sizes. Based in Somerset, NJ, Raritan has a global presence across 38 offices, serving 76 countries and 50,000 locations worldwide. Raritan's award-winning hardware and software solutions increase energy efficiency, improve reliability, and raise productivity. For more information, please visit www.raritan.com or call 800-724-8090.