



LED LAMPS

ProLED[®] ECO Select PAR Series



IP65 Rated



5-Year Warranty



Dimmable



ENERGY STAR[®]
Certified

The energy efficiency of LED with the look and feel of traditional halogen lamps



- 25,000 Hour Life
- 82 CRI
- Dimmable
- IP65 Rated for Outdoor Use
- ENERGY STAR[®] Certified
- 5-Year Warranty

A limited budget doesn't mean sacrificing quality features; ECO Select delivers reliable performance at a budget-friendly price

Applications:

Accent
 Display
 Education
 Healthcare
 Hospitality
 Office
 Retail

Markets:

Commercial
 Residential
 Outdoor



Contact Your Customer Care Specialist For Pricing, Orders And Technical Support.

800.677.3334 www.halcolighting.com

ProLED[®]

ECO Select PAR Series


Product #: _____ Type: _____

Project: _____ Date: _____

Comments: _____ Initials: _____


Specifications

- IP65 Rated for indoor/outdoor application flexibility
- Acceptable for use in ICAT rated luminaires
- Dimmable to 10%
- Prismatic glass lens and silver housing offers traditional halogen PAR look and feel
- Superior efficacy – up to 80 lumens per watt

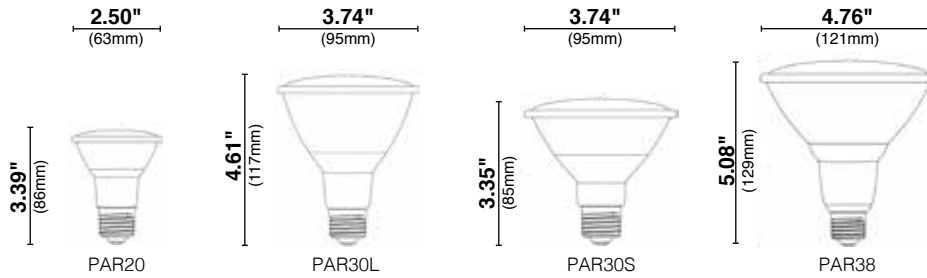

Savings Comparison

Total Lifetime Costs

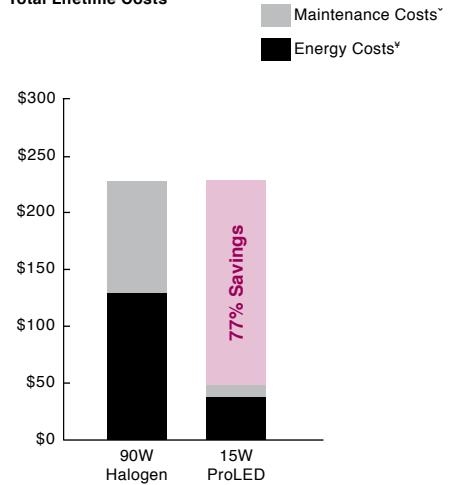

* Maintenance costs based on 15 minutes at \$40 per/hr
 ¥ Energy costs based on \$0.11 kWh

Ordering Information



| | Watt | Base | Product # | Product Code | Description | Volts | Color Temp. | CRI | Lumens | CBCP | Useful Life* | Beam Spread | Pkg. Qty. | MOL | Equivalent Wattage |
|----------------|------|--------|-----------|--------------------------|--------------|-------|-------------|-----|--------|------|--------------|-------------|-----------|-------|--------------------|
| PAR20 | | | | | | | | | | | | | | | |
| ⊕ | 7 | Medium | 82963 | PAR20FL7/827/ECO2/LED | Flood | 120 | 2700K | 82 | 500 | 740 | 25,000 | 40° | 1/20 | 3.39" | 50 |
| ⊕ | 7 | Medium | 82964 | PAR20FL7/830/ECO2/LED | Flood | 120 | 3000K | 82 | 530 | 740 | 25,000 | 40° | 1/20 | 3.39" | 50 |
| ⊕ | 7 | Medium | 82965 | PAR20FL7/840/ECO2/LED | Flood | 120 | 4000K | 82 | 550 | 740 | 25,000 | 40° | 1/20 | 3.39" | 50 |
| ⊕ | 7 | Medium | 82966 | PAR20FL7/850/ECO2/LED | Flood | 120 | 5000K | 82 | 570 | 740 | 25,000 | 40° | 1/20 | 3.39" | 50 |
| PAR30 L | | | | | | | | | | | | | | | |
| ⊕ | 10 | Medium | 82958 | PAR30FL10L/827/ECO2/LED | Flood | 120 | 2700K | 82 | 760 | 1530 | 25,000 | 40° | 1/15 | 4.61" | 60 |
| ⊕ | 10 | Medium | 82959 | PAR30FL10L/830/ECO2/LED | Flood | 120 | 3000K | 82 | 800 | 1530 | 25,000 | 40° | 1/15 | 4.61" | 60 |
| ⊕ | 10 | Medium | 82960 | PAR30FL10L/840/ECO2/LED | Flood | 120 | 4000K | 82 | 840 | 1530 | 25,000 | 40° | 1/15 | 4.61" | 60 |
| ⊕ | 10 | Medium | 82967 | PAR30FL10L/850/ECO2/LED | Flood | 120 | 5000K | 82 | 880 | 1530 | 25,000 | 40° | 1/15 | 4.61" | 60 |
| ⊕ | 10 | Medium | 82968 | PAR30NFL10L/830/ECO2/LED | Narrow Flood | 120 | 3000K | 82 | 800 | 1530 | 25,000 | 25° | 1/15 | 4.61" | 60 |
| PAR30 S | | | | | | | | | | | | | | | |
| ⊕ | 10 | Medium | 81961 | PAR30FL10S/827/ECO2/LED | Flood | 120 | 2700K | 82 | 760 | 970 | 25,000 | 40° | 1/15 | 3.35" | 75 |
| ⊕ | 10 | Medium | 81962 | PAR30FL10S/830/ECO2/LED | Flood | 120 | 3000K | 82 | 800 | 970 | 25,000 | 40° | 1/15 | 3.35" | 75 |
| ⊕ | 10 | Medium | 82969 | PAR30FL10S/840/ECO2/LED | Flood | 120 | 4000K | 82 | 840 | 970 | 25,000 | 40° | 1/15 | 3.35" | 60 |
| ⊕ | 10 | Medium | 82970 | PAR30FL10S/850/ECO2/LED | Flood | 120 | 5000K | 82 | 880 | 970 | 25,000 | 40° | 1/15 | 3.35" | 60 |
| ⊕ | 10 | Medium | 82971 | PAR30NFL10S/830/ECO2/LED | Narrow Flood | 120 | 3000K | 82 | 800 | 970 | 25,000 | 25° | 1/15 | 3.35" | 60 |
| PAR38 | | | | | | | | | | | | | | | |
| ⊕ | 15 | Medium | 81953 | PAR38FL15/827/ECO2/LED | Flood | 120 | 2700K | 82 | 1150 | 1720 | 25,000 | 40° | 1/15 | 5.08" | 90 |
| ⊕ | 15 | Medium | 81954 | PAR38FL15/830/ECO2/LED | Flood | 120 | 3000K | 82 | 1200 | 1720 | 25,000 | 40° | 1/15 | 5.08" | 90 |
| ⊕ | 15 | Medium | 81955 | PAR38FL15/840/ECO2/LED | Flood | 120 | 4000K | 82 | 1250 | 1720 | 25,000 | 40° | 1/15 | 5.08" | 90 |
| ⊕ | 15 | Medium | 81956 | PAR38FL15/850/ECO2/LED | Flood | 120 | 5000K | 82 | 1280 | 1720 | 25,000 | 40° | 1/15 | 5.08" | 90 |
| ⊕ | 15 | Medium | 81957 | PAR38NFL15/830/ECO2/LED | Narrow Flood | 120 | 3000K | 82 | 1200 | 1720 | 25,000 | 25° | 1/15 | 5.08" | 90 |
| ⊕ | 15 | Medium | 82972 | PAR38NFL15/850/ECO2/LED | Narrow Flood | 120 | 5000K | 82 | 1280 | 1720 | 25,000 | 25° | 1/15 | 5.08" | 90 |

⊕ NEW ITEM

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

For details on ProLED PAR16, see ProLED Commercial MR16/PAR16 Series Sell Sheet.

Represents lamps that are ENERGY STAR[®] Certified.

Warranty - Commercial/Industrial: This product is warranted for 5 years from the date purchase.

Not for use in enclosed fixtures.

May not be compatible with all dimmable systems, dimming performance may vary by system, please check the website www.halcolighting.com for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life.