

Analog - Digital multimeters

RISH Multi[®] 12S...18S

CAT-IV



Test and Measurement Instruments C.C.

Tel: 011 683 4365

Fax: 011 583 4461

Email: t.m.i@iafrica.com Website: www.instrumentsgroup.co.za

Analog - Digital multimeters

RISH Multi[®] 12S...18S

Automatic Terminal Blocking System (ABS)

The automatic Terminal blocking system prevents incorrect connection of the test leads and incorrect selection of the measured quantity. This reduces danger to the user, the meter and the system to a remarkable extent.

Interface And Software RISH com 100

The multimeters are fitted with a serial RS-232 C interface via which the measured values can be transmitted to a PC. These values, electrically isolated, are transmitted to the attachable interface adaptor with infrared light through the case*

MIN/MAX Value Storage

In addition to the display of the actual measured value, the minimum or maximum value can constantly be updated and stored.

Indication Of Negative Values On The Analog Scale

When measuring DC quantities, also negative values are shown on the analog scale so that variations of the measured value can be observed at the zero point.

Indication Of Negative Values On The Analog Scale

The measuring principle employed permits the measurement of the root-mean-square value (TRMS) of AC quantities and mixed quantities (AC and DC) regardless of the waveform.

Automatic Data Hold*

The DATA HOLD function makes it possible to hold the digitally displayed measured value. According to a patented method, it is ensured that no freak value but the actual measured value is held in the case of rapid changes in measured quantities. The held measured value appears on the digital display. The actual measured value continues to be shown on the analog scale.

Autoranging / Manual Range Selection

The measured values are selected with rotary switch. The measuring range is automatically matched to the measured value. The measuring range can also be selected manually via the AUTO/MAN push button.

Continuity Test

This permits testing for short circuit and open circuit. In addition to the display, a facility of sound signal is available.

Temperature Measurement

It is possible to use all models of RISH multi series, in direct connection of temperature sensor Pt 100 / Pt 1000. The meters automatically detects the type of sensors connected to it & displays directly measured temperature.

Signalling in the case of a blown fuse

The display FUSE points to a blown fuse.

Power economizing circuit

The meter disconnects automatically when the measured value remains unchanged for about 10 minutes and no operating control was operated during this time. The disconnection facility can be disabled.

* Protected by patent rights



Overload Warning

A sound signal indication violation of the overload limits.

Protective holster for rough duty

A holster of soft rubber with tilt stand protects the meter against damage in the case of shock and drop. The rubber material makes for the meter to stand firmly even on vibrating surface.

Top model RISH multi 18S

The top model Rish multi 18S features a 4 3/4 digit display (31 000 digits) as well as the following additional functions : Event counter, measurement of the duration of the event, time counter (stop watch), data compare, dB measurement, wide-range capacitance measurement.

Calibration

RISH multi is automatically calibrated with respect to Fluke 5500 / Wavetek 9100. Automatic calibration is done through a developed calibration software with RS232 connection to the multimeter. Every multimeter is provided with the Test Certificate which is traceable to National / International standards. All the meters can be recalibrated at the Rishabh Instruments.

Applied rules and standards :

IEC 61010-1:2001 DIN EN 61010 part 1 VDE 0411-1	Safety requirements for electrical equipment for measurement, control and laboratory use.
DIN 43751 IS 13875	Digital measuring instruments
EN 61326:2002	Generic emission standard; Residential, commercial and light industry.
EN 61326:2002	Generic immunity standard; residential, commercial and light industry.
VDI/VDE 3540	Reliability of measuring and control equipment.
DIN EN 60529 DIN VDE 0470 part 1	Test equipment and test procedures -Degrees of protection provided by enclosures (IP Code).

Test and Measurement Instruments C.C.



Tel: 011 683 4365

Email: t.m.i@iafrica.com

Website: www.instrumentsgroup.co.za

Fax: 011 583 4461

Analog - Digital multimeters

RISH Multi[®] 12S...18S

Specifications RISH multi 18S

Meas. function	Measuring range	Resolution	Input impedance		Inherent error of the digital display ± (...) % of rdg.+... digits) at reference conditions		Overload value	Overload capacity	Meas. function	
			=	$\equiv^1)$	=	$\equiv^1)$				
V	300.00 mV	10 μ V	>10 G Ω	5 M Ω // < 40 pF	0.05 + 3; 0.05 + 20 ³⁾	1.0 + 30 (> 600 Digit)	1000 V DC AC RMS sinusoidal	cont.	V	
	3.0000 V	100 μ V	11 M Ω	5 M Ω // < 40 pF	0.05 + 3	0.5 + 30 (> 300 Digit)				
	30.000 V	1 mV	10 M Ω	5 M Ω // < 40 pF	0.05 + 3	0.5 + 30 (> 300 Digit)				
	300.000 V	10 mV	10 M Ω	5 M Ω // < 40 pF	0.05 + 3	0.5 + 30 (> 300 Digit)				
	1000.0 V	100 mV	10 M Ω	5 M Ω // < 40 pF	0.05 + 3	0.5 + 30 (> 300 Digit)				
dB	See table below		—	as at V~	—	$\pm 0.5 \text{ dB}^{4)}$			dB	
			Voltage drop. approx.							
			=	$\equiv^1)$	=	$\equiv^1)$				
mA	300.00 μ A	10 nA	15 mV	15 mV	0.2 + 20	1.2 + 30 (> 300 Digit)	0.36 A cont.	mA		
	3.0000 mA	100 nA	150 mV	150 mV	0.2 + 10	1.2 + 30 (> 300 Digit)				
	30.000 mA	1 μ A	30 mV	30 mV	0.05 + 10	1.2 + 50 (> 300 Digit)				
	300.000 mA	10 μ A	300 mV	300 mV	0.2 + 10	1.2 + 30 (> 300 Digit)				
A	3.0000 A	100 μ A	150 mV	150 mV	0.5 + 10	1.2 + 50 (> 300 Digit)	12A ⁵⁾ 5 min	A		
	10.000 A	1 mA	400 mV	400 mV	0.5 + 10	1.2 + 30 (> 300 Digit)				
			No-load voltage		Short circuit current					
			300.00 Ω	10 m Ω	max. 4.00 V	max. 1 mA				
Ω	3.0000 k Ω	100 m Ω	max. 1.25 V	max. 100 μ A	0.1 + 6	1000 V DC AC RMS sinusoidal	1 min	Ω		
	30.000 k Ω	1 Ω	max. 1.25 V	max. 10 μ A	0.1 + 6					
	300.00 k Ω	10 Ω	max. 1.25 V	max. 1 μ A	0.1 + 6					
	3.0000 M Ω	100 Ω	max. 1.25 V	max. 0.1 μ A	0.1 + 6					
	30.000 M Ω	1 k Ω	max. 1.25 V	max. 0.1 μ A	1.0 + 6					
$\rightarrow\leftarrow$	3.0000 V-	1mV	max. 4.00 V	---	0.2 + 3					
			Discharge resist.		$U_{0\max}$					
			3.000 nF	1 pF	1.5 M Ω	4 V				
F	30.000 nF	10 pF	1.5 M Ω	4 V	1.0 + 8; 1.0 + 60 ³⁾	1000 V DC AC RMS sinusoidal	1 min	F		
	300.000 nF	100 pF	150 k Ω	4 V	1.0 + 8; 1.0 + 30 ³⁾					
	3.000 μ F	1 nF	150 k Ω	4 V	1.0 + 3					
	30.000 μ F	10 nF	15 k Ω	2 V	1.0 + 3					
	300.000 μ F	100 nF	1.5 k Ω	2 V	5.0 + 6					
	3.0000 μ F	1 μ F	1.5 k Ω	2 V	5.0 + 6					
	10000 μ F	10 μ F	1.5 k Ω	2 V	5.0 + 6					
			$f_{min}^{(6)}$							
			300.00 Hz	0.01 Hz	10 Hz	0.1 + 3 ⁷⁾				
Hz	3.0000 kHz	0.1 Hz		10 Hz		cont.	Hz			
	30.000 kHz	1 Hz		10 Hz						
	100.00 kHz	10 Hz		100 Hz						
$^{\circ}\text{C}$	Pt 100	- 200.0... + 100.0 $^{\circ}\text{C}$	0.1 $^{\circ}\text{C}$	—	—	0.5 Kelvin + 3 ⁸⁾	1000 V DC AC rms sine	1 min.	$^{\circ}\text{C}$	
	Pt 1000	+ 100.0... + 850.0 $^{\circ}\text{C}$	0.1 $^{\circ}\text{C}$	—	—	0.5 + 3 ⁸⁾				
	Pt 1000	- 100.0... + 100.0 $^{\circ}\text{C}$	0.1 $^{\circ}\text{C}$	—	—	0.5 Kelvin + 3 ⁸⁾				
	Pt 1000	+ 100.0... + 850.0 $^{\circ}\text{C}$	0.1 $^{\circ}\text{C}$	—	—	0.5 + 3 ⁸⁾				

dB ranges

Measuring ranges	Display span at reference voltage $U = 0.775 \text{ V}$	Display span at reference voltage $U_{ref} (\text{V})$
300 mV ~ 3 V-	- 48 dB... + 8 dB	- 40 dB... + 110 dB
30 mV ~ 30 V-	- 38 dB... + 12 dB	- 60 dB... + 100 dB
300 mV ~ 300 V-	- 18 dB... + 32 dB	- 80 dB... + 80 dB
1000 mV ~ 1000 V-	+ 2 dB... + 52 dB	- 100 dB... + 60 dB
	+ 22 dB... + 63 dB	- 110 dB... + 40 dB
	Display (dB) = $20 \lg U_{ref}(\text{V}) / 0.775 \text{ V}$	Display (dB) = $20 \lg U_{ref}(\text{V}) / U_{ref} (\text{V})$

- 1) TRMS measurement
- values < 100 digit (<500 digit for measuring range 300mV) will be suppressed
- 2) At - 10 $^{\circ}\text{C}$... + 40 $^{\circ}\text{C}$
- 3) With zero adjuster; without zero adjuster
- 4) At a resolution of 0.01 dB
- 5) 16 A for 30s
- 6) Lowest measurable frequency with a sinusoidal measuring signal which is symmetrical to zero
- 7) Range
 - 3 V \equiv : $U_{ref} = 1 \text{ V}_{eff rms} \dots 10 \text{ V}_{eff rms}$
 - 30 V \equiv : $U_{ref} = 10 \text{ V}_{eff rms} \dots 100 \text{ V}_{eff rms}$
 - 300 V \equiv : $U_{ref} = 100 \text{ V}_{eff rms} \dots 1000 \text{ V}_{eff rms}$
- 8) Without sensor



Test and Measurement Instruments C.C.

Tel: 011 683 4365

Email: t.m.i@iafrica.com


Website: www.instrumentsgroup.co.za

Fax: 011 583 4461

Analog - Digital multimeters


RISH Multi[®] 12S...18S

Measuring voltage with resistance measurement 12S ... 16S




Voltage U_x across the resistance R_x to be measured as a function of measuring range and display.

Measuring current with diode test and / or continuity test 12S ... 16S




Measuring current I_x as a function of the displayed voltage U_x on the device under test.

Measuring voltage with resistance measurement 18S



Voltage U_x across the resistance R_x to be measured as a function of measuring range and display.

Measuring current with diode test and / or continuity test 18S



Measuring current I_x as a function of the displayed voltage U_x on the device under test.

Reference conditions

Ambient temperature	+23°C ± 2K
Relative humidity	45% ... 55%
Frequency of the measured quantity	45 Hz ... 65 Hz
Waveform of the measured quantity	Sinusoidal
Battery voltage	8V ± 0.1 V



Test and Measurement Instruments C.C.

Tel: 011 683 4365

Email: t.m.i@iafrica.com

Fax: 011 583 4461

Website: www.instrumentsgroup.co.za


Analog - Digital multimeters

RISH Multi[®] 12S...18S

Display

LCD field (65 mm x 30 mm) with analog indication and digital display and with annunicators for unit of measurement, function and various special functions.


Display RISH multi 12S... 16S

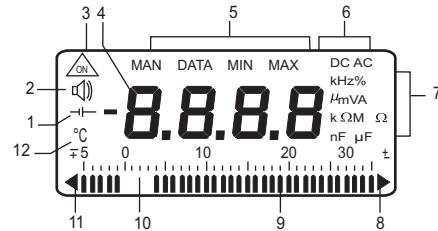

Analog

Indication	LCD scale with pointer
Scale length	55 mm on V --- and A --- ; 47 mm on all other ranges
Scaling	$\pm 5 \dots +30$ with 35 scale divisions on --- , $0 \dots 30$ with 30 scale divisions on all other ranges
Polarity indication	With automatic reversal
OVERRANGE indication	By triangle
Sampling rate	20 readings/s, On Ω 10 readings/s

Display RISH multi 18S

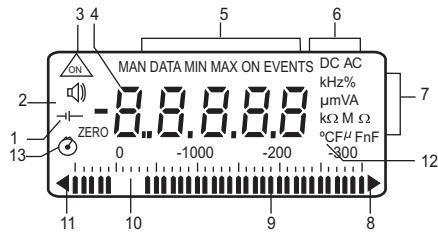

Digital

Display/ height of numerals	Rish multi 12S... 16S, 7 segment numerals / 15mm Rish multi 18S: 7-segment numerals/12 mm
Number of counts	Rish multi 12S... 16S, 3 1/4 digit \triangleq 3100 counts Rish multi 18S: 4 1/4 digit \triangleq 31000 counts
Overrange display Polarity display	"OL" is shown "." sign is shown, When positive pole to "L"
Sampling rate	2 readings/s, On Ω and $^{\circ}\text{C}$:1 reading/s

1. Display with low battery voltage
2. Display with sound signal on
3. Symbol for "CONTINUOUSLY ON"
4. Digital display with indication of decimal point and polarity
5. Display with manual range selection as well as with data and MIN/MAX hold
6. Display of the selected function
7. Display of the unit of measurement
8. Display with overrange
9. Pointer for analog indication
10. Scale for analog indication
11. Indication that negative analog range is exceeded
12. Display of the unit $^{\circ}\text{C}$ when measuring temperature
13. Display with time counter switched on



Test and Measurement Instruments C.C.

Tel: 011 683 4365

Email: t.m.i@iafrica.com


Fax: 011 583 4461

Website: www.instrumentsgroup.co.za


Analog - Digital multimeters

RISH Multi[®] 12S...18S

Influence quantities and variations for 12S...16S

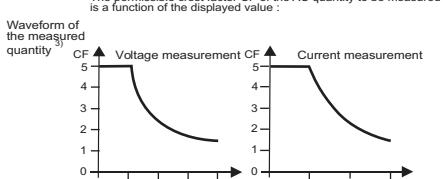Influence quantity	Influence range	Measured quantity / measuring range	Variation ¹⁾ ± (...) % of meas. val. + ... digits
Temperature	0 °C... + 21 °C and +25 °C... + 40 °C	30/300 mV ==	1.0 ± 3
		3... 300 V ==	0.15 ± 1
		1000 V ==	0.2 ± 1
		V ~	0.4 ± 2
		300 µA ==	0.5 ± 1
		300 mA ==	0.15 ± 1
		3A / 10 (16) A ==	0.5 ± 1
		A ~	0.75 ± 1
		30Ω ²⁾	0.15 ± 2
		300Ω	0.25 ± 2
		3 kΩ... 3 MΩ	0.15 ± 1
		30 MΩ	1.0 ± 1
		30 nF ²⁾ ... 3 µF	—
		30 µF	0.5 ± 2
		Hz	2.0 ± 2
		%	0.5 ± 1
		-200... + 200 °C	0.5 K ± 2
		+ 200... + 850 °C	0.5 ± 2
Frequency of the measured quantity	15 Hz... < 30 Hz 30 Hz... < 45 Hz ≥ 65 Hz... 400Hz ≥ 400 Hz... 1 kHz ≥ 1kHz... 20 kHz 30 Hz... < 30 Hz 30 Hz... < 45 Hz ≥ 65 Hz... 1kHz 30 Hz... < 30 Hz 30 Hz... < 45 Hz ≥ 65 Hz... 1kHz	15 Hz... < 30 Hz	—
		30 Hz... < 45 Hz	—
		3... 300 V ~	0.5 ± 3
		2.0 ± 3	0.5 ± 3
		2.0 ± 3	1.0 ± 3
		—	2.0 ± 3
		15 Hz... < 30 Hz	—
		30 Hz... < 45 Hz	—
		1000 V ~	3.0 ± 3
		—	2.0 ± 3
		A ~	—
		—	0.5 ± 3
		—	2.0 ± 3
Waveform of the measured quantity ³⁾	Crest factor CF 1...3 > 3...5	V ~ ⁴⁾ , A~ ⁴⁾	± 1% of rdg. ± 3 % of rdg.
		—	—
<p>The permissible crest factor CF of the AC quantity to be measured is a function of the displayed value :</p> 			

Influence quantities and variations for 18S

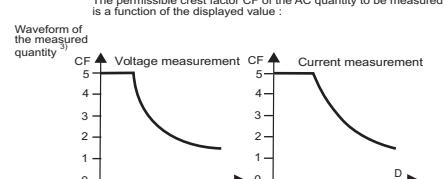Influence quantity	Influence range	Measured quantity / measuring range	Variation ²⁾ ± (...) % of meas. val. + ... digits
Temperature	- 10 °C... + 21 °C and +25 °C... + 40 °C	V ==	0.05 ± 3
		V ~, V ==	0.2 ± 30
		300 µA / 3 mA	0.2 ± 3
		30 mA ==	0.1 ± 3
		300 mA... 10 A ==	0.2 ± 3
		300 µA... 300 mA ==	0.3 ± 30
		3A / 10 A ==	0.5 ± 30
		300 Ω	0.1 ± 5
		3 kΩ... 3 MΩ	0.1 ± 3
		30 MΩ	0.6 ± 3
		30 nF... 3 µF	0.5 ± 3
		30 µF	2.0 ± 3
		Hz	0.1 ± 3
		-200... + 100 °C	0.5 Kelvin ± 2 D
		+ 100... + 850 °C	0.5 ± 2
Frequency of the measured quantity	15 Hz... < 45 Hz 65 Hz... < 200 Hz > 15 Hz... < 30 Hz > 30 Hz... < 45Hz > 65 Hz... 400 Hz > 400 Hz... 1 kHz > 1 kHz... 20 kHz > 15 Hz... < 30 Hz > 30 Hz... < 45 Hz > 65 Hz... 1 kHz 3... 300 V ~	15 Hz... < 45 Hz	1.0 ± 20
		65 Hz... < 200 Hz	1.4 ± 20
		> 15 Hz... < 30 Hz	1.0 ± 20
		> 30 Hz... < 45Hz	0.5 ± 20
		> 65 Hz... 400 Hz	0.5 ± 20
		> 400 Hz... 1 kHz	1.0 ± 20
		> 1 kHz... 20 kHz	2.0 ± 20
		> 15 Hz... < 30 Hz	1.0 ± 20
		> 30 Hz... < 45 Hz	0.5 ± 20
		> 65 Hz... 1 kHz	2.0 ± 20
		A ~	1.0 ± 20
		—	1.0 ± 20
Waveform of the measured quantity ³⁾	Crest factor CF 1...3 > 3...5	V ~ ⁴⁾ , A~ ⁴⁾	± 1% of rdg. ± 3 % of rdg.
		—	—
<p>The permissible crest factor CF of the AC quantity to be measured is a function of the displayed value :</p> 			

Influence quantity	Influence range	Measured quantity / measuring range	Variation 12S... 16S
Battery voltage	5) ... < 7.9 V > 8.1 V... 10.0 V	V ==	± 2 D
		V ~	± 4 D
		A ==	± 4 D
		A~	± 6 D
		300 / 300Ω / °C	± 4 D
		3 kΩ... 30 MΩ	± 3 D
		nF, µF	± 1 D
		Hz	± 1 D
		%	± 1 D
Relative humidity	75 % 3 days Meter off	V ==	
		A ==	
		Ω	
		F	
		Hz	
DATA		%	1x Intrinsic error
		°C	± 1 D
MIN / MAX		V ==, A ==	± 2 D

Influence quantity	Influence range	Measured quantity / measuring range	Variation
Battery voltage	5) ... < 7.9 V > 8.1 V... 10.0 V	V ==	± 6 D
		V ~	± 30 D
		A ==	± 30 D
		A~	± (1% of rdg + 10D)
		Ω	± 10 D
		3 nF... 30 µF	± 10 D
		Hz	± 6 D
		°C	± 5 D
Relative humidity	75 % 3 days Meter off	V, dB, A, Ω, F, Hz, °C	1x inherent deviation
DATA		V, dB, A, Ω, Hz	± 20 D
		F	± 2 D
MIN / MAX		V, dB, A, Ω, Hz	± 10 D
		°C, F	± 1 D

- 1) With temperature; Error data is per 10 K change in temperature.
- 2) With frequency; Error data is valid from a display of 300 digits.
- 3) With zero setting
- 4) With unknown waveform (crest factor CF > 2), the measurement must be made with manual range selection.
- 5) Except for sinusoidal waveform
- 6) From the time the symbol "← I—" appears.

- 1) With zero setting
- 2) With temperature; Error data is per 10 K change in temperature.
- 3) With frequency; Error data is valid from a display of 10% of the measuring range.
- 4) With unknown waveform (crest factor CF > 2), the measurement must be made with manual range selection.
- 5) Except for sinusoidal waveform
- 6) From the time the symbol "← I—" appears.



Test and Measurement Instruments C.C.

Tel: 011 683 4365

Email: t.m.i@iafrica.com

Website: www.instrumentsgroup.co.za

Fax: 011 583 4461

Analog - Digital multimeters

RISH Multi[®] 12S...18S

Influence quantity	Influence range	Meas. range 12S...16S	Damping
Common mode voltage	Disturbance variable max. 1000 V ~	V ==	> 120 dB
	3 V ~ 30 V ~	> 70 dB > 60 dB	
Normal mode voltage	Disturbance variable max. 1000 V ~, nom. value of meas. range at a time, max. 1000 V ~, 50 Hz, 60 Hz sinusoidal	v ==	> 50 dB
	Disturbance variable max. 1000 V --	v ~	> 110 dB

Influence quantity	Influence range	Meas. range 18S	Damping
Common mode voltage	Disturbance variable max. 1000 V ~	V ==	> 120 dB
	300 mV 30 V ~	> 80 dB > 60 dB	
Normal mode voltage	Disturbance variable max. 1000 V ~, nom. value of meas. range at a time, max. 1000 V ~, 50 Hz, 60 Hz sinusoidal	v ==	> 48 dB
	Disturbance variable max. 1000 V --	v ~	> 110 dB

Response time

Response time for 12S...16S (after manual range selection)

Measured quantity measuring range	of analog indication	Response time of digital display	Leap function of the measured quantity
V == V ~ A == A ~	0.7 s	1.5 S	from 0 to 80% of the upper range limit
30Ω...3MΩ	1.5 S	2 S	from ∞ to 50% of the upper range limit
30MΩ	4 S	5 S	
→	0.7 S	1.5 S	
nF, μF, °C		max. 1...3S	
300 Hz...3kHz		max. 2 S	
30...100kHz		max. 0.7 S	
% (1 Hz)		max. 9 S	
% (>10 Hz)		max. 2.5 S	

Response time for 18S (after manual range selection)

Measured quantity measuring range	of analog indication	Response time of digital display	Leap function of the measured quantity
V == V ~ A == A ~	0.7 S	1.5 S	from 0 to 80% of the upper range limit
30Ω...3MΩ	1.5 S	2 S	from ∞ to 50% of the upper range limit
30MΩ	4 S	5 S	
→	0.7 S	1.5 S	
3 nF...300 μF	max. 2 S	max. 2S	
3 000 μF	max. 7 S	max. 7 S	
10 000 μF	max. 14 S	max. 14 S	
> 10 Hz	max. 1.5 S	max. 1.5 S	
°C		max. 3 S	

Power supply

Battery	9-V flat cell battery: manganese-dioxide cell according to IEC 6 F 22. alkaline Manganese cell according to IEC 6 LR 61 or corresponding NiCd storage battery With alkaline-manganese cell: RISH multi 12...16S Approx. 220 hours on V ==, A == Approx. 80 hours on V ~, A ~ (12S...15S) approx. 60 hours on V~, A~ (16S) with interface operation times x 0.7 RISH multi 18S: approx. 120 hours on V == approx. 90 hours on V~, A~ A == Automatic display of the "—" symbol, when the battery voltage drops below approximately 7 V.
Operating time	
Battery test	

Fuses

Fuse link for the ranges up to 300 mA	FF 1.6A/1000V 6.3 mm x 32 mm; Switching capacity 10 kA on 1000 VAC/DC and ohmic load; in connection with power diodes protects all current measuring ranges up to 300 mA
Fuse link for ranges up to 10A	16 A / 1000 V or 15 A / 1000 V 10 mm X 38 mm, Switching capacity 30 kA on 600 V ~ and ohmic load; protects the 3 A and 10 A ranges up to 1000 V

Electrical Safety

(Except 13S)

Protection class	As per IEC 61010-1:2001	
Oversupply category	III	IV
Nominal voltage	1000 V	600V
Degree of pollution	2	2
Nominal Test Voltage	6.7KV~	acc. To IEC 348/DIN VDE 0411

Electromagnetic compatibility EMC

Emission	EN 61326: 2002 class B
Immunity	EN 50082-1: 1992 EN 61326: 2002 IEC 61000-4-2 8 KV atmospheric discharge 4 KV contact discharge IEC 61000-4-3 3 V/m

Date interface

Type	RS-232C, serial, according to DIN 19241
Data transmission	Optical, with infrared light through the case
Baud rate	8192 bit/s

Test and Measurement Instruments C.C.

Tel: 011 683 4365

Email: t.m.i@iafrica.com

Fax: 011 583 4461

Website: www.instrumentsgroup.co.za




Analog - Digital multimeters

RISH Multi[®] 12S...18S

Environmental conditions

Working temperature range	RISH multi 12S... 16S: -10 °C... + 50 °C RISH multi 18S: -20 °C... + 50 °C
Storage temperature range	-25 °C... + 70 °C (excl. batteries)
Climatic class	RISH multi 12S... 16S: 2z/-10/50/70/75% with reference to VDI/VDE 3540 RISH multi 18S: 2z/-20/50/70/75% with reference to VDI/VDE 3540
Altitude above sea level	up to 2000m

Operating controls 12S... 18S

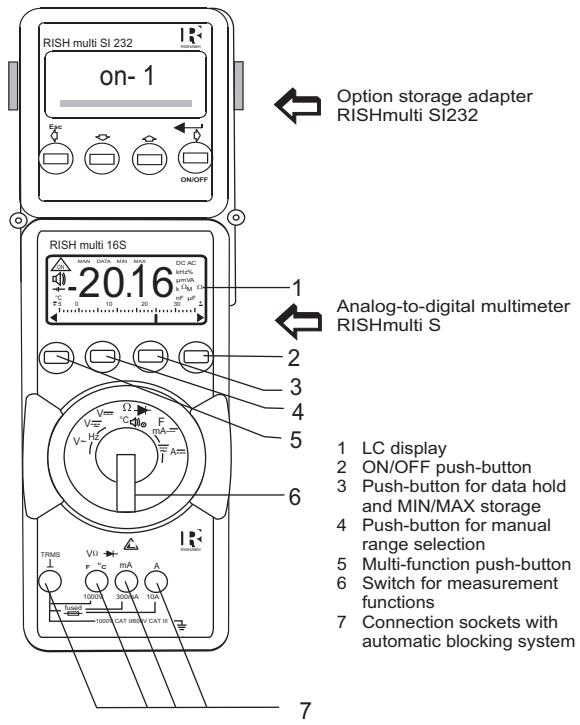

Mechanical configuration

Protection type	For meters; IP 50, for connection sockets: IP 20
Dimensions	84 mm x 195 mm x 35 mm
Weight	0.35 kg, approx., incl. battery

Scope of delivery

- 1 multimeter
- 1 Probe Set
- 1 copy of operating instructions
- 1 test certificate
- 1 rubber holster with tilt stand and carrying strap
- warranty card
- 1 set of extra fuses.

Warranty

3 year against defects in materials and workmanship & calibration from the date of purchase.

Test and Measurement Instruments C.C.



Tel: 011 683 4365

Email: t.m.i@iafrica.com

Fax: 011 583 4461

Website: www.instrumentsgroup.co.za

Analog - Digital multimeters

RISH Multi[®] 12S...18S

Ordering Information

Order Code

Designation	Type	Order Code
Multimeter	RISH multi 12s RISH multi 13s RISH multi 14s RISH multi 15s RISH multi 16s RISH multi 18s	33001 33002 33003 33005 33006 33007
Cable set	KS 17	42126
Carrying Bag	F 389	42179
Voltage probe upto 3 KV	HV 3	42115
Voltage probe upto 30 KV	HV 30	42123
Clip on current transformer 1000A, 1mA/A	Z3512	42119
Shunt 100 A / 100mV	GE 4277	42178
Temperature sensor pt 100	Z 3409	42116
Temperature sensor pt 1000	Z 3408	42122
Single channel storage pack including memory adapter SI 232, Cable & Software RISHcom 100	1 CH pack	33021
Four channel storage pack including 4 nos memory adapter SI 232, Cable & Software RISHcom 100	4 CH pack	33023



Test and Measurement Instruments C.C.

Tel: 011 683 4365

Email: t.m.i@iafrica.com Website: www.instrumentsgroup.co.za

Fax: 011 583 4461