



TEST REPORT

Product Name: Live Sound Card
FCC ID: 2BNZC-KA01
Trademark: N/A
Model Number: KA01, BG007, KSA1, KS01, H600, BG006
Prepared For: Shenzhen Kaiyin Technology Co.,Ltd.
Address: Room 401, Building B, No. 13, Lingxia Road, Phoenix Community, Fuyong Street, Bao'an District, Shenzhen City, Guangdong Province, China.
Manufacturer: Shenzhen Kaiyin Technology Co.,Ltd.
Address: Room 401, Building B, No. 13, Lingxia Road, Phoenix Community, Fuyong Street, Bao'an District, Shenzhen City, Guangdong Province, China.
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Feb. 14, 2025
Sample tested Date: Feb. 14, 2025 to Mar. 10, 2025
Issue Date: Mar. 10, 2025
Report No.: CTB25021404707RF01
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Zhou kui

Zhou Kui

Reviewed by:

Arron Liu

Arron Liu

Approved by:



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup.....	12
6.2 Limit.....	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup.....	16
7.2 Limit.....	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	27
8.1 Block Diagram Of Test Setup.....	27
8.2 Limit.....	27
8.3 Test procedure	27
8.4 Test Result	28
9. CONDUCTED PEAK OUTPUT POWER	35
9.1 Block Diagram Of Test Setup.....	35
9.2 Limit.....	35
9.3 Test procedure	35
9.4 Test Result	35
10. 20DB OCCUPIED BANDWIDTH	39
10.1 Block Diagram Of Test Setup.....	39
10.2 Limit.....	39
10.3 Test procedure	39
10.4 Test Result	39
11. CARRIER FREQUENCIES SEPARATION	43
11.1 Block Diagram Of Test Setup.....	43
11.2 Limit.....	43
11.3 Test procedure	43
11.4 Test Result	43
12. HOPPING CHANNEL NUMBER	47
12.1 Block Diagram Of Test Setup.....	47
12.2 Limit.....	47
12.3 Test procedure	47
12.4 Test Result	47
13. DWELL TIME	49
13.1 Block Diagram Of Test Setup.....	49
13.2 Limit.....	49
13.3 Test procedure	49



13.4 Test Result49

14. PSEUDORANDOM FREQUENCY53

14.1 Limit..... 53

14.2 Test procedure 53

14.3 Test Result 53

15. ANTENNA REQUIREMENT54

16. EUT TEST SETUP PHOTOGRAPHS55

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB25021404707RF01	Mar. 10, 2025	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63℃
frequency	1×10 ⁻⁷
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s): KA01, BG007, KSA1, KS01, H600, BG006

Model Description: All the model are the same circuit and RF module, only the name and appearance colors are different. Test sample model: KA01

Bluetooth Version: Bluetooth 5.0

Hardware Version: FRJ-BG006-V1.0-241119

Software Version: FRJ_BG006_E08_20250120_V9

Operation Frequency: Bluetooth: 2402-2480MHz

Max. RF output power: Bluetooth: 3.478dBm

Type of Modulation: Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK

Antenna installation: Bluetooth: PCB antenna

Antenna Gain: Bluetooth: 1.7dBi

Ratings: DC 5V charging from adapter
DC 3.6V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	Adapter	JIYIN	JY-05100C	/	AE
2	Laptop	DELL	Vostro 5490	N/A	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.6V
Normal Temperature($^{\circ}$ C)	23
Low Temperature($^{\circ}$ C)	0
High Temperature($^{\circ}$ C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/6/28
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/6/28
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/6/28
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/6/28
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/6/28
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/6/28
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/6/28
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2025/6/30
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2025/6/30
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2025/6/30
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/6/28
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/6/28
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2027/6/21
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
18	Amplifier	HP	8447E	2945A02747	/	2025/6/28
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/28
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/28

22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/28
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/28
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/28
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/28


Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2027/6/21
2	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/6/30
3	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2025/6/28
4	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/6/30
5	Coaxial cable	ZDECL	Z302S	18091904	/	2025/6/30
6	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/30
7	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2025/10/25
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/
9	Current Probe	FCC	F-52B	199453	/	2025/5/27
10	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
11	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

Radiated emission(No.1 Chamber)						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2027/6/21
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/7/06
3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/30
5	Amplifier	HP	8447E	2945A02747	/	2025/6/28
6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/29
7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
9	Coaxial cable	ETS	RFC-SNS-100-NMS-80	/	/	2025/6/28

10	Coaxial cable	ETS	RFC-SN-100-NMS-20	/	/	2025/6/28
11	Coaxial cable	ETS	RFC-SNS-100-SMS-20	/	/	2025/6/28
12	Coaxial cable	ETS	RFC-NNS-100-NMS-300	/	/	2025/6/28
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

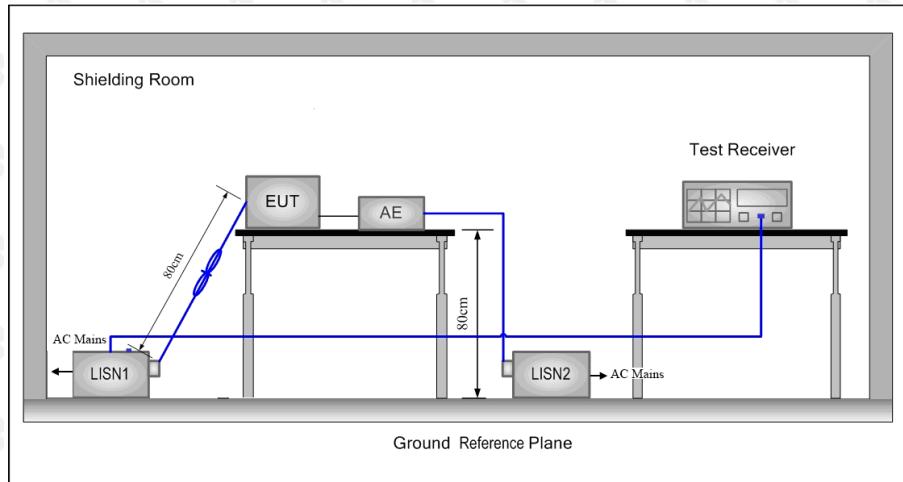

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L: Worst case-GFSK(low channel)

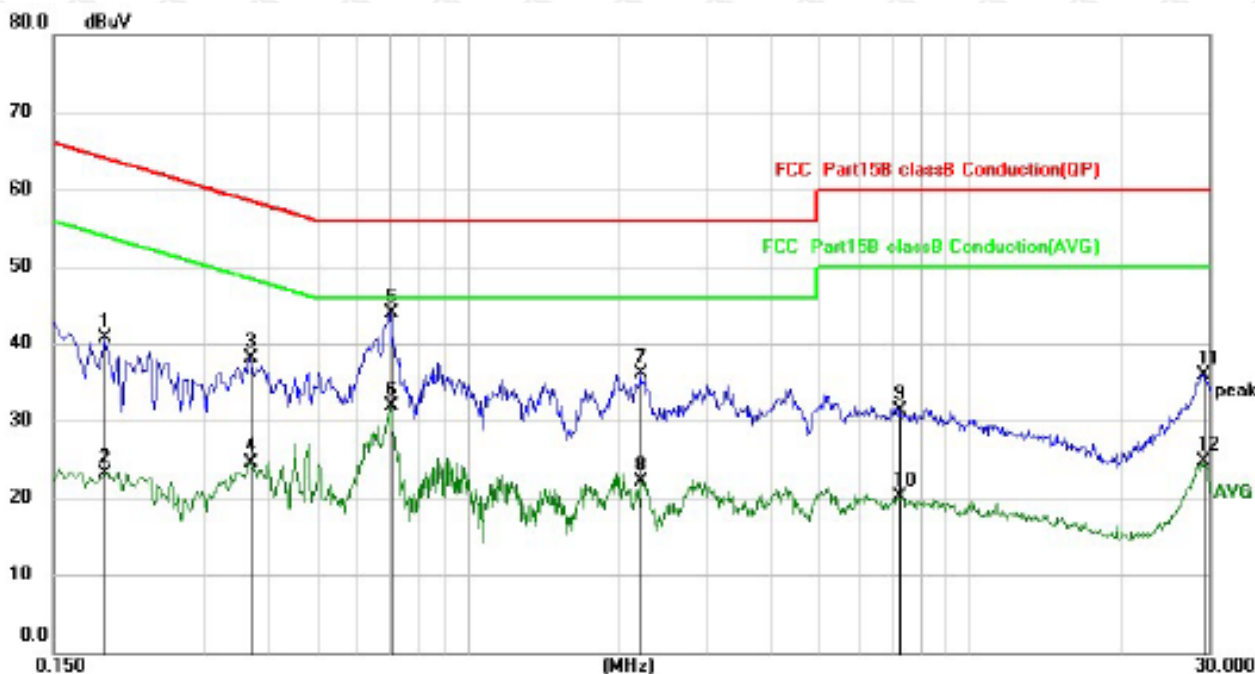


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1900	29.93	10.75	40.68	64.04	-23.36	QP
2		0.1900	12.30	10.75	23.05	54.04	-30.99	AVG
3		0.3700	27.46	10.59	38.05	58.50	-20.45	QP
4		0.3700	13.89	10.59	24.48	48.50	-24.02	AVG
5	*	0.7019	33.14	10.72	43.86	56.00	-12.14	QP
6		0.7019	21.20	10.72	31.92	46.00	-14.08	AVG
7		2.2139	24.57	11.63	36.20	56.00	-19.80	QP
8		2.2139	10.40	11.63	22.03	46.00	-23.97	AVG
9		7.2780	18.32	12.97	31.29	60.00	-28.71	QP
10		7.2780	7.23	12.97	20.20	50.00	-29.80	AVG
11		29.2140	21.49	14.42	35.91	60.00	-24.09	QP
12		29.2140	10.31	14.42	24.73	50.00	-25.27	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

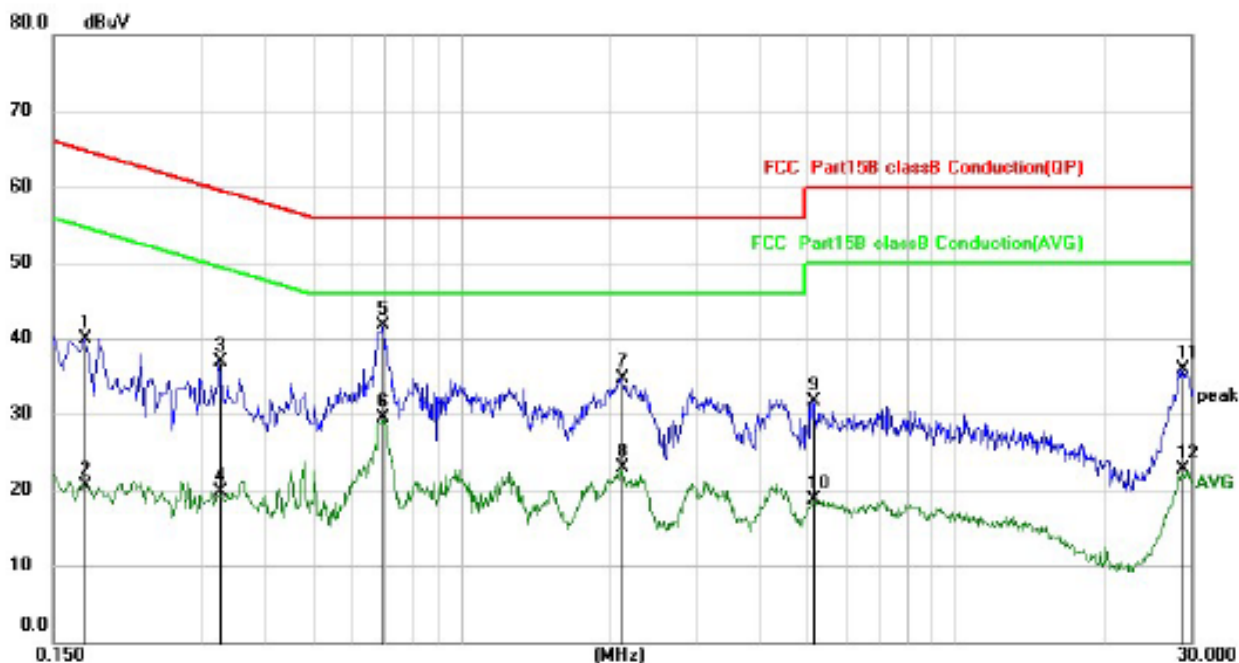

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1740	29.17	10.80	39.97	64.77	-24.80	QP
2		0.1740	9.78	10.80	20.58	54.77	-34.19	AVG
3		0.3260	26.25	10.62	36.87	59.55	-22.68	QP
4		0.3260	9.02	10.62	19.64	49.55	-29.91	AVG
5	*	0.6940	31.00	10.71	41.71	56.00	-14.29	QP
6		0.6940	18.85	10.71	29.56	46.00	-16.44	AVG
7		2.1180	23.09	11.61	34.70	56.00	-21.30	QP
8		2.1180	11.32	11.61	22.93	46.00	-23.07	AVG
9		5.1500	19.45	12.29	31.74	60.00	-28.26	QP
10		5.1500	6.48	12.29	18.77	50.00	-31.23	AVG
11		28.6900	21.45	14.37	35.82	60.00	-24.18	QP
12		28.6900	8.27	14.37	22.64	50.00	-27.36	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

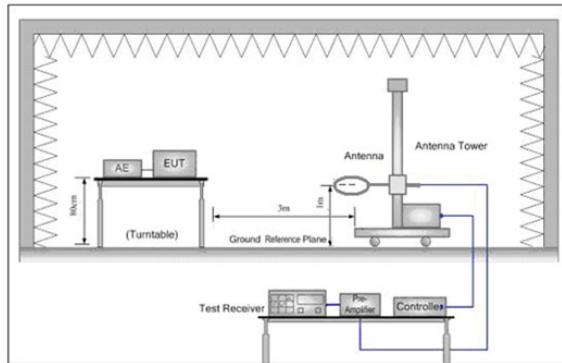


Figure 1. Below 30MHz

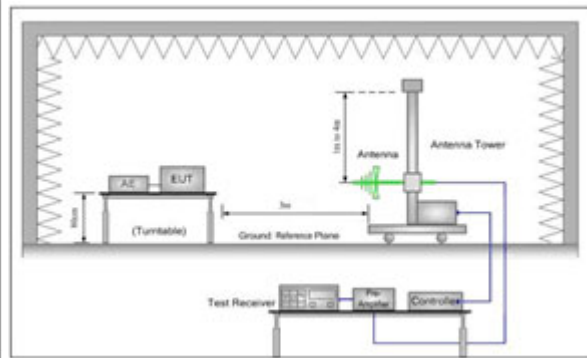


Figure 2. 30MHz to 1GHz

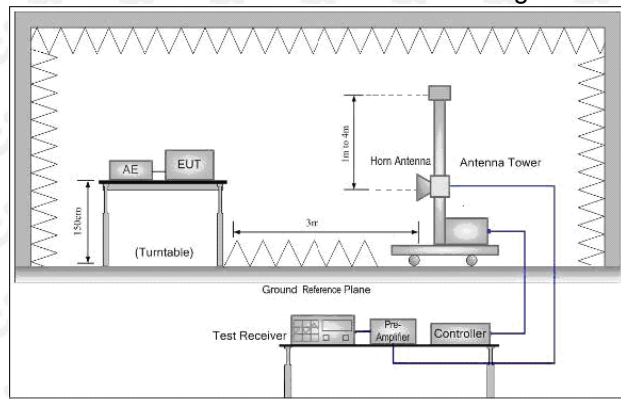


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result


Below 1GHz Test Results:
 Antenna polarity: H
 Worst case-GFSK(low channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		44.9006	31.81	-6.76	25.05	40.00	-14.95	QP
2	!	149.2238	41.28	-2.97	38.31	43.50	-5.19	QP
3	!	295.6648	43.88	-2.98	40.90	46.00	-5.10	QP
4	!	470.5232	38.97	1.30	40.27	46.00	-5.73	QP
5		668.1422	32.99	4.81	37.80	46.00	-8.20	QP
6	*	908.0731	33.06	8.32	41.38	46.00	-4.62	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V
Worst case-GFSK(low channel)

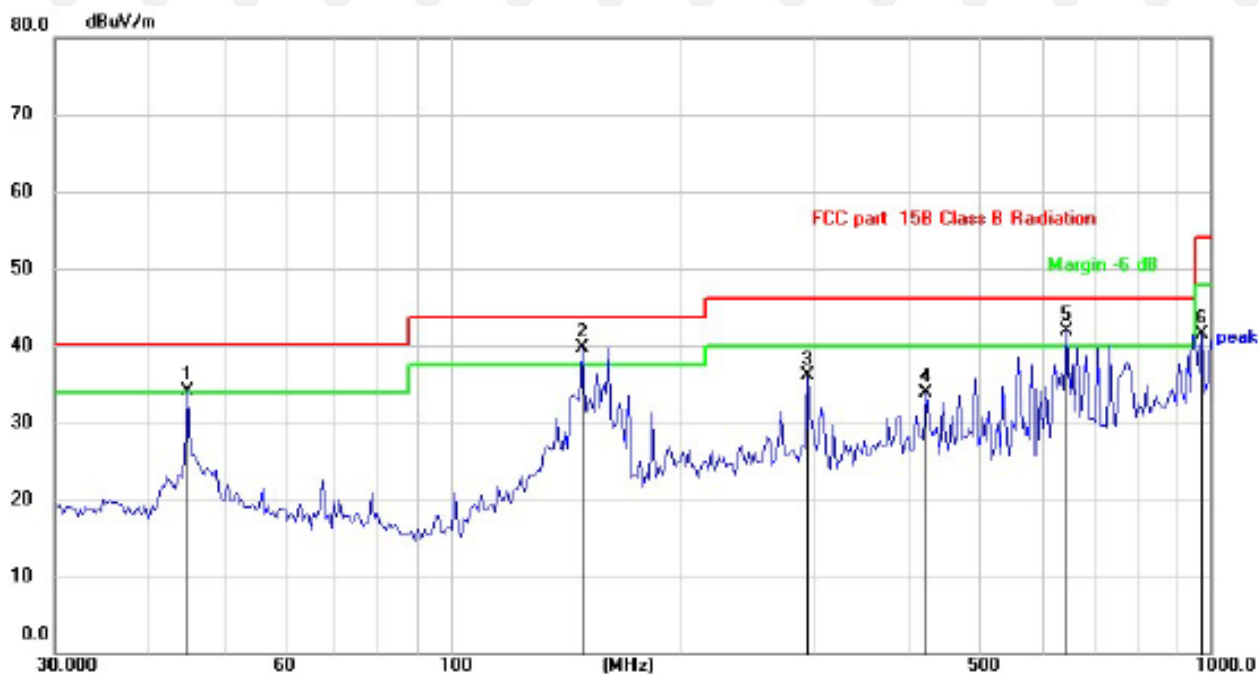

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	!	44.9004	40.89	-6.76	34.13	40.00	-5.87	QP
2	*	149.2238	42.68	-2.97	39.71	43.50	-3.79	QP
3		295.6648	39.10	-2.98	36.12	46.00	-9.88	QP
4		423.5402	34.02	-0.05	33.97	46.00	-12.03	QP
5	!	645.1194	37.54	4.39	41.93	46.00	-4.07	QP
6		974.0435	32.79	8.78	41.57	54.00	-12.43	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal: (Worst case-GFSK)

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4804	58.11	-3.65	54.46	74.00	-19.54	peak
4804	49.46	-3.65	45.81	54.00	-8.19	AVG
7206	58.89	-0.95	57.94	74.00	-16.06	peak
7206	40.36	-0.95	39.41	54.00	-14.59	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4804	58.06	-3.65	54.41	74.00	-19.59	peak
4804	50.32	-3.65	46.67	54.00	-7.33	AVG
7206	58.88	-0.95	57.93	74.00	-16.07	peak
7206	41.17	-0.95	40.22	54.00	-13.78	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)
Horizontal: (Worst case-GFSK)

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4882.00	59.48	-3.54	55.94	74.00	-18.06	peak
4882.00	48.30	-3.54	44.76	54.00	-9.24	AVG
7323.00	56.92	-0.81	56.11	74.00	-17.89	peak
7323.00	41.85	-0.81	41.04	54.00	-12.96	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4882.00	58.50	-3.54	54.96	74.00	-19.04	peak
4882.00	48.53	-3.54	44.99	54.00	-9.01	AVG
7323.00	57.03	-0.81	56.22	74.00	-17.78	peak
7323.00	41.25	-0.81	40.44	54.00	-13.56	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)
Horizontal: (Worst case-GFSK)

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	58.40	-3.43	54.97	74.00	-19.03	peak
4960	49.12	-3.44	45.68	54.00	-8.32	AVG
7440	58.93	-0.77	58.16	74.00	-15.84	peak
7440	40.21	-0.77	39.44	54.00	-14.56	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	58.10	-3.43	54.67	74.00	-19.33	peak
4960	47.55	-3.44	44.11	54.00	-9.89	AVG
7440	59.38	-0.77	58.61	74.00	-15.39	peak
7440	42.52	-0.77	41.75	54.00	-12.25	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	57.07	-5.81	51.26	74.00	-22.74	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.82	-5.84	49.98	74.00	-24.02	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	57.32	-5.81	51.51	74.00	-22.49	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.15	-5.84	50.31	74.00	-23.69	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	54.29	-5.81	48.48	74.00	-25.52	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.85	-6.06	48.79	74.00	-25.21	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	56.16	-5.81	50.35	74.00	-23.65	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.17	-6.06	48.11	74.00	-25.89	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	56.34	-5.81	50.53	74.00	-23.47	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.09	-5.84	48.25	74.00	-25.75	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	54.73	-5.81	48.92	74.00	-25.08	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.31	-5.84	48.47	74.00	-25.53	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	57.37	-5.81	51.56	74.00	-22.44	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.47	-6.06	49.41	74.00	-24.59	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	56.87	-5.81	51.06	74.00	-22.94	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.79	-6.06	48.73	74.00	-25.27	peak
2500.00	/	-6.06	/	54.00	/	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

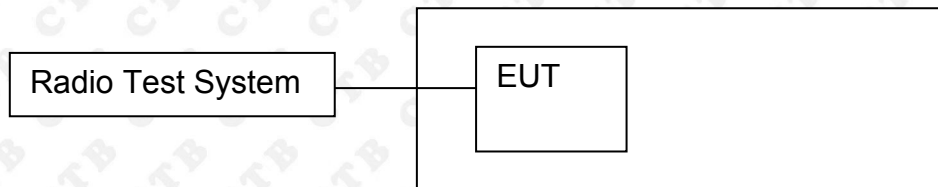


8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - Below 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold
 - Above 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold

8.4 Test Result

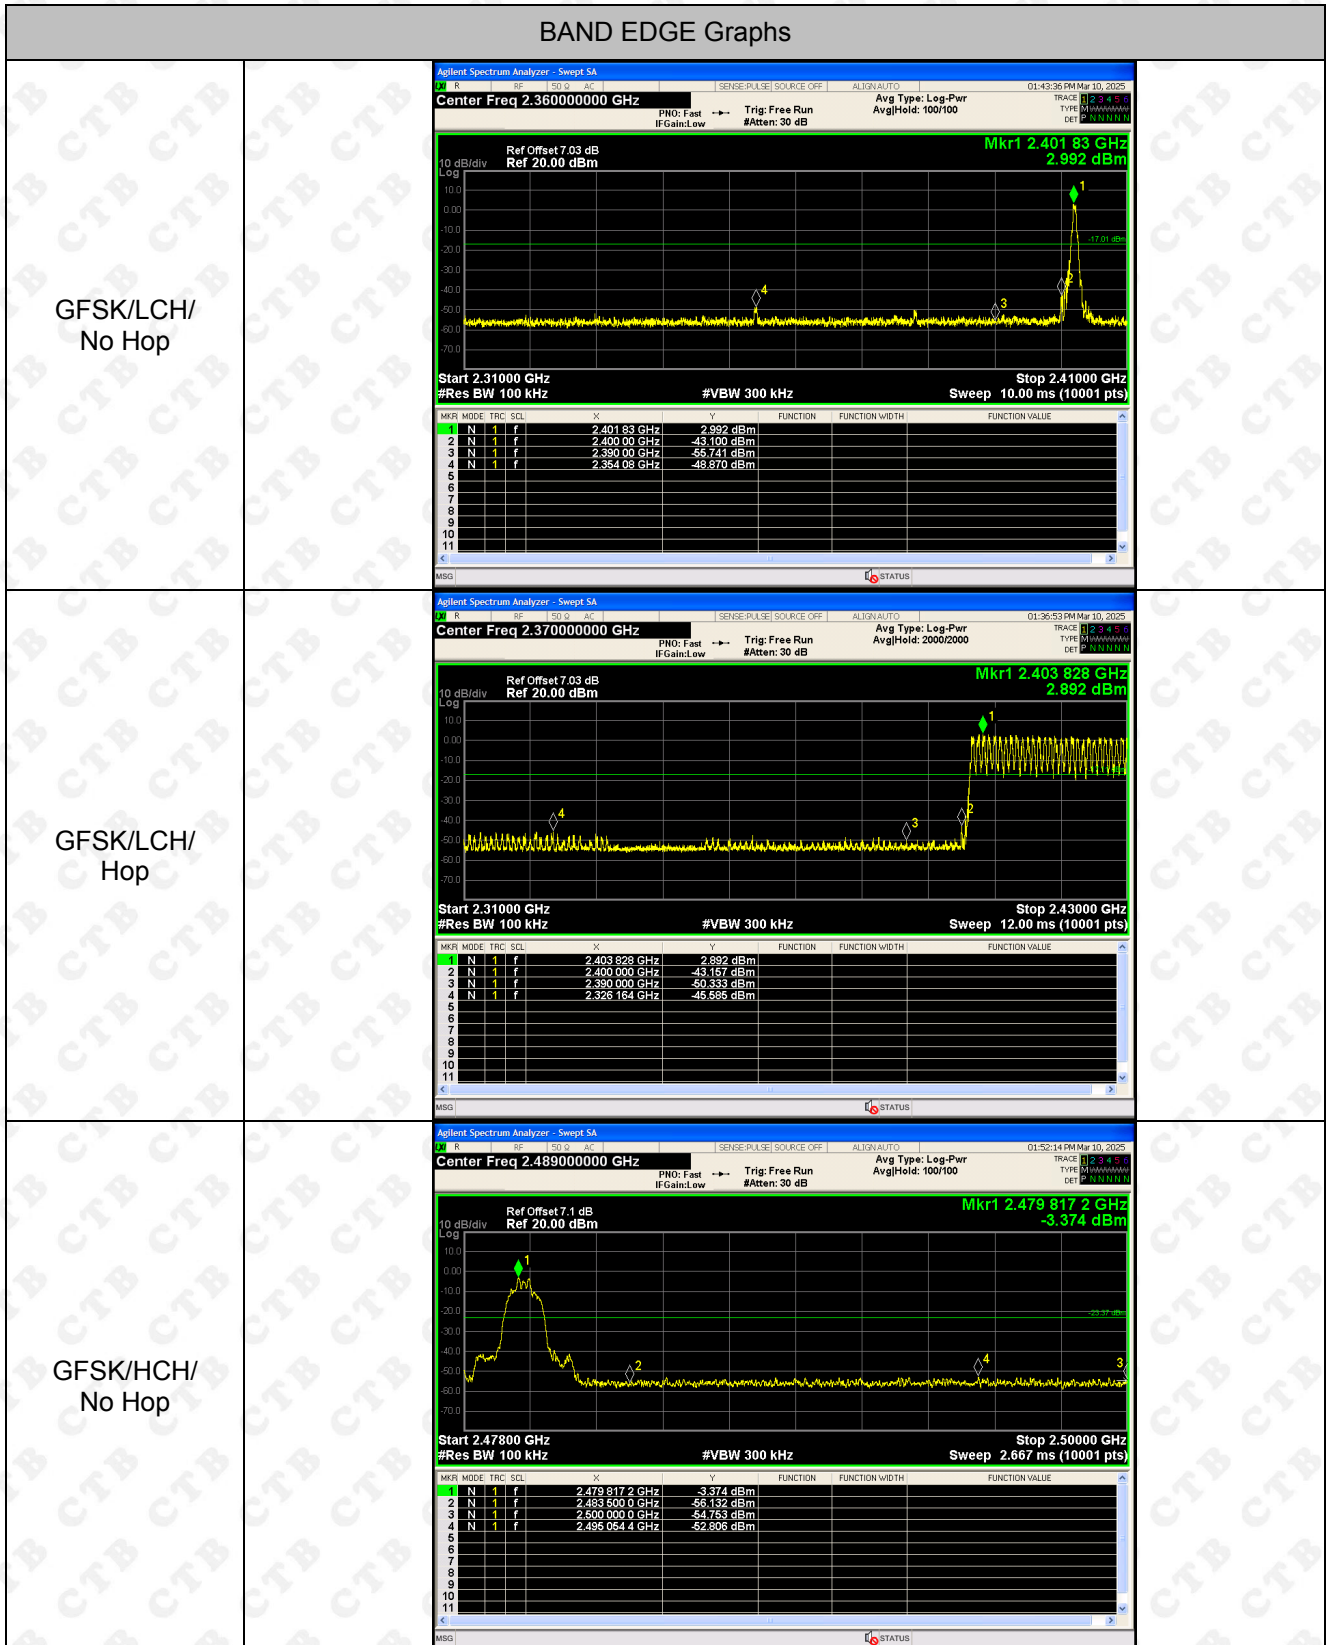


<p>GFSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.468750000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.44016250 GHz 0.557 dBm Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.44016250 GHz</td> <td>0.557 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.48350000 GHz</td> <td>-54.040 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.49000000 GHz</td> <td>-54.500 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.49148125 GHz</td> <td>-50.520 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.44016250 GHz	0.557 dBm				2	N	1	f	2.48350000 GHz	-54.040 dBm				3	N	1	f	2.49000000 GHz	-54.500 dBm				4	N	1	f	2.49148125 GHz	-50.520 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.44016250 GHz	0.557 dBm																																									
2	N	1	f	2.48350000 GHz	-54.040 dBm																																									
3	N	1	f	2.49000000 GHz	-54.500 dBm																																									
4	N	1	f	2.49148125 GHz	-50.520 dBm																																									
<p>$\pi/4$DQPSK/LCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.360000000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.40183 GHz 2.959 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.40183 GHz</td> <td>2.959 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.40000 GHz</td> <td>-43.556 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.39900 GHz</td> <td>-56.772 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.35361 GHz</td> <td>-48.115 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.40183 GHz	2.959 dBm				2	N	1	f	2.40000 GHz	-43.556 dBm				3	N	1	f	2.39900 GHz	-56.772 dBm				4	N	1	f	2.35361 GHz	-48.115 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.40183 GHz	2.959 dBm																																									
2	N	1	f	2.40000 GHz	-43.556 dBm																																									
3	N	1	f	2.39900 GHz	-56.772 dBm																																									
4	N	1	f	2.35361 GHz	-48.115 dBm																																									
<p>$\pi/4$DQPSK/LCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.370000000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.405832 GHz 2.836 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.405832 GHz</td> <td>2.836 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.40000 GHz</td> <td>-43.889 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.39000 GHz</td> <td>-53.224 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.314900 GHz</td> <td>-46.725 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.405832 GHz	2.836 dBm				2	N	1	f	2.40000 GHz	-43.889 dBm				3	N	1	f	2.39000 GHz	-53.224 dBm				4	N	1	f	2.314900 GHz	-46.725 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.405832 GHz	2.836 dBm																																									
2	N	1	f	2.40000 GHz	-43.889 dBm																																									
3	N	1	f	2.39000 GHz	-53.224 dBm																																									
4	N	1	f	2.314900 GHz	-46.725 dBm																																									

<p>$\pi/4$DQPSK/HCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.48900000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.479 828 2 GHz -3.741 dBm Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 2.667 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.479 828 2 GHz</td> <td>-3.741 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-54.933 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-56.300 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.484 208 4 GHz</td> <td>-52.373 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 828 2 GHz	-3.741 dBm				2	N	1	f	2.483 500 0 GHz	-54.933 dBm				3	N	1	f	2.500 000 0 GHz	-56.300 dBm				4	N	1	f	2.484 208 4 GHz	-52.373 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.479 828 2 GHz	-3.741 dBm																																									
2	N	1	f	2.483 500 0 GHz	-54.933 dBm																																									
3	N	1	f	2.500 000 0 GHz	-56.300 dBm																																									
4	N	1	f	2.484 208 4 GHz	-52.373 dBm																																									
<p>$\pi/4$DQPSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46875000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.437 831 25 GHz 0.227 dBm Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.437 831 25 GHz</td> <td>0.227 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-53.624 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-53.924 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.499 412 50 GHz</td> <td>-51.248 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.437 831 25 GHz	0.227 dBm				2	N	1	f	2.483 500 0 GHz	-53.624 dBm				3	N	1	f	2.500 000 0 GHz	-53.924 dBm				4	N	1	f	2.499 412 50 GHz	-51.248 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.437 831 25 GHz	0.227 dBm																																									
2	N	1	f	2.483 500 0 GHz	-53.624 dBm																																									
3	N	1	f	2.500 000 0 GHz	-53.924 dBm																																									
4	N	1	f	2.499 412 50 GHz	-51.248 dBm																																									
<p>8DPSK/LCH/No Hop</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.36000000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.402 17 GHz 2.982 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.41000 GHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 17 GHz</td> <td>2.982 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td>-44.002 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 00 GHz</td> <td>-53.441 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.353 398 GHz</td> <td>-49.039 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 17 GHz	2.982 dBm				2	N	1	f	2.400 00 GHz	-44.002 dBm				3	N	1	f	2.390 00 GHz	-53.441 dBm				4	N	1	f	2.353 398 GHz	-49.039 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 17 GHz	2.982 dBm																																									
2	N	1	f	2.400 00 GHz	-44.002 dBm																																									
3	N	1	f	2.390 00 GHz	-53.441 dBm																																									
4	N	1	f	2.353 398 GHz	-49.039 dBm																																									

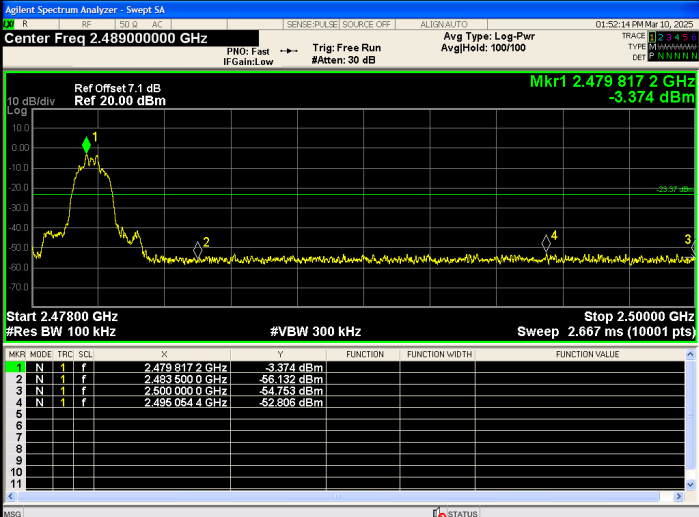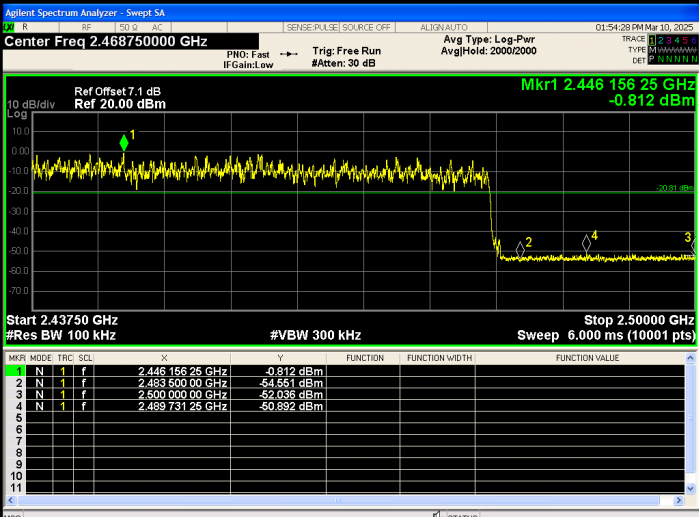
<p>8DPSK /LCH/Hop</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.404164 GHz</td> <td>2.800 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400000 GHz</td> <td>-44.327 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390000 GHz</td> <td>-49.491 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.387016 GHz</td> <td>-46.833 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.404164 GHz	2.800 dBm				2	N	1	f	2.400000 GHz	-44.327 dBm				3	N	1	f	2.390000 GHz	-49.491 dBm				4	N	1	f	2.387016 GHz	-46.833 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.404164 GHz	2.800 dBm																																									
2	N	1	f	2.400000 GHz	-44.327 dBm																																									
3	N	1	f	2.390000 GHz	-49.491 dBm																																									
4	N	1	f	2.387016 GHz	-46.833 dBm																																									
<p>8DPSK /HCH/No Hop</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4798172 GHz</td> <td>-3.374 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4835000 GHz</td> <td>-46.132 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.5000000 GHz</td> <td>-54.153 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4950844 GHz</td> <td>-52.808 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4798172 GHz	-3.374 dBm				2	N	1	f	2.4835000 GHz	-46.132 dBm				3	N	1	f	2.5000000 GHz	-54.153 dBm				4	N	1	f	2.4950844 GHz	-52.808 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.4798172 GHz	-3.374 dBm																																									
2	N	1	f	2.4835000 GHz	-46.132 dBm																																									
3	N	1	f	2.5000000 GHz	-54.153 dBm																																									
4	N	1	f	2.4950844 GHz	-52.808 dBm																																									
<p>8DPSK /HCH/Hop</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.44615625 GHz</td> <td>-0.812 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.48350000 GHz</td> <td>-54.651 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.50000000 GHz</td> <td>-52.936 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.48973125 GHz</td> <td>-50.892 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.44615625 GHz	-0.812 dBm				2	N	1	f	2.48350000 GHz	-54.651 dBm				3	N	1	f	2.50000000 GHz	-52.936 dBm				4	N	1	f	2.48973125 GHz	-50.892 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.44615625 GHz	-0.812 dBm																																									
2	N	1	f	2.48350000 GHz	-54.651 dBm																																									
3	N	1	f	2.50000000 GHz	-52.936 dBm																																									
4	N	1	f	2.48973125 GHz	-50.892 dBm																																									

RF Conducted Spurious Emissions Graphs


GFSK/LCH

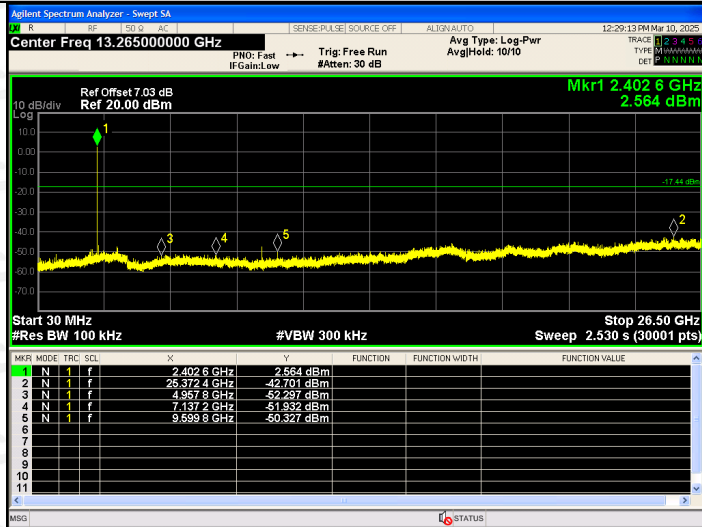





GFSK/MCH

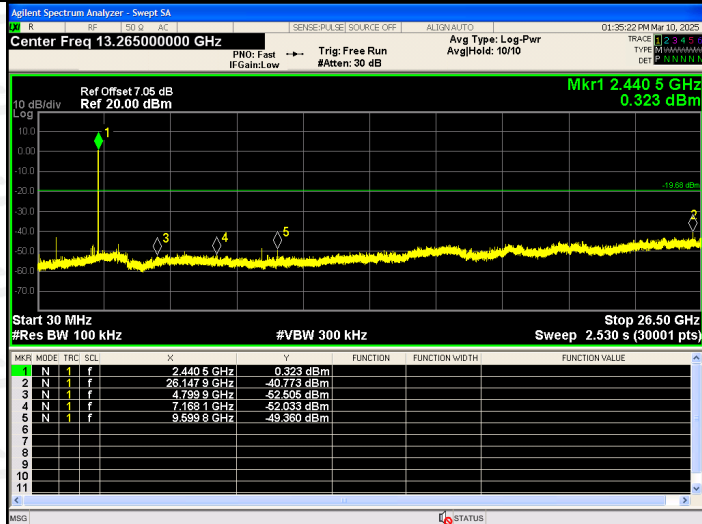

GFSK/HCH

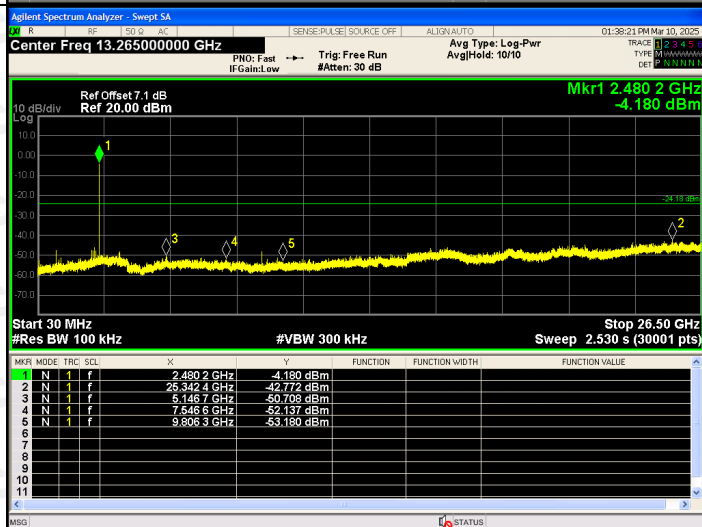

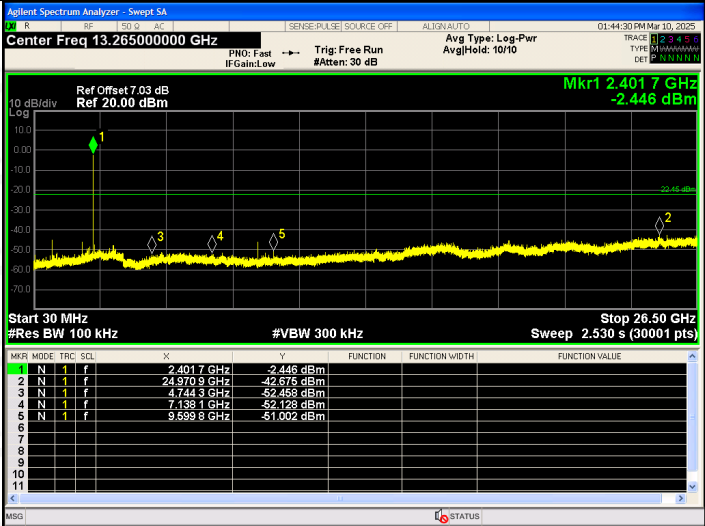
<p>$\pi/4$DQPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td>-2.446 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.9709 GHz</td> <td>-42.675 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7443 GHz</td> <td>-52.459 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.1381 GHz</td> <td>-52.128 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6998 GHz</td> <td>-51.002 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	-2.446 dBm				2	N	1	f	24.9709 GHz	-42.675 dBm				3	N	1	f	4.7443 GHz	-52.459 dBm				4	N	1	f	7.1381 GHz	-52.128 dBm				5	N	1	f	9.6998 GHz	-51.002 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4017 GHz	-2.446 dBm																																																		
2	N	1	f	24.9709 GHz	-42.675 dBm																																																		
3	N	1	f	4.7443 GHz	-52.459 dBm																																																		
4	N	1	f	7.1381 GHz	-52.128 dBm																																																		
5	N	1	f	9.6998 GHz	-51.002 dBm																																																		
<p>$\pi/4$DQPSK/MCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4405 GHz</td> <td>-5.063 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.4771 GHz</td> <td>-42.230 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7637 GHz</td> <td>-52.207 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.1681 GHz</td> <td>-51.577 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6998 GHz</td> <td>-49.956 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4405 GHz	-5.063 dBm				2	N	1	f	26.4771 GHz	-42.230 dBm				3	N	1	f	4.7637 GHz	-52.207 dBm				4	N	1	f	7.1681 GHz	-51.577 dBm				5	N	1	f	9.6998 GHz	-49.956 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4405 GHz	-5.063 dBm																																																		
2	N	1	f	26.4771 GHz	-42.230 dBm																																																		
3	N	1	f	4.7637 GHz	-52.207 dBm																																																		
4	N	1	f	7.1681 GHz	-51.577 dBm																																																		
5	N	1	f	9.6998 GHz	-49.956 dBm																																																		
<p>$\pi/4$DQPSK/HCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4794 GHz</td> <td>-8.323 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.4836 GHz</td> <td>-42.381 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8483 GHz</td> <td>-51.674 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.5545 GHz</td> <td>-52.031 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.8964 GHz</td> <td>-52.703 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4794 GHz	-8.323 dBm				2	N	1	f	26.4836 GHz	-42.381 dBm				3	N	1	f	4.8483 GHz	-51.674 dBm				4	N	1	f	7.5545 GHz	-52.031 dBm				5	N	1	f	9.8964 GHz	-52.703 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4794 GHz	-8.323 dBm																																																		
2	N	1	f	26.4836 GHz	-42.381 dBm																																																		
3	N	1	f	4.8483 GHz	-51.674 dBm																																																		
4	N	1	f	7.5545 GHz	-52.031 dBm																																																		
5	N	1	f	9.8964 GHz	-52.703 dBm																																																		
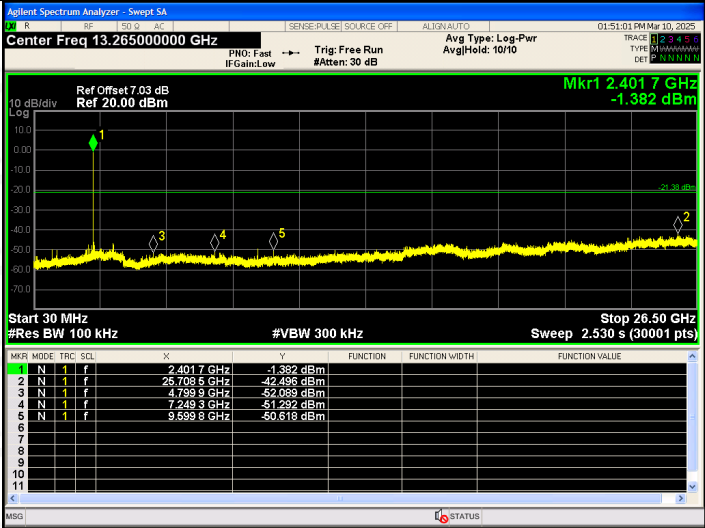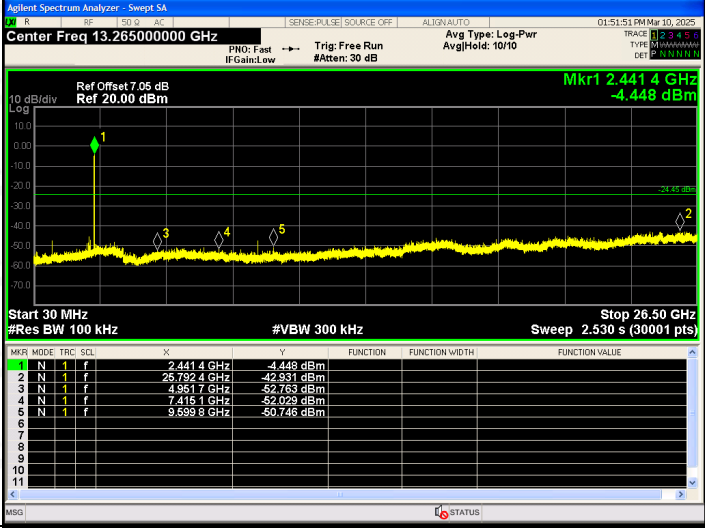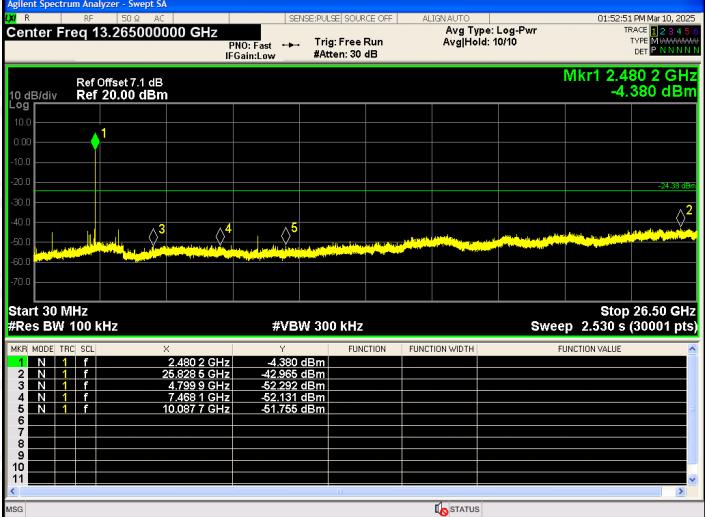
<p>8DPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td>-1.382 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.7085 GHz</td> <td>-42.486 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7299 GHz</td> <td>-52.029 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.2493 GHz</td> <td>-51.292 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6998 GHz</td> <td>-50.618 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	-1.382 dBm				2	N	1	f	26.7085 GHz	-42.486 dBm				3	N	1	f	4.7299 GHz	-52.029 dBm				4	N	1	f	7.2493 GHz	-51.292 dBm				5	N	1	f	9.6998 GHz	-50.618 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4017 GHz	-1.382 dBm																																																		
2	N	1	f	26.7085 GHz	-42.486 dBm																																																		
3	N	1	f	4.7299 GHz	-52.029 dBm																																																		
4	N	1	f	7.2493 GHz	-51.292 dBm																																																		
5	N	1	f	9.6998 GHz	-50.618 dBm																																																		
<p>8DPSK /MCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4414 GHz</td> <td>-4.448 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.7924 GHz</td> <td>-42.931 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8817 GHz</td> <td>-52.783 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4161 GHz</td> <td>-52.029 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6998 GHz</td> <td>-50.746 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz	-4.448 dBm				2	N	1	f	26.7924 GHz	-42.931 dBm				3	N	1	f	4.8817 GHz	-52.783 dBm				4	N	1	f	7.4161 GHz	-52.029 dBm				5	N	1	f	9.6998 GHz	-50.746 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4414 GHz	-4.448 dBm																																																		
2	N	1	f	26.7924 GHz	-42.931 dBm																																																		
3	N	1	f	4.8817 GHz	-52.783 dBm																																																		
4	N	1	f	7.4161 GHz	-52.029 dBm																																																		
5	N	1	f	9.6998 GHz	-50.746 dBm																																																		
<p>8DPSK /HCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-4.380 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.8285 GHz</td> <td>-42.965 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7989 GHz</td> <td>-52.232 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4831 GHz</td> <td>-52.151 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>10.0877 GHz</td> <td>-51.755 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-4.380 dBm				2	N	1	f	26.8285 GHz	-42.965 dBm				3	N	1	f	4.7989 GHz	-52.232 dBm				4	N	1	f	7.4831 GHz	-52.151 dBm				5	N	1	f	10.0877 GHz	-51.755 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4802 GHz	-4.380 dBm																																																		
2	N	1	f	26.8285 GHz	-42.965 dBm																																																		
3	N	1	f	4.7989 GHz	-52.232 dBm																																																		
4	N	1	f	7.4831 GHz	-52.151 dBm																																																		
5	N	1	f	10.0877 GHz	-51.755 dBm																																																		

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

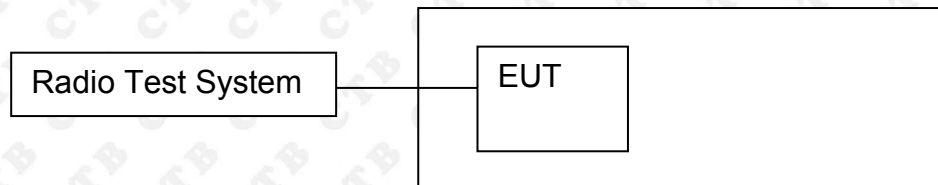

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.


9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.




9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	3.478	20.97	PASS
	MCH	0.925	20.97	PASS
	HCH	-2.542	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	3.445	20.97	PASS
	MCH	0.896	20.97	PASS
	HCH	-2.639	20.97	PASS
EDR mode (8DPSK)	LCH	3.428	20.97	PASS
	MCH	0.908	20.97	PASS
	HCH	-2.6	20.97	PASS

Test Graph:

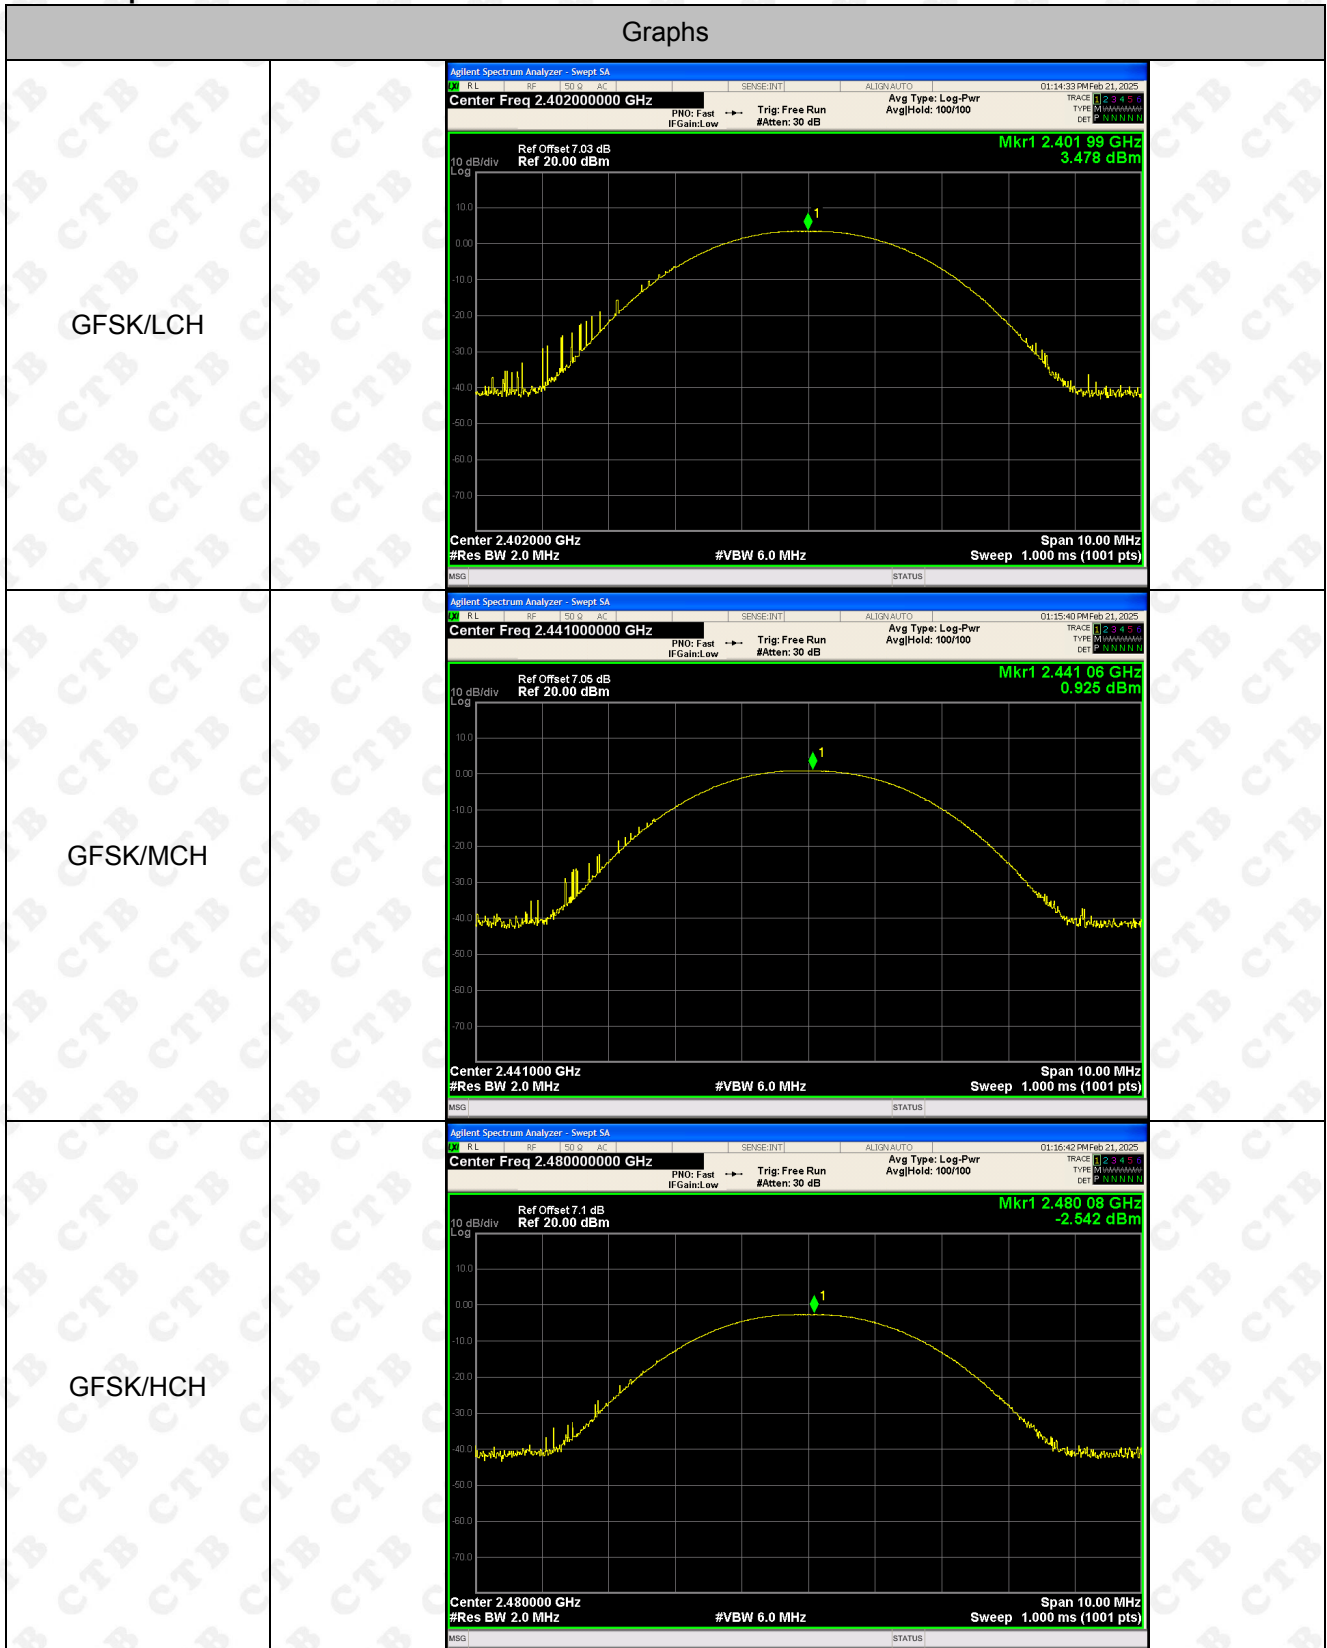


<p>$\pi/4$DQPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.40190 GHz 3.445 dBm #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
<p>$\pi/4$DQPSK/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.44100000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.44080 GHz 0.896 dBm #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
<p>$\pi/4$DQPSK/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.47983 GHz -2.639 dBm #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
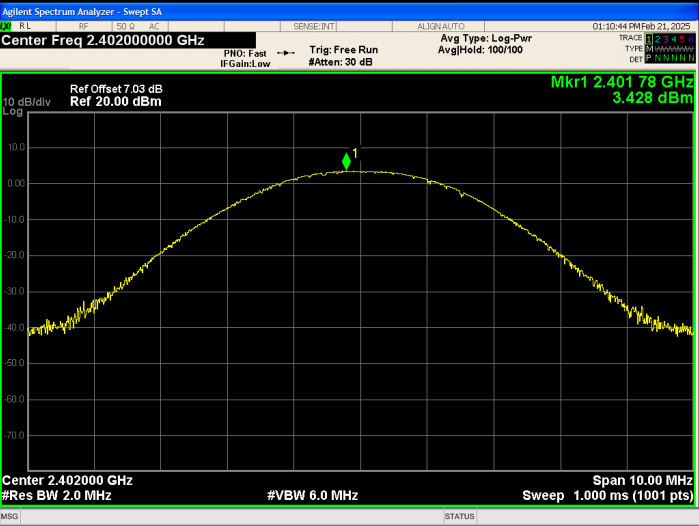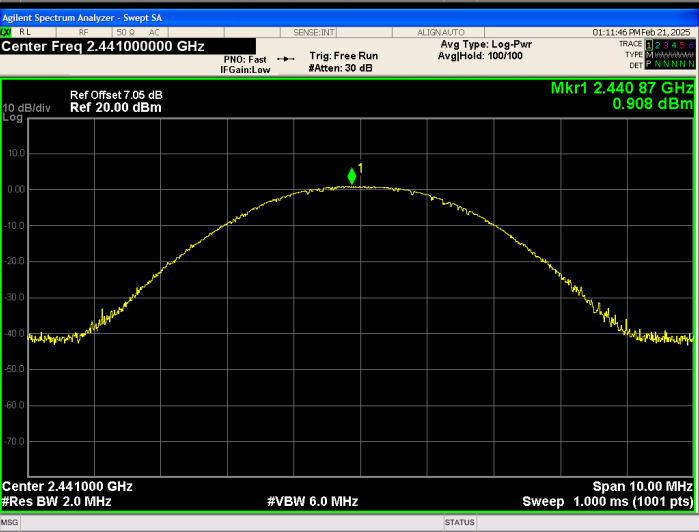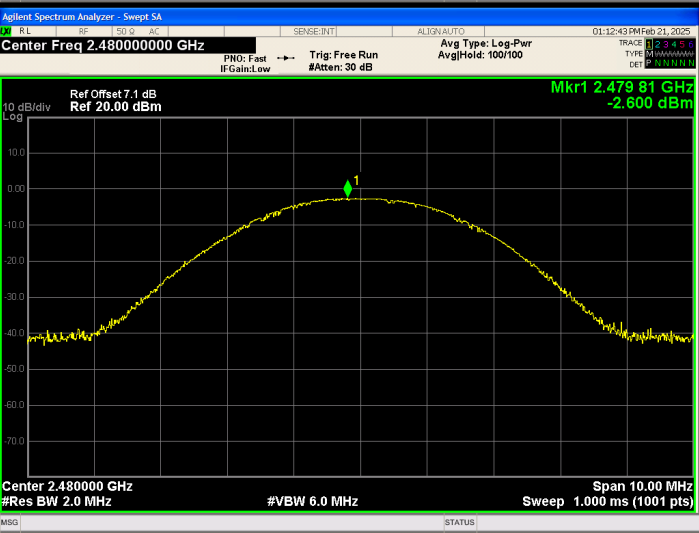
<p>8DPSK/LCH</p>		
<p>8DPSK /MCH</p>		
<p>8DPSK /HCH</p>		

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

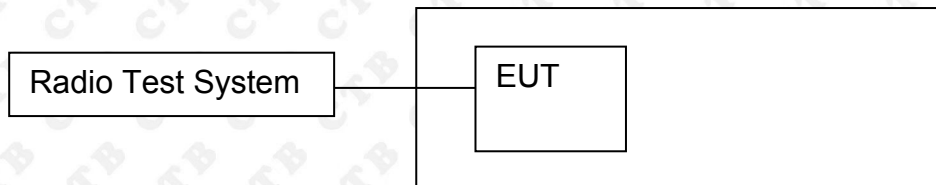

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	1.037	PASS
	Mid channel	1.025	PASS
	High channel	1.03	PASS
$\pi/4$ DQPSK	Low channel	1.295	PASS
	Mid channel	1.299	PASS
	High channel	1.291	PASS
8DPSK	Low channel	1.289	PASS
	Mid channel	1.289	PASS
	High channel	1.293	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:


<p>GFSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.40200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.03 dB</p> <p>Ref 27.03 dBm</p> <p>Mkr3 2.402506 GHz</p> <p>-19.814 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 928.22 kHz</p> <p>Total Power 9.32 dBm</p> <p>Transmit Freq Error -12.355 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.037 MHz</p> <p>x dB -20.00 dB</p>
<p>GFSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44100000 GHz</p> <p>Center Freq: 2.44100000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.05 dB</p> <p>Ref 27.05 dBm</p> <p>Mkr3 2.441494 GHz</p> <p>-21.650 dBm</p> <p>Center 2.441 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 921.20 kHz</p> <p>Total Power 6.63 dBm</p> <p>Transmit Freq Error -18.478 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.025 MHz</p> <p>x dB -20.00 dB</p>
<p>GFSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.48000000 GHz</p> <p>Center Freq: 2.48000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.1 dB</p> <p>Ref 27.10 dBm</p> <p>Mkr3 2.480495 GHz</p> <p>-25.499 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 922.57 kHz</p> <p>Total Power 3.01 dBm</p> <p>Transmit Freq Error -19.660 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.030 MHz</p> <p>x dB -20.00 dB</p>

<p>$\pi/4$-DQPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB</p> <p>Ref: 27.03 dBm</p> <p>Mkr3 2.402651 GHz</p> <p>-19.804 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>8.88 dBm</td> </tr> <tr> <td>1.2147 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>3.539 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>1.295 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	8.88 dBm	1.2147 MHz			Transmit Freq Error	OBW Power	99.00 %	3.539 kHz			x dB Bandwidth	x dB	-20.00 dB	1.295 MHz		
Occupied Bandwidth	Total Power	8.88 dBm																	
1.2147 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
3.539 kHz																			
x dB Bandwidth	x dB	-20.00 dB																	
1.295 MHz																			
<p>$\pi/4$-DQPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.05 dB</p> <p>Ref: 27.05 dBm</p> <p>Mkr3 2.44165 GHz</p> <p>-22.231 dBm</p> <p>Center 2.441 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.86 dBm</td> </tr> <tr> <td>1.2021 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>737 Hz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>1.299 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	5.86 dBm	1.2021 MHz			Transmit Freq Error	OBW Power	99.00 %	737 Hz			x dB Bandwidth	x dB	-20.00 dB	1.299 MHz		
Occupied Bandwidth	Total Power	5.86 dBm																	
1.2021 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
737 Hz																			
x dB Bandwidth	x dB	-20.00 dB																	
1.299 MHz																			
<p>$\pi/4$-DQPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.1 dB</p> <p>Ref: 27.10 dBm</p> <p>Mkr3 2.480646 GHz</p> <p>-26.220 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>2.86 dBm</td> </tr> <tr> <td>1.1886 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>448 Hz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>1.291 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	2.86 dBm	1.1886 MHz			Transmit Freq Error	OBW Power	99.00 %	448 Hz			x dB Bandwidth	x dB	-20.00 dB	1.291 MHz		
Occupied Bandwidth	Total Power	2.86 dBm																	
1.1886 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
448 Hz																			
x dB Bandwidth	x dB	-20.00 dB																	
1.291 MHz																			

<p>8DPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB</p> <p>Ref: 27.03 dBm</p> <p>Mkr3: 2.402639 GHz</p> <p>-19.583 dBm</p> <p>Center: 2.402 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.2137 MHz</p> <p>Total Power: 8.88 dBm</p> <p>Transmit Freq Error: -5.357 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.289 MHz</p> <p>x dB: -20.00 dB</p>
<p>8DPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.05 dB</p> <p>Ref: 27.05 dBm</p> <p>Mkr3: 2.441642 GHz</p> <p>-23.593 dBm</p> <p>Center: 2.441 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.2080 MHz</p> <p>Total Power: 6.14 dBm</p> <p>Transmit Freq Error: -2.718 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.289 MHz</p> <p>x dB: -20.00 dB</p>
<p>8DPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.1 dB</p> <p>Ref: 27.10 dBm</p> <p>Mkr3: 2.480635 GHz</p> <p>-27.352 dBm</p> <p>Center: 2.48 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.2154 MHz</p> <p>Total Power: 2.18 dBm</p> <p>Transmit Freq Error: -11.162 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.293 MHz</p> <p>x dB: -20.00 dB</p>

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

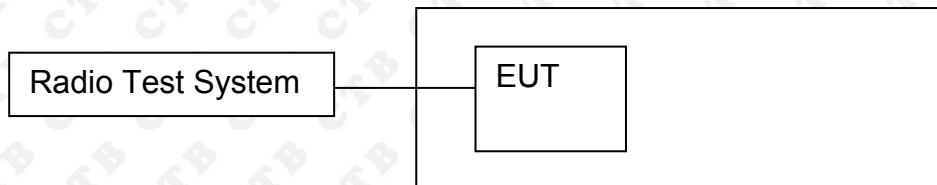

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.


11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 20kHz. VBW = 60kHz , Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	1.004	0.691	PASS
GFSK	MCH	0.998	0.683	PASS
GFSK	HCH	1.002	0.687	PASS
$\pi/4$ DQPSK	LCH	1.000	0.863	PASS
$\pi/4$ DQPSK	MCH	1.000	0.866	PASS
$\pi/4$ DQPSK	HCH	1.002	0.861	PASS
8DPSK	LCH	1.000	0.859	PASS
8DPSK	MCH	1.002	0.859	PASS
8DPSK	HCH	1.004	0.862	PASS

Test Graph

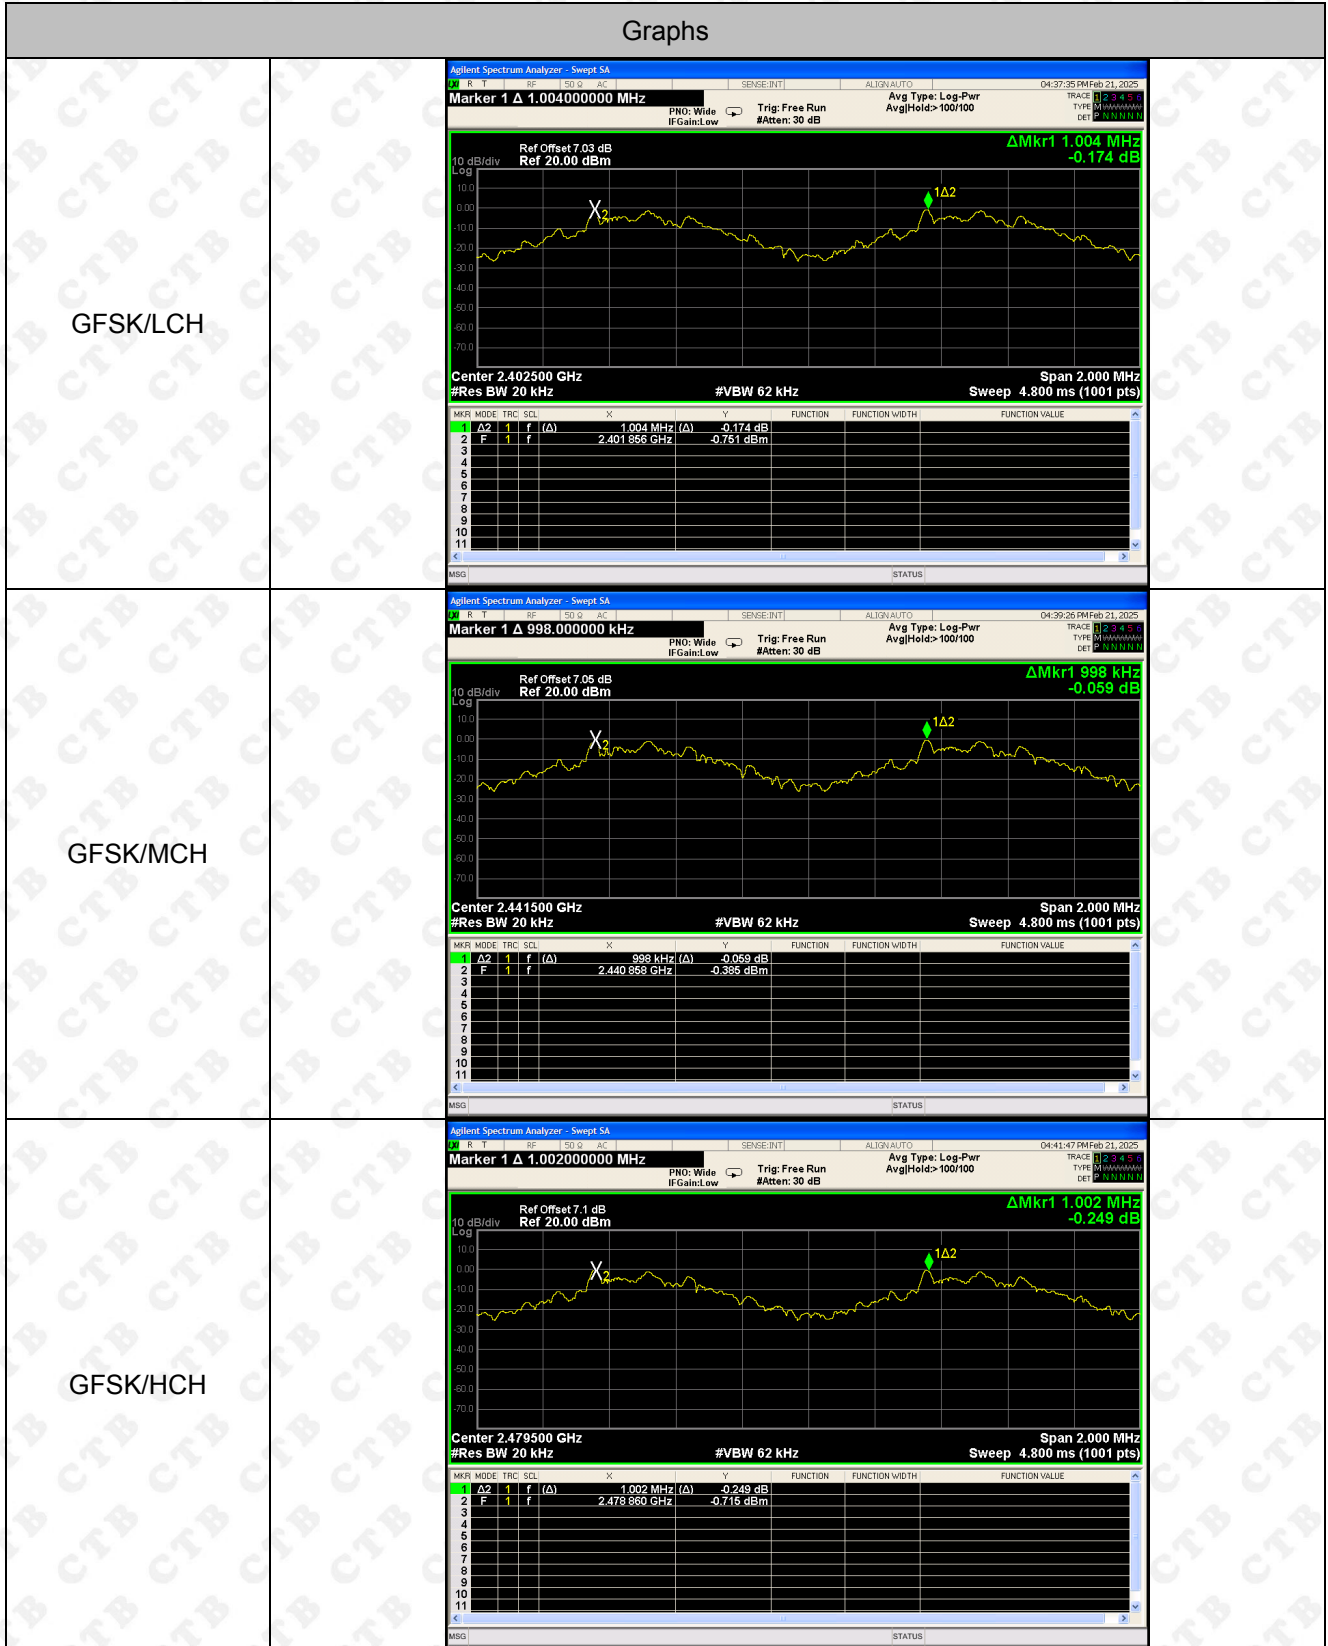


<p>$\pi/4$DQPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.000000000 MHz</p> <p>Ref Offset 7.03 dB Ref 20.00 dBm</p> <p>Center 2.402500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.000 MHz</td> <td>(A)</td> <td></td> <td>1.185 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.402 014 GHz</td> <td></td> <td></td> <td>-2.766 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	1.000 MHz	(A)		1.185 dB	2	F	1	f		2.402 014 GHz			-2.766 dBm	
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	A2	1	f	(A)	1.000 MHz	(A)		1.185 dB																					
2	F	1	f		2.402 014 GHz			-2.766 dBm																					
<p>$\pi/4$DQPSK/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.000000000 MHz</p> <p>Ref Offset 7.05 dB Ref 20.00 dBm</p> <p>Center 2.441500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.000 MHz</td> <td>(A)</td> <td></td> <td>-0.090 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.441 014 GHz</td> <td></td> <td></td> <td>-1.232 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	1.000 MHz	(A)		-0.090 dB	2	F	1	f		2.441 014 GHz			-1.232 dBm	
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	A2	1	f	(A)	1.000 MHz	(A)		-0.090 dB																					
2	F	1	f		2.441 014 GHz			-1.232 dBm																					
<p>$\pi/4$DQPSK/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.002000000 MHz</p> <p>Ref Offset 7.1 dB Ref 20.00 dBm</p> <p>Center 2.479500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.002 MHz</td> <td>(A)</td> <td></td> <td>0.103 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.479 014 GHz</td> <td></td> <td></td> <td>-1.821 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	1.002 MHz	(A)		0.103 dB	2	F	1	f		2.479 014 GHz			-1.821 dBm	
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	A2	1	f	(A)	1.002 MHz	(A)		0.103 dB																					
2	F	1	f		2.479 014 GHz			-1.821 dBm																					

<p>8DPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.00000000 MHz</p> <p>Ref Offset 7.03 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.000 MHz -0.844 dB</p> <p>Center 2.402500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.000 MHz</td> <td>(A)</td> <td></td> <td>-0.844 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.402 012 GHz</td> <td></td> <td></td> <td>-1.646 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	1.000 MHz	(A)		-0.844 dB	2	F	1	f		2.402 012 GHz			-1.646 dBm	
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	A2	1	f	(A)	1.000 MHz	(A)		-0.844 dB																					
2	F	1	f		2.402 012 GHz			-1.646 dBm																					
<p>8DPSK /MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.00200000 MHz</p> <p>Ref Offset 7.05 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.002 MHz 0.084 dB</p> <p>Center 2.441500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.002 MHz</td> <td>(A)</td> <td></td> <td>0.084 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.441 010 GHz</td> <td></td> <td></td> <td>-1.766 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	1.002 MHz	(A)		0.084 dB	2	F	1	f		2.441 010 GHz			-1.766 dBm	
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	A2	1	f	(A)	1.002 MHz	(A)		0.084 dB																					
2	F	1	f		2.441 010 GHz			-1.766 dBm																					
<p>8DPSK /HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.00400000 MHz</p> <p>Ref Offset 7.1 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.004 MHz -0.106 dB</p> <p>Center 2.479500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.004 MHz</td> <td>(A)</td> <td></td> <td>-0.106 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.479 014 GHz</td> <td></td> <td></td> <td>-2.002 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	1.004 MHz	(A)		-0.106 dB	2	F	1	f		2.479 014 GHz			-2.002 dBm	
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	A2	1	f	(A)	1.004 MHz	(A)		-0.106 dB																					
2	F	1	f		2.479 014 GHz			-2.002 dBm																					

12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

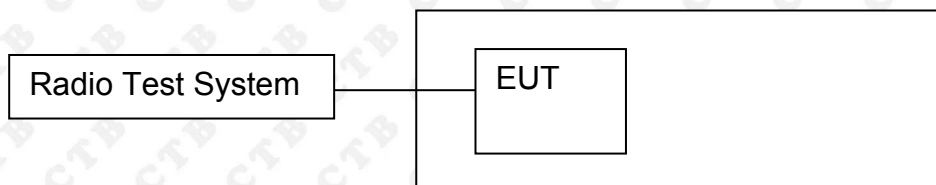

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


12.4 Test Result

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS
8DPSK	Hop	79	≥ 15	PASS


Test Graph

Graphs


GFSK/Hop

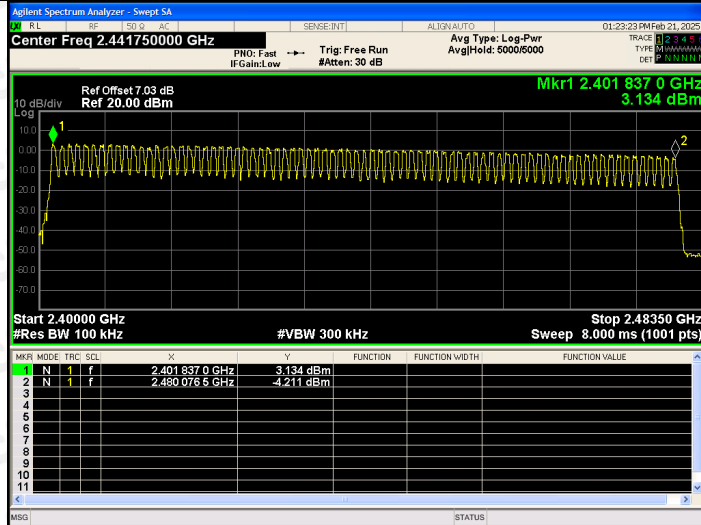

π /4DQPSK/Hop

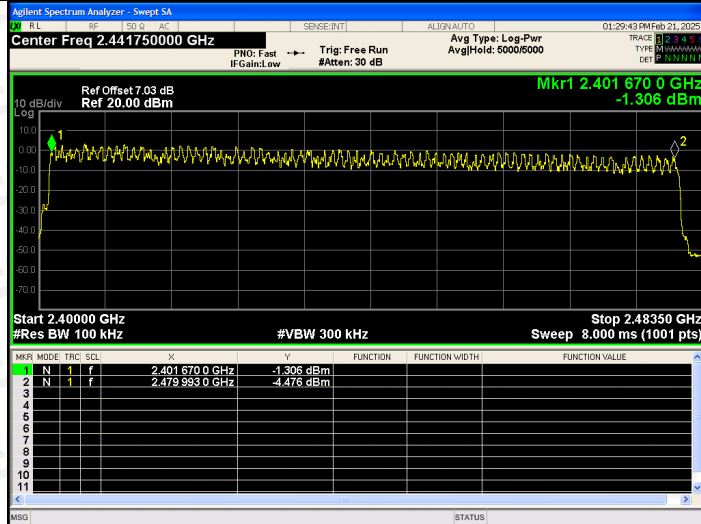


8DPSK/Hop

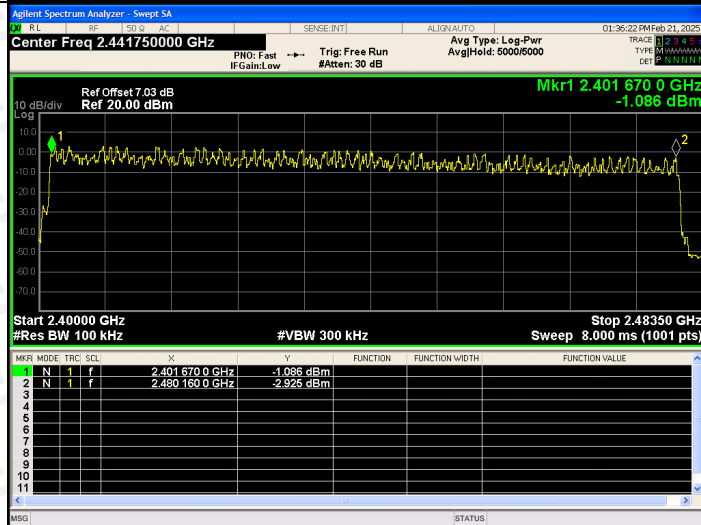

13. DWELL TIME

13.1 Block Diagram Of Test Setup

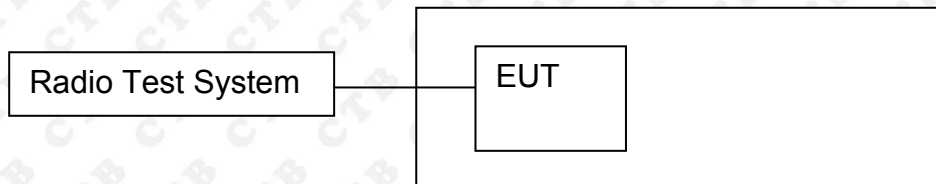

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz.Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.379	121.28	400	PASS
	DH1	MCH	0.38	121.6	400	PASS
	DH1	HCH	0.38	121.6	400	PASS
	DH3	LCH	1.639	262.24	400	PASS
	DH3	MCH	1.638	262.08	400	PASS
	DH3	HCH	1.638	262.08	400	PASS
	DH5	LCH	2.887	307.947	400	PASS
	DH5	MCH	2.887	307.947	400	PASS
	DH5	HCH	2.887	307.947	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


DH5: $1600/79/6*0.4*79*(MkrDelta)/1000$


DH3: $1600/79/4*0.4*79*(MkrDelta)/1000$

DH1: $1600/79/2*0.4*79*(MkrDelta)/1000$

Remark: Mkr Delta is once pulse time.

Test Graph

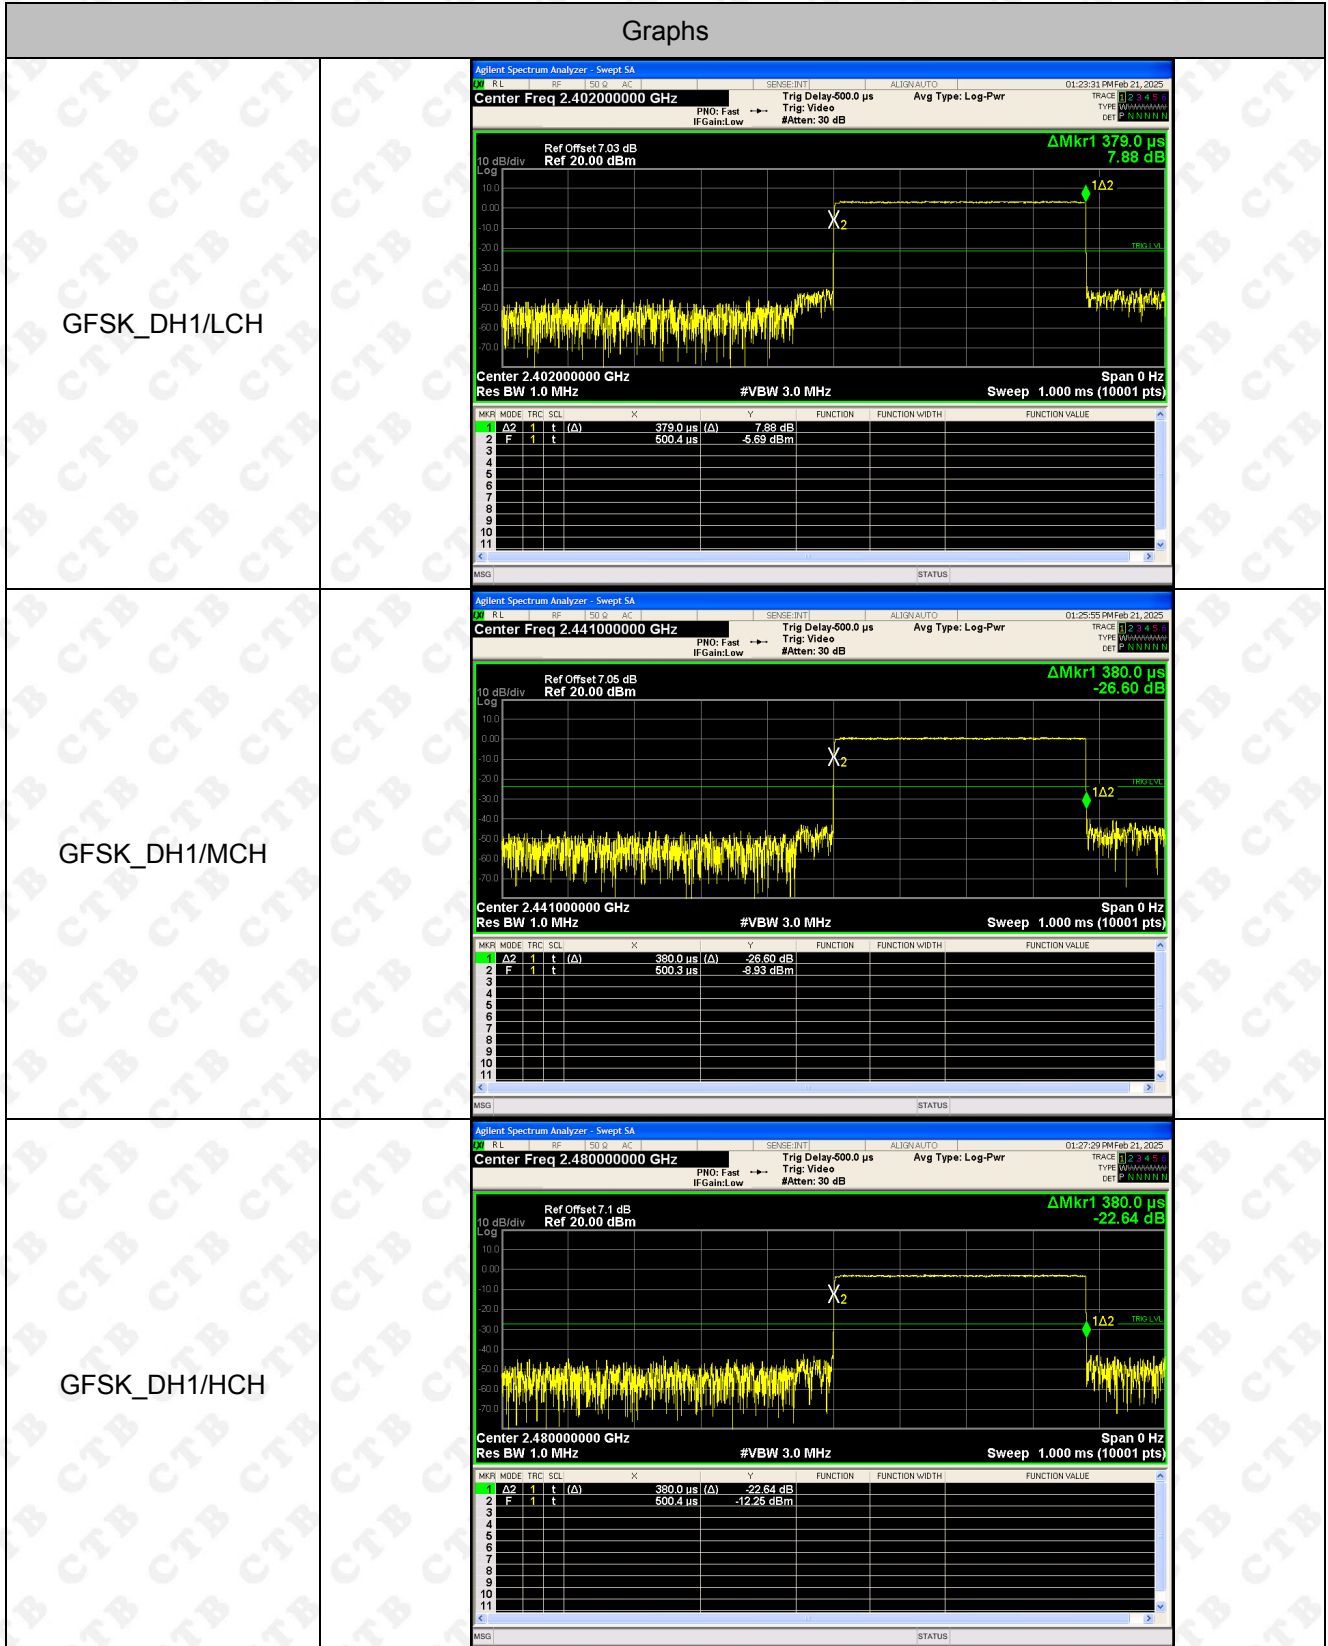

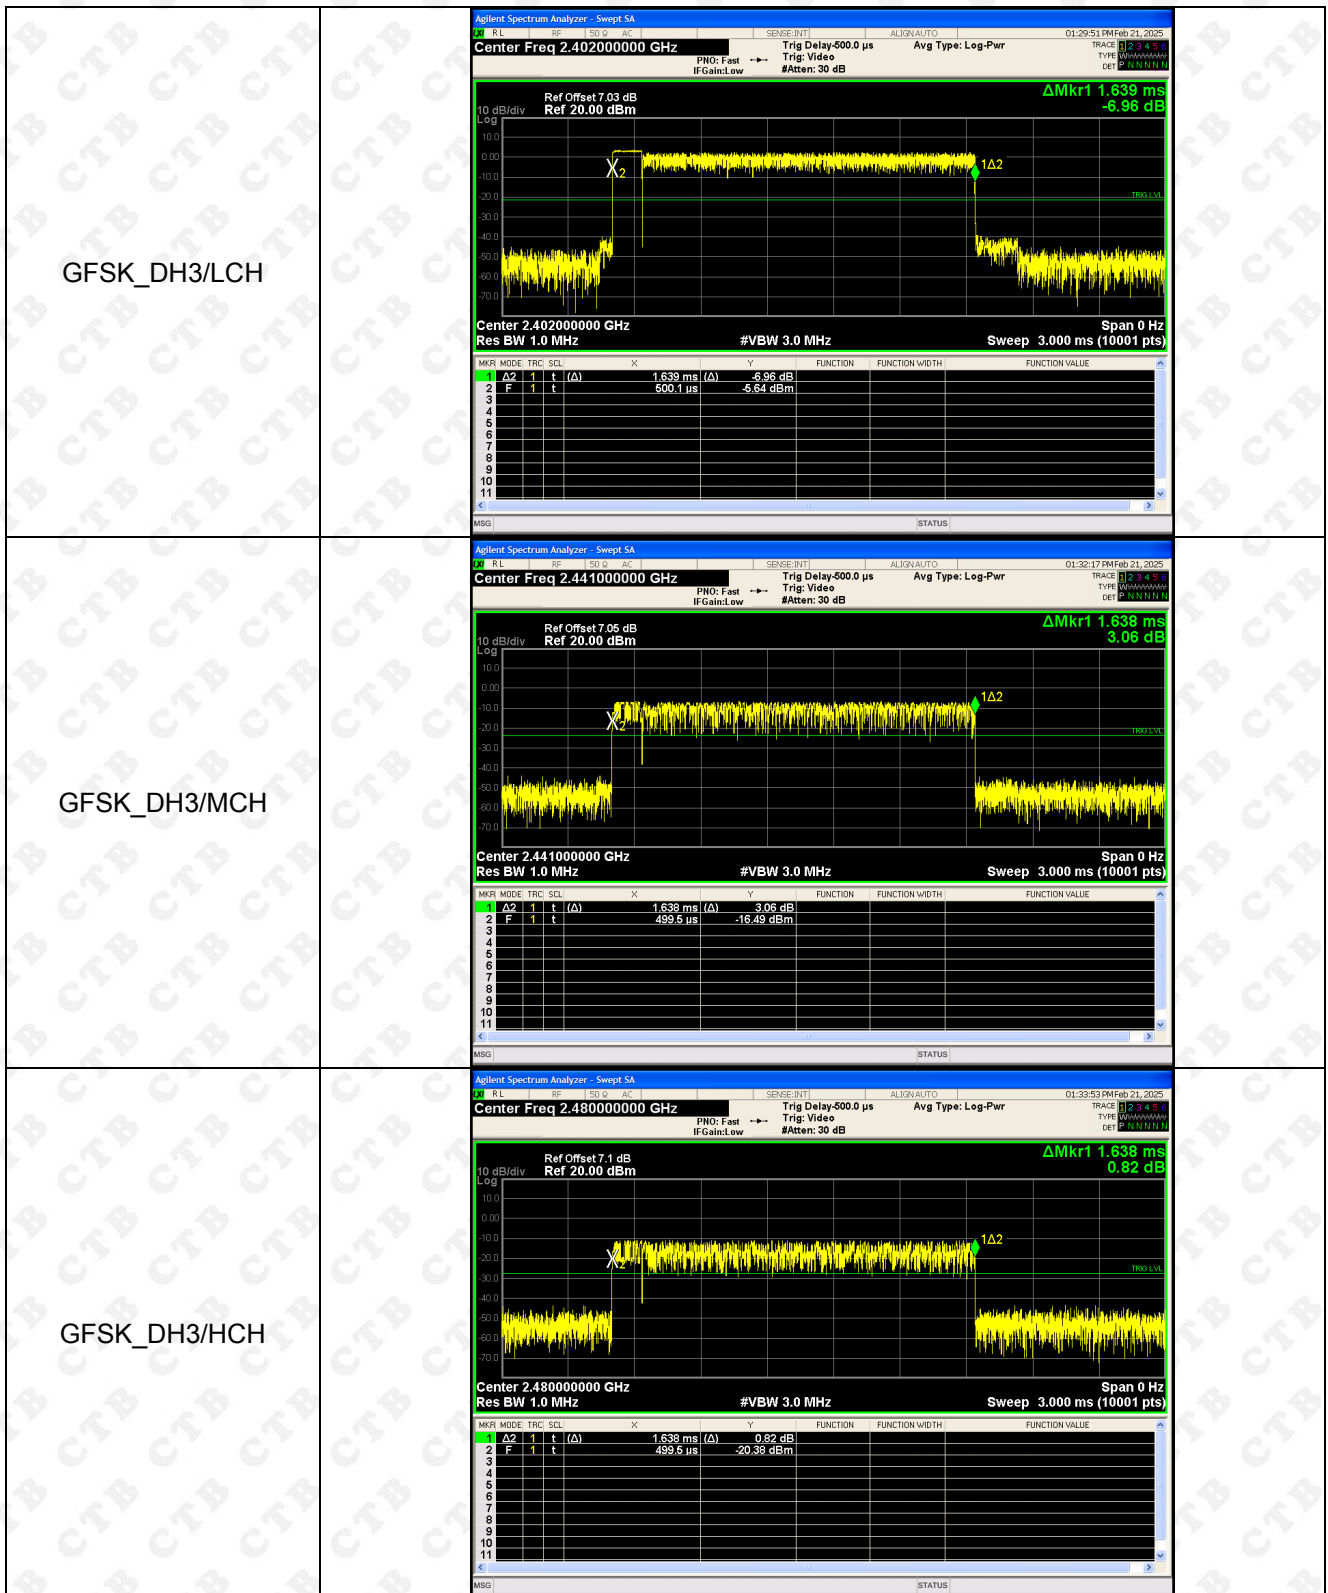

<p>GFSK_DH5/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 7.03 dB Ref 20.00 dBm</p> <p>Trig Delay 500.0 μs Trig: Video #Atten: 30 dB</p> <p>10 dB/div Log</p> <p>ΔMkr1 2.887 ms -9.20 dB</p> <p>Center 2.402000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>2.887 ms (A)</td> <td>-9.20 dB</td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.0 μs</td> <td>-11.42 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	2	A2	1	t	(A)	2.887 ms (A)	-9.20 dB			3	F	1	t		500.0 μ s	-11.42 dBm		
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
2	A2	1	t	(A)	2.887 ms (A)	-9.20 dB																						
3	F	1	t		500.0 μ s	-11.42 dBm																						
<p>GFSK_DH5/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.441000000 GHz</p> <p>Ref Offset 7.05 dB Ref 20.00 dBm</p> <p>Trig Delay 500.0 μs Trig: Video #Atten: 30 dB</p> <p>10 dB/div Log</p> <p>ΔMkr1 2.887 ms 3.72 dB</p> <p>Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>2.887 ms (A)</td> <td>3.72 dB</td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.0 μs</td> <td>-7.44 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	2	A2	1	t	(A)	2.887 ms (A)	3.72 dB			3	F	1	t		500.0 μ s	-7.44 dBm		
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
2	A2	1	t	(A)	2.887 ms (A)	3.72 dB																						
3	F	1	t		500.0 μ s	-7.44 dBm																						
<p>GFSK_DH5/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 7.1 dB Ref 20.00 dBm</p> <p>Trig Delay 500.0 μs Trig: Video #Atten: 30 dB</p> <p>10 dB/div Log</p> <p>ΔMkr1 2.887 ms 6.20 dB</p> <p>Center 2.480000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>2.887 ms (A)</td> <td>6.20 dB</td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>362.0 μs</td> <td>-12.47 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	2	A2	1	t	(A)	2.887 ms (A)	6.20 dB			3	F	1	t		362.0 μ s	-12.47 dBm		
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
2	A2	1	t	(A)	2.887 ms (A)	6.20 dB																						
3	F	1	t		362.0 μ s	-12.47 dBm																						

14. PSEUDORANDOM FREQUENCY

14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

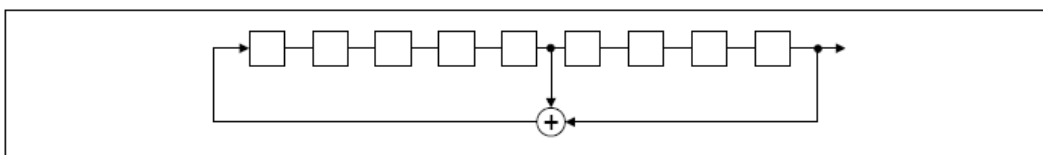

An example of Pseudorandom Frequency Hopping Sequence as follow:

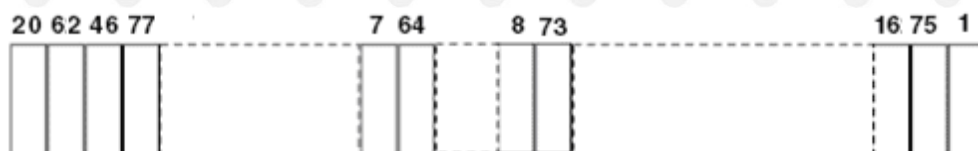

Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is PCB antenna. The best case gain of the antenna is 1.7dBi.


16. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission


Below 1G

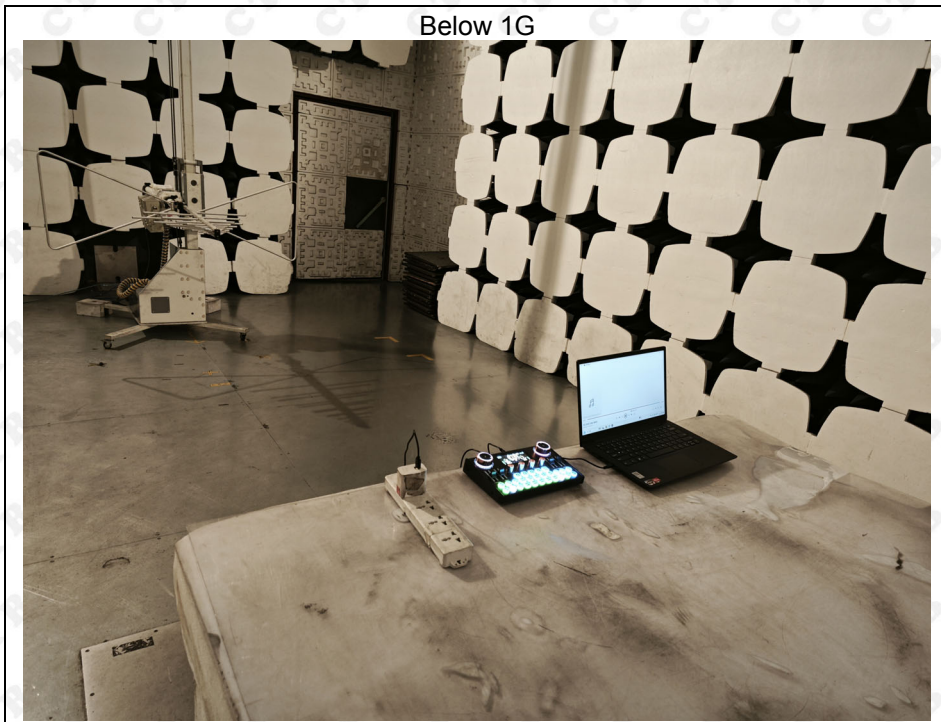

Above 1G

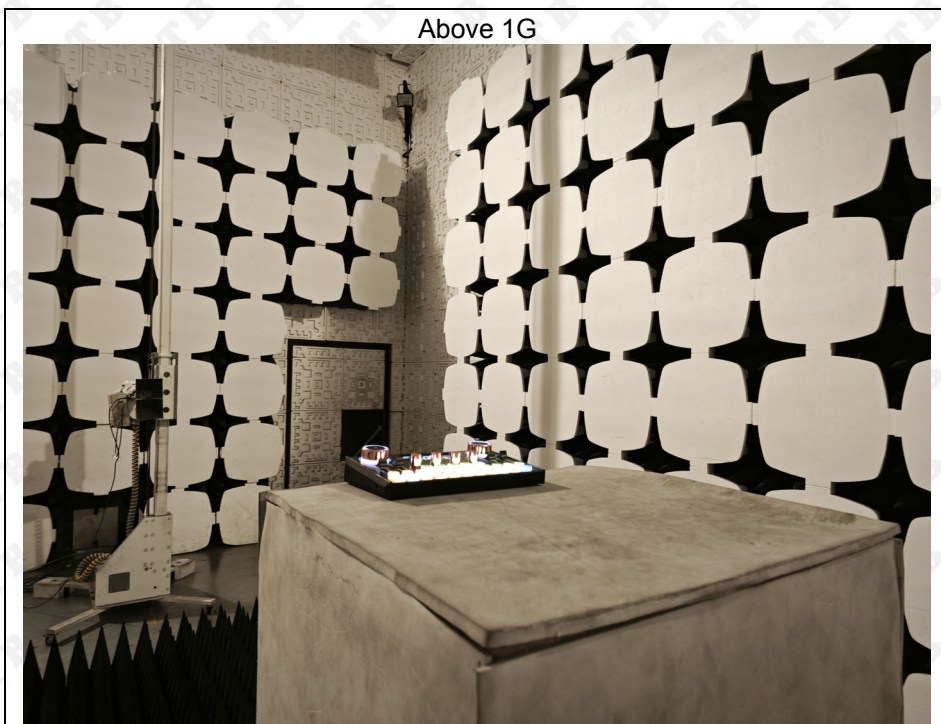

Conducted emissions

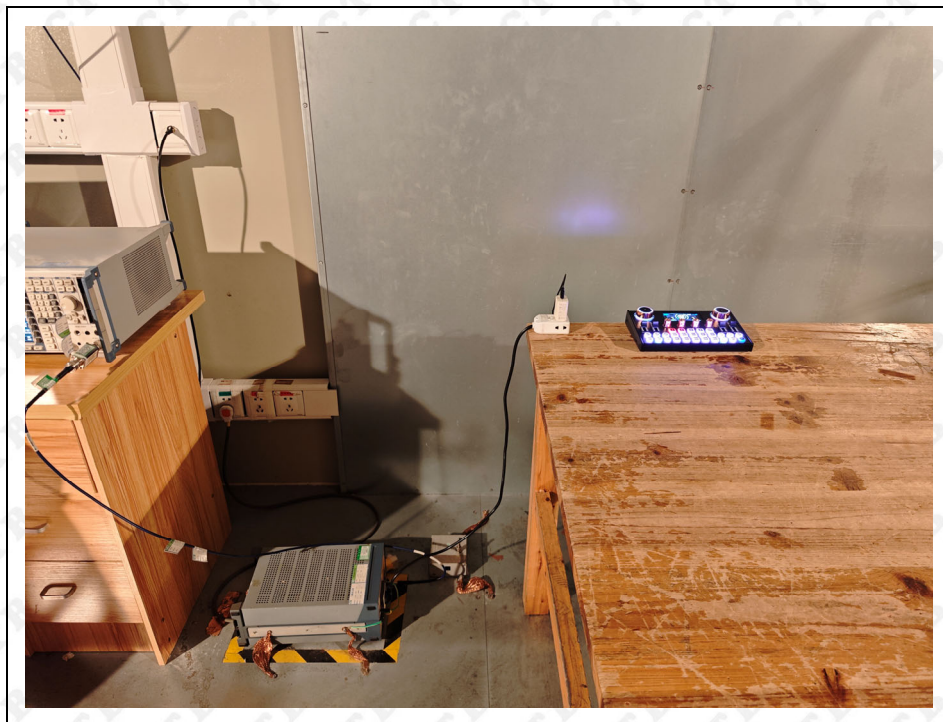

※※※※※ END OF REPORT ※※※※※