

A complete kitchen for your everyday essentials.

Introducing the new generation
of built-in appliances from Bosch.



BOSCH
Invented for life



Contents

2 Introduction

Ovens

4 Features Unique to Bosch

14 Buying Guide

15 Range Information

Hobs

24 Electric Hobs

25 Know your Hobs

27 Features Unique to Bosch

32 Range Information

34 Gas Hobs

37 Range Information

41 Domino Hobs

42 Range Information

Hoods

45 The Right Hood

47 Recirculation VS Ducted Systems

48 Features Unique to Bosch

50 Range Information

Bosch in every detail. German Engineered.

Every detail of every appliance has been carefully designed, produced and tested by our engineers to fully satisfy the highest standards in quality, performance and convenience. The result is cutting-edge technology, timeless design and remarkable ease of use, reducing the workload for you in the kitchen and consistently delivering perfect results.



Why choose Bosch?

Proven quality

Bosch appliances offer premium quality, advanced technology, ease of operation and outstanding German made and engineered technology. These attributes have earned us many national and international accolades, such as the reddot Design Award, the iF product design award and other endorsements, year after year.

Top performance

What drives us every day is our desire to improve. We strive to make the best even better, by developing functional, durable and energy-efficient innovations that surpass all expectations.

Maximum convenience

Bosch is dedicated to making your life easier. Our innovative built-in appliances are easy to use, while sophisticated features deliver the best results every time, saving you time and effort.



The Intuitive Control Ring:
Turn your dream dishes into
reality, easily.

Everything you need at hand: our intuitive control ring makes cooking easier than ever. With just a small turn of the stainless steel ring, you can adjust any of your oven's settings. The TFT-touch display, with its clear and straightforward design, guides you through the various menu options. This gives you full control over your dishes at all times and everything succeeds with ease.



Become a master chef, at the touch of a button.



Bosch Assist

You could easily search through cookbooks and family recipes without ever finding the exact temperature or cooking time for that favourite dish. Thanks to Bosch Assist, you don't have to.

The advanced sensor technology found in PerfectRoast and PerfectBake™ – combined with the functionality of automatic programs as we know them today – offers an extensive menu of food categories that help create your perfect meal.



PerfectBake™

No more guesswork needed while baking

Baking perfect bread and pastries typically involves careful setting of heating modes, temperatures baking times and constant monitoring. Baking enthusiasts can consider a Bosch oven with PerfectBake sensors that measure and regulate the baking process automatically.

Simply select Assist and the type of dish such as cake and press start, your oven will do the rest. The result: bread, cake and pastries baked to perfection.



PerfectRoast

Get the perfect roast without monitoring closely

Whether it's poultry, meat or fish – with the PerfectRoast meat probe, you'll get perfect results every time. Through 3 highly sensitive measuring points, the probe determines the core temperature of your roast to the exact degree and second, guaranteeing perfect roasting results.

Simply insert the meat probe into your roast and select type of dish such as poultry and press start, your oven will do the rest. Another benefit: you can also use the meat probe in the microwave and steam oven mode.



Steams so gently, even vitamins stay for dinner.

There is no healthier or tastier way to prepare food than in a Series 8 steamer or combination steam oven.

Preserving vitamins and minerals

Dishes that are cooked in hot steam not only retain their vitamins and minerals, but also their full, natural flavour. So you can go easy on the extra seasoning, and use much less salt when cooking.

No transfer of smell

With the Series 8 steamer, you can prepare an entire set menu using up to three levels at once. Salmon with asparagus and rosemary potatoes? Cook them all together and everything will turn out perfectly. Need to prepare dessert, too? Thanks to the moisture in the oven, there's no intermingling of flavours – each dish retains its own authentic flavour.



Other steam functions



Reheating

At 90 – 95°C, food is gradually reheated to taste as if it was freshly cooked.



Added steam function

Enhance your cooking results by adding a little bit of moisture from time to time, thanks to the added steam function. Whether you're reheating dishes, proving dough, baking or roasting, you can set the oven to automatically add bursts of steam, or you can add steam manually to regulate the intensity. Added steam works with: 4D Hotair, Hot air grilling, Top and bottom heating and Keep warm feature.



Drying Function

Drying option enables to dry the internal after steam usage.

The versatility of all in 1 solution.

With the Bosch Series 8 combination oven(s), you can do various types of cooking such as baking, steaming or microwaving.

For a combination steam oven, it combines the benefits of pure steam cooking and functions of a conventional oven which give your roasts and home-made bread a crispy finish.









You can also add speed to your traditional cooking process without comprising on taste while using the combination microwave ovens.



Bosch Combination ovens provide convenience and help achieve improved food results.






Perfect heating modes to meet your every cooking need.


Perfect baking and roasting not only requires the right temperature, but also the appropriate heating function, too. From 4D Hotair to Hotair Eco, Bosch ovens offer heating functions that deliver everything from haute cuisine to everyday feasts.

	What does it do?	Recommended for
 4D Hotair[^]	For baking and roasting on one or more levels. The fan distributes heat from the ring heating element in the back panel evenly around the cooking compartment. You can also bake and roast up to 4 different levels simultaneously.	Cakes and small baked items (Muffins, biscuits) 
 Hotair Eco	For energy-optimised cooking of selected dishes on one level without preheating. The fan distributes the energy-optimised heat from the ring heating element in the back wall evenly around the cooking compartment.	Cakes and small baked items (Muffins, biscuits) 
 Top and bottom heat Eco	This supports cooking on a single shelf for energy efficient cooking.	Cakes and bread 
 Intensive heat	Combines the top element with a more powerful bottom heating element that is perfect for crispy bases and baking in tins.	Tarts and savoury cakes 

	What does it do?	Recommended for
 Desiccation	For removing moisture from fruits, vegetables and herbs with maximum flavour retention.	Herbs, vegetables and fruits (Plums) 

	What does it do?	Recommended for
 Bottom heating	For cooking in a bain-marie (slow cooking) and for the final baking stage. Suitable for bakes that require crispy base without the top drying.	Pizza and pies 
 Pizza setting	For preparing pizza and dishes which require a lot of heat from underneath as well as providing moderate heat on the top of the dish.	Pizza and baguette

	What does it do?	Recommended for
 Hot air grilling*	For roasting. The grill element and fan switch on and off producing even and crisp roasting results.	Poultry, whole fish and larger pieces of meat 
 Full-width grill	For grilling flat items.	Steak and sausage and making toast 
 Half-width grill	For grilling small amounts of food where grilling a smaller surface area is required.	Small portion of steak, sausage and making toast
 Slow Cooking	For gentle and slow cooking of seared, tender pieces of meat in ovenware without a lid. The heat is emitted evenly from the top and bottom at low temperatures.	Poultry and other meats (Beef, pork, lamb) 
 Keeping warm*	Keeps cooked food warm.	Any cooked food 

	What does it do?
 Rapid heating	With rapid heating, you can shorten the heat-up time for selected heating functions, including 4D Hotair, Top and bottom heating and Intensive heat.

* Possible to use added steam for this type of heating (operation only possible when the water tank is full). [^]To cook on all four levels simultaneously, four wire racks are required for best results. For up to three levels, all accessories are suitable, ie. universal tray or baking tray. Features may vary depending on models. Please check individual product specifications.

At last, someone in the house who enjoys cleaning up.


Anyone who has ever cleaned an oven by hand knows how exhausting and time-consuming it can be. However, this chore is a thing of the past, thanks to our EcoClean Direct cleaning aid and pyrolytic self-cleaning function. You won't waste a minute on cleaning, leaving you more time to enjoy cooking.



Save time and energy with EcoClean Direct

While the oven bakes or roasts, the special direct coating of microfine ceramic particles on its interior walls absorbs grease and residue and breaks them down through oxidation. All you need to do is wipe the area without EcoClean Direct, saving you time and energy.

The coating of the Bosch EcoClean Direct panel regenerates each time you use the oven via heat and oxidation to minimise the effort required to maintain a clean oven interior.

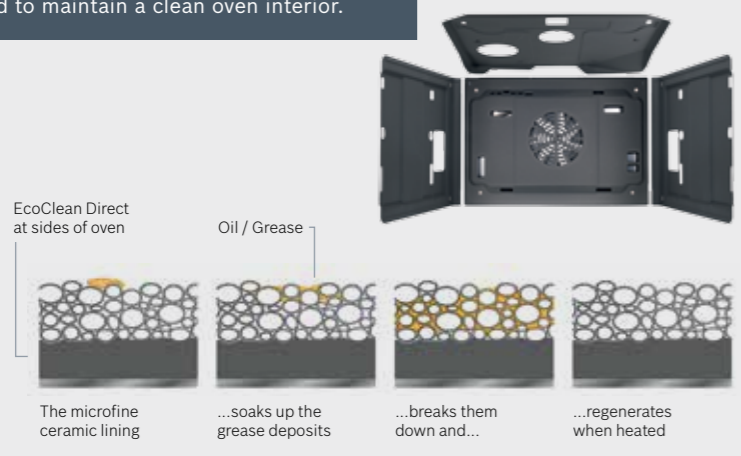






Remove stubborn stains effortlessly with Pyrolytic Cleaning

When you activate the pyrolytic cleaning function, the oven heats up to 465°C and burns off any burned-on grease and food residue. All that's left is a little ash that you can easily remove with a paper towel. And because the baking trays, racks and shelf rails are all pyrolytic-proof, you can leave them in the oven during cleaning.



Ovens that suit your every need.

Types of Cooks	Suitable Oven Models			Key Oven Functions and Features
	60cm	45cm	38cm	
 The Connoisseur: Cuisiniers on a Quest for Culinary Perfection	HNG6764S1A			<ul style="list-style-type: none"> PerfectBake and PerfectRoast Sensor Microwave Added Steam
 The Health Junkie: Nourishing Your Inner Wellness Warrior		CDG634BS1		<ul style="list-style-type: none"> Steamer
		CSG656RS2		<ul style="list-style-type: none"> Combination Steam PerfectBake and PerfectRoast Sensor
 The Avant-Garde: Innovation for the Progressive Experimentalis	HBG656RS1B			<ul style="list-style-type: none"> PerfectBake and PerfectRoast Sensor
	HSG636ES1			<ul style="list-style-type: none"> PerfectBake and PerfectRoast Sensor Full Steam
 The Busy Gourmet: Food Preparation Made Quick and Fuss-Free		CMG6633BS1B	BEL554MSOK	<ul style="list-style-type: none"> Microwave
 The DIY Chef: Autonomy for the Independent	HBF134BSOK			<ul style="list-style-type: none"> Conventional Oven
	HBF114BR0K			
	HBA5780S0B			
	HBG633BS1B			
	HBG635BB1J			
	HBG6753S1A			



HBG633BS1B
60cm | Stainless Steel Built-in Single Oven

Performance

- 10 Heating Methods:
 - 4D Hotair
 - Hotair Eco
 - Top and Bottom Heat
 - Top and Bottom Heat Eco
 - Hot Air Grilling
 - Full-width Grill
 - Half-width Grill
 - Pizza Setting
 - Bottom Heat
 - Defrost
- Energy Efficiency Class: A+

Cleaning Functions

- EcoClean Direct: Back Panel

Features

- Cavity: 71L
- TFT Color and Text Display with Touch Control Buttons
- Rapid Heating-up
- Temperature Range: 30°C – 300°C
- Softmove: Oven with Soft Closing & Opening

Safety Functions

- Childproof Lock
- Automatic Switch Off
- Maximum Window Temperature: 40°C
- 3 Layered Glass Door
- Integral Cooling Fan
- Residual Heat Indicator

Technical Information

- Total Connected Load: 2.99kW
- Voltage: 220 – 240V
- Power Frequency: 50 / 60Hz / 13A
- Cable Length: 1.2m
- Appliance Dimensions (H x W x D): 595 x 594 x 548mm
- Min. Cut Out Dimensions (H x W x D): 585 x 560 x 550mm



HBG635BB1J
60cm | Black Glass Design Built-in Single Oven

Performance

- 13 Heating Methods:
 - 4D Hotair
 - Hotair Eco
 - Top and Bottom Heat
 - Top and Bottom Heat Eco
 - Hot Air Grilling
 - Full-width Grill
 - Half-width Grill
 - Pizza Setting
 - Bottom Heat
 - Defrost
 - Slow Cooking
 - Preheating
 - Keep Warm
- Energy Efficiency Class: A+

Cleaning Functions

- EcoClean Direct: Back Panel

Features

- Cavity: 71L
- TFT Color and Text Display with Touch Control Buttons
- 10 Automatic Programs
- Rapid Heating-up
- Temperature Range: 30°C – 300°C
- Softmove: Oven with Soft Closing & Opening

Safety Functions

- Childproof Lock
- Automatic Switch Off
- Maximum Window Temperature: 40°C
- 3 Layered Glass Door
- Integral Cooling Fan
- Residual Heat Indicator

Technical Information

- Total Connected Load: 2.85kW
- Voltage: 220 – 230V
- Power Frequency: 50 / 60Hz / 13A
- Cable Length: 1.2m
- Appliance Dimensions (H x W x D): 595 x 594 x 548mm
- Min. Cut Out Dimensions (H x W x D): 585 x 560 x 550mm



HBG6753S1A

60cm | Stainless Steel Built-in Single Oven

Performance

- 13 Heating Methods:
 - 4D Hotair
 - Hotair Eco
 - Top and Bottom Heat
 - Top and Bottom Heat Eco
 - Hot Air Grilling
 - Full-width Grill
 - Half-width Grill
 - Pizza Setting
 - Bottom Heat
 - Defrost
 - Slow Cooking
 - Preheating
 - Keep Warm

• Energy Efficiency Class: A

Cleaning Functions

- Pyrolytic Self-cleaning Function
- Pyrolytic Proof Tray Holder and Baking Tray

Features

- Cavity: 71L
- TFT Color and Text Display with Touch Control Buttons
- 10 Automatic Programs
- Rapid Heating-up
- Temperature Range: 30°C – 300°C
- Softmove: Oven with Soft Closing & Opening

Safety Functions

- Childproof Lock
- Door Lock
(When is Off and During Pyrolytic Cleaning Only)
- Automatic Switch Off
- Maximum Window Temperature: 30°C
- 4 Layered Glass Door
- Integral Cooling Fan
- Residual Heat Indicator

Technical Information

- Total Connected Load: 3.60kW
- Voltage: 220 – 240V
- Power Frequency: 50 / 60Hz / 16A
- Direct Wiring
- Cable Length: 1.2m
- Appliance Dimensions (H x W x D): 595 x 594 x 548mm
- Min. Cut Out Dimensions (H x W x D): 585 x 560 x 550mm



HBG656RS1B

60cm | Stainless Steel Built-in Single Oven

Performance

- 13 Heating Methods:
 - 4D Hotair
 - Hotair Eco
 - Top and Bottom Heat
 - Top and Bottom Heat Eco
 - Hot Air Grilling
 - Full-width Grill
 - Half-width Grill
 - Pizza Setting
 - Bottom Heat
 - Defrost
 - Slow Cooking
 - Preheating
 - Keep Warm

• Energy Efficiency Class: A+

Cleaning Functions

- EcoClean Direct: Top, Side Liners and Back Panels

Features

- Cavity: 71L
- Assist Function (PerfectBake and PerfectRoast)
- TFT Color and Graphics Display with Direct Touch Function
- Rapid Heating-up
- Temperature Range: 30°C – 300°C
- Softmove: Oven with Soft Closing & Opening

Safety Functions

- Childproof Lock
- Automatic Switch Off
- Maximum Window Temperature: 40°C
- 3 Layered Glass Door
- Integral Cooling Fan
- Residual Heat Indicator

Technical Information

- Total Connected Load: 3.60kW
- Voltage: 220 – 240V
- Power Frequency: 50 / 60Hz / 16A
- Direct Wiring
- Cable Length: 1.2m
- Appliance Dimensions (H x W x D): 595 x 594 x 548mm
- Min. Cut Out Dimensions (H x W x D): 585 x 560 x 550mm



HSG636ES1

60cm | Stainless Steel Built-in Combination Steam Oven

Performance

- 12 Heating Methods:
 - 4D Hotair
 - Hotair Eco
 - Top and Bottom Heat
 - Top and Bottom Heat Eco
 - Hot Air Grilling
 - Full-width Grill
 - Half-width Grill
 - Pizza setting
 - Bottom heat
 - Slow cooking
 - Preheating
 - Keep warm

• Additional Heating Methods with Steam: Steam 100%, Regeneration, Fermentation, Defrost

• Additional Function: 10 mins Drying

• Energy Efficiency Class: A+

Cleaning Functions

- EcoClean Direct: Back Panel

Features

- Cavity: 71L; Water Tank Capacity: 1L
- Assist Function (PerfectBake and PerfectRoast)
- TFT Color and Graphics Display with Direct Touch Function
- Rapid Heating-up
- Temperature Range: 30°C – 250°C
- Softmove: Oven with Soft Closing & Opening

Safety Functions

- Childproof Lock
- Automatic Switch Off
- Maximum Window Temperature: 40°C
- 3 Layered Glass Door
- Integral Cooling Fan
- Residual Heat Indicator

Technical Information

- Total Connected Load: 3.6kW
- Voltage: 220 – 240V
- Power Frequency: 50 / 60Hz / 16A
- Direct Wiring
- Cable Length: 1.2m
- Appliance Dimensions (H x W x D): 595 x 594 x 548mm
- Min. Cut Out Dimensions (H x W x D): 585 x 560 x 550mm



HNG6764S1A

60cm | Stainless Steel Built-in Combination Microwave Oven with Added Steam

Performance

- 14 Heating Methods:
 - 4D Hotair
 - Hotair Eco
 - Top and Bottom Heat
 - Top and Bottom Heat Eco
 - Hot Air Grilling
 - Full-width Grill
 - Half-width Grill
 - Pizza Setting
 - Bottom Heat
 - Intensive Heat
 - Slow Cooking
 - Preheating
 - Keep Warm
 - Desiccation

• Additional Heating Methods with Steam: Regeneration, Fermentation

• Additional Heating Methods with Microwave: Microwave, Combi Microwave Variable

• Additional Function: 10 mins Drying

Features

- Cavity: 67L; Water Tank Capacity: 1L
- Assist Function (PerfectBake and PerfectRoast)
- TFT Color and Graphics Display with Direct Touch Function
- Rapid Heating-up
- Temperature Range: 30°C – 300°C
- Softmove: Oven with Soft Closing & Opening

Cleaning Functions

- Pyrolytic Self-cleaning Function
- Pyrolytic Proof Tray Holder and Baking Tray

Safety Functions

- Childproof Lock
- Door Lock
(When is Off and During Pyrolytic Cleaning Only)
- Automatic Switch Off
- Maximum Window Temperature: 30°C
- 4 Layered Glass Door
- Integral Cooling Fan
- Residual Heat Indicator

Technical Information

- Total Connected Load: 3.60kW
- Voltage: 220 – 240V
- Power Frequency: 50 / 60Hz / 16A
- Direct Wiring
- Cable Length: 1.2m
- Appliance Dimensions (H x W x D): 595 x 594 x 548mm
- Min. Cut Out Dimensions (H x W x D): 585 x 560 x 550mm

**CDG634BS1**45cm | Stainless Steel
Built-in Steamer**Performance**

- 4 heating methods:
 - Steam 100%
 - Regeneration
 - Fermentation
 - Defrost
- Additional function: 10 mins drying

Features

- Cavity: 38L; Water tank capacity: 1.3L
- 20 automatic programs
- TFT color and text display with touch control buttons
- Temperature range: 30°C – 100°C
- Softmove: oven with soft closing & opening

Safety Functions

- Childproof lock
- Automatic switch off
- Maximum window temperature: 40°C
- 3 layered glass door
- Integral cooling fan

Technical Information

- Total connected load: 1.9kW
- Voltage: 220 – 240V
- Power frequency: 50 / 60Hz / 10A
- Cable length: 1.2m
- Appliance dimensions (H x W x D): 455 x 595 x 548mm
- Min. cut out dimensions (H x W x D): 450 x 560 x 550mm

**CMG633BS1B**45cm | Stainless steel Built in Oven with
Microwave function**Performance**

- 6 Heating Methods:
 - 4D Hot Air
 - Hot Air-eco
 - Hot Air Grilling
 - Full Width Grill
 - Half Width Grill
 - Preheating
- Additional Heating Methods with Microwave: Microwave, Combi Microwave Constant

Cleaning Functions

- Easy Clean

Features

- Auto Pilot 14: 14 Preset Automatic Programmes
- 5 Microwave Power Settings (90W, 180W, 360W, 600W, 900W) with Inverter (MW)
- TFT Color and Graphics Display with Direct Touch Function
- Rapid Heating-up
- Softmove: Oven with Soft Closing & Opening

Safety Functions

- Childproof Lock
- Automatic Switch Off
- Maximum Window Temperature: 40°C
- 3 Layered Glass Door
- Integral Cooling Fan
- Residual Heat Indicator

Technical Information

- Total Connected Load: 3.6kW
- Voltage: 220 – 240V
- Power Frequency: 50 / 60Hz / 16A
- Direct Wiring
- Cable Length: 1.5m
- Appliance Dimensions (H x W x D): 455 x 594 x 548mm
- Min. Cut Out Dimensions (H x W x D): 450-455 x 560-568 x 550mm

**CSG656RS2**45cm | Stainless steel Built-in Combination
Steam Oven**Performance**

- 14 Heating Methods:
 - 4D Hot Air
 - Bottom Heat
 - Conventional Heat
 - Conventional Heat Eco
 - Desiccation
 - Hot Air-eco
 - Hot Air Grilling
 - Full Width Grill
 - Half Width Grill
 - Intensive Heat
 - Low Temperature Cooking
 - Pizza Setting
 - Pre-Heating
 - Warming

- Additional Heating Methods: Steam Regeneration, Fermentation, Defrost
- Energy Efficiency Class: A+

Cleaning Functions

- Eco Clean Direct: Top, Side Liners and Back Panel

Features

- Cavity: 47L; Water Tank Capacity: 1L
- Assist Function (Perfect Bake and Perfect Roast)
- TFT Color and Graphics Display with Direct Touch Function
- Rapid Heating-Up
- Softmove: Oven with Soft Closing and Opening

Safety Functions

- Childproof Lock
- Automatic Switch Off
- Maximum Window Temperature: 40°C
- 3 Layered Glass Door
- Integral Cooling Fan
- Residual Heat Indicator

Technical Information

- Total Connected Load: 3.3kW
- Voltage: 220-240V
- Power Frequency: 50Hz/ 60Hz/ 16A
- Direct Wiring
- Cable Length: 1.5m
- Appliance Dimensions (H x W x D): 455 x 594 x 548mm
- Min. Cut Out Dimensions (H x W X D): 450-455 x 560-568 x 550mm

**BIC630NS1B**14cm | Stainless Steel
Warming Drawer**Performance**

- Stepless Temperature Control for 40°C – 80°C
- Maximum Loading Espresso Cups: 64 pieces
- Maximum Loading Plates: 12 pieces

Features

- Cavity: 20L
- Dough Proving
- Thawing Foods
- Keeping Drinks and Food Warm
- Pre-heating Utensils
- Low Temperature Cooking

Safety Functions

- Loading up to 25kg
- Telescopic Pull-out Drawer
- Cool Door
- Operating Indicator Light

Technical Information

- Total Connected Load: 0.81kW
- Voltage: 220 – 240V
- Power Frequency: 50 /60Hz / 10A
- Cable Length: 1.5m
- Appliance Dimensions (H x W x D): 140 x 594 x 548mm
- Min. Cut Out Dimensions (H x W x D): 140 x 560 x 550mm



CTL636ES1

45cm | Stainless Steel Fully Automatic Espresso Maker / Fully Automatic Coffee Machine

Beverages

- One-touch preparation: Ristretto, Espresso, Espresso Macchiato, Coffee, Cappuccino, Latte Macchiato, Caffe Latte
- MyCoffee Feature: Save 8 Favourite Beverages with Individual Names and Adjustable Mixing Ratio of Milk and Espresso
- Coffee Outlet and Milk Frother Height-adjustable: Up to 15 cm High Latte Macchiato Glasses fit Underneath
- IndividualCup Volume: Cup Sizes Adjustable Individually
- OneTouch DoubleCup: Prepare Two Cups Simultaneously for all Coffee and Milk Specialties

Features

- Water Tank Capacity: 2.4L
- Unique SensoFlow Heating System Guarantees Highest Espresso Indulgence with Every Cup with its Ideal, Constant Brewing Temperature
- AromaDouble Shot Prepares Extra-strong Coffee with Less Bitterness and Full Aroma
- CoffeeSensor Pro: The Grinding Unit Automatically Adjusts to Bean Variety
- One Touch Function for Drinks with Milk

Convenience

- Intuitive Control Ring
- TFT Display with Interactive Menu
- Early Warning if Water Tank or Bean Container is almost Empty
- Flexible Milk Solution: Connects the Provided Milk Container or using any other Container, e.g. a Milk Carton

Hygiene

- Removable Brewing Unit: Easy and Hygienic Cleaning under Running Water
- AutoMilk Clean: Fully-automatic Steam Cleaning of the Milk System after every Beverage
- Milk Frother Removable and Dishwasher-proof
- SinglePortion Cleaning: Complete Emptying of all Pipes after each Brewing Process
- Automatic Rinsing Program When Switching Off, Switching On
- Removable and Dishwasher Proof Drip Tray and Coffee Grounds Container
- Automatic Cleaning and Descaling Programme
- Reminds in Time of Water Filter Change, Descaling, Cleaning; Including Display of Remaining Cups

Additional Features

- Concealed Accessories Storage
- Bean Container with Aroma Protection Lid (500g volume)
- Illuminated Coffee Outlet
- Grinding Fineness Adjustable (Multi-level)
- Childproof Lock

Technical Information

- Connection Rating: 1.6kW
- Voltage: 220 – 240V
- Power Frequency: 50 / 60Hz / 13A
- Cable Length: 1.7m
- Appliance Dimensions (H x W x D): 455 x 594 x 375mm
- Min. Cut Out Dimensions (H x W x D): 449 x 558 x 356mm



BEL554MS0K

38cm | Stainless Steel Built-in Microwave Oven with Grill

Performance

- 3 Cooking Methods:
 - Microwave
 - Grill
 - Combined Operation
- 8 Auto Programs
- 1 Memory Function

Features

- Cavity: 25L
- 900W Microwave
- 5 Settings: 90W, 180W, 360W, 600W, 900W
- Automatic Switch Off
- Door Contact Switch

Technical Information

- Total Connected Load: 1.45kW
- Voltage: 230 – 240V
- Power Frequency: 50Hz / 10A
- Cable Length: 1.5m
- Appliance Dimensions (H x W x D): 382 x 594 x 388mm
- Min. Cut Out Dimensions (H x W x D): 380–382 x 560–568 x 550mm



HBA5780S0B

60cm | Stainless Steel Built-in Single Oven

Performance

- 10 Heating Methods:

- 3D Hot Air	- Full Width Grill
- Conventional Heat	- Hot Air Grilling
- Bottom Heat	- Pizza Setting
- Hot Air Gentle	- Defrost
- Low Temperature Cooking	- Keep Warm

- Energy Efficiency Class: A

Cleaning Functions

- Pyrolytic Self Cleaning Function

Features

- Cavity: 71L
- Rapid Heating Up
- AutoPilot 30

Safety Functions

- Childproof Lock
- Maximum Window Temperature: 30 °C
- 4 Layered Glass Door
- Integral Cooling Fan

Technical Information

- Total Connected Load: 2.99kW
- Voltage: 220-240V
- Power Frequency: 50 / 60Hz / 13A
- Direct Wiring
- Cable Length: 1.2m
- Appliance Dimensions (H x W x D): 595 x 594 x 548 mm
- Min. Cut Out Dimensions (H x W x D): 585 x 560 x 550 mm



HBF114BR0K

60cm | Stainless Steel
Built-in Single Oven

Performance

- 7 Heating Methods:
 - 3D Hotair
 - Top and Bottom Heat
 - Bottom Heat
 - Gentle Hot Air
 - Full Width Variable Grill
 - Hot Air Grilling
 - Pizza Setting

- Energy Efficiency Class: A

Cleaning Functions

- GranitEnamel – Easy to Clean Interior

Features

- Cavity: 66L
- Rapid Heating Up

Safety Functions

- Childproof Lock
- Maximum Window Temperature: 50 °C
- 3 Layered Glass Door
- Integral Cooling Fan

Technical Information

- Total Connected load: 2.95kW
- Voltage: 220-240V
- Power Frequency: 50 / 60Hz/ 13A
- Cable Length: 2.0m
- Appliance Dimensions (H x W x D):
595 x 594 x 548 mm
- Min. Cut Out Dimensions (H x W X D):
575-597 x 560-568 x 550mm

Accessories

- 1 x Combination Grid
- 1 x Universal Pan



HBF134BS0K

60cm | Stainless Steel
Built-in Oven

Performance

- 7 Heating Methods:
 - 3D Hot Air
 - Top and Bottom Heat
 - Bottom Heat
 - Gentle Hot Air
 - Full Width Variable Grill
 - Hot Air Grilling
 - Pizza Setting

- Energy efficiency class: A

Cleaning Functions

- Eco Clean Direct Coating – Back Panel

Features

- Cavity: 66L
- Rapid Heating Up
- Retractable Knobs

Safety Functions

- Childproof Lock
- Maximum Window Temperature: 50 °C
- 3 Layered Glass Door


Technical Information

- Total Connected Load: 2.95kW
- Voltage: 220-240V
- Power Frequency: 50Hz/ 60Hz/ 13A
- Cable Length: 2.0m
- Appliance Dimensions (H x W x D):
595 x 594 x 548 mm
- Min. Cut Out Dimensions (H x W X D):
575-597 x 560-568 x 550mm

Accessories

- 1 x Enamel Baking Tray
- 1 x Combination Grid
- 1 x Universal Pan

Accessories

Description		
	00740766	Inlaid wire shelf for universal pan Wire shelf fits into universal pan for grilling applications. Universal pan and wire shelf can be removed together. Suits all Bosch ovens except CDG634BS1.
	00577535	Baking stone Ceramic baking stone and wooden paddle. Ideal when baking bread, unleavened bread, pizza and frozen food dishes. Pyrolysis compatible with pyrolytic ovens. Suits all Bosch ovens except CDG634BS1.
	11029050	Baking tray Enamelled baking tray for cakes, biscuits, rolls and bread. Easy to clean. Pyrolysis compatible with pyrolytic ovens. Suits all Bosch ovens except CDG634BS1.
	17002738	Professional pan, enamelled Extra deep, large enamelled pan with wire shelf insert. Best suitable for large roasts and ideal for automatic programmes when used with the fitting lid. Pyrolysis compatible with pyrolytic ovens. Suits all Bosch ovens except CDG634BS1.
	00577170	Baking and roasting grid (standard) Wire rack to accomodate all dishes in forms like baking tins, ceramic and glass roasting dishes. Suits all Bosch ovens except HSG636ES1, HMG656RS1, HNG6764S1A, CDG634BS1, CSG656RS1, CNG6764S1B.
	00577551	Steam container, punched, size XL For steaming vegetables, fish and meat. For larger amount of food. Suits all Bosch Ovens except for HBG633BS1J, HBG635BB1J, HBG635BW1J, HBG6753S1A, HBG656RS1B, HMG656RS1, HNG6764S1A, CDG634BS1, CNG6764S1B.
	11029049	Multipurpose pan, enamelled Deep enamelled pan for juicy fruit cakes, pizza, large roasts, casseroles and bakes. Can be used to hold any residual fat during grilling. Easy to clean. Suits all Bosch Ovens except for CDG634BS1.
	00575760	Glass tray Special glass dish for roasting and bakes. Easy to clean and hygenic. Suits all Bosch Ovens except for HBG635BB1J, HBG635BW1J, HMG656RS1, HNG6764S1A, CNG6764S1B.
	00577328	3 level telescopic shelf rails Replacement for shelf support with three telescopic rails on three levels, fully extendable. Suits all Bosch Ovens except for HBG6753S1A, HBG656RS1B, HSG636ES1, HMG656RS1, HNG6764S1A, CDG634BS1, CSG656RS1, CNG6764S1B.

* Accessories order will be on indent basis.




The world of Bosch electric hobs.

There is a wide range of induction and radiant hobs to choose from. As you would expect from Bosch, all are made using high-quality materials, are easy to use and add versatility, style and elegance to any kitchen.



Know your hobs.

3 main types of hobs to choose from based on heating methods.

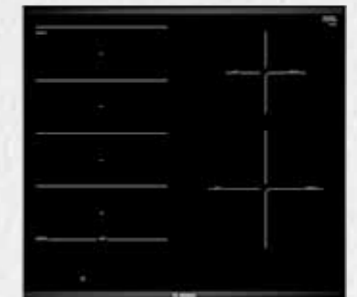

	Gas Hobs	Radiant Hobs	Induction Hobs
Cooks by	Direct flame	A heating element under ceramic glass	Heat is generated in the cooking vessel directly through induction
Ease of cleaning	✓	✓✓	✓✓✓
Intelligent features	✓	✓✓✓	✓✓✓
Safety features	✓	✓✓	✓✓✓
Best for	Wok-hei taste / General cooking	General cooking	Fast cooking with superior control and energy efficiency

Why induction?

Bring 2 litres of water to a boil in just 4.7 minutes. Our PowerBoost function can increase the power output to a selected cooking zone by approximately 50%. Saving you precious time.




Why is it so fast, so easy to clean and safe?

Induction Hobs are easier to clean than traditional hobs, because the ceramic glass doesn't get as hot. Any spillages can be quickly and easily wiped away.


With an Induction Hob, micro-currents are generated in the bottom of the pot. Consequently, heat is only created when the pan is connected to the hob – heating will stop as soon as it's removed, which means it's far safer than cooking with traditional hobs.

DID YOU KNOW ?


Time (in minutes) for heating 2 litres of water from 15°C to 90°C




Radiant



Gas



Induction



Induction with PowerBoost

Multiple heating zones. 17 cooking levels. Endless possibilities.

Bosch FlexInduction is the result of decades of research and development. At last, practical, hi-tech appliances that escape the confines of traditional cooktops. Here is freedom in the kitchen.

What is FlexInduction?

Ideal for small pots, large pots, multiple pans, frying pans or cassarole dishes, the system allows you to control pots and pans separately, offering increased flexibility.



Combi Induction hobs

Consists of FlexInduction Zone and standard induction zones.

Our Combi Induction hobs feature one large rectangular cooking zone, ideal for any cooking needs. A flick of a switch, 2 induction zones become one large induction surface. You can also consider converting the FlexInduction zone to a Teppanyaki cooking area by adding a Teppanyaki plate.




Additional feature for Combi Induction hobs – MoveMode*

When your recipe requires you to switch from boil to simmer at just the right moment, MoveMode is there when you need it.

Switch from level 9 to level 1 by simply sliding your pot. MoveMode lets you move seamlessly from your first high-powered cooking task to the next, without a hiccup, and always in control.

*Applicable to selected models. Default setting is based on factory setting.

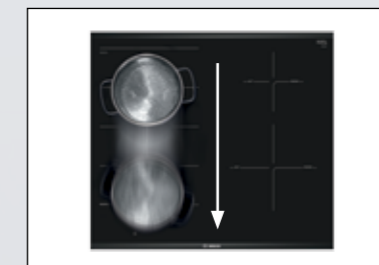

Set to the perfect level. Cooked to the perfect consistency.

The right temperature is crucial for successful frying. The PerfectFry sensor automatically monitors the frying temperature and adjusts it as required to ensure perfectly-fried dishes. Say goodbye to burnt food and hello to perfection.



Perfectly frying food starts with getting the temperature right for the oil. Different types of oil have different smoke points and without exact temperature management, food can be burnt easily. PerfectFry shows you when the ideal temperature for adding the oil to the pan has been reached.

Achieving perfect results with the 5 PerfectFry temperature levels:



1

Very low
Ideal for boiling down sauces



2

Low
Suitable for frying with virgin olive oil, or for frying omelettes



3

Medium-low
Perfect for frying fish, meatballs or sausages



4

Medium-high
Perfect for frying steak (medium or well done), ragout or vegetables



5

High
Perfect for frying potatoes or rare steaks

Electric hobs. Features and Benefits.

Performance



Quality ceramic top

High quality and durable ceramic top that can withstand heat up to 700°C.



17-stage power setting

Enjoy total control on every recipe with 17-stage power settings. This function allows cooking zones to be set in increments of 0.5 (eg. 0.5, 1, 1.5, 2...9).



Automatic pan recognition

The automatic pan recognition function allows our induction hobs to identify the size of the pan and only heats up the base of the pan, not the entire zone, saving time and energy.



PowerBoost

With PowerBoost, the power level of your induction hobs is increased to help you give that little extra boost when cooking. This means you can bring a pot filled with two litres of water to boil almost three times as quickly as on a conventional ceramic hob.

Safety




Childproof lock

Maximum protection for children's hands: the integrated lock function allows you to secure your cooking area and protect it against unwanted operation. This guarantees total safety – for both you and your loved ones.



Overflow protection

A safety system protects the hob. If a metal object is placed on the hob or should there be any spillage, the hob may switch off and sound an alarm. An "E" naming message will appear on the display. This ensures safety for your loved ones.

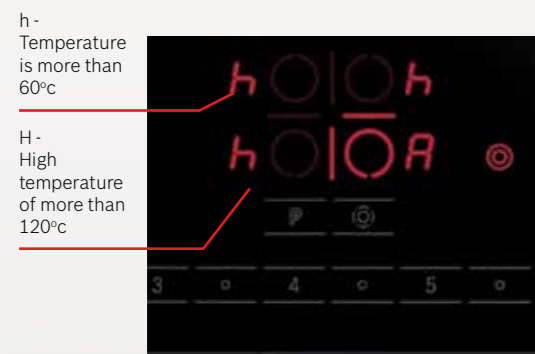

2-stage residual heat display

The 2-stage residual heat display provides clear indication on the heat of the zones after it is turned off, providing enhanced safety for the family.



QuickStart

The cooktop automatically detects where a pot has been placed after being switched on, and the zone is indicated on the display. You can get started immediately and select the desired cooking level for your pot.

Convenience



DirectSelect

With the DirectSelect function, all it takes is a finger select from the power level on offer, eliminating the needs to press +/- keys repeatedly.



HighSpeed ceramic glass

HighSpeed cooking zones shorten initial heat-up times, allowing for rapid searing and frying.




ReStart

If the hob is accidentally switched off, you can restore the last selected setting by just turning on the hob.



Wipe protection

Total control – even when you clean. With this function, you can lock the sensor buttons for 30 seconds to avoid making accidental changes to the cooking settings. This allows you to clean the surfaces without having to re-adjust settings.

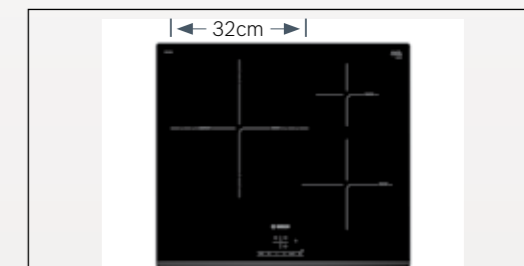


Triple ring cook zone

The 32cm cooking zone for our induction hob is now the biggest in the market, allowing users to select a smaller or larger cook zone for different pan sizes.



Count-up timer

If you want to know how long your spaghetti has been cooking and be alerted the moment it is al dente, you can simply use the Count-up timer. It shows exactly how long you have been cooking. This is especially useful when you need to follow or test out recipes.

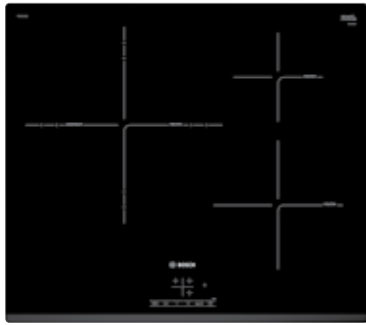**PID631BB1E**

60cm | Ceramic Induction Hob

Performance

- 3 Induction Cooking Zones
- Rear Left: 3.3kW, 2.6kW, 2.2kW (with Booster): 5.5kW, 4.4kW, 3.7kW (ø: 320mm, 260mm, 210mm)
- Rear Right: 1.4kW with Booster 2.2kW (ø145mm)
- Front Right: 2.2kW with Booster 3.7kW (ø210mm)

Features

- Automatic Pan Recognition Sensor
- Boost Function for all Zones
- Quick Start and Restart
- Quality Ceramic Top

Convenience

- Touch Select Control: 17 Power Levels

Safety

- 2 Stage Residual Heat Indicator for each Zone
- Timer with Switch Off Function for each Zone
- Safety Time Switch-off
- Childproof Lock

Technical Information

- Total Connected Load: 7.4kW
- Voltage: 220 – 240V
- Power Frequency: 50 / 60Hz
- Cable Length: 1.1m without Plug
- Appliance Dimensions (H x W x D): 51 x 592 x 522mm
- Cut Out Dimensions (H x W x D): 51 x 560 x 490 – 500mm
- Direct Wiring

**PIE631FB1E**

60cm | Ceramic Induction Hob

Performance

- 4 Induction Cooking Zones
- Rear Left: 1.8kW with Booster 3.1kW (ø180mm)
- Rear Right: 1.4kW with Booster 2.2kW (ø145mm)
- Front Left: 1.8kW with Booster 3.1kW (ø180mm)
- Front Right: 2.2kW with Booster 3.7kW (ø210mm)

Features

- Automatic Pan Recognition Sensor
- Boost Function for all Zones
- Quickstart and Restart
- Quality Ceramic Top
- Keep Warm

Convenience


- Direct Select Control: 17 Power Levels
- Energy Consumption Display

Safety

- 2 Stage Residual Heat Indicator for each Zone
- Timer with Switch Off Function for each Zone
- Safety Time Switch-off
- Childproof Lock
- Wipe Protection Function

Technical Information

- Total Connected Load: 7.4kW
- Voltage: 220 – 240V
- Power Frequency: 50 / 60Hz
- Cable Length: 1.1m without Plug
- Appliance Dimensions (H x W x D): 51 x 592 x 522mm
- Cut Out Dimensions (H x W x D): 51 x 560 x 490 – 500mm
- Direct Wiring

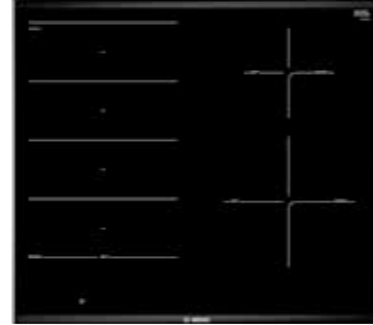**PXE675DC1E**

60cm | Ceramic Induction Hob

Performance

- 4 Induction Cooking Zones
- Rear Left / Front Left: 2.2kW with Booster 3.7kW (ø240mm)
- Full Left Area: 3.3kW with Booster 3.7kW (ø380mm)
- Rear Right: 1.4kW with Booster 2.2kW (ø145mm)
- Front Right: 2.2kW with Booster 3.7kW (ø210mm)

Features

- Automatic Pan Recognition Sensor
- Boost Function for all Zones
- Perfectfry Sensor
- PanBoost
- MoveMode
- Count-up Timer / Cooktop
- Quickstart and Restart
- Quality Ceramic Top
- Keep Warm

Convenience


- Direct Select Premium: 17 Power Levels
- Energy Consumption Display

Safety

- 2 Stage Residual Heat Indicator for each Zone
- Timer with Switch Off Function for each Zone
- Safety Time Switch-off
- Childproof Lock
- Wipe Protection Function

Technical Information

- Total Connected Load: 7.4kW
- Voltage: 220 – 240V
- Power Frequency: 50 / 60Hz
- Cable Length: 1.1m without Plug
- Appliance Dimensions (H x W x D): 51 x 606 x 527mm
- Cut Out Dimensions (H x W x D): 51 x 560 x 490 – 500mm
- Direct Wiring

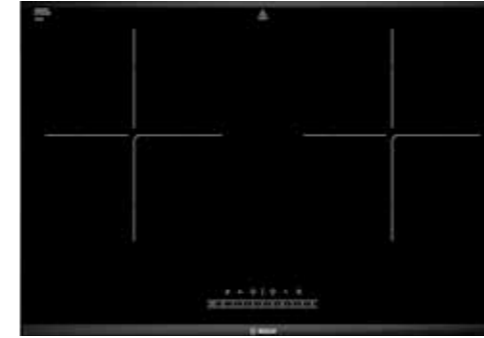**PPI82560MS**

78cm | Ceramic Induction Hob

Performance

- 2 Induction Cooking Zones
- Left and Right Zone: 1.8kW with Booster 3.1kW (Ø180mm)

Features

- Automatic Pan Recognition Sensor
- Power Management Function

Convenience

- Direct Select Touch Control: 17 Power Levels

Safety

- 2 Stage Residual Heat Indicator for each Zone
- Timer with Switch Off Function for each Zone
- Safety Time Switch-off
- Childproof Lock
- Wipe Protection Function

Technical Information

- Total Connected Load: 3.5kW
- Voltage: 220 - 240V
- Power Frequency: 50 / 60Hz
- Cable Length: 1.5m without Plug
- Appliance Dimensions (H x W x D): 59 x 780 x 450mm
- Cut Out Dimension (H x W x D): 59 x 700 x 400mm
- Direct Wiring

**PKK651FP1E**

60cm | Ceramic Radiant Hob

Performance

- 3 Radiant Cooking Zones
- Left and Right Zone: 1.8kW with Booster 3.1kW (Ø180mm)
- Left Dual-circuit Cooking Zone: 2.7kW, 2.1kW with Booster 3.4kW (Ø275mm, 210mm)
- Rear Right: 1.2kW (Ø145mm)
- Front Right: 1kW, 2kW with Booster 2.3kW (Ø180mm, 120mm)

Features

- Quality Ceramic Top

Convenience

- Direct Select Touch Control: 17 Power Levels
- PowerBoost Function

Safety

- 2 Stage Residual Heat Indicator for each Zone
- Timer with Switch Off Function for each Zone
- Safety Time Switch-off
- Childproof Lock
- Power on Indicator Light
- Wipe Protection Function

Technical Information

- Total Connected Load: 5.75kW
- Voltage: 220 - 240V
- Power Frequency: 50 / 60Hz
- Cable Length: 1.0m without Plug
- Appliance Dimensions (H x W x D): 45 x 592 x 522mm
- Cut Out Dimension (H x W x D): 45 x 560 x 490 - 500mm
- Direct Wiring

What is FlameSelect?



Using an innovative valve technology, **FlameSelect** allows you to accurately control the flame with nine defined heat levels. This is achieved through precise regulating of gas output and flame size.

- ✓ First brand in Singapore with this new patented valve technology
- ✓ Equipped with a heat indicator that highlights areas of the hob with residual heat



* Not applicable for PCC6A5B90 model

Conventional vs Flame Select Hobs

	FlameSelect Gas Hob	Conventional Gas Hob
Size of Flame	Controllable with 9 power levels	Lesser consistency, requires constant monitoring
Power Setting	Complete control of temperature settings	Less accurate due to ranging temperatures
Residual Heat Indicator*	Shows which pan supports are still hot when hobs are switched off	No indication

* Not applicable for PCC6A5B90 model

DID YOU KNOW ?

With your new cooktop you can choose between 9 heat settings. Select the appropriate setting depending on the food and cooking method.

Bringing to the boil
Settings ▶ 7-9

Searing
Settings ▶ 6-9


Boiling/cooking/braising
Settings ▶ 4-7

Melting, liquefying
Settings ▶ 3-5

Simmering, gentle boiling
Settings ▶ 1-3

Gentle frying
Settings ▶ 1-5

9 HEAT SETTINGS



Performance



Precise flame control

Ensure precise control of inner and outer flame.



High-power wok-style burner

Selected gas cooktop models feature a powerful wok-style burner, which provides up to 6.0kW. Suitable for use with flat-based pans or with a wok using the wok ring provided.



3D flame wheel for evenly distributed heat

Our burners are designed to provide triple flame (for LPG Gas) and double flame (for Town Gas), to give powerful and even heat distribution.

Safety



Flame failure safety device

Safety valve system will cut off gas automatically when the flame goes out unexpectedly.

Convenience



Sealed top sheet

Prevention of spillage into the gas hob, ensuring safety and easy maintenance of appliance.



One-hand electric ignition

The gas ignites automatically by pushing and turning the control knobs, offering convenience as there is no separate ignition button needed for cleaning. It also reduces the hassle of changing batteries.



Flexible burners

With different burner combinations, enjoy greater cooking efficiency with the correct sized burner for the size of pan.



PBD7251SG

76cm | Stainless Steel Gas Hob
(Suitable for Town Gas and LPG)

Performance

- 2 Gas Burners
- 2 Triple Circuit Burner (4.5kW) for Each Wok Burner

Features

- Precise Flame Control

Convenience

- Safe and Quick Ignition

Safety

- Flame Failure Safety Device

Technical Information

- Voltage: 220 – 240V
- Power Frequency: 50Hz
- Cable Length: 1.2m with Plug
- Appliance Dimensions (H x W x D): 80 x 760 x 460mm
- Cut Out Dimensions (H x W x D): 80 x 700 x 400mm



PBD7231SG / PBD7232SG*

78.5cm | Tempered Glass Gas Hob
(Suitable for Town Gas / *LPG)

Performance

- 2 Gas Burners
- 2 Triple Circuit Burner (4.5kW) for Each Wok Burner

Features

- Precise Flame Control

Convenience

- Safe and Quick Ignition

Safety

- Flame Failure Safety Device

Technical Information

- Voltage: 220 – 240V
- Power Frequency: 50Hz
- Cable Length: 1.2m with Plug
- Appliance Dimensions (H x W x D): 80 x 785 x 450mm
- Cut Out Dimensions (H x W x D): 80 x 700 x 400mm

**PBD7351SG**

76cm | Stainless Steel Gas Hob
(Suitable for Town Gas and LPG)

Performance

- 3 Gas Burners
 - Left Burner: 4.5kW
 - Center Burner: 1.7kW
 - Right Burner: 4.5kW

Features

- Precise Flame Control

Convenience

- Safe and Quick Ignition

Safety

- Flame Failure Safety Device

Technical Information

- Voltage: 220 – 240V
- Power Frequency: 50Hz
- Cable Length: 1.2m with Plug
- Appliance Dimensions (H x W x D):
80 x 760 x 460mm
- Cut Out Dimensions (H x W x D):
80 x 700 x 400mm

**PBD7331SG / PBD7332SG***

78.5cm | Tempered Glass Gas Hob
(Suitable for Town Gas / *LPG)

Performance

- 3 Gas Burners
 - Left Burner: 4.5kW
 - Center Burner: 1.7kW
 - Right Burner: 4.5kW

Features

- Precise Flame Control

Convenience

- Safe and Quick Ignition

Safety

- Flame Failure Safety Device

Technical Information

- Voltage: 220 – 240V
- Power Frequency: 50Hz
- Cable Length: 1.2m with Plug
- Appliance Dimensions (H x W x D):
80 x 785 x 450mm
- Cut Out Dimensions (H x W x D):
80 x 700 x 400mm

**PBD9351SG**

90cm | Stainless Steel Gas Hob
(Suitable for Town Gas and LPG)

Performance

- 3 Gas Burners
 - Left Burner: 4.5kW
 - Center Burner: 1.7kW
 - Right Burner: 4.5kW

Features

- Precise Flame Control

Convenience

- Safe and Quick Ignition

Safety

- Flame Failure Safety Device

Technical Information

- Voltage: 220 – 240V
- Power Frequency: 50Hz
- Cable Length: 1.2m with Plug
- Appliance Dimensions (H x W x D):
80 x 900 x 480mm
- Cut Out Dimensions (H x W x D):
80 x 880 x 455mm

**PBD9331SG**

92cm | Tempered Glass Gas Hob
(Suitable for Town Gas and LPG)

Performance

- 3 Gas Burners
 - Left Burner: 4.5kW
 - Center Burner: 1.7kW
 - Right Burner: 4.5kW

Features

- Precise Flame Control

Convenience

- Safe and Quick Ignition

Safety

- Flame Failure Safety Device

Technical Information

- Voltage: 220 – 240V
- Power Frequency: 50Hz
- Cable Length: 1.2m with Plug
- Appliance Dimensions (H x W x D):
80 x 920 x 511mm
- Cut Out Dimensions (H x W x D):
80 x 880 x 455mm



PCC6A5B90K / PCC6A5B90*

60cm | Stainless Steel Gas Hob
(Suitable for Town Gas / LPG*)

Performance

- 3 Gas Burners
 - Rear Right: Rapid Burner 3kW
 - Left: Wok Burner 4kW
 - Right Front: Economy Burner 1kW

Features

- FlameSelect
- Ergonomic Sword Control Knobs

Convenience

- Cast Iron Continuous Pan Supports

Safety

- Flame Failure Safety Device



Technical Information

- Voltage: 220 – 240V
- Power Frequency: 50 / 60Hz
- Cable Length: 1.5m with Plug
- Appliance Dimensions (H x W x D):
45 x 582 x 520mm
- Cut Out Dimensions (H x W x D):
45 x 560 – 562 x 480 – 492mm
- Refer to Technical Diagram

Design with Flexibility

Domino hobs offer the ultimate in flexibility and consumer choice. With this nifty modular system, you have the freedom of designing your own cooking centre by mixing and matching a wide range of different hobs. Select any combination from our range of gas, induction, radiant or bbq grill.

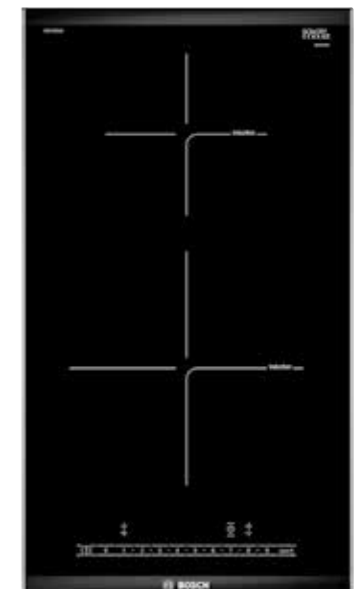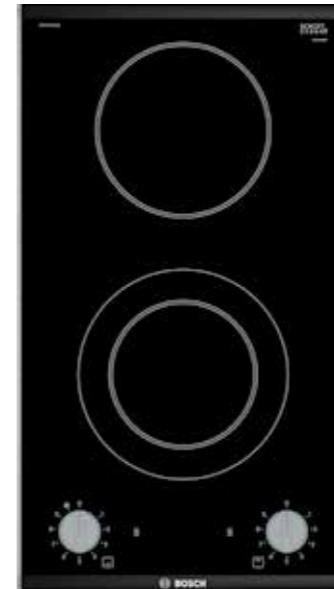

**PRA3A6D70**

30cm | Ceramic Domino Gas Hob
(Suitable for LPG)

Performance

- 1 Dual Wok Burner – 6.0kW

Features

- Flame Select
- Quality Ceramic Top

Convenience

- Flexibility: can be Combined with Various Types of Hobs
- Cast Iron and Dishwasher Proof Pan Support
- Ergonomic Sword Control Knobs

Safety

- Flame Failure Safety Device
- Residual Heat Indicator

Technical Information

- Gas Connection Rating 6.0kW
- Voltage: 220 – 240V
- Power Frequency: 50 / 60Hz
- Cable Length: 1m without Plug
- Appliance Dimensions (H x W x D): 45 x 306 x 527mm
- Cut Out Dimensions (H x W x D): 45 x 270 x 490 – 500mm

PRA3B6B70K

30cm | Ceramic Domino Gas Hob
(Suitable for Town Gas)

Performance

- 1 Dual Wok Burner – 4.9kW

Features

- Quality Ceramic Top

Convenience

- Flexibility: can be Combined with Various Types of Hobs
- Cast Iron and Dishwasher Proof Pan Support
- Ergonomic Sword Control Knobs

Safety

- Flame Failure Safety Device

Technical Information

- Gas Connection Rating 4.9kW
- Voltage: 220 – 240V
- Power Frequency: 50 / 60Hz
- Cable Length: 1.5m with Plug
- Appliance Dimensions (H x W x D): 87 x 306 x 527mm
- Cut Out Dimensions (H x W x D): 87 x 270 x 490 – 500mm

PRB3A6D70

30cm | Ceramic Gas Hob
(Suitable for LPG)

Performance

- Double Burner
- Front: 1.9kW
- Rear: 2.8kW

Features

- Flame Select
- Quality Ceramic Top

Convenience

- Flexibility: can be Combined with Various Types of Hobs
- Cast Iron and Dishwasher Proof Pan Support
- Ergonomic Sword Control Knobs

Safety

- Flame Failure Safety Device
- Residual Heat Indicator

Technical Information

- Gas Connection Rating 4.7kW
- Voltage: 220 – 240V
- Power Frequency: 50 / 60Hz
- Cable Length: 1m without Plug
- Appliance Dimensions (H x W x D): 45 x 306 x 527mm
- Cut Out Dimensions (H x W x D): 45 x 270 x 490 – 500mm

PRB3B6B70K

30cm | Ceramic Domino Gas Hob
(Suitable for Town Gas)

Performance

- Double Burner
- Front: 1.9kW
- Rear: 2.8kW

Features

- Quality Ceramic Top

Convenience

- Flexibility: can be Combined with Various Types of Hobs
- Cast Iron and Dishwasher Proof Pan Support
- Ergonomic Sword Control Knobs

Safety

- Flame Failure Safety Device

Technical Information

- Gas Connection Rating 4.7kW
- Voltage: 220 – 240V
- Power Frequency: 50 / 60Hz
- Cable Length: 1.5m with Plug
- Appliance Dimensions (H x W x D): 45 x 306 x 527mm
- Cut Out Dimensions (H x W x D): 205 x 270 x 490 – 500mm
- Refer to Technical Diagram

PKF375CA1E

30cm | Ceramic Radiant Domino Hob

Performance

- 2 Radiant Cooking Zones
- Rear Center: 1.2kW (ø145mm)
- Front Dual-circuit Cooking Zone: 2.0kW, 0.80kW (ø120mm, ø180mm)

Features

- Surface-mounted Controls: 9 Power Levels
- Quality Ceramic Top

Convenience

- Flexibility: can be Combined with Various Types of Hobs

Safety

- 2 Power on Indicator Lights
- 2-stage Residual Heat Indicator for each Zone

Technical Information

- Electrical Connection Rating 3.2kW
- Voltage: 220 – 240V
- Power Frequency: 50 / 60Hz
- Cable Length: 1m without Plug
- Appliance Dimensions (H x W x D): 48 x 306 x 527mm
- Cut Out Dimensions (H x W x D): 45 x 270 x 490 – 500mm
- Direct Wiring

PIB375FB1E

30cm | Induction Domino Hob

Performance

- 2 Induction Cooking Zones
- Rear Center: 1.4kW with Booster 2.2kW (ø145mm)
- Front Center: 2.2kW with Booster 3.7kW (ø210mm)

Features

- Automatic Pan Recognition Sensor
- DirectSelect Touch Control: 17 Power Levels
- Count-up Timer
- Quickstart and Restart
- Quality Ceramic Top

Convenience

- Flexibility: can be Combined with Various Types of Hobs
- Electronic Display
- Energy Consumption Display

Safety

- 2 Power on Indicator Lights
- 2-stage Residual Heat Indicator for each Zone
- Childproof Lock
- Safety Time Switch-off

Technical Information

- Electrical Connection Rating 3.7kW
- Voltage: 220 – 240V
- Power Frequency: 50 / 60Hz
- Cable Length: 1.1m without Plug
- Appliance Dimensions (H x W x D): 51 x 306 x 527mm
- Cut Out Dimensions (H x W x D): 51 x 270 x 490 – 500mm
- Direct Wiring

**PKY475FB1E**

40cm | Teppanyaki Domino Hob

Performance

- Two Separately Controlled Cooking Zones: Cook or Heat using the Entire or Either Half of the Surface

Features

- Automatic Pan Recognition Sensor
- DirectSelect Touch Control: 17 Power Levels
- Quality Ceramic Top
- Count-up Timer
- Keep Warm
- Restart

Convenience

- Flexibility: can be Combined with Various Types of Hobs
- Big Stainless Steel Roast Area
- Electronic Display
- Energy Consumption Display

Safety

- Power on Indicator Lights
- 2 Stage Residual Heat Indicator for each Zone
- Safety Time Switch-off

Technical Information

- Electrical Connection Rating 1.9kW
- Voltage: 220 – 240V
- Power Frequency: 50 / 60Hz
- Cable Length: 1m without Plug
- Appliance Dimensions (H x W x D):
90 x 396 x 527mm
- Cut Out Dimensions (H x W x D):
90 x 360 x 490 – 500mm

The world of Bosch hoods.

With a wide variety of sizes, types and finishes to choose from, it's easy to find the right Bosch hood to perfectly suit your kitchen's design.



The Right Hood.

Match your hood with your kitchen to keep your flat smelling clean and fresh. The right hood replaces air in your kitchen ideally 10 times an hour.



What extraction rate do I need from my hood?

$\times 10 =$

Volume of Your Kitchen (m³) Minimum Extraction Rate Required

When choosing a hood, always match its air delivery power to the size of your kitchen. An effective extractor should be able to replace the air in your kitchen 10 times an hour.

DID YOU KNOW ?

There are different types of air extraction measurements.

Other Types of Air Extraction Measurement

Measurement of net fan power at the air outlet above motor in appliance without connection to ducting system


Measurement of net fan power based on motor only

Bosch Stringent Measurement on Air Extraction: Testing according to EN 61591

Measurement of net fan power at air outlet above motor in appliance with connection to ducting system according to EN 61591


At Bosch, ducted and recirculation systems smell the same. Of nothing.

Our hoods swiftly and reliably extract odours and grease particles from your kitchen. They create a consistently fresh feel good ambience before, during and after cooking. At the same time, they perfectly illuminate your worktop area and still look unbelievably attractive even after all that hard work.

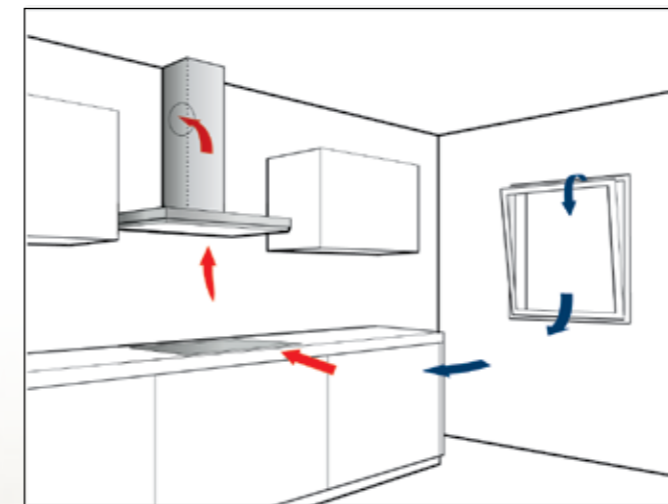

Ducting

- Ducted hoods are powerful and effective.
- Odours, grease and steam are extracted, filtered and ducted to the outside.
- All that is required is sufficient fresh air, for instance from an open window.

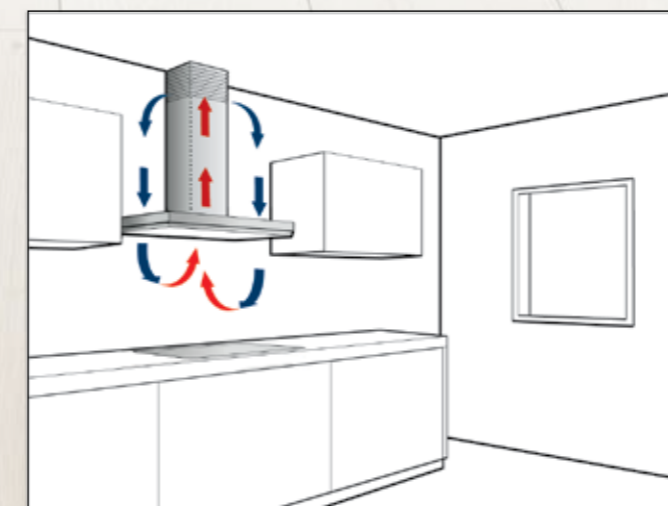

Recirculation

- Hoods with recirculation are powerful and energy-efficient.
- Odours and grease are extracted and filtered. The purified air is returned to the room.
- As no ducting openings are necessary, no energy can escape (e.g. cold or heat).



Relax in a quieter kitchen.



EcoSilence Drive

EcoSilence Drive motor operates without carbon brushes, eliminating the disadvantages of conventional motors. Instead of energy loss, wear and noise, you get efficiency, durability, and smooth operation.

To reduce motor noise even further, we have optimised the airflow inside the hood. The result: low noise levels with high power.

Design

Worktop Lighting



LED lighting

LED lights offer a longer lifetime and use less energy than conventional halogen lighting. Additional convenience is offered with SoftLight which gently fades lighting in and out with dimmer function.



Halogen lighting

Integrated halogen lighting ensures that the cooking area is clearly illuminated. They are more efficient than standard lights and are designed to last longer.



Inner frame

The patented Bosch inner frame is specially shaped to permit an optimum flow of air and leading stability to the hood. Without any edges, cleaning the frame is also easy.


Hoods.
Features and Benefits.

Performance



Powerful extraction rate

With models offering up to 1000m³/h maximum extraction and ventilating capability, the Bosch line of efficient, high-performance hoods aids in removing steam, odours, grease and smoke quickly.

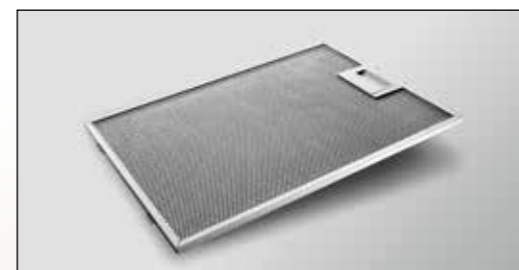

Dishwasher-safe metal grease filters


All Bosch filters have up to 5 layers of filters and for easy cleaning it can be safely loaded into any Bosch dishwasher for sparkling results.



Active carbon filter

A recirculating kit with active carbon filter eliminates unpleasant odours and is easy to install and replace.

Convenience

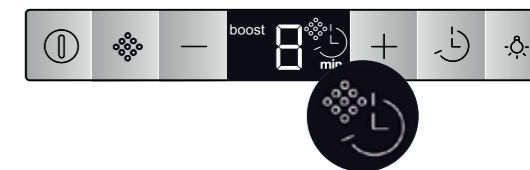

Electronic 'clean-filter indicator'

A light is illuminated when the filter needs a cleaning, ensuring optimal efficiency of the hood.

After running

Continuing operation of the hood for approx. ten minutes after normal usage ensure vapours and odours are effectively removed.

Automatic switch back

When the intensive setting is selected, it may be set to automatically revert back to a pre-defined normal level after a short period of time.



<p>DHI623GSG 60cm Slimline Hood</p> <p>Performance</p> <ul style="list-style-type: none"> • Max Extraction Rate: 380 m³/h, According to EN 61591 • Suitable for Ducted or Re-circulated Operation • Operating Sound Level: 70db <p>Features</p> <ul style="list-style-type: none"> • 3 Speeds <p>Convenience</p> <ul style="list-style-type: none"> • Dishwasher Safe Metal Grease Filter • Push Buttons Controls <p>Technical Information</p> <ul style="list-style-type: none"> • Voltage: 220 – 240V • Power Frequency: 50Hz • Cable Length: 2.0m • Appliance Dimensions <ul style="list-style-type: none"> - Exhaust and Recirculate (H x W x D): 180 x 598 x 300mm - Cut Out Dimensions (H x W x D): 140 x 550 x 280mm 	<p>DHI923GSG 90cm Slimline Hood</p> <p>Performance</p> <ul style="list-style-type: none"> • Max Extraction Rate: 380 m³/h, According to EN 61591 • Suitable for Ducted or Re-circulated Operation • Operating Sound Level: 70db <p>Features</p> <ul style="list-style-type: none"> • 3 Speeds <p>Convenience</p> <ul style="list-style-type: none"> • Dishwasher Safe Metal Grease Filter • Push Buttons Controls <p>Technical Information</p> <ul style="list-style-type: none"> • Voltage: 220 – 240V • Power Frequency: 50Hz • Cable Length: 2.0m • Appliance Dimensions <ul style="list-style-type: none"> - Exhaust and Recirculate (H x W x D): 180 x 898 x 300mm - Cut Out Dimensions (H x W x D): 140 x 850 x 280mm 	<p>DHL755BL 75cm Chimney Wall Hood</p> <p>Performance</p> <ul style="list-style-type: none"> • Max Extraction Rate: 638m³/h, According to EN 61591 • Suitable for Ducting or Re-circulated Operation • Operating Sound Level: 56dB <p>Features</p> <ul style="list-style-type: none"> • Twin Channel High Performance Fan Motor • 3 Speed Plus 1 Intensive Settings <p>Convenience</p> <ul style="list-style-type: none"> • Easy-to-clean Interior • Dishwasher Safe Metal Grease Filter <p>Technical Information</p> <ul style="list-style-type: none"> • Voltage: 220 –240V • Power Frequency: 50 Hz • Cable Length: 1.3m • Appliance Dimensions <ul style="list-style-type: none"> - Exhaust and Recirculate (H x W x D): 255 x 730 x 380mm - Cut-out Dimensions (H x W x D): 255 x 700 x 350mm
--	--	--

<p>DFS097A50B 90cm Silver Metallic Slimline Hood</p> <p>Performance</p> <ul style="list-style-type: none"> • Max Extraction Rate: 758m³/h, According to EN 61591 • Suitable for Ducted or Re-circulated Operation • Operating sound level: 55dB <p>Features</p> <ul style="list-style-type: none"> • EcoSilence™ Drive • 3 Speed Settings Plus Intensive Setting • 2 x 3W LED Lighting • Automatic Run On: 10 mins • Intensive Operation Revert: 6 mins <p>Convenience</p> <ul style="list-style-type: none"> • Dishwasher Safe Metal Grease Filter • Push Button Controls with Electronic Display <p>Technical Information</p> <ul style="list-style-type: none"> • Voltage: 220 – 240V • Power Frequency: 50 / 60Hz • Cable Length: 1.75m • Appliance Dimensions <ul style="list-style-type: none"> - Exhaust and Recirculate (H x W x D): 426 x 898 x 290mm - Cut Out Dimensions (H x W x D): 385 x 524 x 290mm 	<p>DFS098K53 90cm Stainless Steel Slimline Hood</p> <p>Performance</p> <ul style="list-style-type: none"> • Max Extraction Rate: 867m³/h, According to EN 61591 • Suitable for Ducted or Re-circulated Operation • Operating Sound Level: 51dB <p>Features</p> <ul style="list-style-type: none"> • EcoSilence™ Drive • 3 Speed Plus 2 Intensive Settings • 2 x 3W LED Lighting • Automatic Run On: 10 mins • Intensive Operation Revert: 6 mins • Air Quality Sensor <p>Convenience</p> <ul style="list-style-type: none"> • Dishwasher Safe Metal Grease Filter • Electronic Controls with TouchControl <p>Technical Information</p> <ul style="list-style-type: none"> • Voltage: 220 – 240V • Power Frequency: 50 / 60Hz / 13A • Cable Length: 1.75m • Appliance Dimensions <ul style="list-style-type: none"> - Exhaust and Recirculate (H x W x D): 378 x 898 x 290mm - Cut Out Dimensions (H x W x D): 337 x 524 x 290mm 	<p>DWB97CM50B 90cm Box Design Chimney Hood</p> <p>Performance</p> <ul style="list-style-type: none"> • Max Extraction Rate: 721m³/h, According to EN 61591 • Suitable for Ducting or Re-circulated Operation • Operating Sound Level: 55dB <p>Features</p> <ul style="list-style-type: none"> • EcoSilence™ Drive • 3 Speed Plus 1 Intensive Settings • 3 x 1.5W LED Lighting • Intensive Operation Revert: 6min <p>Convenience</p> <ul style="list-style-type: none"> • Easy-to-clean Interior • Dishwasher Safe Metal Grease Filter • Touch Control <p>Technical Information</p> <ul style="list-style-type: none"> • Voltage: 220 –240V • Power Frequency: 50/60Hz • Cable Length: 1.3m • Appliance Dimensions <ul style="list-style-type: none"> - Exhaust(H x W x D): 628-954 x 898 x 500mm - Recirculate (H x W x D): 628–1064 x 898 x 500 mm
---	---	--



DWB98JQ50B

90cm | Box Design
Chimney Hood

Performance

- Max Extraction Rate: 843m³/h, According to EN 61591
- Suitable for Ducting or Re-circulated Operation
- Operating Sound Level: 55dB

Features

- EcoSilence™ Drive
- 3 Speed Plus 2 Intensive Settings
- Perfect Air Sensor (Automatic Control of Settings for Maximal Extractor Performance)
- Light with Dimmer Function
- 3 x 1.5W LED Lighting
- Intensive Operation Revert: 6min
- Automatic Run On: 10min

Convenience

- Easy-to-clean Interior
- Dishwasher Safe Metal Grease Filter
- Saturation Indicator for Metal and Charcoal Filter
- Electronic Controls with Touch Control

Technical Information

- Voltage: 220 – 240V
- Power Frequency: 50/60Hz
- Cable Length: 1.3m
- Appliance Dimensions
 - Exhaust (H x W x D): 628-954 x 898 x 500mm
 - Recirculate (H x W x D): 628-1064 x 898 x 500 mm



DEE928PSG

90cm | Slimline Pyramid Design
Chimney Hood

Performance

- Max Extraction Rate: 1000m³/h
- Suitable for Ducted or Re-circulated Operation
- Operating Sound Level: 69dB

Features

- 3 Speeds
- 2 x 3W LED Lighting

Convenience

- Dishwasher Safe Metal Grease Filter
- Easy to Clean Integrative Chimney
- Push Button Controls

Technical Information

- Voltage: 220 – 240V
- Power Frequency: 50Hz
- Cable Length: 1.5m
- Appliance Dimensions
 - Exhaust (H x W x D): 707 – 1075 x 895 x 530mm
 - Recirculate (H x W x D): 707 – 1195 x 895 x 530mm



DEE928BSG

90cm | Box Design Chimney Hood

Performance

- Max Extraction Rate: 1000m³/h
- Suitable for Ducted or Re-circulated Operation
- Operating Sound Level: 69dB

Features

- 3 Speeds
- 2 x 3W LED Lighting

Convenience

- Dishwasher Safe Metal Grease Filter
- Easy to Clean Integrative Chimney
- Push Button Controls

Technical Information

- Voltage: 220 – 240V
- Power Frequency: 50Hz
- Cable Length: 1.5m
- Appliance Dimensions
 - Exhaust (H x W x D): 678 – 1048 x 895 x 530mm
 - Recirculate (H x W x D): 678 – 1168 x 895 x 530mm



DWP96BC50B

90cm | Pyramid Design Chimney Hood

Performance

- Max Extraction Rate: 626m³/h, According to EN 61591
- Suitable for Ducted or Re-circulated Operation
- Operating Sound Level: 69dB

Features

- 2 x 1.5W LED
- Energy Efficient Capacitor Motor
- 3 Speeds via Push Buttons
- Metal Grease Filter

Convenience

- Dishwasher Safe Metal Grease Filter

Technical Information

- Voltage: 220 – 240V
- Power Frequency: 50/60Hz
- Cable Length: 1.3m
- Appliance Dimensions
 - Exhaust (H x W x D): 799-975 x 900 x 500 mm
 - Recirculate (H x W x D): 799-975 x 900 x 500 mm

**DIB98JQ50**

90cm | Island Hood

Performance

- Max Extraction Rate: 867m³/h, According to EN 61591
- Suitable for Ducting or Re-circulated Operation
- Operating Sound Level: 54dB

Features

- EcoSilence™ Drive
- 3 Speed Plus 2 Intensive Settings
- Perfect Air Sensor (Automatic Control of Settings for Maximal Extractor Performance)
- Light with Dimmer Function
- 4 x 1.5W LED Lighting
- Intensive Operation Revert: 6min
- Automatic Run On: 10min

Convenience

- Easy-to-clean Interior
- Dishwasher Safe Metal Grease Filter
- Saturation Indicator for Metal and Charcoal Filter
- Electronic Controls with Touch Control

Technical Information

- Voltage: 220 – 240V
- Power Frequency: 50/60Hz
- Cable Length: 1.3m
- Appliance Dimensions
 - Exhaust (H x W x D): 744-924 x 898 x 600mm
 - Recirculate (H x W x D): 744-1044 x 898 x 600 mm

**DDD97BM60B**

90cm | Downdraft Hood

Performance

- Max Extraction Rate: 750m³/h, According to EN 61591
- Suitable for Ducted or Re-circulated Operation
- Operating Sound Level: 62db

Features

- Capacitor Motor
- 1 x 7W LED-module
- 3 Speed Plus 2 Intensive Settings
- Automatic Run On: 10 mins
- Intensive Operation Revert: 6 mins
- Rim Ventilation

Convenience

- Dishwasher Safe Metal Grease Filter

Technical Information

- Voltage: 220 – 240V
- Power Frequency: 50Hz
- Cable Length: 1.5m
- Appliance Dimensions
 - Exhaust and Recirculate (H x W x D): 738 – 1038 x 918 x 268mm

**DWF97RU60**

90cm | Flat Design with Glass Canopy Hood (Wall-mounted)

Performance

- Max Extraction Rate: 717m³/h, According to EN 61591
- Suitable for Ducted or Re-circulated Operation
- Operating Sound Level: 57db

Features

- Twin Channel High Performance Fan Motor
- EcoSilence™ Drive
- 3 Speed Plus 2 Intensive Settings
- Softlight with Dimmer Function
- 2 x 3W LED Lighting
- Automatic Run On: 5 / 10 / 15 mins
- Intensive Operation Revert: 6 mins
- Rim Ventilation
- 2 Capture Areas: Front and Bottom Side

Convenience

- Dishwasher Safe Metal Grease Filter
- Easy Clean Interior
- 7 Segment Display with Control Ring

Technical Information

- Voltage: 220 – 240V
- Power Frequency: 50 / 60Hz
- Cable Length: 1.3m
- Appliance Dimensions
 - Exhaust (H x W x D): 1019 – 1289 x 890 x 263mm
 - Recirculate (H x W x D): 480 x 890 x 263mm

**DWK98JM60**

90cm | Inclined Hood (Wall-mounted)

Performance

- Max Extraction Rate: 828m³/h, According to EN 61591
- Suitable for Ducting or Re-circulated Operation
- Operating Sound Level: 55dB

Features

- EcoSilence™ Drive
- 3 Speed Plus 1 Intensive Settings
- 2 x 1.5W LED Lighting
- Rim Ventilation
- Intensive Operation Revert: 6min
- 2 Capture Areas: Front and Bottom Side

Convenience

- Easy-to-clean Interior
- Dishwasher Safe Metal Grease Filter
- Filter Cover Glass
- LED Touch Control

Technical Information

- Voltage: 220 – 240V
- Power Frequency: 50/60Hz
- Cable Length: 1.3m
- Appliance Dimensions
 - With Ducting
 - Exhaust(H x W x D): 928-1198 x 890 x 499mm
 - Recirculate (H x W x D): 988-1258 x 890 x 499 mm
 - Without Ducting
 - Recirculate (H x W x D): 452 x 890 x 499 mm

Customer service support you can depend on.

Trust Bosch customer service to help you throughout the lifetime of your appliance.



Experts repairs from our qualified engineers with only original spare parts



Bosch online store offers you the convenience to get your cleaning & care products, that will enhance the performance of your appliance



Create a MyBosch account to register your appliance warranty



Added peace of mind with our extended warranty plans



Our Customer Call Center is available from Monday to Friday 9am to 6pm and Saturday 9am to 1pm at (65) 6751 5000 . Closed on Sunday and Public Holidays.



All Bosch home appliances are produced with maximum care, in high quality materials. We promise it in our 2-year manufacturer's warranty on all appliances.

For service repair and spare parts replacement, please contact:

Customer Care Line:
(65) 6751 5000

Customer Service Center:
38C Jalan Pemimpin #01-01 Singapore 577180

Operating Hours:
Monday to Friday, 8.30am to 5.30pm (Excluding Public Holidays)



BSH Home Appliances Pte. Ltd. (Reg. No: 199608497E)

11 Bishan Street 21 Bosch Building #04-02

Singapore 573943

Toll Free: 1800-MY-BOSCH (1800-69-26724)

Fax: (65) 6507 3818

www.bosch-home.com.sg