

FCC ICSE Test Report Part 74 & RSS-210

Report No.: FCC_IC_RF_SL19101602-BSS-010_TR-825 Rev_1.0

Product: Dual Receiver UHF Wireless Intercom Beltpack

Models: TR-825-FD, TR-825-FE, TR-825-HE

FCC ID: B5DM537

IC: 1321A-TR825DE

Received Date: 12/09/2019

Test Date: 01/02/2020-01/19/2020

Issued Date: 02/25/2020

Applicant: Bosch Security Systems, Inc.

Applicant Address: 8601 East Cornhusker Highway, Lincoln, NE 68507 USA

Manufacturer: Bosch Security Systems, Inc.

Manufacturer Address: 130 Perinton Parkway, Fairport, NY 14450 USA

Issued By: Bureau Veritas Consumer Products Services, Inc.

Lab Address: 775 Montague Expressway, Milpitas, CA 95035

**FCC Registration /
Designation Number:** 540430

ISED# / CAB identifier: 4842D



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any government agencies.

TABLE OF CONTENTS

| | |
|---|----|
| RELEASE CONTROL RECORD | 4 |
| 1 CERTIFICATE OF CONFORMITY | 5 |
| 2 SUMMARY OF TEST RESULTS..... | 6 |
| 2.1 MEASUREMENT UNCERTAINTY..... | 7 |
| 3 GENERAL INFORMATION | 8 |
| 3.1 GENERAL DESCRIPTION OF EUT | 8 |
| 3.2 DESCRIPTION OF TEST MODES | 9 |
| 3.2.1 GENERAL DESCRIPTION OF APPLIED STANDARDS..... | 10 |
| 3.3 DESCRIPTION OF SUPPORT UNITS | 10 |
| 3.3.1 CONFIGURATION OF SYSTEM UNDER TEST..... | 11 |
| 4 TEST TYPES AND RESULTS..... | 12 |
| 4.1 OUTPUT POWER MEASUREMENT..... | 12 |
| 4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT | 12 |
| 4.1.2 TEST INSTRUMENTS | 12 |
| 4.1.3 TEST PROCEDURES..... | 12 |
| 4.1.4 TEST SETUP | 13 |
| 4.1.5 EUT OPERATING CONDITIONS | 13 |
| 4.1.6 TEST RESULTS..... | 14 |
| 4.2 FREQUENCY STABILITY MEASUREMENT | 15 |
| 4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT..... | 15 |
| 4.2.2 TEST INSTRUMENTS | 15 |
| 4.2.3 TEST PROCEDURE | 16 |
| 4.2.4 TEST SETUP | 16 |
| 4.2.5 TEST RESULTS..... | 17 |
| 4.3 MODULATION DEVIATION MEASUREMENT | 19 |
| 4.3.1 LIMITS OF MODULATION DEVIATION MEASUREMENT | 19 |
| 4.3.2 TEST INSTRUMENTS | 19 |
| 4.3.3 TEST PROCEDURE | 20 |
| 4.3.4 TEST SETUP | 21 |
| 4.3.5 TEST RESULTS..... | 22 |
| 4.4 OCCUPIED BANDWIDTH AND EMISSION MASK MEASUREMENT | 26 |
| 4.4.1 LIMITS OF OCCUPIED BANDWIDTH AND EMISSION MASK MEASUREMENT... | 26 |
| 4.4.2 TEST INSTRUMENTS | 26 |
| 4.4.3 TEST SETUP | 27 |
| 4.4.4 TEST PROCEDURES..... | 28 |
| 4.4.5 TEST RESULTS..... | 29 |
| 4.5 CONDUCTED SPURIOUS EMISSIONS | 33 |
| 4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT..... | 33 |
| 4.5.2 TEST INSTRUMENTS | 33 |
| 4.5.3 TEST PROCEDURE | 34 |
| 4.5.4 TEST SETUP | 34 |
| 4.5.5 EUT OPERATING CONDITIONS | 34 |
| 4.5.6 TEST RESULTS..... | 35 |

| | | |
|-------|---|----|
| 4.6 | RADIATED EMISSION MEASUREMENT | 37 |
| 4.6.1 | LIMITS OF RADIATED EMISSION MEASUREMENT | 37 |
| 4.6.2 | TEST INSTRUMENTS | 38 |
| 4.6.3 | TEST PROCEDURES..... | 39 |
| 4.6.4 | DEVIATION FROM TEST STANDARD..... | 39 |
| 4.6.5 | TEST SETUP | 40 |
| 4.6.6 | EUT OPERATING CONDITIONS | 40 |
| 4.6.7 | TEST RESULTS..... | 41 |
| 5 | PHOTOGRAPHS OF THE TEST CONFIGURATION | 45 |
| 6 | INFORMATION OF THE TESTING LABORATORIES | 46 |



Release Control Record

| Issue No. | Reason for change | Date issued |
|--|--|-------------|
| FCC_IC_RF_SL19101602-BSS-010_TR-825 | Original release | 02/11/2020 |
| FCC_IC_RF_SL19101602-BSS-010_TR-825 Rev_1.0 | Update Applicant & Manufacturer Address Per Customer Review | 02/25/2020 |

1 Certificate of Conformity

Product: Dual Receiver UHF Wireless Intercom Beltpack
Brand: RTS
Test Model: TR-825-FD, TR-825-FE, TR-825-HE
Series Model: N/A
Sample Status: Engineering sample
Applicant: Bosch Security Systems, Inc.
Test standards: FCC 47 CFR Part 74
RSS-210 Issue 10 December 2019

The above equipment has been tested by **Bureau Veritas Consumer Products Services, Inc., Milpitas Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & equipment under test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Deon , **Date:** 02/25/2020
Deon Dai / Test Engineer

Approved by : Chen Ge , **Date:** 02/25/2020
Chen Ge / Engineer Reviewer

2 Summary of test results

The EUT has been tested according to the following specifications:

| Applied standard: FCC Part74 & Part 2 RSS-210 Annex G | | | |
|--|------------------------------|---------------|--------------------------------|
| Standard section | Test type and limit | Result | Remark |
| 2.1046 74.861 RSS-210 G.1 | RF Power Output | Pass | Meet the requirement of limit. |
| 2.1055 74.861 RSS-210 G.3 | Frequency Stability | Pass | Meet the requirement of limit. |
| 2.1047 74.861 RSS-210 G.5 | Modulation Deviation | Pass | Meet the requirement of limit. |
| 2.1047 RSS-210 G.5 | Audio Frequency Response | Pass | Meet the requirement of limit. |
| 2.1049 74.861 RSS-210 G.2 | Occupied Bandwidth | Pass | Meet the requirement of limit. |
| 2.1051 74.861 RSS-210 G.4 | Conducted Spurious Emissions | Pass | Meet the requirement of limit. |
| 2.1051 74.861 RSS-210 G.4 | Radiated Spurious Emissions | Pass | Meet the requirement of limit. |

2.1 Measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

| Measurement | Frequency | Expanded Uncertainty ($k=2$) (\pm) |
|------------------------------------|----------------|---|
| Conducted Emissions at mains ports | 150kHz ~ 30MHz | 3.51dB |
| Radiated Emissions up to 1 GHz | 30MHz ~ 1GHz | 3.73dB |
| Radiated Emissions above 1 GHz | 1GHz ~ 6GHz | 4.64dB |
| | 6GHz ~ 18GHz | 4.82dB |
| | 18GHz ~ 40GHz | 4.91dB |

3 General Information

3.1 General description of EUT

| | |
|----------------------|--|
| Product | Dual Receiver UHF Wireless Intercom Beltpack |
| Brand | RTS |
| Models | TR-825-FD, TR-825-FE, TR-825-HE |
| FCC ID | B5DM537 |
| IC | 1321A-TR825DE |
| Power Supply | 9.0 Vdc |
| Modulation | FM |
| Operating Frequency | TR-825 Band FD: TX:572.1-589.9MHz RX:482-500MHz TR-825 Band HE: TX:590.1-607.9MHz RX:500-518MHz |
| Channel Bandwidth | 100kHz |
| Max. Conducted power | TR-825 Band F: 15.34 dBm TR-825 Band H: 14.76 dBm |
| Antenna type | ¼- wave dipole Antenna |
| Antenna gain | 0dBi |
| Associated Devices | N/A |

Note:

1. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of test modes

The following channels have been tested and presented.

| TR-825 FD Band | | TR-825 HE Band | |
|----------------|-----------------|----------------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| Low | 572.1 | Low | 590.1 |
| Middle | 581.0 | Middle | 599.0 |
| High | 589.9 | High | 607.9 |

3.2.1 General Description of Applied Standards

The EUT has RF transmitter and receiver. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR part 2

FCC 47 CFR part 74

RSS-210 Issue 10 December 2019

ANIS/TIA/EIA-603-e 2016

ANSI 63.26-2015

All test items have been performed and recorded as per the above standards.

3.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


| No. | Product | Brand | Model no. | Serial no. | FCC ID |
|-----|---------|-------|-----------|------------|--------|
| 1 | | | | | |
| 2 | | | | | |
| 3 | | | | | |
| 4 | | | | | |
| 5 | | | | | |
| 6 | | | | | |

| No. | Signal cable description of the above support units |
|-----|---|
| 1 | |
| 2 | |
| 3 | |
| 4 | |
| 5 | |
| 6 | |

Note: all power cords of the above support units are Non-shielded (1.8m).

3.3.1 Configuration of system under test

Work with battery

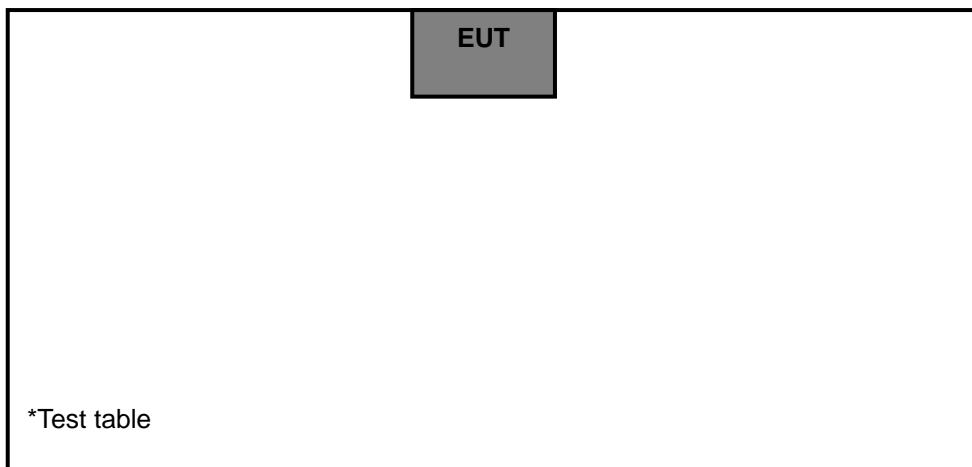

4 Test types and results

4.1 Output Power Measurement

4.1.1 Limits of output power measurement

| LPAS operation in TV bands | |
|--|------------------------|
| Frequency Band | Conducted Output Power |
| 54 – 72MHz 76 – 88MHz 174 – 216MHz | 50mW (17dBm) EIRP |
| 470 – 608 614 - 698 | 250mW (24dBm) |

| LPAS operation in other than TV bands | |
|---------------------------------------|---|
| Conducted Power (W) | 1 |

4.1.2 Test instruments

For conducted power:


| Description & manufacturer | Model no. | Serial no. | Calibrated date | Calibrated until |
|----------------------------|-----------|------------|-----------------|------------------|
| USB Power Sensor | 7002-006 | 159814 | 03/18/2019 | 03/18/2020 |
| 30dB Attenuation | VAT-30W2 | N/A | N/A | N/A |

4.1.3 Test procedures

The transmitter output was connected to power meter through an attenuator. The test result was measured and recorded.

4.1.4 Test setup

Conducted power measurement:

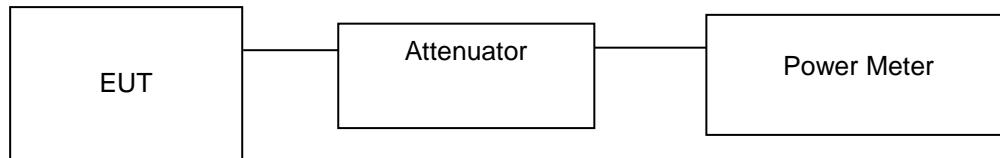

4.1.5 EUT operating conditions

- a. Placed the EUT on the testing table.
- b. Turn on the EUT power by battery.
- c. Enable EUT under transmission condition continuously at specific channel frequency.

4.1.6 Test results

| Band | Frequency (MHz) | Output Power (dBm) | Output Power (mW) | Limit (mW) |
|-----------|-----------------|--------------------|-------------------|------------|
| TR-825 FD | 572 | 14.56 | 28.58 | 250 |
| | 581 | 15.22 | 33.27 | 250 |
| | 590 | 15.34 | 34.20 | 250 |
| TR-825 HE | 590 | 14.76 | 29.92 | 250 |
| | 599 | 14.66 | 29.24 | 250 |
| | 608 | 14.39 | 28.58 | 250 |

4.2 Frequency stability measurement

4.2.1 Limits of frequency stability measurement

| Frequency stability | Limit |
|---|--------|
| Refer as FCC 74.861 (e)(4) RSS-210 G.3 | 0.005% |

According to the FCC part 2.1055 shall be tested the frequency stability. The test extreme voltage is according to the 2.1055(d)(1) vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with specification of EUT -30°C ~ 50°C.


4.2.2 Test instruments

| Description & manufacturer | Model no. | Serial no. | Calibrated date | Calibrated until |
|------------------------------|--------------|------------|-----------------|------------------|
| 50GHz Spectrum Analyzer | N9030B (PXA) | MY57140597 | 06/05/2019 | 06/05/2020 |
| Temperature/Humidity Chamber | 1007H | 61201 | 12/16/2019 | 12/16/2020 |

4.2.3 Test procedure

- a. Turn on EUT and set spectrum analyzer center frequency to the EUT operating frequency. Set spectrum analyzer Resolution Bandwidth to 1 kHz and Video Resolution Bandwidth to 1 kHz AND Frequency Span to 50 kHz, Record this frequency as reference frequency.
- b. Set the temperature of chamber to 50°C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber. Turn the EUT on and measure the EUT operating frequency.
- c. Repeat set 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured. Record all measured frequencies on each temperature step.
- d. Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

4.2.4 Test setup

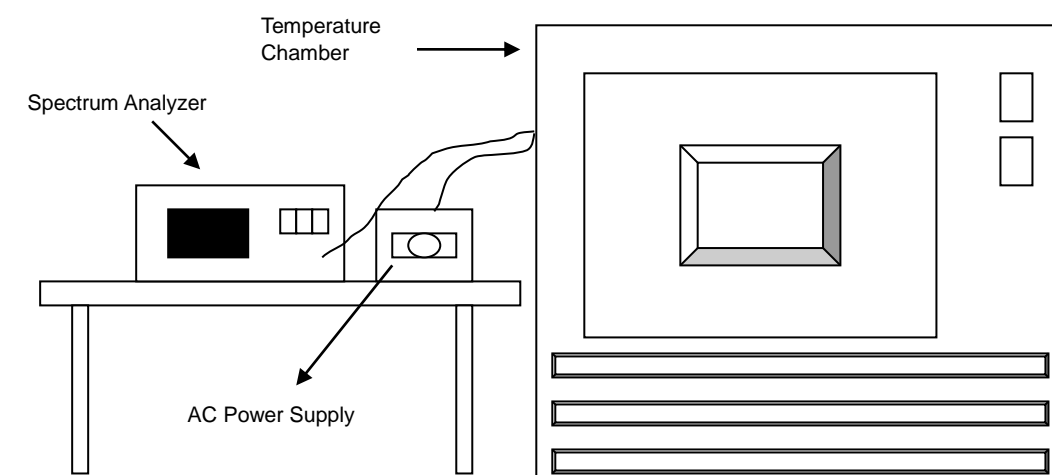

4.2.5 Test results

TR-825 FD:

| | | | |
|--------------------------|----------------------------|-------------|----------|
| Mode | Middle channel 581(MHz) | Input power | 9.0 Vdc |
| Environmental conditions | 20°C, 60%rh | Tested by | Deon Dai |

| Frequency error vs. Voltage | | | | | | | | |
|-----------------------------|-----------------|----------|-----------------|----------|-----------------|----------|-----------------|----------|
| Voltage (volts) | 0minutes | | 2minutes | | 5minutes | | 10minutes | |
| | Frequency (MHz) | (%) | Frequency (MHz) | (%) | Frequency (MHz) | (%) | Frequency (MHz) | (%) |
| 10.35 | 581.0014 | 0.00024 | 580.9987 | -0.00022 | 581.0012 | 0.00021 | 581.0012 | 0.00021 |
| 9.0 | 580.9986 | -0.00024 | 580.9983 | -0.00029 | 580.9983 | -0.00029 | 581.0011 | 0.00019 |
| 7.65 | 581.0013 | 0.00022 | 581.0012 | 0.00021 | 580.9986 | -0.00024 | 580.9989 | -0.00019 |

| Frequency error vs. Temp | | | | | | | | |
|--------------------------|-----------------|----------|-----------------|----------|-----------------|----------|-----------------|----------|
| Temp (°C) | 0minutes | | 2minutes | | 5minutes | | 10minutes | |
| | Frequency (MHz) | (%) | Frequency (MHz) | (%) | Frequency (MHz) | (%) | Frequency (MHz) | (%) |
| 50 | 581.0013 | 0.00022 | 581.0011 | 0.00019 | 580.9983 | -0.00029 | 581.0012 | 0.00021 |
| 40 | 581.0002 | 0.00003 | 581.0007 | 0.00012 | 581.0003 | 0.00005 | 580.9989 | -0.00019 |
| 30 | 580.9985 | -0.00026 | 580.9988 | -0.00021 | 580.9985 | -0.00026 | 580.9999 | -0.00002 |
| 20 | 581.0013 | 0.00022 | 580.9982 | -0.00031 | 581.0013 | 0.00022 | 581.0008 | 0.00014 |
| 10 | 580.9982 | -0.00031 | 580.9993 | -0.00012 | 580.9986 | -0.00024 | 580.9988 | -0.00021 |
| 0 | 581.0002 | 0.00003 | 581.0012 | 0.00021 | 581.0009 | 0.00015 | 581.0007 | 0.00012 |
| -10 | 580.9993 | -0.00012 | 580.9982 | -0.00031 | 580.9985 | -0.00026 | 580.9988 | -0.00021 |
| -20 | 581.0014 | 0.00024 | 581.0011 | 0.00019 | 580.9989 | -0.00019 | 580.9982 | -0.00031 |
| -30 | 580.9998 | -0.00003 | 580.9985 | -0.00026 | 580.9989 | -0.00019 | 580.9988 | -0.00021 |

TR-825 HE:

| | | | |
|--------------------------|----------------------------|-------------|----------|
| Mode | Middle channel 599(MHz) | Input power | 9.0 Vdc |
| Environmental conditions | 20°C , 60%rh | Tested by | Deon Dai |

| Frequency error vs. Voltage | | | | | | | | |
|-----------------------------|-----------------|----------|-----------------|----------|-----------------|----------|-----------------|----------|
| Voltage (volts) | 0minutes | | 2minutes | | 5minutes | | 10minutes | |
| | Frequency (MHz) | (%) | Frequency (MHz) | (%) | Frequency (MHz) | (%) | Frequency (MHz) | (%) |
| 10.35 | 598.9981 | -0.00032 | 599.0005 | 0.00008 | 599.0002 | 0.00003 | 599.0012 | 0.00020 |
| 9.0 | 599.0013 | 0.00022 | 599.0013 | 0.00022 | 599.0002 | 0.00003 | 599.0004 | 0.00007 |
| 7.65 | 598.9983 | -0.00028 | 598.9982 | -0.00030 | 598.9996 | -0.00007 | 598.9983 | -0.00028 |

| Frequency error vs. Temp | | | | | | | | |
|--------------------------|-----------------|----------|-----------------|----------|-----------------|----------|-----------------|----------|
| Temp (°C) | 0minutes | | 2minutes | | 5minutes | | 10minutes | |
| | Frequency (MHz) | (%) | Frequency (MHz) | (%) | Frequency (MHz) | (%) | Frequency (MHz) | (%) |
| 50 | 599.0011 | 0.00018 | 598.9992 | -0.00013 | 599.0012 | 0.00020 | 599.0009 | 0.00015 |
| 40 | 598.9992 | -0.00013 | 599.0012 | 0.00020 | 599.0008 | 0.00013 | 599.0013 | 0.00022 |
| 30 | 598.9991 | -0.00015 | 598.9992 | -0.00013 | 598.9988 | -0.00020 | 598.9988 | -0.00020 |
| 20 | 599.0019 | 0.00032 | 599.0011 | 0.00018 | 599.0001 | 0.00002 | 599.0002 | 0.00003 |
| 10 | 599.0012 | 0.00020 | 599.0014 | 0.00023 | 599.0012 | 0.00020 | 599.0007 | 0.00012 |
| 0 | 598.9989 | -0.00018 | 599.0008 | 0.00013 | 598.9983 | -0.00028 | 599.0013 | 0.00022 |
| -10 | 598.9985 | -0.00025 | 598.9989 | -0.00018 | 598.9982 | -0.00030 | 598.9982 | -0.00030 |
| -20 | 599.0012 | 0.00020 | 599.0018 | 0.00030 | 599.0018 | 0.00030 | 598.9991 | -0.00015 |
| -30 | 599.0013 | 0.00022 | 599.0003 | 0.00005 | 598.9982 | -0.00030 | 599.0013 | 0.00022 |

4.3 Modulation Deviation measurement

4.3.1 Limits of modulation Deviation measurement

| Modulation Deviation | Limit |
|--|---------|
| Refer as FCC 74.861 (e) (3) RSS-210 G.5 | ±75 kHz |

4.3.2 Test instruments

| Description & manufacturer | Model no. | Serial no. | Calibrated date | Calibrated until |
|---------------------------------------|--------------|------------|-----------------|------------------|
| Modulation Analyzer | 8901B | 3226A04414 | 04/23/2019 | 04/23/2020 |
| Function/Arbitrary Waveform Generator | 33220A | MY44016131 | 03/11/2019 | 03/11/2020 |
| 50GHz Spectrum Analyzer | N9030B (PXA) | MY57140597 | 06/05/2019 | 06/05/2020 |

4.3.3 Test procedure

Audio frequency response

- a) Connect the equipment as illustrated.
- b) Set the test receiver to measure peak position deviation. Set the audio bandwidth for ≤ 50 Hz to ≥ 15000 Hz. Turn the de-emphasis function off.
- c) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- d) Apply a 1000 Hz tone and adjust the audio frequency generator to produce 20% of the rated system deviation.
- e) Set the test receiver to measure rms deviation and record the deviation reading as DEV_{REF} .
- f) Set the audio frequency generator to the desired test frequency between 300 Hz and 3000 Hz.
- g) Record the test receiver deviation reading as DEV_{FREQ} .
- h) Calculate the audio frequency response at the present frequency as follows:


$$\text{audio frequency response} = 20 \log_{10} \left(\frac{DEV_{FREQ}}{DEV_{REF}} \right)$$

- i) Repeat step f) through step h) for all the desired test frequencies.

Modulation limiting

- a) Connect the equipment as illustrated.
- b) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- c) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for ≤ 0.25 Hz to 15000 Hz. Turn the de-emphasis function off.
- d) Apply a 1000 Hz modulating signal to the transmitter from the audio frequency generator, and adjust the level to obtain 60% of full rated system deviation. This is the 0 dB reference level.
- e) Increase the level from the audio generator by 20 dB in 5 dB increments recording the deviation as measured from the test receiver in each step. Verify that the audio level used to make the OBW measurement is included in the sweep.
- f) Repeat for step e) at 300 Hz, 2500 Hz and 3000 Hz at a minimum using the 0 dB reference level obtained in step d).
- g) Set the test receiver to measure peak negative deviation and repeat step d) through step f).
- h) The values recorded in step f) and step g) are the modulation limiting.

4.3.4 Test setup

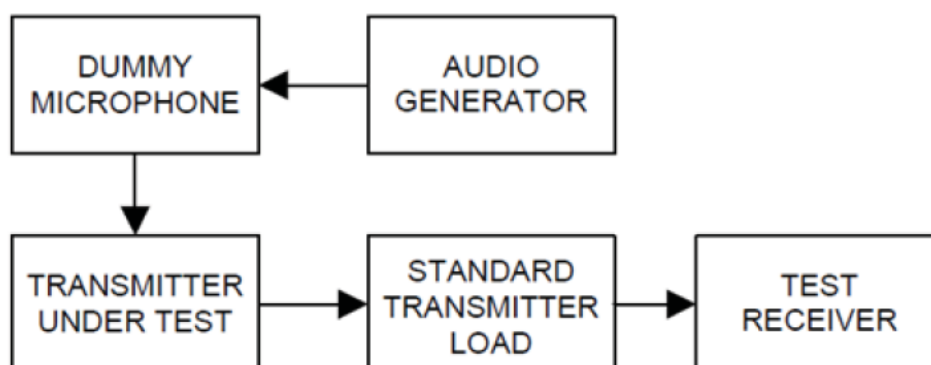


4.3.5 Test results

Modulation Limit

TR-825 FD

Carrier Frequency: 581 MHz

| Modulation Level (dB) | Peak freq. Deviation (kHz) | | | | Limit (kHz) |
|-----------------------|----------------------------|--------|--------|--------|-------------|
| | 300Hz | 1000Hz | 2500Hz | 3000Hz | |
| -20 | 25.3 | 29.3 | 30.2 | 32.4 | ± 75 |
| -15 | 26.7 | 29.9 | 31.2 | 34.6 | ± 75 |
| -10 | 29.3 | 32.3 | 34.2 | 36 | ± 75 |
| -5 | 31.4 | 35.2 | 33.6 | 37.2 | ± 75 |
| 0 | 34.6 | 38.2 | 46.7 | 49.3 | ± 75 |
| 5 | 48.3 | 53.6 | 56.7 | 57.6 | ± 75 |
| 10 | 55.2 | 57.2 | 59.2 | 60.3 | ± 75 |
| 15 | 59.8 | 60.9 | 61.2 | 62.5 | ± 75 |
| 20 | 63.2 | 64.2 | 65.3 | 67.3 | ± 75 |

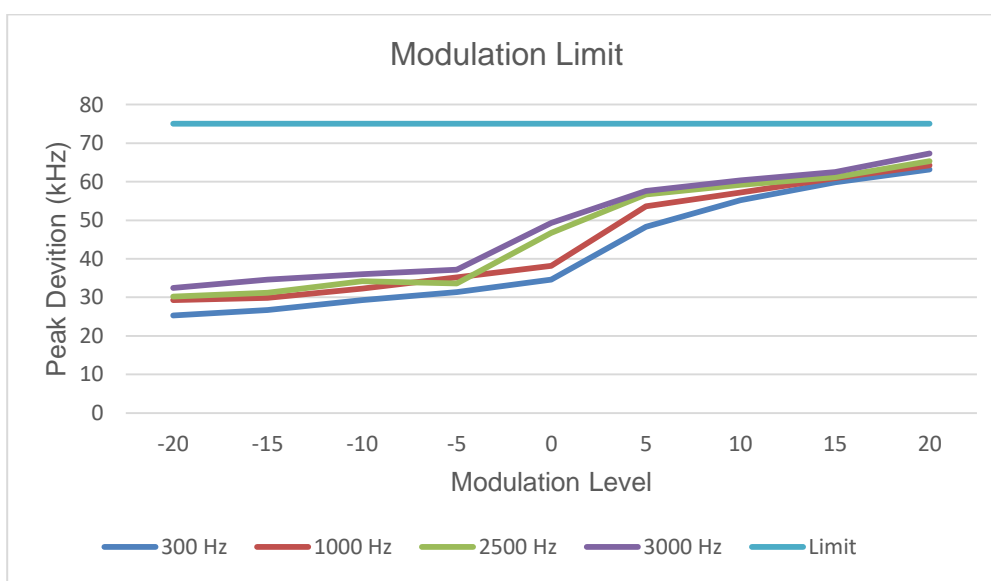

Audio Frequency Response (Middle Channel)

| Modulation Frequency (Hz) | Input Level (mw) | Audio Frequency Response (dB) |
|------------------------------|---------------------|----------------------------------|
| 100 | 27.3 | 2.05 |
| 300 | 25.3 | 1.39 |
| 500 | 22.42 | 0.34 |
| 700 | 21.6 | 0.02 |
| 1000 | 21.56 | 0.00 |
| 1500 | 19.8 | -0.74 |
| 2000 | 16.43 | -2.36 |
| 2500 | 13.5 | -4.07 |
| 3500 | 12.33 | -4.85 |
| 5000 | 11.34 | -5.58 |


Note: AF Response = $20 \cdot \log(\text{AF Level} / \text{AF Level of 1 kHz})$

Modulation Limit

TR-825 HE

Carrier Frequency: 599 MHz

| Modulation Level (dB) | Peak freq. Deviation (kHz) | | | | Limit (kHz) |
|-----------------------|----------------------------|--------|--------|--------|-------------|
| | 300Hz | 1000Hz | 2500Hz | 3000Hz | |
| -20 | 26.4 | 28.2 | 32.2 | 34.2 | ± 75 |
| -15 | 27.5 | 29.6 | 33.2 | 35.2 | ± 75 |
| -10 | 28.6 | 30.2 | 34.5 | 36.3 | ± 75 |
| -5 | 30.4 | 31.2 | 36.3 | 37.2 | ± 75 |
| 0 | 32.2 | 41.4 | 44.5 | 50.3 | ± 75 |
| 5 | 45.2 | 54.2 | 56.4 | 56.2 | ± 75 |
| 10 | 54.6 | 58.2 | 59.2 | 59.6 | ± 75 |
| 15 | 59.3 | 61.9 | 61.4 | 63.7 | ± 75 |
| 20 | 62.6 | 64.2 | 65.3 | 66.2 | ± 75 |

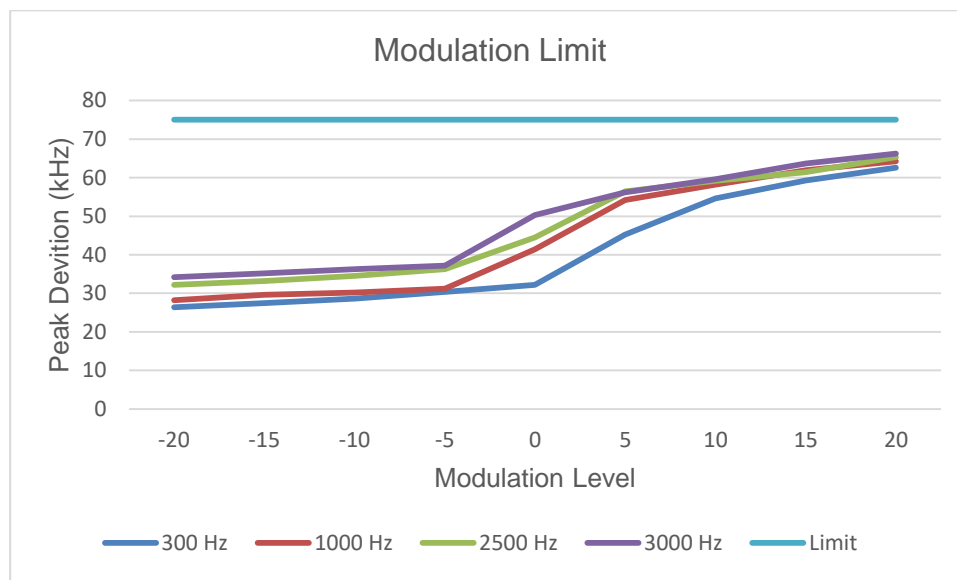

Audio Frequency Response (Middle Channel)

| Modulation Frequency (Hz) | Input Level (mw) | Audio Frequency Response (dB) |
|------------------------------|---------------------|----------------------------------|
| 100 | 25.66 | 1.56 |
| 300 | 23.52 | 0.80 |
| 500 | 22.31 | 0.34 |
| 700 | 21.88 | 0.17 |
| 1000 | 21.45 | 0.00 |
| 1500 | 18.92 | -1.09 |
| 2000 | 15.6 | -2.77 |
| 2500 | 13.64 | -3.93 |
| 3500 | 12.33 | -4.81 |
| 5000 | 11.34 | -5.54 |

Note: AF Response = $20 \cdot \log(\text{AF Level} / \text{AF Level of 1 kHz})$

4.4 Occupied bandwidth and emission Mask measurement

4.4.1 Limits of occupied bandwidth and emission Mask measurement

According to FCC 74.861 (e) (3) any form of modulation may be used. A maximum deviation of ± 75 kHz is permitted when frequency modulation is employed.


(5) The operating bandwidth shall not exceed 200 kHz.

(7) Analog emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.1.2 of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Digital emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.2.2 (Figure 4) of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Beyond one megahertz below and above the carrier frequency, emissions shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 v1.4.2 (2011-08). The requirements of this paragraph (e)(7) shall not apply to applications for certification of equipment in these bands until nine months after release of the Commission's Channel Reassignment Public Notice, as defined in §73.3700(a)(2) of this chapter;

4.4.2 Test instruments

| Description & manufacturer | Model no. | Serial no. | Calibrated date | Calibrated until |
|---------------------------------------|--------------|------------|-----------------|------------------|
| 50GHz Spectrum Analyzer | N9030B (PXA) | MY57140597 | 06/05/2019 | 06/05/2020 |
| Function/Arbitrary Waveform Generator | 33220A | MY44016131 | 03/10/2019 | 03/10/2020 |
| 30dB Attenuation | VAT-30W2 | N/A | N/A | N/A |

4.4.3 Test setup

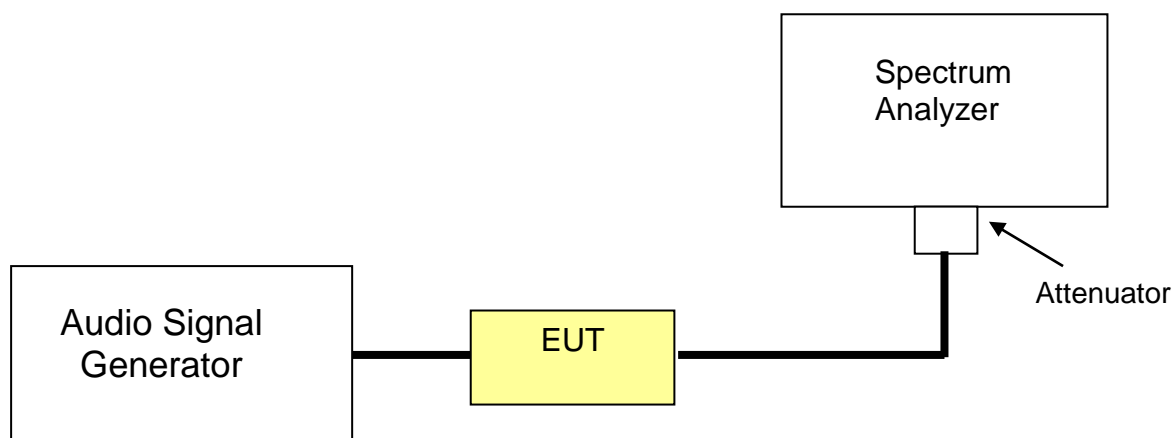

4.4.4 Test procedures

The OBW is according to KDB 971168 D01v03r01

The Emission Mask is according to section 8.3 of ETSI EN 300 422-1 V1.4.2 (2011-08).


4.4.5 Test results

| Band | Frequency (MHz) | 99% Bandwidth (kHz) | Limit (kHz) | Result |
|-----------|-----------------|---------------------|-------------|--------|
| TR-825 FD | 572.1 | 87.16 | 200 | Pass |
| | 581.0 | 88.49 | 200 | Pass |
| | 589.9 | 92.22 | 200 | Pass |
| TR-825 HE | 590.1 | 84.83 | 200 | Pass |
| | 599.0 | 82.92 | 200 | Pass |
| | 607.9 | 88.36 | 200 | Pass |




BUREAU VERITAS


Bandwidth Test Plots

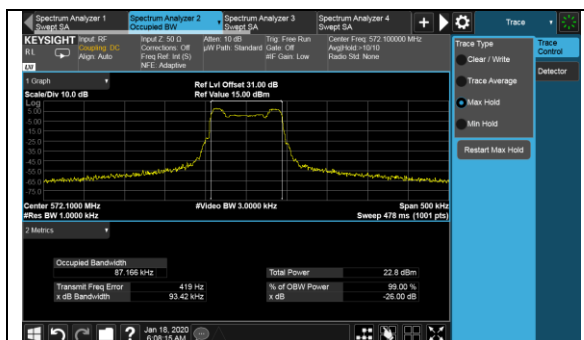


TR-825 FD - Low Channel

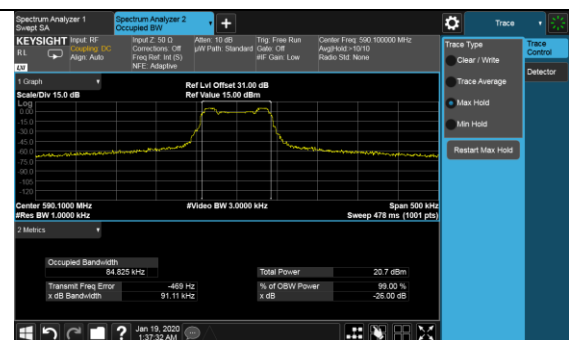


TR-825 HE - Low Channel

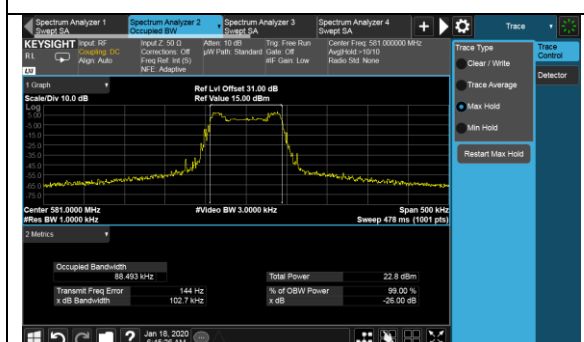


TR-825 FD - Middle Channel

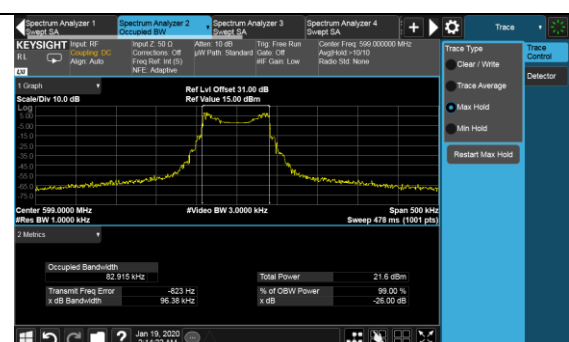

TR-825 HE - Middle Channel

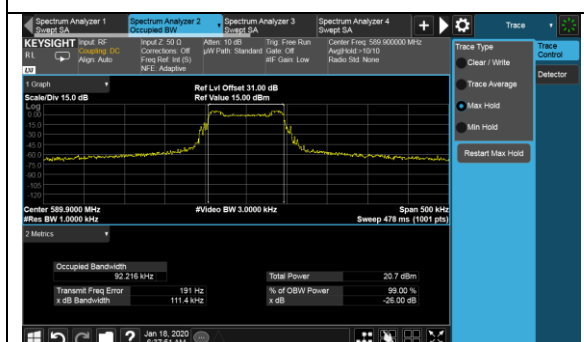


TR-825 FD - High Channel

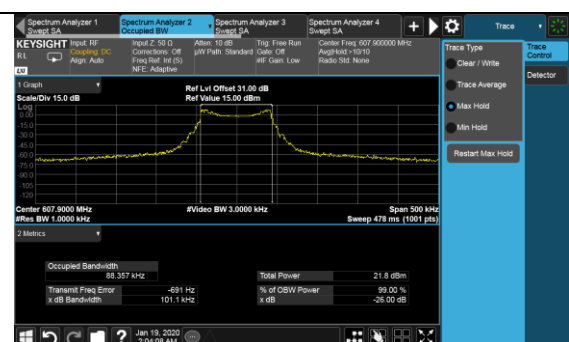


TR-825 HE - High Channel

Emission Mask Test Plots


TR-825 FD:

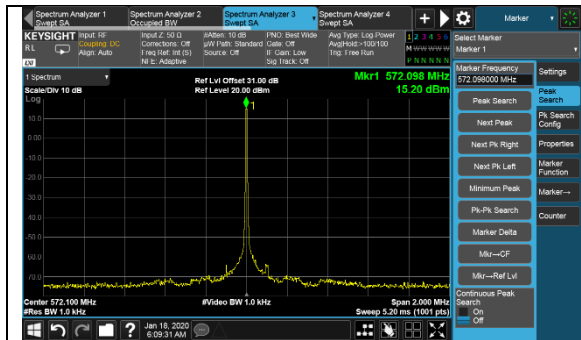


Low Channel, Reference

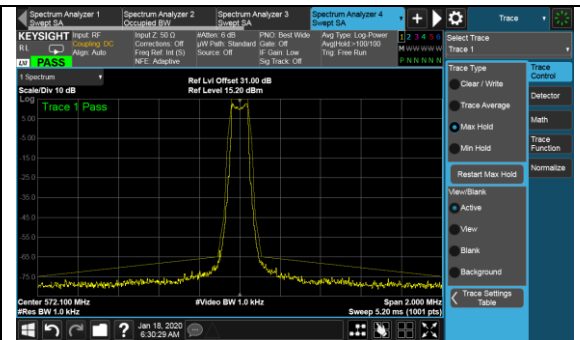


Low Channel, Mask

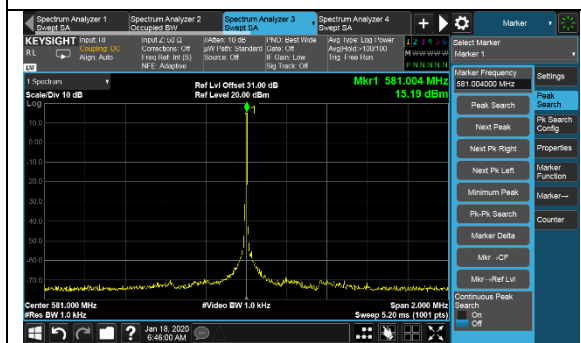


Middle Channel, Reference

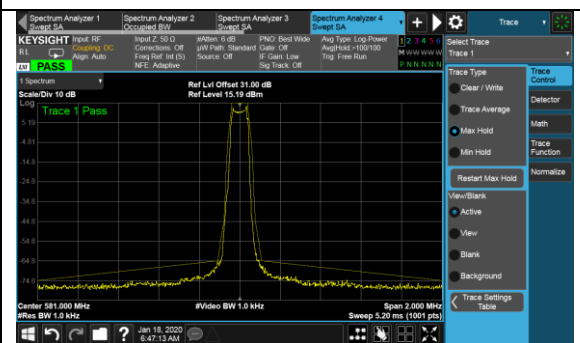

Middle Channel, Mask

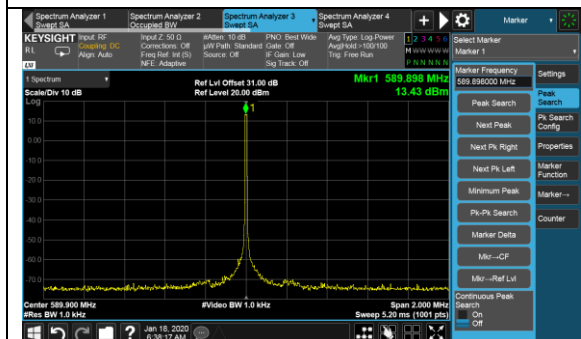


High Channel, Reference

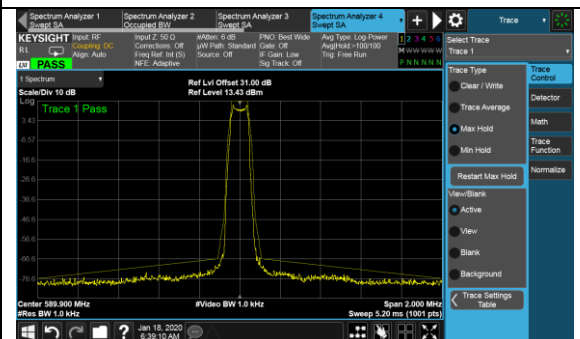


High Channel, Mask


TR-825 HE:

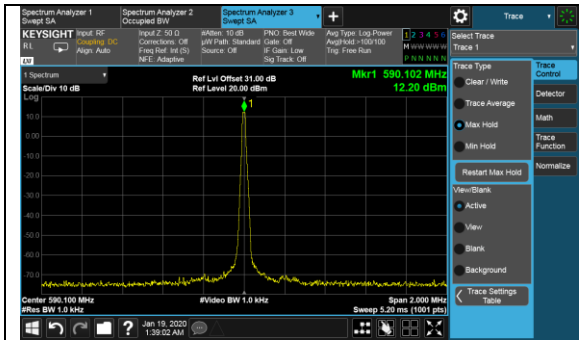


Low Channel, Reference

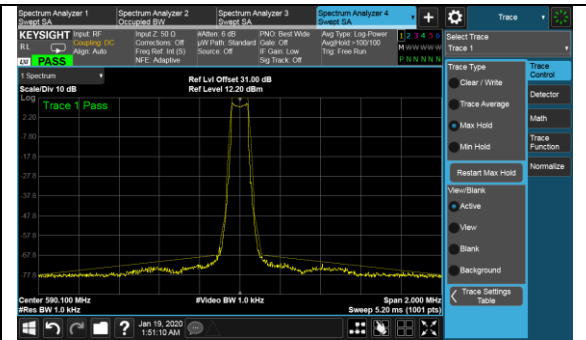


Low Channel, Mask

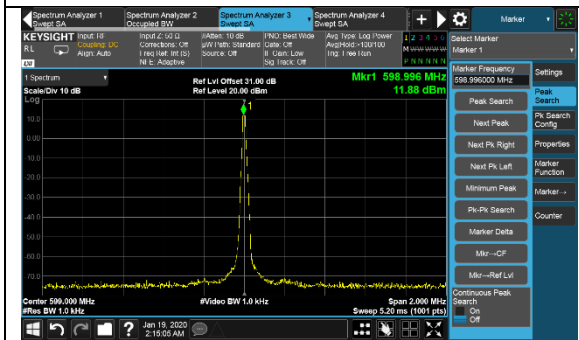


Middle Channel, Reference

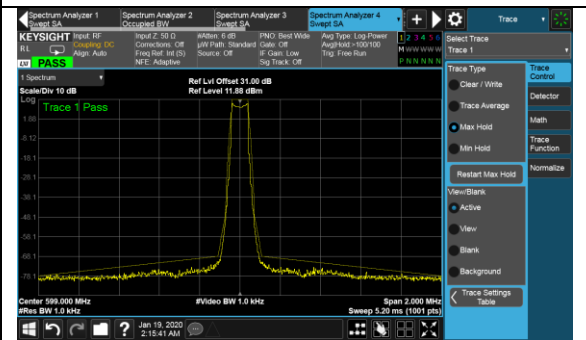

Middle Channel, Mask

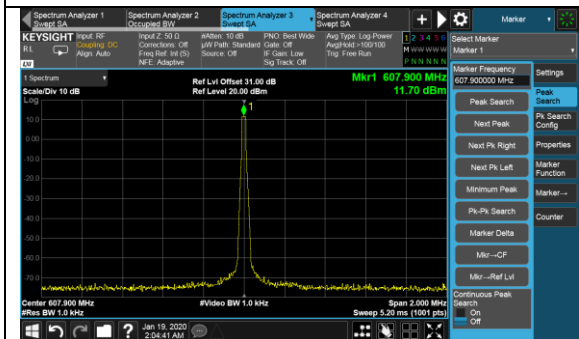

High Channel, Reference

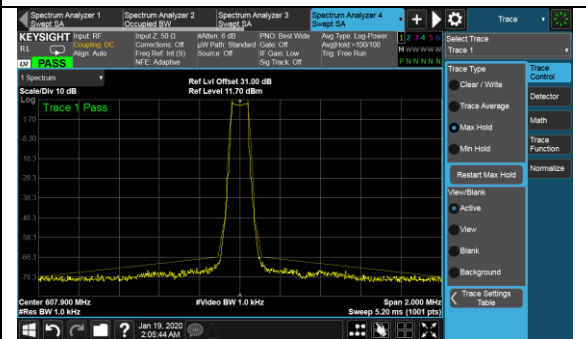

High Channel, Mask

4.5 Conducted spurious emissions

4.5.1 Limits of conducted spurious emissions measurement

According to FCC 74.861 (e) (7) Analog emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.1.2 of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Digital emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.2.2 (Figure 4) of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Beyond one megahertz below and above the carrier frequency, emissions shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 v1.4.2 (2011-08). The requirements of this paragraph (e)(7) shall not apply to applications for certification of equipment in these bands until nine months after release of the Commission's Channel Reassignment Public Notice, as defined in §73.3700(a)(2) of this chapter.


4.5.2 Test instruments

| Description & manufacturer | Model no. | Serial no. | Calibrated date | Calibrated until |
|----------------------------|--------------|------------|-----------------|------------------|
| 50GHz Spectrum Analyzer | N9030B (PXA) | MY57140597 | 06/05/2019 | 06/05/2020 |
| 30dB Attenuation | VAT-30W2 | N/A | N/A | N/A |

4.5.3 Test procedure

- a. The EUT was set up for the rated peak power. The power was measured with spectrum analyzer. All measurements were done at 3 channels: low, middle and high operational frequency range.
- b. When the spectrum scanned from 30 MHz to 26.5 GHz, it shall be connected to spectrum analyzer via an attenuator. The spectrum set RBW = 100 kHz, VBW = 300 kHz while below 1GHz and set RBW = 1 MHz, VBW = 3 MHz with above 1GHz.

4.5.4 Test setup

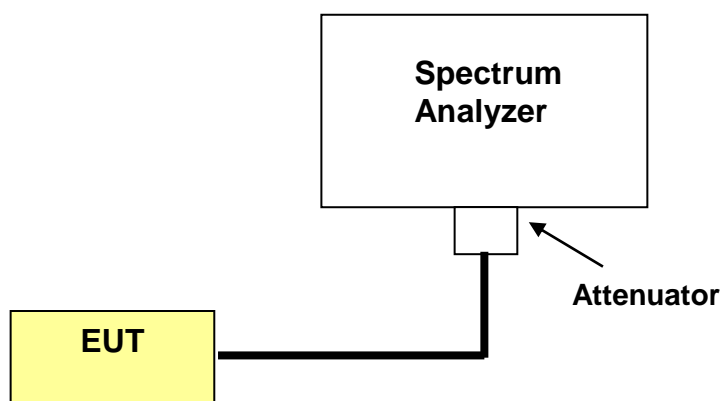

4.5.5 EUT operating conditions


Same as item 4.1.5

4.5.6 Test results

TR-825 FD:



TR-825 HE:

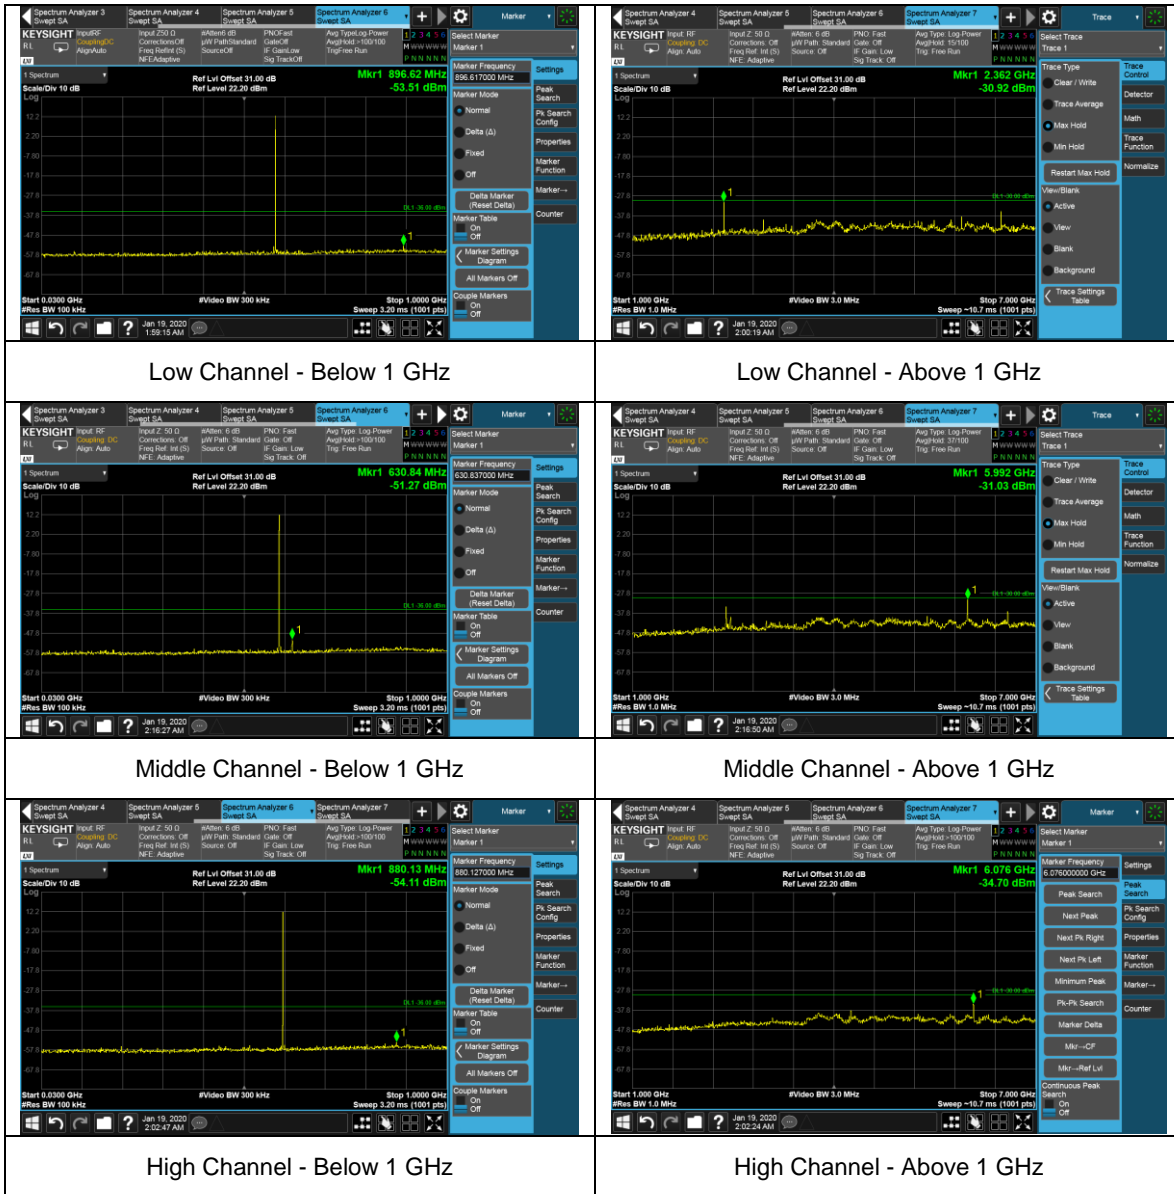

4.6 Radiated emission measurement

4.6.1 Limits of radiated emission measurement

According to FCC 74.861 (e) (7) Analog emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.1.2 of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Digital emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in section 8.3.2.2 (Figure 4) of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2 (2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; part 1: Technical characteristics and methods of measurement. Beyond one megahertz below and above the carrier frequency, emissions shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 v1.4.2 (2011-08). The requirements of this paragraph (e)(7) shall not apply to applications for certification of equipment in these bands until nine months after release of the Commission's Channel Reassignment Public Notice, as defined in §73.3700(a)(2) of this chapter.

According to RSS-210 Annex G.4 Transmitter unwanted emissions

The transmitter unwanted emissions shall meet and be measured according to the requirements in sections 8.3 and 8.4 of ETSI EN 300 422-1.

4.6.2 Test instruments

| Description & Manufacturer | Model No. | Serial No. | Calibrated Date | Calibrated Until |
|---|------------------|-------------------|------------------------|-------------------------|
| Keysight Signal Generator | MXG N5182A | MY47071065 | 06/28/2019 | 06/28/2020 |
| 50GHz Spectrum Analyzer | N9030B (PXA) | MY57140374 | 07/22/2019 | 07/22/2020 |
| Preamplifier RF-Lambda | RAMP00M50GA | 17032300047 | 09/19/2019 | 09/19/2020 |
| RF Preamplifier | LPA-6-30 | 11170602 | 05/06/2019 | 05/06/2020 |
| Hybrid Antenna SUNAR | JB6 | A111717 | 03/09/2019 | 03/09/2020 |
| DRG Horn Antenna ETS LINDGREN | 3117 | 214309 | 11/22/2019 | 11/22/2020 |
| Tuned Dipole Antenna 30 - 1000 MHz (4pcs set) | AD-100 | 40133 | 01/23/2018 | 01/23/2020 |

4.6.3 Test procedures


1. The power was measured with spectrum analyzer. All measurements were done at the worst channel. (low, middle and high channel of operational frequency range.)
2. Substitution method is used for EIRP measurement. In the open area test site, EUT placed on the 0.8m height of turn table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “read value” is the spectrum reading the maximum power value.
3. The substitution antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the turn table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a value of spectrum reading equal to “read value “ of step b. Record the power level of S.G
4. $EIRP = \text{output power level of S.G} - \text{TX cable loss} + \text{antenna gain of substitution antenna}.$

Note: the resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz


4.6.4 Deviation from test standard

No deviation

4.6.5 Test setup

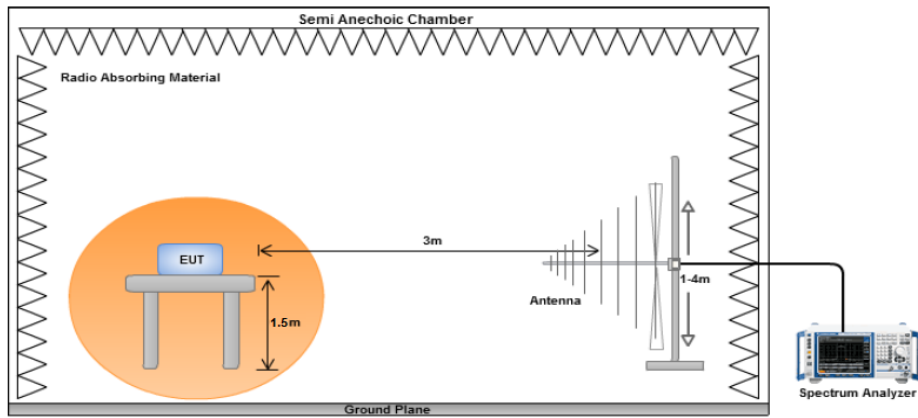

Test Setup below 1GHz

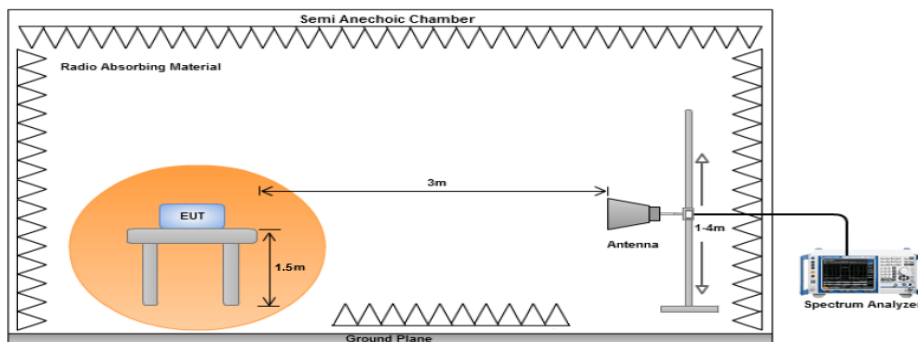

Test Setup above 1GHz

For the actual test configuration, please refer to the related item – photographs of the test configuration.

4.6.6 EUT operating conditions

Same as item 4.1.5

4.6.7 Test results

TR-825 FD:

Below 1GHz Worst-case Data

| | | | |
|------------------------|--------------|--|--------------|
| OPERATING STATE | Transmitting | SPURIOUS EMISSION FREQUENCY RANGE | 30MHz ~ 1GHz |
|------------------------|--------------|--|--------------|

| Indicated | | | Test Antenna | | Substituted | | | | | | |
|------------|-----------|-----|--------------|-----------|-------------|-------------|----------------|-----------------|----------------------|-------------|-------------|
| Freq (MHz) | Raw (dBm) | Deg | Hgt (cm) | Pol (V/H) | Freq (MHz) | Level (dBm) | Ant Gain (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
| 105.72 | -71.76 | 100 | 177 | V | 105.72 | -66.31 | 0 | 0.34 | -66.65 | -54 | -12.65 |
| 105.72 | -74.11 | 173 | 190 | H | 105.72 | -67.13 | 0 | 0.34 | -67.47 | -54 | -13.47 |
| 428 | -69.08 | 298 | 202 | V | 428 | -64.07 | 0 | 0.61 | -64.68 | -36 | -28.68 |
| 428 | -71.52 | 0 | 186 | H | 428 | -66.05 | 0 | 0.61 | -66.66 | -36 | -30.66 |

Above 1GHz

| | | | |
|------------------------|-----------------|--------------------------|-----------|
| Frequency Range | 1GHz ~ 12.75GHz | Operating Channel | 572.1 MHz |
|------------------------|-----------------|--------------------------|-----------|

| Indicated | | | Test Antenna | | Substituted | | | | | | |
|------------|-----------|-----|--------------|-----------|-------------|-------------|----------------|-----------------|----------------------|-------------|-------------|
| Freq (MHz) | Raw (dBm) | Deg | Hgt (cm) | Pol (V/H) | Freq (MHz) | Level (dBm) | Ant Gain (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
| 1144.2 | -48.28 | 109 | 155 | V | 1144.2 | -43.68 | 8.14 | 1.12 | -36.66 | -30 | -6.66 |
| 1144.2 | -47.27 | 274 | 286 | H | 1144.2 | -42.77 | 8.14 | 1.12 | -35.75 | -30 | -5.75 |
| 1716.3 | -49.15 | 237 | 183 | V | 1716.3 | -44.61 | 9.24 | 1.3 | -36.67 | -30 | -6.67 |
| 1716.3 | -47.96 | 37 | 173 | H | 1716.3 | -43.35 | 9.24 | 1.3 | -35.41 | -30 | -5.41 |

| | | | |
|------------------------|-----------------|--------------------------|---------|
| Frequency Range | 1GHz ~ 12.75GHz | Operating Channel | 581 MHz |
|------------------------|-----------------|--------------------------|---------|

| Indicated | | | Test Antenna | | Substituted | | | | | | |
|------------|-----------|-----|--------------|-----------|-------------|-------------|----------------|-----------------|----------------------|-------------|-------------|
| Freq (MHz) | Raw (dBm) | Deg | Hgt (cm) | Pol (V/H) | Freq (MHz) | Level (dBm) | Ant Gain (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
| 1162 | -47.72 | 281 | 133 | V | 1162 | -42.96 | 8.14 | 1.12 | -35.94 | -30 | -5.94 |
| 1162 | -48.32 | 72 | 108 | H | 1162 | -43.53 | 8.14 | 1.12 | -36.51 | -30 | -6.51 |
| 1743 | -49.23 | 183 | 183 | V | 1743 | -44.37 | 9.24 | 1.3 | -36.43 | -30 | -6.43 |
| 1743 | -49.86 | 174 | 174 | H | 1743 | -44.89 | 9.24 | 1.3 | -36.95 | -30 | -6.95 |

| | | | |
|------------------------|-----------------|--------------------------|-----------|
| Frequency Range | 1GHz ~ 12.75GHz | Operating Channel | 589.9 MHz |
|------------------------|-----------------|--------------------------|-----------|

| Indicated | | | Test Antenna | | Substituted | | | | | | |
|------------|-----------|-----|--------------|-----------|-------------|-------------|----------------|-----------------|----------------------|-------------|-------------|
| Freq (MHz) | Raw (dBm) | Deg | Hgt (cm) | Pol (V/H) | Freq (MHz) | Level (dBm) | Ant Gain (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
| 1179.8 | -48.73 | 184 | 107 | V | 1179.8 | -43.81 | 8.36 | 1.14 | -36.59 | -30 | -6.59 |
| 1179.8 | -47.8 | 122 | 194 | H | 1179.8 | -42.88 | 8.36 | 1.14 | -35.66 | -30 | -5.66 |
| 1769.7 | -47.54 | 208 | 174 | V | 1769.7 | -46.5 | 9.16 | 1.32 | -38.66 | -30 | -8.66 |
| 1769.7 | -47.83 | 138 | 199 | H | 1769.7 | -44.83 | 9.16 | 1.32 | -36.99 | -30 | -6.99 |

REMARKS:

1. Absolute level (dBm) = Level (dBm) + Ant Gain (dBi) – Cable Loss (dB)
2. Margin value = Absolute level – Limit value.

TR-825 HE:

Below 1GHz Worst-case Data

| | | | |
|------------------------|--------------|--|--------------|
| OPERATING STATE | Transmitting | SPURIOUS EMISSION FREQUENCY RANGE | 30MHz ~ 1GHz |
|------------------------|--------------|--|--------------|

| Indicated | | | Test Antenna | | Substituted | | | | | | |
|------------|-----------|-----|--------------|-----------|-------------|-------------|----------------|-----------------|----------------------|-------------|-------------|
| Freq (MHz) | Raw (dBm) | Deg | Hgt (cm) | Pol (V/H) | Freq (MHz) | Level (dBm) | Ant Gain (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
| 98.92 | -68.31 | 298 | 108 | V | 98.92 | -64.33 | 0 | 0.34 | -64.67 | -54 | -10.67 |
| 98.92 | -70.01 | 166 | 205 | H | 98.92 | -64.97 | 0 | 0.34 | -65.31 | -54 | -11.31 |
| 425.29 | -65.12 | 27 | 163 | V | 425.29 | -60.45 | 0 | 0.61 | -61.06 | -36 | -25.06 |
| 425.29 | -67.34 | 199 | 189 | H | 425.29 | -63.64 | 0 | 0.61 | -64.25 | -36 | -28.25 |

Above 1GHz

| | | | |
|------------------------|-----------------|--------------------------|-----------|
| Frequency Range | 1GHz ~ 12.75GHz | Operating Channel | 590.1 MHz |
|------------------------|-----------------|--------------------------|-----------|

| Indicated | | | Test Antenna | | Substituted | | | | | | |
|------------|-----------|-----|--------------|-----------|-------------|-------------|----------------|-----------------|----------------------|-------------|-------------|
| Freq (MHz) | Raw (dBm) | Deg | Hgt (cm) | Pol (V/H) | Freq (MHz) | Level (dBm) | Ant Gain (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
| 1180.2 | -50.18 | 122 | 158 | V | 1180.2 | -45.08 | 8.36 | 1.14 | -37.86 | -30 | -7.86 |
| 1180.2 | -49.06 | 129 | 209 | H | 1180.2 | -44.03 | 8.36 | 1.14 | -36.81 | -30 | -6.81 |
| 1770.3 | -51.23 | 298 | 184 | V | 1770.3 | -45.6 | 9.16 | 1.32 | -37.76 | -30 | -7.76 |
| 1770.3 | -51.3 | 36 | 174 | H | 1770.3 | -44.57 | 9.16 | 1.32 | -36.73 | -30 | -6.73 |

| | | | |
|------------------------|-----------------|--------------------------|---------|
| Frequency Range | 1GHz ~ 12.75GHz | Operating Channel | 599 MHz |
|------------------------|-----------------|--------------------------|---------|

| Indicated | | | Test Antenna | | Substituted | | | | | | |
|------------|-----------|-----|--------------|-----------|-------------|-------------|----------------|-----------------|----------------------|-------------|-------------|
| Freq (MHz) | Raw (dBm) | Deg | Hgt (cm) | Pol (V/H) | Freq (MHz) | Level (dBm) | Ant Gain (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
| 1198 | -48.08 | 99 | 157 | V | 1198 | -42.98 | 8.36 | 1.14 | -35.76 | -30 | -5.76 |
| 1198 | -50.51 | 173 | 280 | H | 1198 | -44.17 | 8.36 | 1.14 | -36.95 | -30 | -6.95 |
| 1797 | -50.19 | 163 | 185 | V | 1797 | -45.09 | 9.16 | 1.32 | -37.25 | -30 | -7.25 |
| 1797 | -52.21 | 186 | 174 | H | 1797 | -46.02 | 9.16 | 1.32 | -38.18 | -30 | -8.18 |

| | | | |
|------------------------|-----------------|--------------------------|-----------|
| Frequency Range | 1GHz ~ 12.75GHz | Operating Channel | 607.9 MHz |
|------------------------|-----------------|--------------------------|-----------|

| Indicated | | | Test Antenna | | Substituted | | | | | | |
|------------|-----------|-----|--------------|-----------|-------------|-------------|----------------|-----------------|----------------------|-------------|-------------|
| Freq (MHz) | Raw (dBm) | Deg | Hgt (cm) | Pol (V/H) | Freq (MHz) | Level (dBm) | Ant Gain (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) | Margin (dB) |
| 1215.8 | -49.89 | 222 | 173 | V | 1215.8 | -44.76 | 8.36 | 1.14 | -37.54 | -30 | -7.54 |
| 1215.8 | -48.61 | 163 | 120 | H | 1215.8 | -43.61 | 8.36 | 1.14 | -36.39 | -30 | -6.39 |
| 1823.7 | -52.78 | 360 | 102 | V | 1823.7 | -47.65 | 9.16 | 1.32 | -39.81 | -30 | -9.81 |
| 1823.7 | -51.62 | 28 | 174 | H | 1823.7 | -46.51 | 9.16 | 1.32 | -38.67 | -30 | -8.67 |

REMARKS:

1. Absolute level (dBm) = Level (dBm) + Ant Gain (dBi) – Cable Loss (dB)
2. Margin value = Absolute level – Limit value.

5 Photographs of the test configuration

Please refer to the attached file (test setup photo).

6 Information Of The Testing Laboratories

Bureau Veritas is a global leader in testing, inspection and certification (TIC) services. We help businesses improve safety, sustainability and productivity; and our clients include the majority of leading brands in retail, manufacturing and other industries. With a presence in every major country around the world, our quality assurance and compliance solutions are vital in helping our customers enhance product quality and concept-to-consumer journeys. We also assist with increasing speed to market, profitability and brand equity throughout the supply chain. Bureau Veritas is a leading wireless/IoT testing, inspection, audit and certification provider, with a global network of test laboratories to support the IoT industry in areas of connectivity, security, interoperability as well as quality, health & safety, and environmental/chemical requirements.

If you have any comments, please feel free to contact us at the following:

Milpitas EMC/RF/Safety/Telecom Lab

775 Montague Expressway, Milpitas, CA 95035
Tel: +1 408 526 1188

Sunnyvale OTA/Bluetooth Lab

1293 Anvilwood Avenue, Sunnyvale, CA
94089
Tel: +1 669 600 5293

Littleton EMC/RF/Safety/Environmental Lab

1 Distribution Center Cir #1, Littleton, MA 01460
Tel: +1 978 486 8880

Email: sales.eaw@us.bureauveritas.com

Web Site: www.cps.bureauveritas.com

The address and road map of all our labs can be found in our web site also.

--- END ---