






Test Graphs of Spurious Emissions outside of the 5.470-5.725 GHz band for transmitters operating in the 5.470-5.725 GHz band




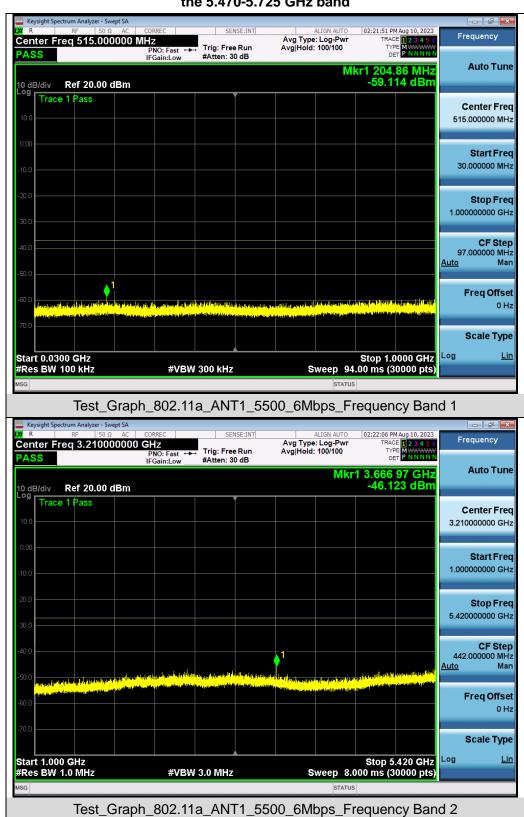




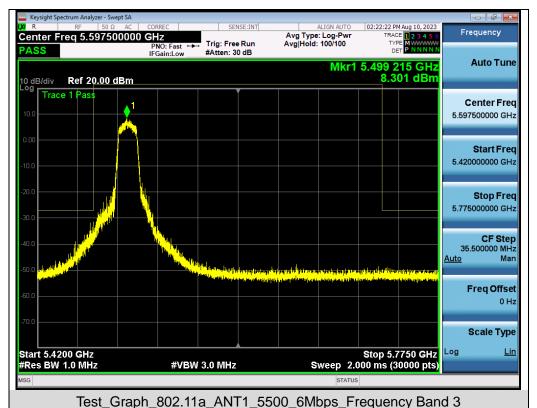










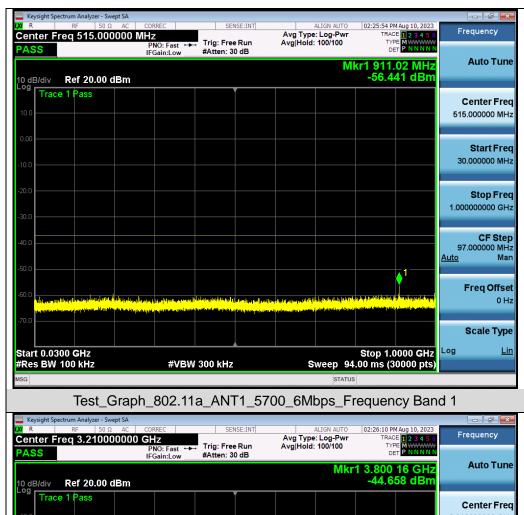

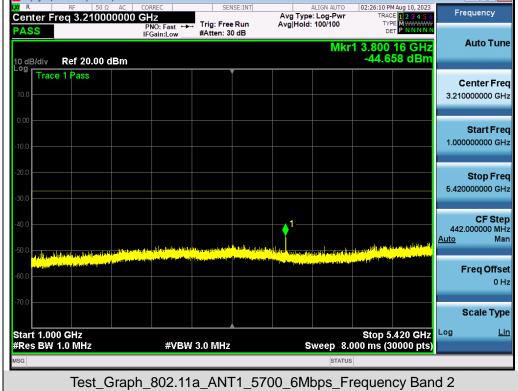






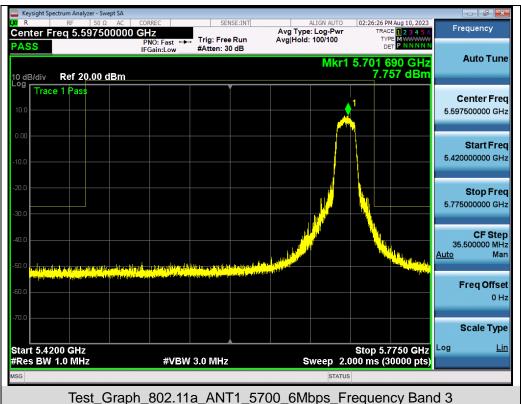






Freq Offset 0 Hz

Scale Type

Log

Stop 5.420 GHz Sweep 8.000 ms (30000 pts)




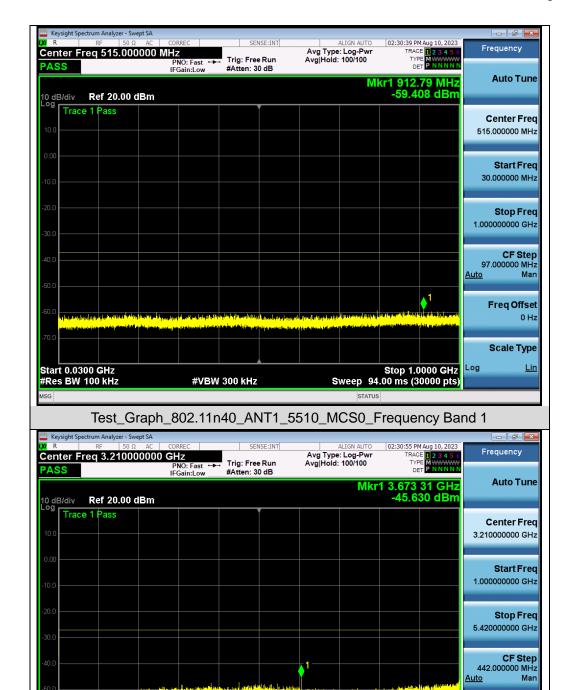


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Graph 802.11n40 ANT1 5510 MCS0 Frequency Band 2


#VBW 3.0 MHz





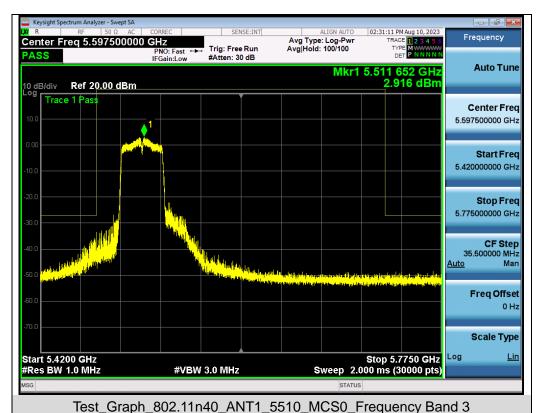






Scale Type

Stop 5.420 GHz Sweep 8.000 ms (30000 pts)




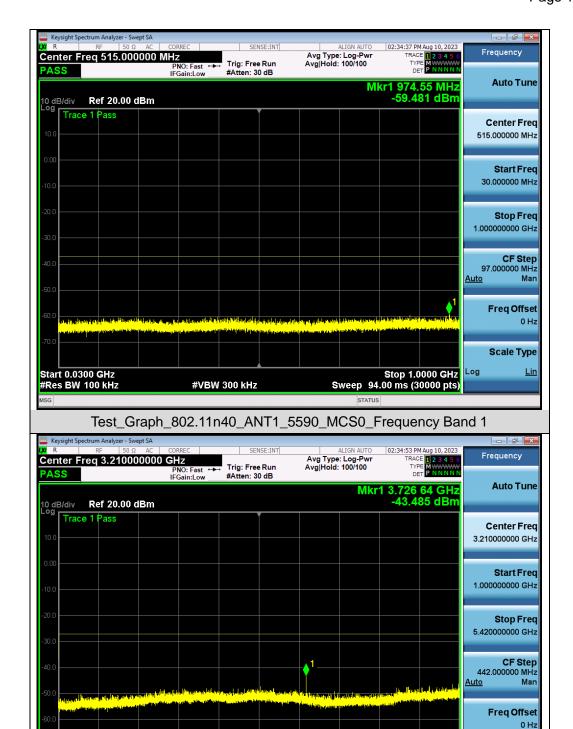


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Graph 802.11n40 ANT1 5590 MCS0 Frequency Band 2


#VBW 3.0 MHz





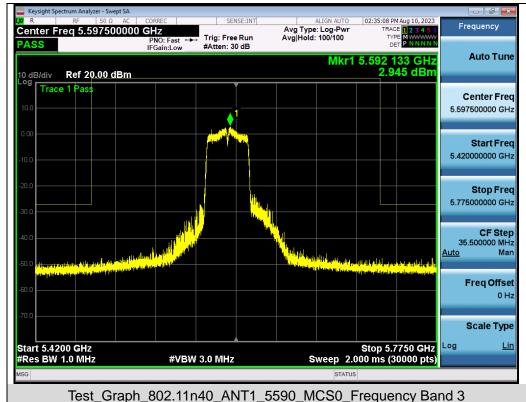






Scale Type

Log

Stop 5.420 GHz Sweep 8.000 ms (30000 pts)




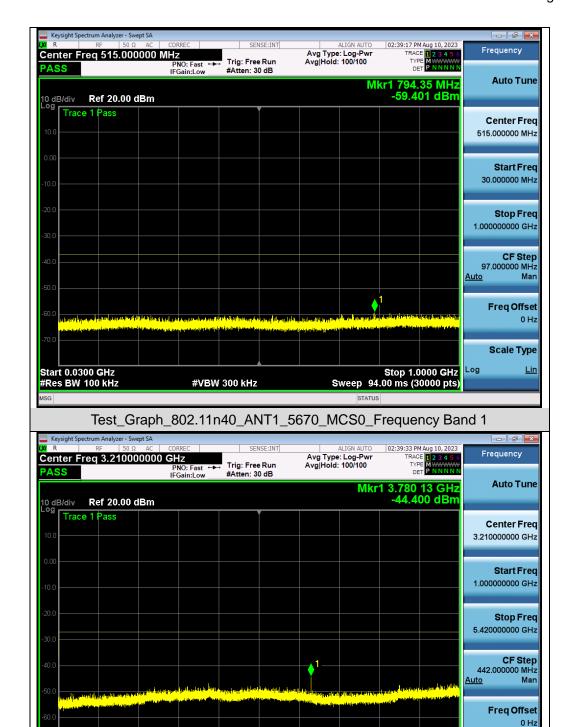


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Graph 802.11n40 ANT1 5670 MCS0 Frequency Band 2


#VBW 3.0 MHz





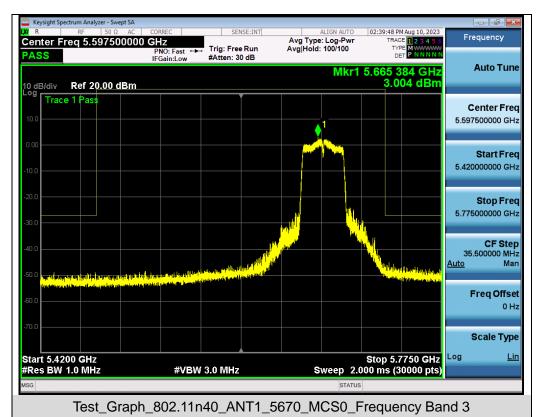





0 Hz

Scale Type

Log

Stop 5.420 GHz Sweep 8.000 ms (30000 pts)







Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11ac80_ANT1_5530_MCS9_Frequency Band 2


#VBW 3.0 MHz






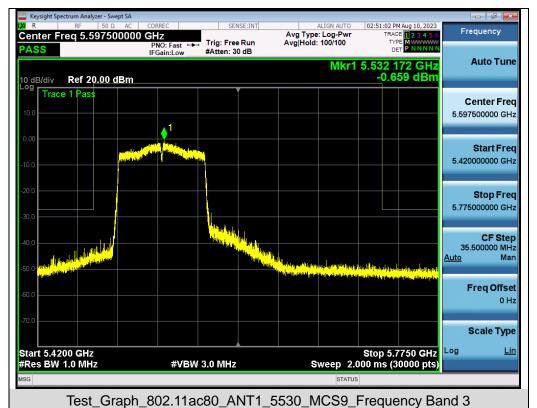










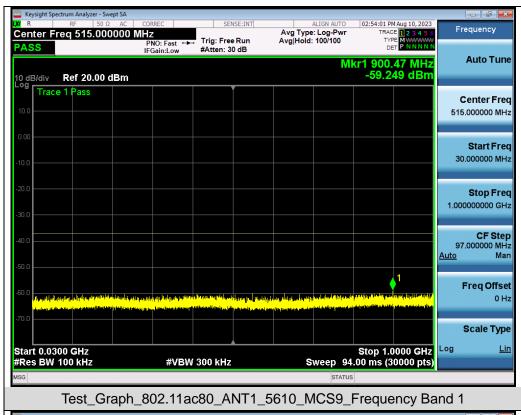

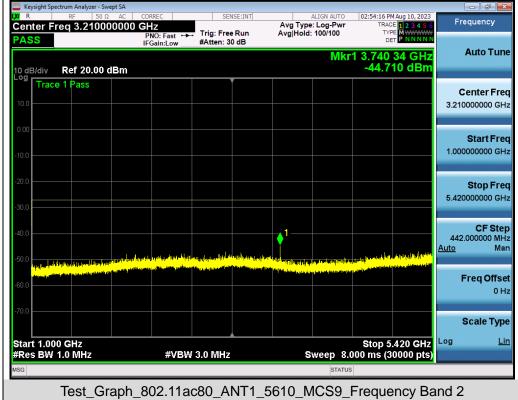






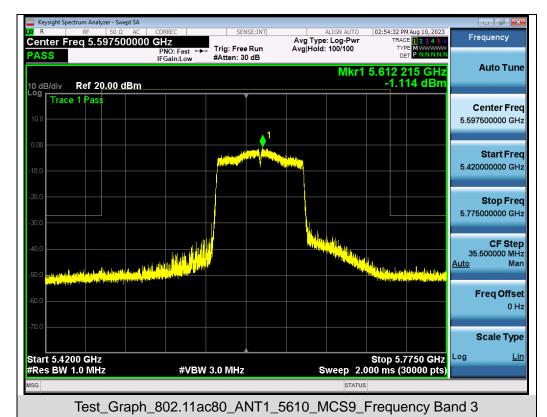










Test Graphs of Spurious Emissions outside of the 5.725-5.85 GHz band for transmitters operating in the 5.725-5.85 GHz band

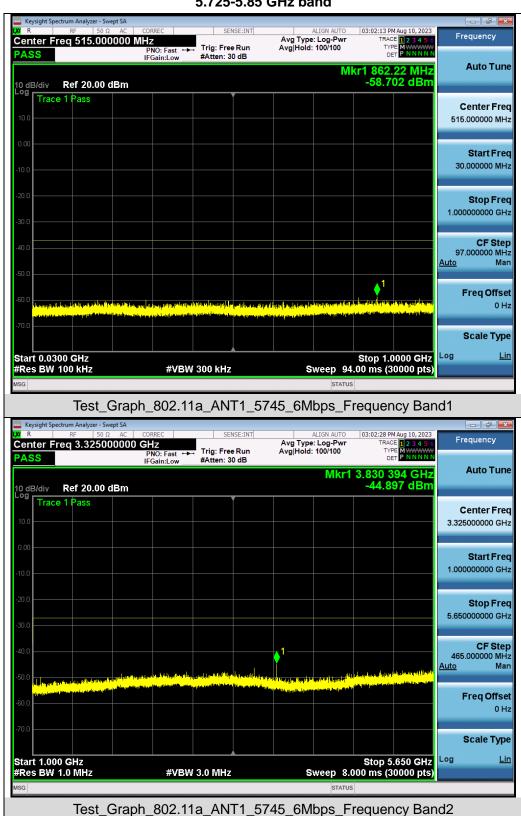






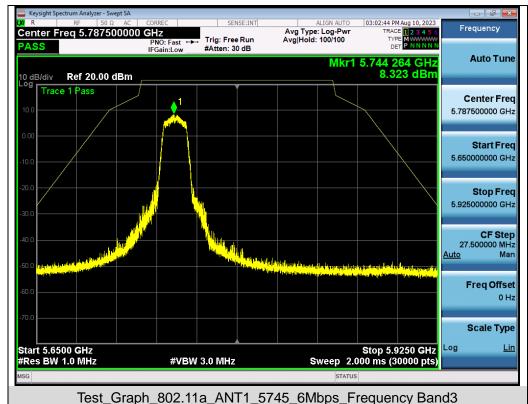






0 Hz

Scale Type

Stop 5.650 GHz Sweep 8.000 ms (30000 pts)




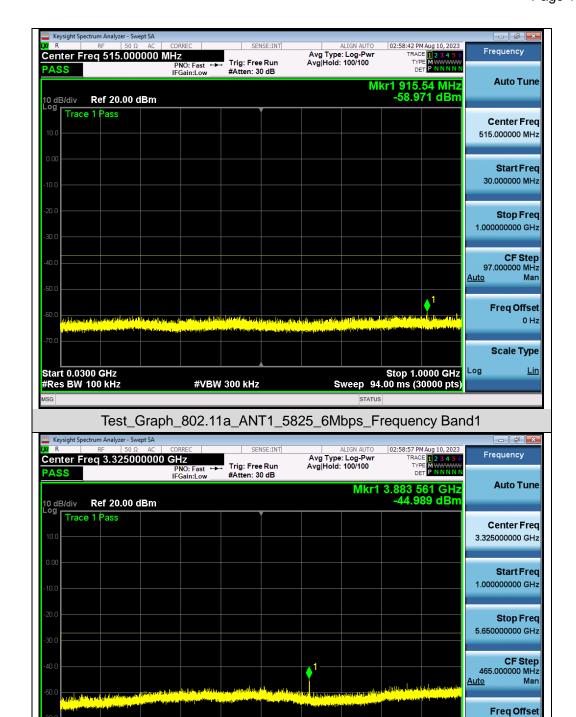


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Graph 802.11a ANT1 5825 6Mbps Frequency Band2


#VBW 3.0 MHz






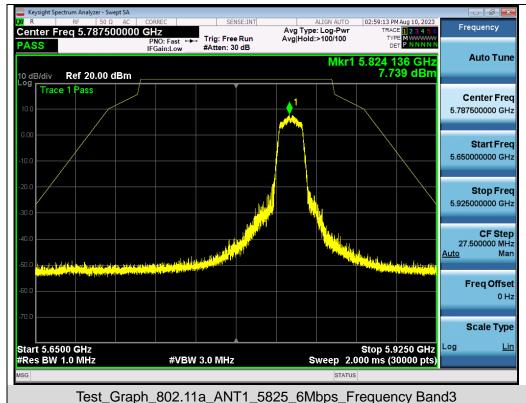







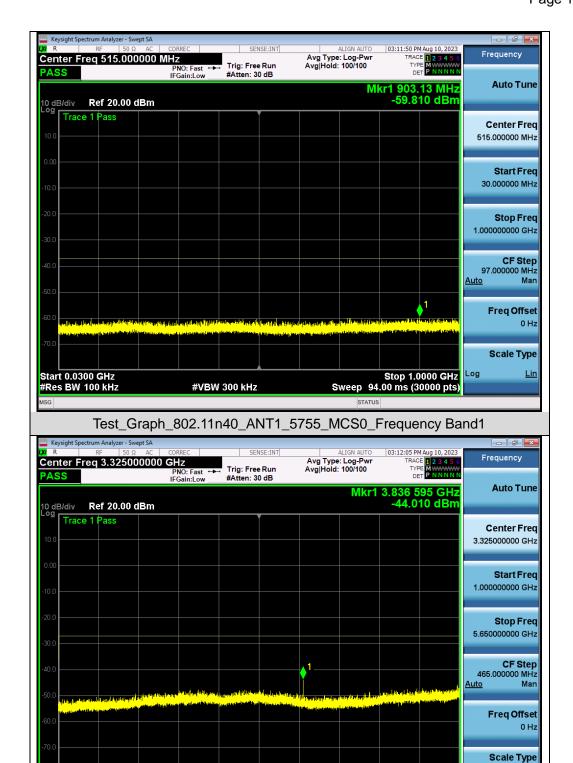


Test Graph 802.11n40 ANT1 5755 MCS0 Frequency Band2


#VBW 3.0 MHz

Stop 5.650 GHz Sweep 8.000 ms (30000 pts)


Log





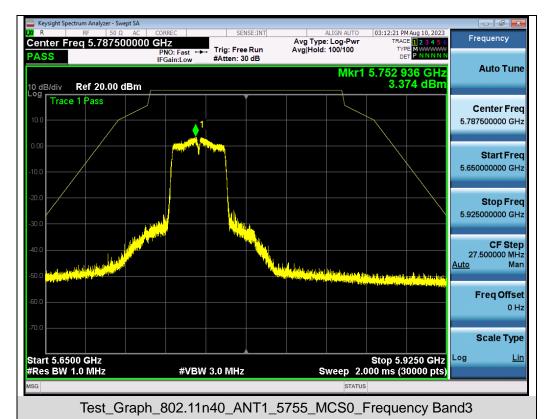






Scale Type

Log

Stop 5.650 GHz Sweep 8.000 ms (30000 pts)




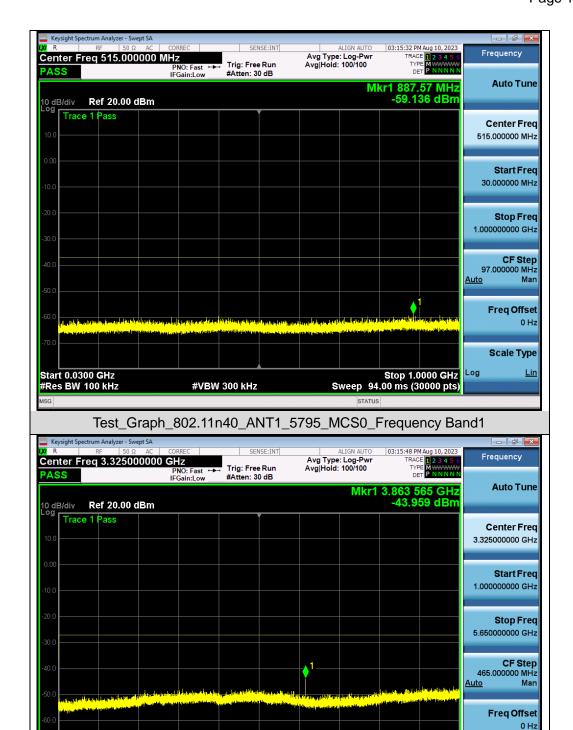


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Graph 802.11n40 ANT1 5795 MCS0 Frequency Band2


#VBW 3.0 MHz





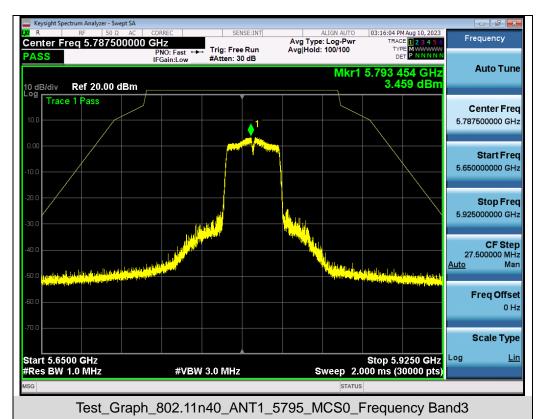






Freq Offset 0 Hz

Scale Type

Log

Stop 5.650 GHz Sweep 8.000 ms (30000 pts)




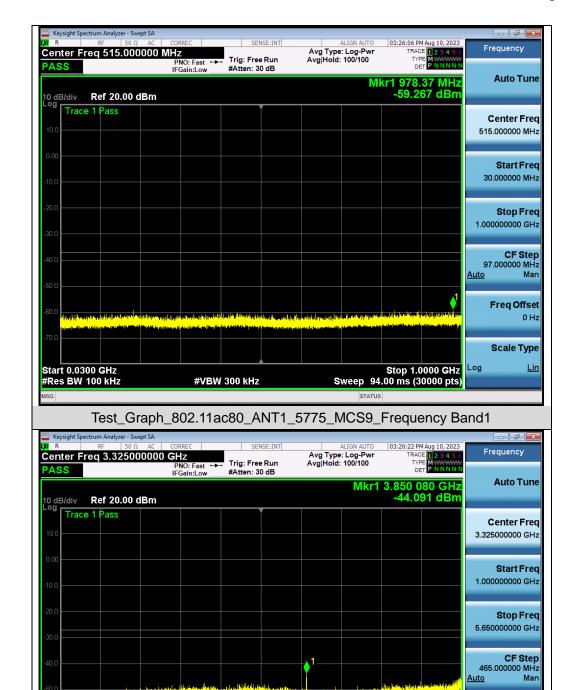


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11ac80_ANT1_5775_MCS9_Frequency Band2

#VBW 3.0 MHz





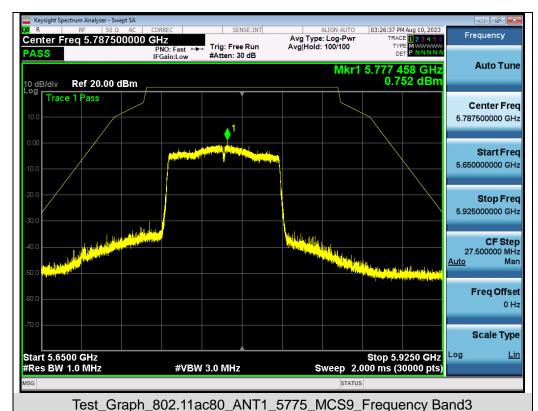





11. Radiated Spurious Emission

11.1 Measurement Limit

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

NOTE:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $(dBuV/m) = 20 \log Emission level (uV/m)$.
- 3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

	Applicable to	Limit			
Restricted	789033 D02 General UNII Test	Field strength at 3m (dBuV/m)			
bands	Procedures New Rules v02r01	PK: 74	AV: 54		
	Applicable to	EIRP Limit (dBm/MHz)	Equivalent field Strength at 3m (dBuV/m)		
Out of the	FCC 15.407(b)(1)		PK: 68.2		
restricted bands	15.407(b)(2)	PK: -27			
	15.407(b)(3)				
	15.407(b)(4)	See Note 2			

Note 1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

E =
$$\frac{1000000 \sqrt{30 P}}{3}$$
 µV/m, where P is the eirp (Watts).

Note 2: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.



Page 150 of 190

11.2 Measurement Procedure

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



Page 151 of 190

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.Section G) Unwanted emissions measurement.

♦ Procedure for Unwanted Emissions Measurements Below 1000MHz:

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

♦ Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz:


- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

Procedures for Average Unwanted Emissions Measurements Above 1000MHz:

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Procedures for Average Unwanted Emissions Measurements Above 1000MHz:


- RBW = 1 MHz
- VBW = 3 MHz Detector = power averaging (rms), set span/(# of points in sweep) ≥ RBW/2.
- Averaging type = power averaging (RMS)
- The correction factor shall be offset is 10 $\log (1/x)$, where x is the duty cycle.






11.3 Measurement Setup (Block Diagram of Configuration)


Radiated Emission Test Setup 9kHz-30MHz

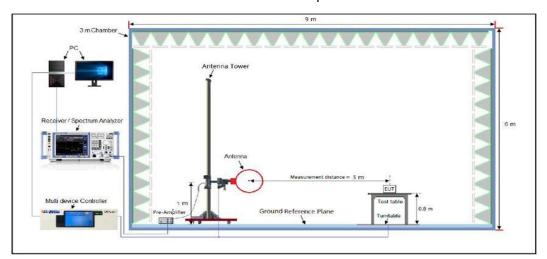

Radiated Emission Test Setup 30MHz-1000MHz

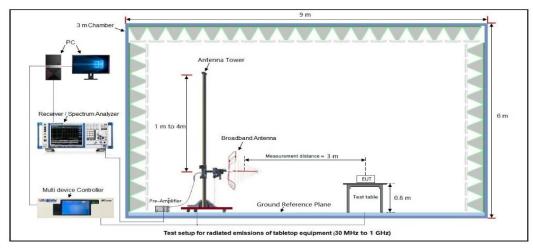

Radiated Emission Test Setup Above 1000MHz

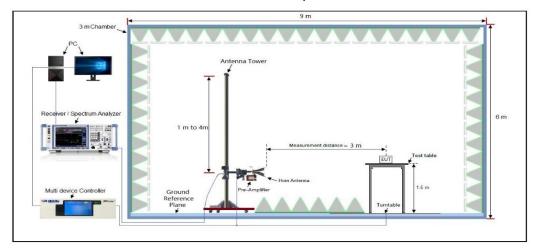



11.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.


Radiated Emission Test Results at 30MHz-1GHz

EUT Nam	ne	Body Wo	rn Camera	l	Model Na	me	K7	
Tempera	ture	25°C	25°C Relative Humidity 55.4%					
Pressure)	960hPa			Test Volta	age	DC 3.8	V by battery
Test Mod	le	802.11n(20MHz)_5	180MHz	Antenna		Horizor	ntal
	130			FCC PART	15E			_
[qg]'n/w]	120 110 100 90 80 70 60 50 40 30 20		#2 \/#2				4	
	10 0 10 10 10 10 10 10 10 10 10 10 10 10	— Horizontal PK	100M	Frequency[Hz)			16
NO.	10 0 -10 30M		Factor [dB]	Frequency[Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle	Polarity
NO. 1	O QP Limit QP Detector	Level	Factor	Limit	Margin			
	Treq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	[cm]	[°]	Polarity
1	Preq. [MHz] 57.16	Level [dBµV/m] 23.90	Factor [dB]	Limit [dBµV/m] 40.00	Margin [dB] 16.10	[cm]	[°]	Polarity Horizontal
1 2	Freq. [MHz] 57.16 82.38	Level [dBµV/m] 23.90 24.33	Factor [dB] 12.39 11.14	Limit [dBµV/m] 40.00 40.00	Margin [dB] 16.10 15.67	[cm] 100 100	[°] 10 280	Polarity Horizontal Horizontal
1 2 3	Freq. [MHz] 57.16 82.38 99.84	Level [dBµV/m] 23.90 24.33 28.34	Factor [dB] 12.39 11.14 21.38	Limit [dBµV/m] 40.00 40.00 43.50	Margin [dB] 16.10 15.67 15.16	[cm] 100 100 100	[°] 10 280 350	Polarity Horizontal Horizontal Horizontal

Result: Pass



EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11n(20MHz)_5180MHz	Antenna	Vertical

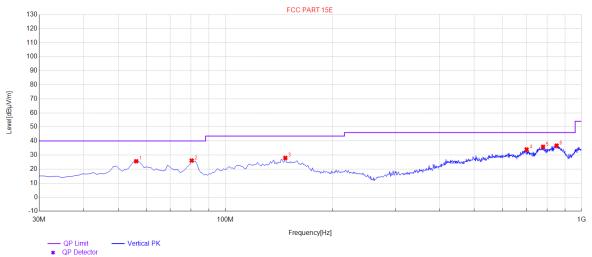

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	56.19	25.57	14.30	40.00	14.43	100	20	Vertical
2	80.44	26.04	12.17	40.00	13.96	100	220	Vertical
3	147.37	27.94	20.62	43.50	15.56	100	300	Vertical
4	701.24	33.94	28.96	46.00	12.06	100	350	Vertical
5	779.81	35.84	30.96	46.00	10.16	100	140	Vertical
6	851.59	36.72	32.23	46.00	9.28	100	290	Vertical

Result: Pass

Note:

- 1. Factor=Antenna Factor + Cable loss, Margin= Limit-Measurement.
- 2. All test modes had been pre-tested, Refer to Chapter 5 of the report for details.



Page 155 of 190

Radiated Emissions Test Results Above 1GHz

EUT Name	Body Worn Camera	Model Name	K7
Temperature	Temperature 25°C		60%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11n20_5180MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz-Horizontal

Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)] "			
48.31	9.14	57.45	68.20	-10.75	peak			
47.25	10.22	57.47	74.00	-16.53	peak			
33.75	10.22	43.97	54.00	-10.03	AVG			
Remark:								
	Reading (dBµV) 48.31 47.25	Reading Factor (dBμV) (dB) 48.31 9.14 47.25 10.22	Reading Factor Level (dBμV) (dB) (dBμV/m) 48.31 9.14 57.45 47.25 10.22 57.47	Reading Factor Level Limits (dBμV) (dB) (dBμV/m) (dBμV/m) 48.31 9.14 57.45 68.20 47.25 10.22 57.47 74.00	Reading Factor Level Limits Margin (dBμV) (dB) (dBμV/m) (dBμV/m) (dB) 48.31 9.14 57.45 68.20 -10.75 47.25 10.22 57.47 74.00 -16.53			

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
10360.000	49.02	9.14	58.16	68.20	-10.04	peak
15540.000	49.32	10.22	59.54	74.00	-14.46	peak
15540.000	31.62	10.22	41.84	54.00	-12.16	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Result: Pass



Page 156 of 190

Radiated Emissions Test Results Above 1GHz

EUT Name	Body Worn Camera	Model Name	K7	
Temperature	emperature 25°C		60%	
Pressure	960hPa	Test Voltage	DC 3.8V by battery	
Test Mode	est Mode 802.11n20_5200MHz		Horizontal/Vertical	

Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре			
10400.000	48.31	9.14	57.45	68.20	-10.75	peak			
15600.000	48.15	10.22	58.37	74.00	-15.63	peak			
15600.000	33.75	10.22	43.97	54.00	-10.03	AVG			
	Remark:								
	Factor - Antonna Factor + Cable Loss - Pro amplifier								

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре		
10400.000	49.02	9.14	58.16	68.20	-10.04	peak		
15600.000	48.11	10.22	58.33	74.00	-15.67	peak		
15600.000	30.22	10.22	40.44	54.00	-13.56	AVG		
	Remark:							
	Factor = Antenna Factor + Cable Loss - Pre-amplifier.							

Result: Pass



Page 157 of 190

Radiated Emissions Test Results Above 1GHz

EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11n20_5240MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value - Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
10480.000	48.52	9.27	57.79	68.20	-10.41	peak
15720.000	47.99	10.38	58.37	74.00	-15.63	peak
15720.000	32.16	10.38	42.54	54.00	-11.46	AVG
Remark:						

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
10480.000	47.85	9.27	57.12	68.20	-11.08	peak
15720.000	46.97	10.38	57.35	74.00	-16.65	peak
15720.000	31.57	10.38	41.95	54.00	-12.05	AVG
Domorke						

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Result: Pass



Page 158 of 190

Radiated Emissions Test Results Above 1GHz

EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11n20_5260MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
10520.000	46.33	9.42	55.75	68.20	-12.45	peak
15780.000	47.31	10.51	57.82	74.00	-16.18	AVG
15780.000	31.87	10.51	42.38	54.00	-11.62	peak
Remark:						

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
10520.000	46.33	9.42	55.75	68.20	-12.45	peak
15780.000	45.27	10.51	55.78	74.00	-18.22	AVG
15780.000	30.46	10.51	40.97	54.00	-13.03	peak
_			,			

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Result: Pass



Page 159 of 190

Radiated Emissions Test Results Above 1GHz

EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11n20_5300MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Турс
10600.000	46.33	9.14	55.47	74.00	-18.53	peak
10600.000	32.14	9.14	41.28	54.00	-12.72	AVG
15900.000	45.32	10.22	55.54	74.00	-18.46	peak
15900.000	31.78	10.22	42.00	54.00	-12.00	AVG
					_	
Remark:						
Forton Antonio Fortoni Ocklo Losa Disconsillar						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
10600.000	46.85	9.14	55.99	74.00	-18.01	peak
10600.000	31.56	9.14	40.70	54.00	-13.30	AVG
15900.000	46.85	10.22	57.07	74.00	-16.93	peak
15900.000	30.14	10.22	40.36	54.00	-13.64	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Result: Pass



Page 160 of 190

Radiated Emissions Test Results Above 1GHz

EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11n20_5320MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
10640.000	49.85	9.14	58.99	74.00	-15.01	peak
10640.000	31.25	9.14	40.39	54.00	-13.61	AVG
15960.000	47.24	10.22	57.46	74.00	-16.54	peak
15960.000	31.22	10.22	41.44	54.00	-12.56	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
10640.000	48.58	9.14	57.72	74.00	-16.28	peak
10640.000	32.58	9.14	41.72	54.00	-12.28	AVG
15960.000	48.27	10.22	58.49	74.00	-15.51	peak
15960.000	31.54	10.22	41.76	54.00	-12.24	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Result: Pass



Page 161 of 190

Radiated Emissions Test Results Above 1GHz

EUT Name	Body Worn Camera	Model Name	K7	
Temperature	25°C	Relative Humidity	60%	
Pressure	960hPa	Test Voltage	DC 3.8V by battery	
Test Mode	802.11n20_5500MHz	Antenna	Horizontal/Vertical	

Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Турс
11000.000	48.31	9.14	57.45	74.00	-16.55	peak
11000.000	32.63	9.14	41.77	54.00	-12.23	AVG
16500.000	40.63	10.22	50.85	68.20	-17.35	peak
Remark:						

Remark

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
11000.000	49.02	9.14	58.16	74.00	-15.84	peak
11000.000	33.14	9.14	42.28	54.00	-11.72	AVG
16500.000	40.12	10.22	50.34	68.20	-17.86	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Result: Pass



Page 162 of 190

Radiated Emissions Test Results Above 1GHz

EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11n20_5580MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	туре
11160.000	48.31	9.14	57.45	74.00	-16.55	peak
11160.000	31.58	9.14	40.72	54.00	-13.28	AVG
16740.000	39.74	10.22	49.96	68.20	-18.24	peak
Remark:						

Remark

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
11160.000	49.02	9.14	58.16	74.00	-15.84	peak
11160.000	33.63	9.14	42.77	54.00	-11.23	AVG
16740.000	39.62	10.22	49.84	68.20	-18.36	peak

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Result: Pass



Page 163 of 190

Radiated Emissions Test Results Above 1GHz

EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.1n20_5700MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value - Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
11400.000	48.20	9.14	57.34	74.00	-16.66	peak
11400.000	32.33	9.14	41.47	54.00	-12.53	AVG
17100.000	38.62	10.22	48.84	68.20	-19.36	peak
Remark:						

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Турс
11400.000	47.96	9.14	57.10	74.00	-16.90	peak
11400.000	34.05	9.14	43.19	54.00	-10.81	AVG
17100.000	40.12	10.22	50.34	68.20	-17.86	peak

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Result: Pass



Page 164 of 190

Radiated Emissions Test Results Above 1GHz

EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11n20_5745MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	туре
11490.000	46.17	9.42	55.59	74.00	-18.41	peak
11490.000	32.07	9.42	41.49	54.00	-12.51	AVG
17235.000	41.28	10.51	51.79	68.20	-16.41	peak
Remark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Турс
11490.000	47.11	9.42	56.53	74.00	-17.47	peak
11490.000	32.18	9.42	41.60	54.00	-12.40	AVG
17235.000	41.35	10.51	51.86	68.20	-16.34	peak

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Result: Pass



Page 165 of 190

Radiated Emissions Test Results Above 1GHz

EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11n20_5785MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Type
11570.000	48.12	9.42	57.54	74.00	-16.46	peak
11570.000	31.96	9.42	41.38	54.00	-12.62	AVG
17355.000	40.57	10.51	51.08	68.20	-17.12	peak
Damanic						

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре
11570.000	49.39	9.42	58.81	74.00	-15.19	peak
11570.000	31.74	9.42	41.16	54.00	-12.84	AVG
17355.000	41.32	10.51	51.83	68.20	-16.37	peak

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Result: Pass



Page 166 of 190

Radiated Emissions Test Results Above 1GHz

EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11n20_5825MHz	Antenna	Horizontal/Vertical

Radiated Emission Above 1GHz-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value - Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	туре
11650.000	47.13	9.62	56.75	74.00	-17.25	peak
11650.000	30.05	9.62	39.67	54.00	-14.33	AVG
17475.000	41.37	10.75	52.12	68.20	-16.08	peak
Remark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Radiated Emission Above 1GHz-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре	
11650.000	48.39	9.62	58.01	74.00	-15.99	peak	
11650.000	30.85	9.62	40.47	54.00	-13.53	AVG	
17475.000	40.74	10.75	51.49	68.20	-16.71	peak	
Remark:	Remark:						

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Result: Pass

Note:

- The amplitude of other spurious emissions from 1GHz to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Amplifier gain, Margin=Measure Result-Limit.
- The "Factor" value can be calculated automatically by software of measurement system. 3.
- 4. All test modes had been pre-tested. Refer to Chapter 5 of the report for details.




EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11a20_5180MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

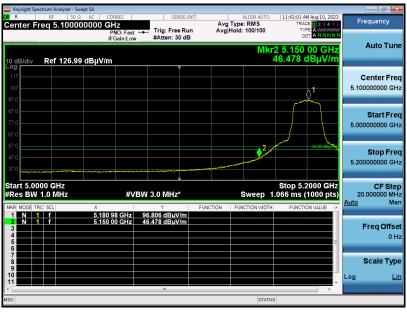

Result: Pass



root koodit for Dank ongo Ennocion at koodineton bando						
EUT Name	Body Worn Camera	Model Name	K7			
Temperature	25°C	Relative Humidity	55.4%			
Pressure	960hPa	Test Voltage	DC 3.8V by battery			
Test Mode	802.11a20_5180MHz	Antenna	Vertical			

Test Graph for Peak Measurement



Test Graph for Average Measurement



Result: Pass



EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11n40_5190MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



Result: Pass




Tool Nocale for Balla Gago Elificotori at Nocaliotoa Ballac			
EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11n40_5190MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

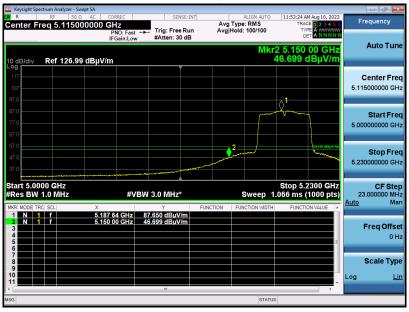

Result: Pass




Tool Robalt for Bana bags Enhocion at Robanotta Banac			
EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11ac80_5210MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

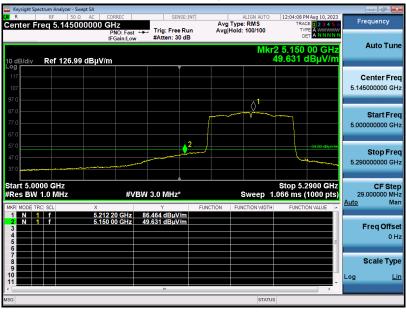

Result: Pass



EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11n20_5260MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



Result: Pass



EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11a20_5260MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



Result: Pass



Toot Noodit for Bana bago Emicolon at Noodi lotto Banac			
EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11a20_5260MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement




Result: Pass




100t Robatt for Dana Sago Emission at Robatico Dana			
EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11n40_5270MHz	Antenna	Horizontal

Test Graph for Peak Measurement

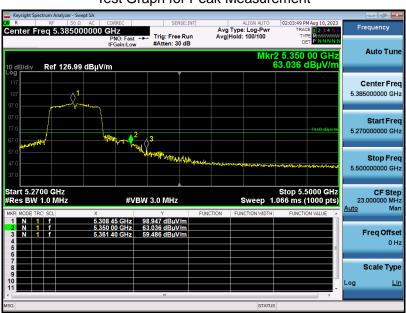

Test Graph for Average Measurement

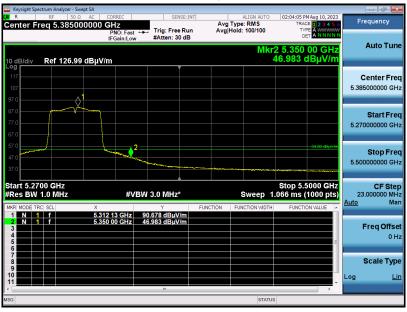

Result: Pass



Tool Robalt for Band bags Enhocion at Robandton Bands			
EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11n40_5270MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



Result: Pass




EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11ac80_5290MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

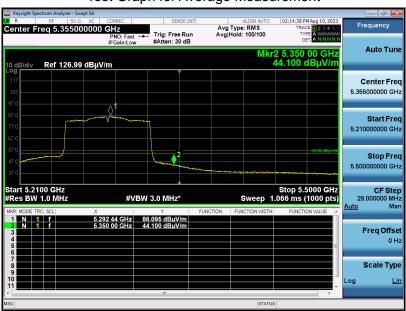

Result: Pass



EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11ac80_5290MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



Result: Pass



EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11a20_5510MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



Result: Pass



Tool Robalt for Bana bags Enhocion at Robanotta Banac			
EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11a20_5510MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



Result: Pass




Tool Robalt for Bana bags Enhocion at Robanotta Banac			
EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11n40_5510MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

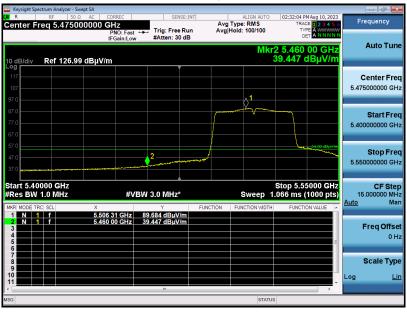

Result: Pass




EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11n40_5510MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

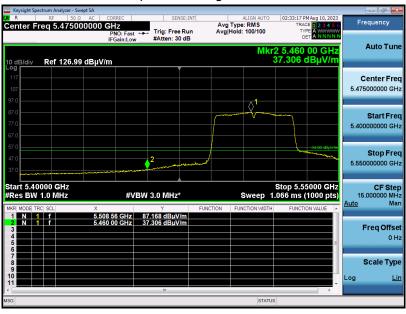

Result: Pass




EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11ac80_5530MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

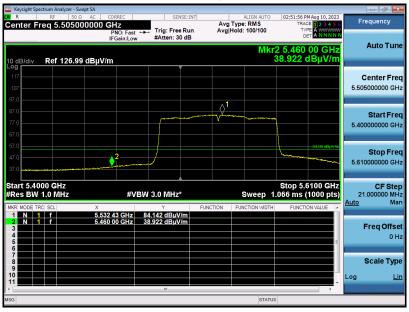

Result: Pass




EUT Name	Body Worn Camera	Model Name	K7
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	802.11ac80_5530MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

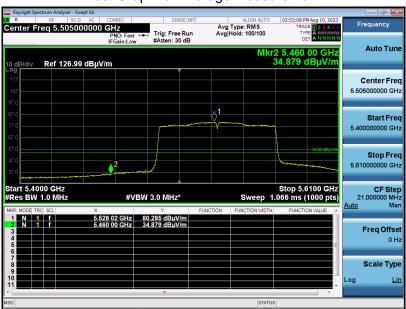

Result: Pass



Page 185 of 190

Note:

- 1. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.
- 2. All test modes had been pre-tested, Refer to Chapter 5 of the report for details.



12. AC Power Line Conducted Emission Test


12.1 Measurement limit

Francisco	Maximum RF Line Voltage					
Frequency	Q.P (dBμV)	Average (dBμV)				
150kHz~500kHz	66-56	56-46				
500kHz~5MHz	56	46				
5MHz~30MHz	60	50				

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

12.2 Block Diagram of Line Conducted Emission Test

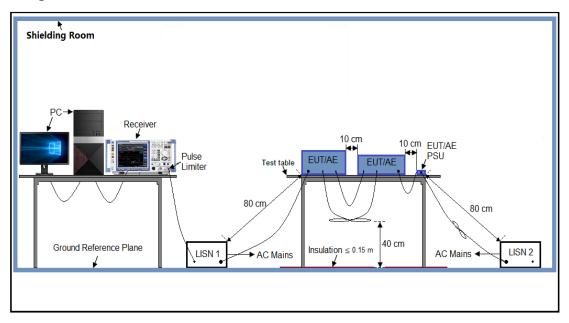



Page 187 of 190

12.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received charging voltage by adapter which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- The test data of the worst case was reported on the Summary Data page.



12.5 Test Result of Line Conducted Emission Test

est Mode	802.11n(20MHz)	5180	۷Н۶				LIS	I IA	ine				Hot S	ide	
ost iviouc	002.1111(20111112)	01001	VII 12				Lic	/I V L	-11110				1101 0	iuc	
	vel [dBµV]															
08					 !	:					<u>-</u>					
70	·		· – -¦ ¦										 		!	
60			-					-i		-	 	-			-	
50		<u>_</u>	·¦¦			¦		- -		_	<u>; ;</u>	÷	<u> </u>		÷	
40	ا ــــام	i	i i	i i	i 	i		i	-1		i i	_ i	i i + -!			i
30	~W~~\w	Mussault	سلاا	الطراسيس		Make_	_MEN_		<u></u> _	حياب	إرا	!	<u> </u>			ا ل
20	$\sim\sim$	\sqrt{N}	1/M	MMww	Wash whater				TW	March	,	ليبالا	ar halpi.	belle language	ساسانا	اللين
			*******		 	~	V		~	البريدية	-	-			in de la constantina	1111
10					L	;		7					† -¦		-	
0	·	 		·-ii-				-i	-j	- -	-ii		-i		· -j	
-10	150k 300	0k 400k	600k	800k 1	M	21	Л	3M	4M	5M 6	M	8M	10M		20M	30M
	301	700K	OUUN	000K 1			" ency [Hz		7141	JIII (OW	10111		ZUIVI	30111

MEASUREMENT RESULT: "agc_fin"


2023/8/8 Freque			Transd dB	Limit dBµV	Margin dB	Detector	Line
0.498	000	40.60	6.1	56	15.4	QP	L1
1.002	000	33.10	6.2	56	22.9	QP	L1
1.102	000	30.80	6.2	56	25.2	QP	L1
1.170	000	31.60	6.2	56	24.4	QP	L1
1.230	000	32.70	6.2	56	23.3	QP	L1
1.342	000	31.10	6.2	56	24.9	QP	L1

MEASUREMENT RESULT: "agc fin2"

2023/8/8 10:03 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.474000 0.502000 0.538000 0.606000 1.010000 1.206000	27.10 35.00 28.70 26.50 26.90 26.90	6.1 6.2 6.2 6.2 6.2 6.2	46 46 46 46 46	17.3 19.5 19.1	AV AV	L1 L1 L1 L1 L1 L1



AC Power Line Conducted Emission Test									
Test Mode	802.11n(20MHz)5180MHz	LISN Line	Neutral Side						
80 - 70 - 60 -	[dBµV] 								

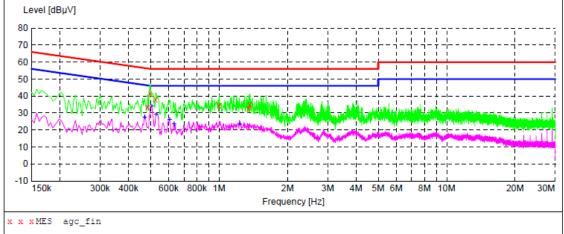

MEASUREMENT RESULT: "agc fin"

2023/8/8	10:06						
_	ncy MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.486	000	33.40	6.1	56		QP	N
0.498	000	41.70	6.1	56	14.3	QP	N
0.526	000	37.90	6.2	56		QP	N
1.002	000	34.60	6.2	56	21.4	QP	N
1.350	000	32.80	6.2	56	23.2	QP	N
1.366	000	34.90	6.2	56	21.1	OP	N

MEASUREMENT RESULT: "agc_fin2"

2023/8/8 : Frequence Mi		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.4700 0.5060		6.1 6.2	47 46	18.9 12.1		N N
0.5300	00 29.30	6.2	46	16.7	AV	N
0.6060	00 26.20	6.2	46	19.8	AV	N
0.6340		6.2	46	22.6	AV	N
1.2300	00 23.40	6.2	46	22.6	AV	N

Result: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 190 of 190

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC02762230801AP01

Appendix II: Photographs of EUT

Refer to the Report No.: AGC02762230801AP04

----End of Report----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.