



FCC RF Test Report

APPLICANT : DZS Inc.
EQUIPMENT : XGSPON ONT
BRAND NAME : **DZS**
MODEL NAME : 5228XG
FCC ID : PJZ5228XG
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Apr. 20, 2023 ~ Apr. 24, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer..... 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 7

 1.6 Testing Location 7

 1.7 Test Software..... 7

 1.8 Applicable Standards..... 8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9

 2.1 Carrier Frequency and Channel 9

 2.2 Test Mode..... 10

 2.3 Connection Diagram of Test System..... 11

 2.4 Support Unit used in test configuration and system 12

 2.5 EUT Operation Test Setup 12

 2.6 Measurement Results Explanation Example..... 12

3 TEST RESULT 13

 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 13

 3.2 Maximum Conducted Output Power Measurement 15

 3.3 Power Spectral Density Measurement 17

 3.4 Unwanted Emissions Measurement 20

 3.5 AC Conducted Emission Measurement..... 25

 3.6 Antenna Requirements 27

4 LIST OF MEASURING EQUIPMENT 29

5 UNCERTAINTY OF EVALUATION 30

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 17 dBm/MHz	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 0.57 dB at 5149.920 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 15.41 dB at 0.329 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	N/A	N/A	Pass	-

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

DZS Inc.
5700 Tennyson Parkway, Plano, TX 75024 USA

1.2 Manufacturer

DZS Inc.
5700 Tennyson Parkway, Plano, TX 75024 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	XGSPON ONT
Brand Name	DZS
Model Name	5228XG
FCC ID	PJZ5228XG
SN Code	Conducted: 501282552 Conduction: 501282550 Radiation: 501282548
HW Version	V02
SW Version	S7.0.021
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification																					
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5745 MHz ~ 5825 MHz																				
Maximum Output Power to Antenna	MIMO <Ant. 0+1+2+3> <5180 MHz ~ 5240 MHz> 802.11a : 24.87 dBm / 0.3069 W 802.11ax HE20: 25.41 dBm / 0.3475 W 802.11ax HE40: 27.87 dBm / 0.6124 W 802.11ax HE80: 25.64 dBm / 0.3664 W <5745 MHz ~ 5825 MHz> 802.11a : 19.04 dBm / 0.0802 W 802.11ax HE20: 20.36 dBm / 0.1086 W 802.11ax HE40: 29.96 dBm / 0.9908 W 802.11ax HE80: 24.38 dBm / 0.2742 W																				
99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 17.90 MHz 802.11ax HE20: 19.34 MHz 802.11ax HE40: 38.12 MHz 802.11ax HE80: 77.68 MHz <5745 MHz ~ 5825 MHz> 802.11a : 17.78 MHz 802.11ax HE20: 19.34 MHz 802.11ax HE40: 38.92 MHz 802.11ax HE80: 77.68 MHz																				
Antenna Type / Gain	<5180 MHz ~ 5240 MHz> <Ant. 0> : PCB Antenna with gain 4.50 dBi <Ant. 1> : PCB Antenna with gain 4.55 dBi <Ant. 2> : PCB Antenna with gain 4.55 dBi <Ant. 3> : PCB Antenna with gain 4.41 dBi <5745 MHz ~ 5825 MHz> <Ant. 0> : PCB Antenna with gain 4.52 dBi <Ant. 1> : PCB Antenna with gain 4.54 dBi <Ant. 2> : PCB Antenna with gain 4.46 dBi <Ant. 3> : PCB Antenna with gain 4.37 dBi																				
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)																				
Antenna Function Description	<table border="1"> <thead> <tr> <th></th> <th>Ant. 0</th> <th>Ant. 1</th> <th>Ant. 2</th> <th>Ant. 3</th> </tr> </thead> <tbody> <tr> <td>802.11 a/n/ac/ax SISO</td> <td>V</td> <td>V</td> <td>V</td> <td>V</td> </tr> <tr> <td>802.11 a/n/ac/ax CDD 1S4T</td> <td>V</td> <td>V</td> <td>V</td> <td>V</td> </tr> <tr> <td>802.11 n/ac/ax Tx Beamforming 1S4T</td> <td>V</td> <td>V</td> <td>V</td> <td>V</td> </tr> </tbody> </table>		Ant. 0	Ant. 1	Ant. 2	Ant. 3	802.11 a/n/ac/ax SISO	V	V	V	V	802.11 a/n/ac/ax CDD 1S4T	V	V	V	V	802.11 n/ac/ax Tx Beamforming 1S4T	V	V	V	V
	Ant. 0	Ant. 1	Ant. 2	Ant. 3																	
802.11 a/n/ac/ax SISO	V	V	V	V																	
802.11 a/n/ac/ax CDD 1S4T	V	V	V	V																	
802.11 n/ac/ax Tx Beamforming 1S4T	V	V	V	V																	

Note:

- For SISO&MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power.



2. For 802.11n 20/40MHz and 802.11 ac/ax 20/40/80 MHz mode, the power setting of 802.11n 20/40MHz, 802.11ac 20/40/80MHz mode are the same or lower than 802.11ax 20/40/80MHz mode. Therefore, the whole testing have assessed only 802.11ax HE20/HE40/HE80 mode.
3. The device does not support partial RU tone for 802.11ax mode
4. 802.11ax support Tx Beamforming mode, and the Tx Beamforming power/EIRP is not greater than CDD mode, so we only evaluate CDD mode by referring to their maximum conducted power.
5. The device supports multiple spatial streams, the worst case directional gain will occur when NSS = 1, therefore, the 1S4T(CDD&TXBF) mode is the worst; 1S4T: NSS=1, MIMO 4Tx.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH07-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH07-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80 and 802.11ax HE80.



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Mode

Modulation	Data Rate
802.11a CDD 1S4T	6 Mbps
802.11ax HE20 CDD 1S4T	MCS0
802.11ax HE40 CDD 1S4T	MCS0
802.11ax HE80 CDD 1S4T	MCS0

AC Conducted Emission	Mode 1 : WIFI link (5G) + POST Port Link + LAN Link + Gpon Loading with OLT + Power from adapter + with bracket
Remark: For Radiated Test Cases, The tests were performance with Adapter.	


Co-location
WLAN 2.4G 802.11ax HE40 CH03 1S3T + WLAN 5G 802.11a CH36 1S4T

Ch. #		U-NII-1	U-NII-1	U-NII-1	U-NII-1
		802.11a	802.11ax HE20	802.11ax HE40	802.11ax HE80
L	Low	36	36	38	-
M	Middle	44	44	-	42
H	High	48	48	46	-


Ch. #		U-NII-3	U-NII-3	U-NII-3	U-NII-3
		802.11a	802.11ax HE20	802.11ax HE40	802.11ax HE80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

2.3 Connection Diagram of Test System

For Conducted Emission:

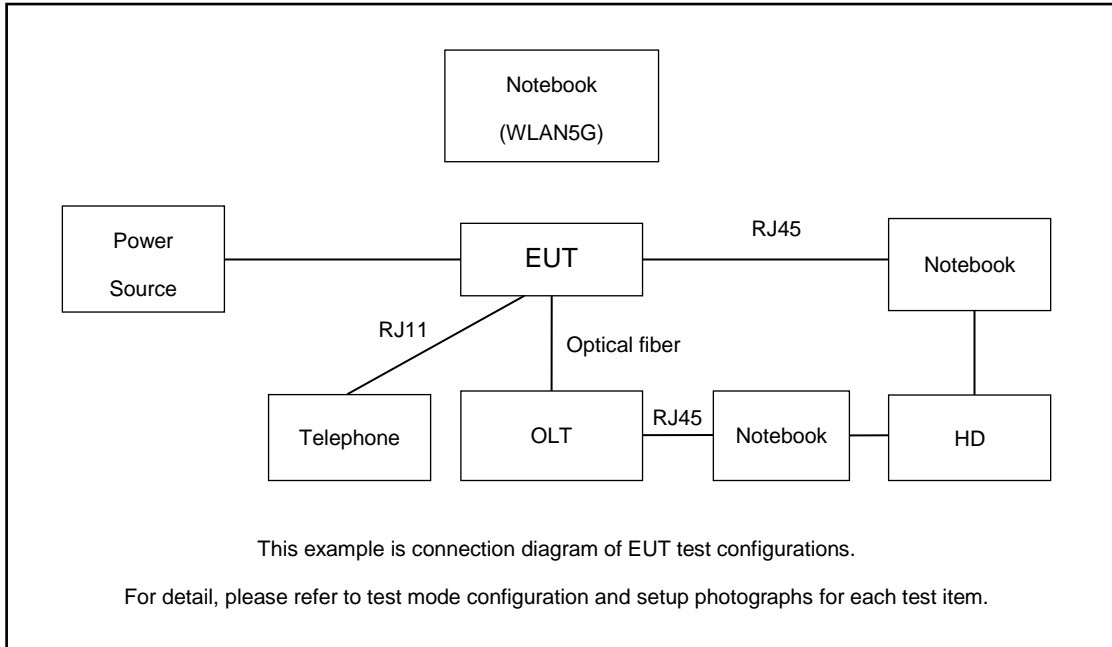

For Radiated Emission:

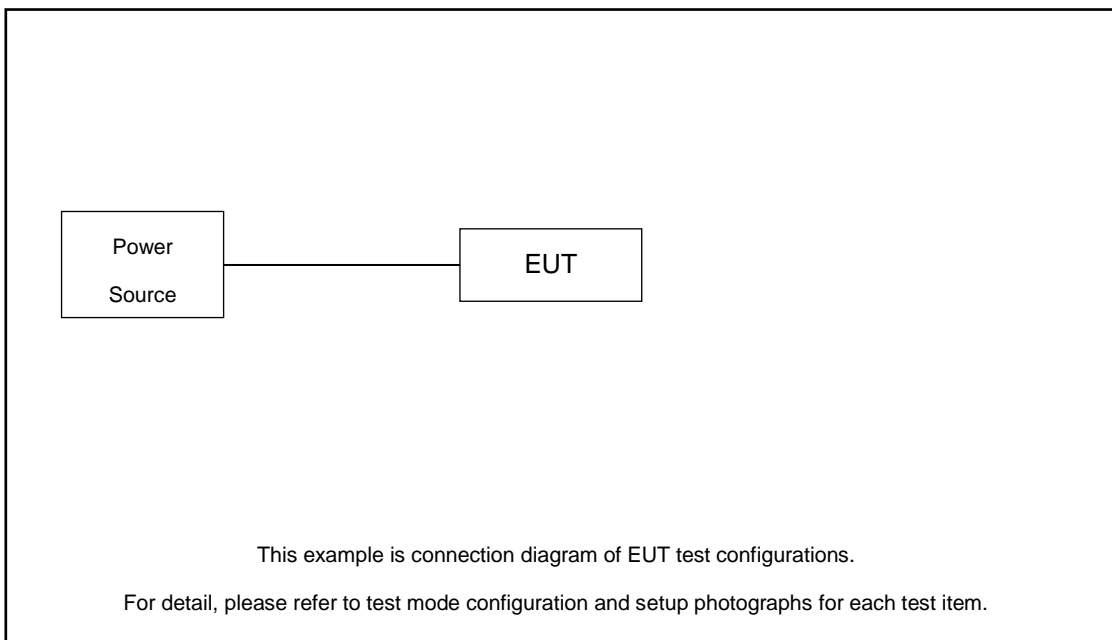



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook*2	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
2.	PC	Lenovo	YangtianM4900c	Fcc DoC	N/A	Unshielded,1.8m
3.	(USB)Mouse	Lenovo	OEUUOA	Fcc DoC	Shielded, 1.8m	N/A
4.	(USB)Keyboard	Lenovo	SK-8821	Fcc DoC	Shielded, 1.8m	N/A
5.	Monitor	Lenovo	LS2033wA	Fcc DoC	N/A	Unshielded,1.8m
6.	Hard Disk*2	WD	C6B	N/A	N/A	N/A
7.	Telephone*2	bubugao	HCD007(6082)TSD	N/A	N/A	N/A
8.	OLT	DZS	N/A	N/A	N/A	N/A
9.	RJ45	N/A	N/A	N/A	N/A	N/A
10.	RJ11	N/A	N/A	N/A	N/A	N/A
11.	Optical fiber	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the notebook under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6.25 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 6.25 + 10 = 16.25 \text{ (dB)}$$



3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- 1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	<ol style="list-style-type: none"> 1. Set RBW = approximately 1% of the emission bandwidth. 2. Set the VBW > RBW. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. 6. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW. 7. Measure and record the results in the test report.
<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	<ol style="list-style-type: none"> 1. Set RBW = 100kHz. 2. Set the VBW ≥ 3 x RBW. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission. 6. Measure and record the results in the test report.

3.1.4 Test Setup

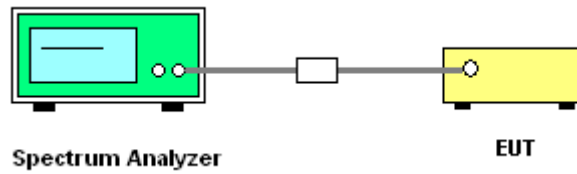

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):


1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

<TXBF Modes>

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 for TXBF modes.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

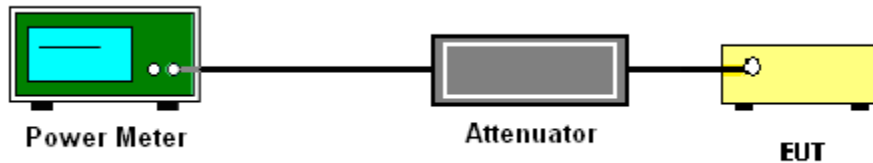3.2.4 Test Setup**3.2.5 Test Result of Maximum Conducted Output Power**

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section F) Maximum power spectral density.

For devices operating in the bands 5.15 - 5.25 GHz

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW \geq 3 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.



For devices operating in the band 5.725 - 5.85 GHz

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
 - Set VBW \geq 1 MHz.
 - Number of points in sweep \geq 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is the bin-by-bin summation to obtain the combined spectrum. For the device with 4 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.


Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

Method (c): Measure and add $10 \log(N_{\text{ANT}})$ dB, where N_{ANT} is the number of outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The quantity $10 \log(N_{\text{ANT}})$ dB is added to each spectrum value before comparing to the emission limit.

3.3.4 Test Setup

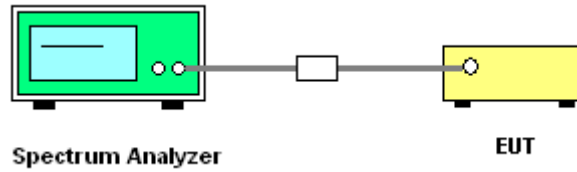

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) For transmitters operating in the 5.725-5.85 GHz band:
15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$



where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dB μ V/m

d_{Meas} is the measurement distance, in m

(4) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




(4) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
 - VBW = 3 MHz
 - Detector = power averaging (rms), set span/(# of points in sweep) \geq RBW/2.
 - Averaging type = power averaging(RMS)
 - The correction factor shall be offset is $10 \log (1/x)$, where x is the duty cycle.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
 3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
 4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
 5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
 6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
 7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

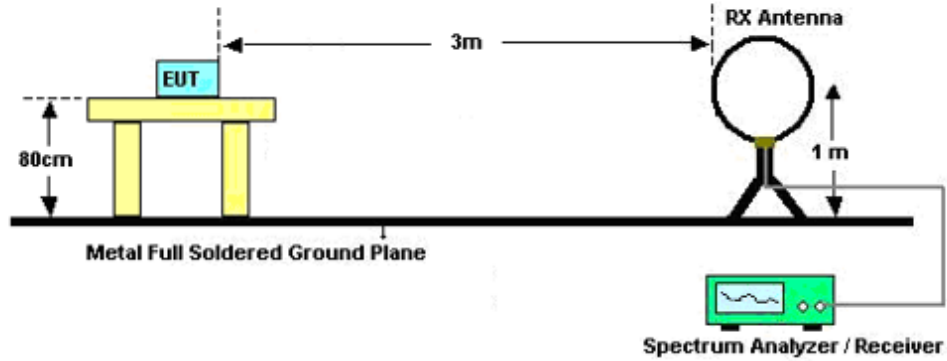

For radiated emissions from 30MHz to 1GHz

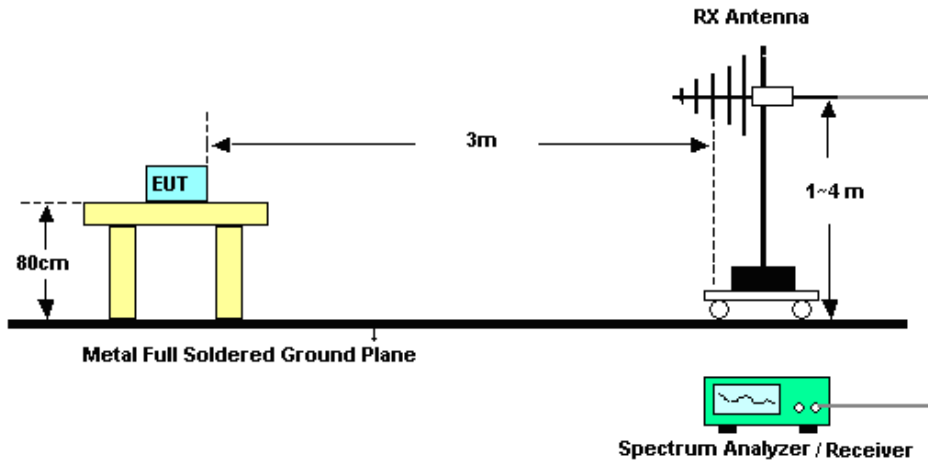

For radiated emissions above 1GHz

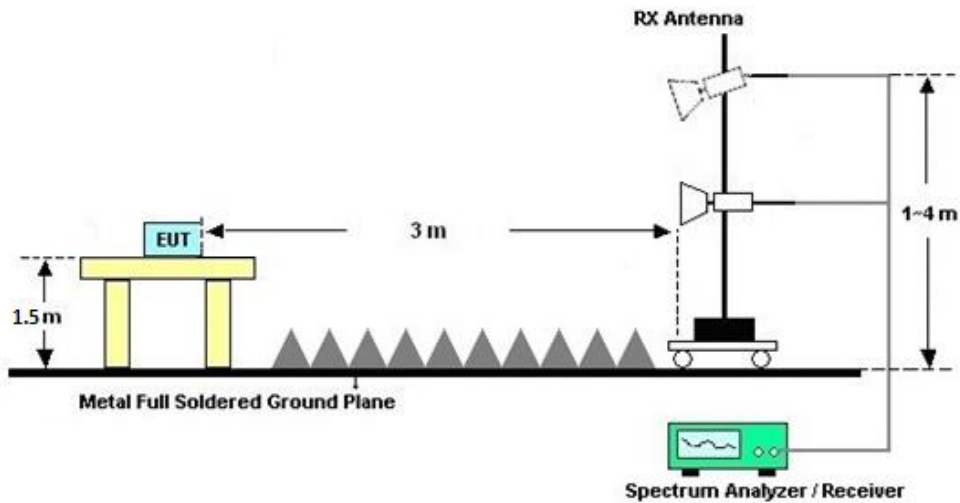



3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

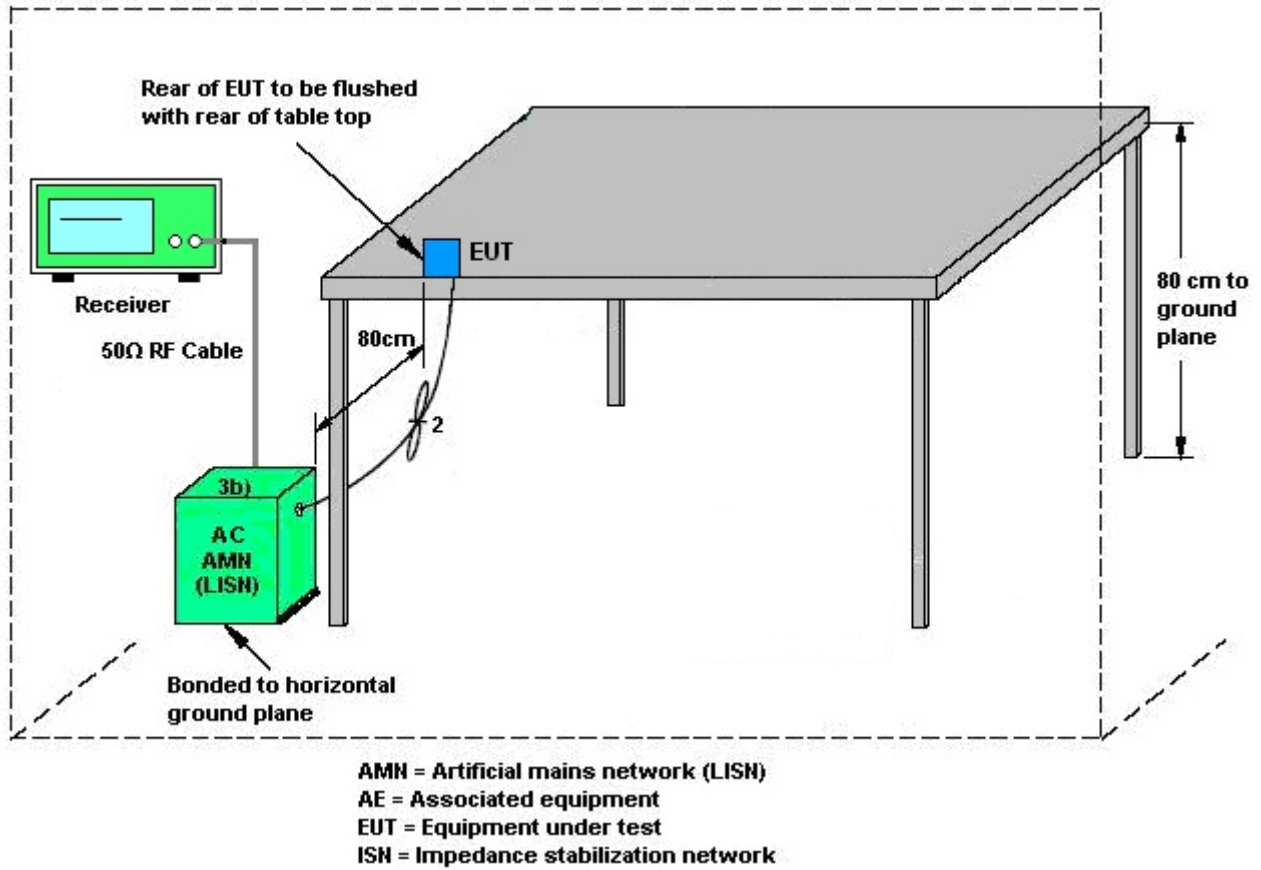

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For 802.11b/g/n/ax mode, directional gain is calculated as

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e.,

Directional gain = G_{ANT MAX}(Ant.1 Gain, Ant.2 Gain,...) + Array Gain, as following table for Power, where Array Gain = 0 dB (i.e., no array gain) for N_{ANT} ≤ 4;

For PSD, the directional gain calculation is following,

Directional gain = 10 log[(10^{G₁/20} + 10^{G₂/20} + ... + 10^{G_n/20})² /N_{ANT}] dBi, as following table for PSD.

N_{ANT} = number of transmit antennas

N_{SS} = number of spatial streams. (The worst case directional gain will occur when NSS = 1)

The directional gain “DG” is calculated as following table.

<CDD Modes>								
					DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant. 0 (dBi)	Ant. 1 (dBi)	Ant. 2 (dBi)	Ant. 3 (dBi)				
UNII-1	4.50	4.55	4.55	4.41	4.55	10.52	0.00	4.52
UNII-3	4.52	4.54	4.46	4.37	4.54	10.49	0.00	4.49

Power Limit Reduction = DG(Power) – 6dBi, (min = 0)

PSD Limit Reduction = DG(PSD) – 6dBi, (min = 0)

TXBF modes

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For 802.11ax mode, directional gain is calculated as

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

The directional gain calculation is following F)2)e)ii) of KDB 662911 D01 v02r01.

The directional gain “DG” is calculated as following table.

					DG	DG	Power	PSD
					for	for	Limit	Limit
	Ant 0	Ant 1	Ant 2	Ant 3	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
UNII-1	4.50	4.55	4.55	4.41	10.52	10.52	4.52	4.52
UNII-3	4.52	4.54	4.46	4.37	10.49	10.49	4.49	4.49

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Apr. 20, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2023	Apr. 20, 2023	Jan. 04, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2023	Apr. 20, 2023	Jan. 04, 2024	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max x 30dBm	Oct. 12, 2022	Apr. 20, 2023~Apr. 23, 2023	Oct. 11, 2023	Radiation (03CH07-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44G,MAX 30dB	Oct. 12, 2022	Apr. 20, 2023~Apr. 23, 2023	Oct. 11, 2023	Radiation (03CH07-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Apr. 20, 2023~Apr. 23, 2023	Oct. 15, 2023	Radiation (03CH07-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz-1GHz	Aug. 26, 2022	Apr. 20, 2023~Apr. 23, 2023	Aug. 25, 2023	Radiation (03CH07-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 05, 2023	Apr. 20, 2023~Apr. 23, 2023	Apr. 04, 2024	Radiation (03CH07-KS)
high gain Amplifier	EM	EM01G18GA	060840	1Ghz-18Ghz	Oct. 12, 2022	Apr. 20, 2023~Apr. 23, 2023	Oct. 11, 2023	Radiation (03CH07-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Oct. 17, 2022	Apr. 20, 2023~Apr. 23, 2023	Oct. 16, 2023	Radiation (03CH07-KS)
Amplifier	SONOMA	310N	413740	9KHz-1GHz	Jan. 05, 2023	Apr. 20, 2023~Apr. 23, 2023	Jan. 04, 2024	Radiation (03CH07-KS)
Amplifier	EM	EM01G18GA	060834	1Ghz-18Ghz	Oct. 12, 2022	Apr. 20, 2023~Apr. 23, 2023	Oct. 11, 2023	Radiation (03CH07-KS)
Amplifier	EM	EM18G40GGA	060851	18~40GHz	Jan. 05, 2023	Apr. 20, 2023~Apr. 23, 2023	Jan. 04, 2024	Radiation (03CH07-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Apr. 20, 2023~Apr. 23, 2023	NCR	Radiation (03CH07-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Apr. 20, 2023~Apr. 23, 2023	NCR	Radiation (03CH07-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Apr. 20, 2023~Apr. 23, 2023	NCR	Radiation (03CH07-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May 24, 2022	Apr. 24, 2023	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Apr. 24, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	Apr. 24, 2023	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Apr. 24, 2023	Oct. 11, 2023	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.1 %
Conducted Power Spectral Density	±0.40 dB

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.78 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------



Appendix A. Conducted Test Results

Report Number : FR332120B

Test Engineer:	Jiang Jun	Temperature:	21~25	°C
Test Date:	2023/4/20	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Power Table

FCC Band I																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Ant	Average Conducted Power with duty factor (dBm)					FCC Power Limit (dBm)	DG (dBi)	FCC EIRP Power (dBm)	FCC EIRP Power Limit (dBm)	Pass/Fail	Power Setting
						Ant 0	Ant 1	Ant 2	Ant 3	SUM						
11a	6Mbps	4	36	5180	0+1+2+3	18.80	19.06	18.33	18.77	24.77	30.00	4.55	29.32	-	Pass	71.00
11a	6Mbps	4	44	5220	0+1+2+3	18.82	19.19	18.49	18.88	24.87	30.00	4.55	29.42	-	Pass	71.00
11a	6Mbps	4	48	5240	0+1+2+3	18.22	18.60	17.83	18.19	24.24	30.00	4.55	28.79	-	Pass	68.00
HE20	MCS0	4	36	5180	0+1+2+3	19.37	19.62	19.17	19.30	25.39	30.00	4.55	29.94	-	Pass	72.00
HE20	MCS0	4	44	5220	0+1+2+3	19.26	19.75	19.01	19.49	25.41	30.00	4.55	29.96	-	Pass	72.00
HE20	MCS0	4	48	5240	0+1+2+3	18.99	19.17	18.51	19.04	24.96	30.00	4.55	29.51	-	Pass	70.00
HE40	MCS0	4	38	5190	0+1+2+3	18.61	18.69	18.52	18.36	24.57	30.00	4.55	29.12	-	Pass	68.00
HE40	MCS0	4	46	5230	0+1+2+3	21.75	22.04	21.83	21.76	27.87	30.00	4.55	32.42	-	Pass	82.00
HE80	MCS0	4	42	5210	0+1+2+3	19.57	19.79	19.55	19.53	25.64	30.00	4.55	30.19	-	Pass	72.00

TEST RESULTS DATA
Average Power Table

Band IV																		
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)					FCC Conducted Power Limit (dBm)	DG (dBi)				FCC EIRP Power (dBm)	FCC EIRP Power Limit (dBm)	Pass/Fail	Power Setting
					Ant 0	Ant 1	Ant 2	Ant 3	SUM		Ant 0	Ant 1	Ant 2	Ant 3				
11a	6Mbps	4	149	5745	12.08	12.10	11.67	12.47	18.11	30.00	4.54				22.65	-	Pass	40
11a	6Mbps	4	157	5785	12.03	12.06	11.56	12.35	18.03	30.00	4.54				22.57	-	Pass	40
11a	6Mbps	4	165	5825	12.95	13.05	12.62	13.44	19.04	30.00	4.54				23.58	-	Pass	44
HE20	MCS0	4	149	5745	12.86	13.11	12.6	13.09	18.94	30.00	4.54				23.48	-	Pass	42
HE20	MCS0	4	157	5785	12.30	12.44	11.84	12.61	18.33	30.00	4.54				22.87	-	Pass	40
HE20	MCS0	4	165	5825	14.39	14.54	13.93	14.46	20.36	30.00	4.54				24.90	-	Pass	48
HE40	MCS0	4	151	5755	15.06	15.25	14.73	15.35	21.13	30.00	4.54				25.67	-	Pass	50
HE40	MCS0	4	159	5795	23.91	24.10	23.6	24.12	29.96	30.00	4.54				34.50	-	Pass	90
HE80	MCS0	4	155	5775	18.30	18.61	17.97	18.51	24.38	30.00	4.54				28.92	-	Pass	64

TEST RESULTS DATA
Average Power Table

FCC Band I																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Ant	Average Conducted Power with duty factor (dBm)					FCC Power Limit (dBm)	DG (dBi)	FCC EIRP Power (dBm)	FCC EIRP Power Limit (dBm)	Pass/Fail	Power Setting
						Ant 0	Ant 1	Ant 2	Ant 3	SUM						
HE20	MCS0	4	36	5180	0+1+2+3	12.90	13.45	12.75	12.96	19.05	25.38	10.62	29.67	-	Pass	49.00
HE20	MCS0	4	44	5220	0+1+2+3	13.12	13.31	12.74	13.01	19.07	25.38	10.62	29.69	-	Pass	49.00
HE20	MCS0	4	48	5240	0+1+2+3	12.81	13.14	12.49	12.69	18.81	25.38	10.62	29.43	-	Pass	48.00
HE40	MCS0	4	38	5190	0+1+2+3	12.48	12.74	12.40	12.19	18.48	25.38	10.62	29.10	-	Pass	45.00
HE40	MCS0	4	46	5230	0+1+2+3	15.86	16.05	15.52	15.48	21.76	25.38	10.62	32.38	-	Pass	57.00
HE80	MCS0	4	42	5210	0+1+2+3	13.50	13.73	13.36	13.48	19.54	25.38	10.62	30.16	-	Pass	48.00

TEST RESULTS DATA
Average Power Table

Band IV																		
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)					FCC Conducted Power Limit (dBm)	DG (dBi)				FCC EIRP Power (dBm)	FCC EIRP Power Limit (dBm)	Pass/Fail	Power Setting
					Ant 0	Ant 1	Ant 2	Ant 3	SUM		Ant 0	Ant 1	Ant 2	Ant 3				
HE20	MCS0	4	149	5745	7.01	7.33	6.754	4.66	12.58	25.51	10.49				23.07	-	Pass	10
HE20	MCS0	4	157	5785	5.40	6.54	7.264	5.80	12.33	25.51	10.49				22.83	-	Pass	16
HE20	MCS0	4	165	5825	7.84	8.60	6.474	7.79	13.76	25.51	10.49				24.26	-	Pass	23
HE40	MCS0	4	151	5755	7.48	9.84	9.034	9.80	15.16	25.51	10.49				25.65	-	Pass	20
HE40	MCS0	4	159	5795	18.01	18.12	17.43	18.00	23.92	25.51	10.49				34.42	-	Pass	62
HE80	MCS0	4	155	5775	12.41	12.63	11.96	12.53	18.41	25.51	10.49				28.91	-	Pass	40



Emission Bandwidth

Test Result



TestMode	Antenna	Freq(MHz)	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A-CDD	Ant0	5180	21.28	5169.40	5190.68	---	---
	Ant1	5180	21.56	5169.32	5190.88	---	---
	Ant2	5180	21.16	5169.44	5190.60	---	---
	Ant3	5180	20.96	5169.48	5190.44	---	---
	Ant0	5220	21.20	5209.24	5230.44	---	---
	Ant1	5220	21.44	5209.24	5230.68	---	---
	Ant2	5220	21.00	5209.44	5230.44	---	---
	Ant3	5220	21.36	5209.32	5230.68	---	---
	Ant0	5240	21.04	5229.56	5250.60	---	---
	Ant1	5240	21.04	5229.48	5250.52	---	---
	Ant2	5240	21.04	5229.48	5250.52	---	---
	Ant3	5240	21.00	5229.56	5250.56	---	---
	Ant0	5745	21.08	5734.56	5755.64	---	---
	Ant1	5745	21.32	5734.36	5755.68	---	---
	Ant2	5745	21.08	5734.52	5755.60	---	---
	Ant3	5745	21.12	5734.40	5755.52	---	---
	Ant0	5785	21.16	5774.40	5795.56	---	---
	Ant1	5785	21.08	5774.40	5795.48	---	---
	Ant2	5785	21.20	5774.40	5795.60	---	---
	Ant3	5785	21.08	5774.44	5795.52	---	---
11AX20MIMO	Ant0	5825	21.32	5814.28	5835.60	---	---
	Ant1	5825	21.16	5814.36	5835.52	---	---
	Ant2	5825	21.28	5814.48	5835.76	---	---
	Ant3	5825	21.20	5814.32	5835.52	---	---
	Ant0	5180	21.76	5169.20	5190.96	---	---
	Ant1	5180	21.44	5169.28	5190.72	---	---
	Ant2	5180	21.28	5169.36	5190.64	---	---
	Ant3	5180	21.28	5169.36	5190.64	---	---
	Ant0	5220	21.40	5209.48	5230.88	---	---
	Ant1	5220	21.64	5209.12	5230.76	---	---
Ant2	5220	21.52	5209.24	5230.76	---	---	
Ant3	5220	21.48	5209.16	5230.64	---	---	
Ant0	5240	21.32	5229.56	5250.88	---	---	
Ant1	5240	21.32	5229.32	5250.64	---	---	



	Ant2	5240	21.40	5229.24	5250.64	---	---
	Ant3	5240	21.28	5229.40	5250.68	---	---
	Ant0	5745	21.40	5734.36	5755.76	---	---
	Ant1	5745	21.36	5734.24	5755.60	---	---
	Ant2	5745	21.48	5734.20	5755.68	---	---
	Ant3	5745	21.16	5734.36	5755.52	---	---
	Ant0	5785	21.52	5774.36	5795.88	---	---
	Ant1	5785	21.72	5774.08	5795.80	---	---
	Ant2	5785	21.52	5774.12	5795.64	---	---
	Ant3	5785	21.16	5774.52	5795.68	---	---
	Ant0	5825	21.56	5814.12	5835.68	---	---
	Ant1	5825	21.44	5814.28	5835.72	---	---
	Ant2	5825	21.60	5814.20	5835.80	---	---
	Ant3	5825	21.40	5814.32	5835.72	---	---
11AX40MIMO	Ant0	5190	40.72	5169.76	5210.48	---	---
	Ant1	5190	40.40	5169.84	5210.24	---	---
	Ant2	5190	40.32	5169.84	5210.16	---	---
	Ant3	5190	40.48	5169.68	5210.16	---	---
	Ant0	5230	40.88	5209.68	5250.56	---	---
	Ant1	5230	41.04	5209.44	5250.48	---	---
	Ant2	5230	40.64	5209.68	5250.32	---	---
	Ant3	5230	40.72	5209.76	5250.48	---	---
	Ant0	5755	40.64	5734.68	5775.32	---	---
	Ant1	5755	40.48	5734.76	5775.24	---	---
	Ant2	5755	40.72	5734.68	5775.40	---	---
	Ant3	5755	40.48	5734.76	5775.24	---	---
	Ant0	5795	74.40	5759.08	5833.48	---	---
	Ant1	5795	79.44	5755.48	5834.92	---	---
	Ant2	5795	69.68	5758.36	5828.04	---	---
	Ant3	5795	75.76	5757.72	5833.48	---	---
11AX80MIMO	Ant0	5210	82.24	5168.88	5251.12	---	---
	Ant1	5210	81.44	5169.52	5250.96	---	---
	Ant2	5210	82.08	5169.20	5251.28	---	---
	Ant3	5210	81.76	5169.36	5251.12	---	---
	Ant0	5775	82.24	5734.04	5816.28	---	---
	Ant1	5775	82.08	5734.04	5816.12	---	---
	Ant2	5775	81.76	5734.04	5815.80	---	---
	Ant3	5775	81.44	5734.36	5815.80	---	---




Test Graphs

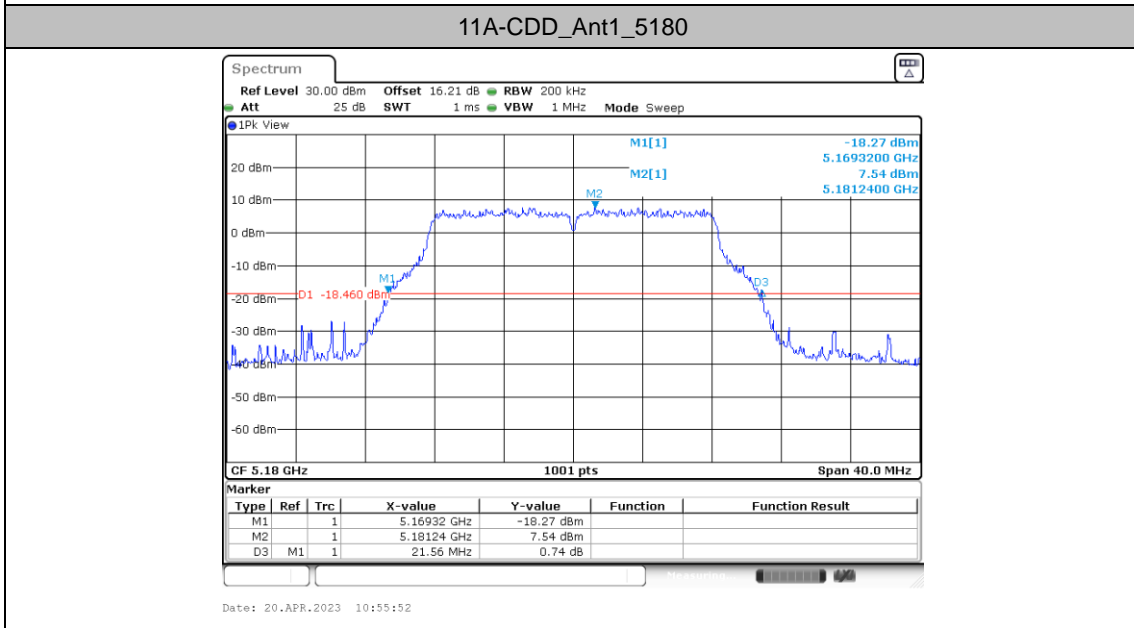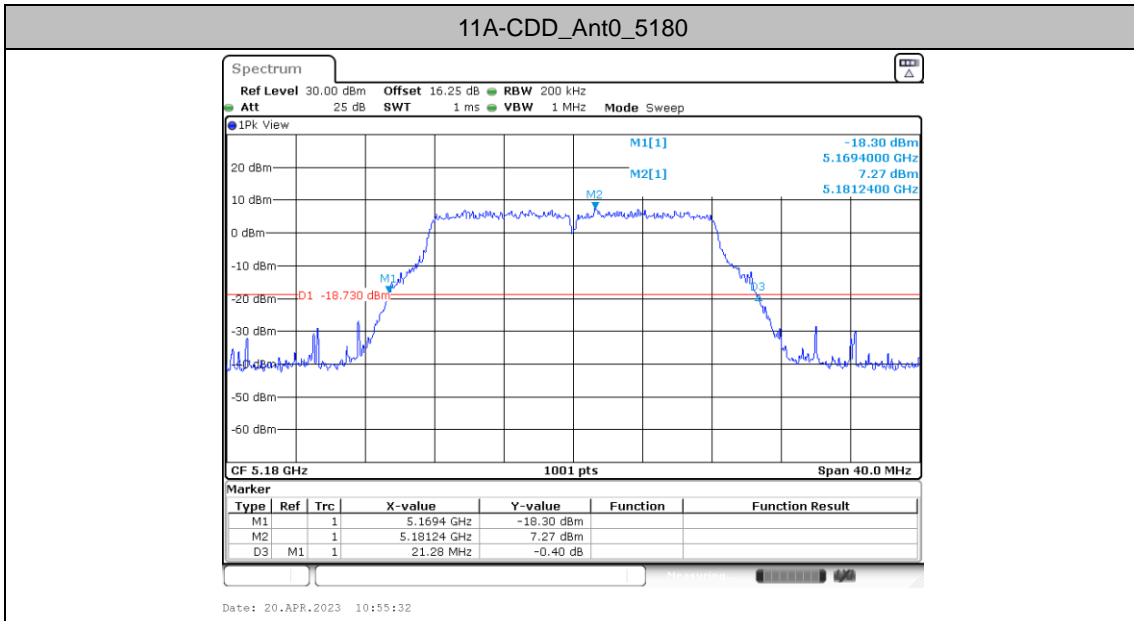




11A-CDD_Ant2_5180

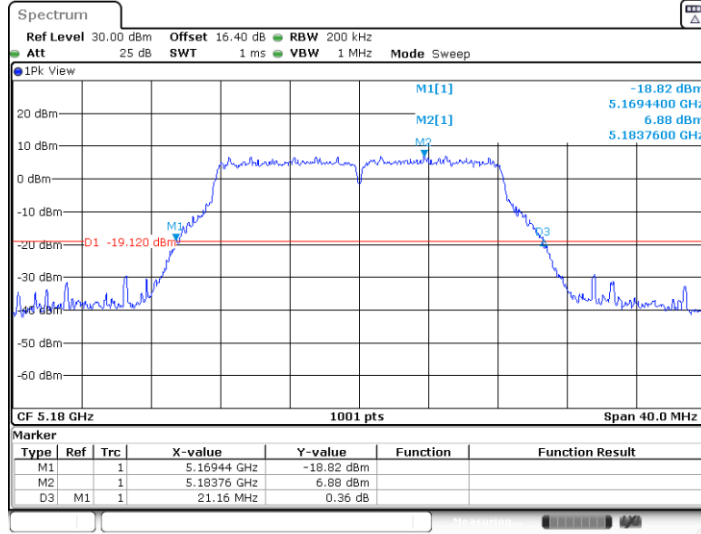

Date: 20.APR.2023 10:56:23


11A-CDD_Ant3_5180

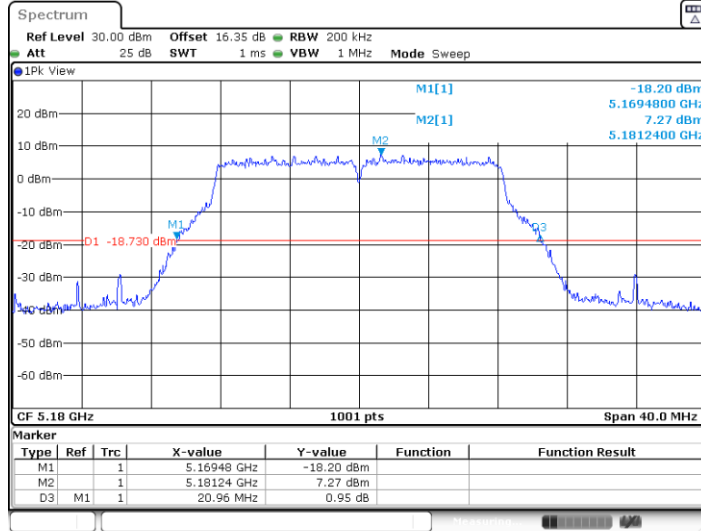

Date: 20.APR.2023 10:57:38




11A-CDD_Ant0_5220


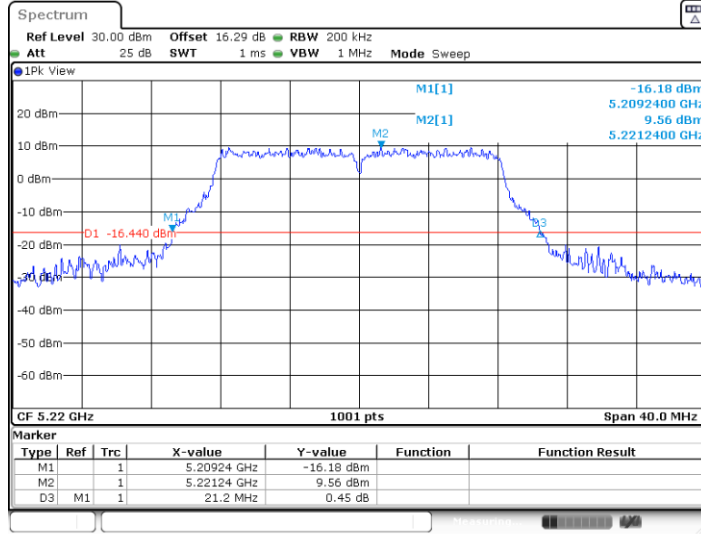



Date: 20.APR.2023 11:01:03

11A-CDD_Ant1_5220

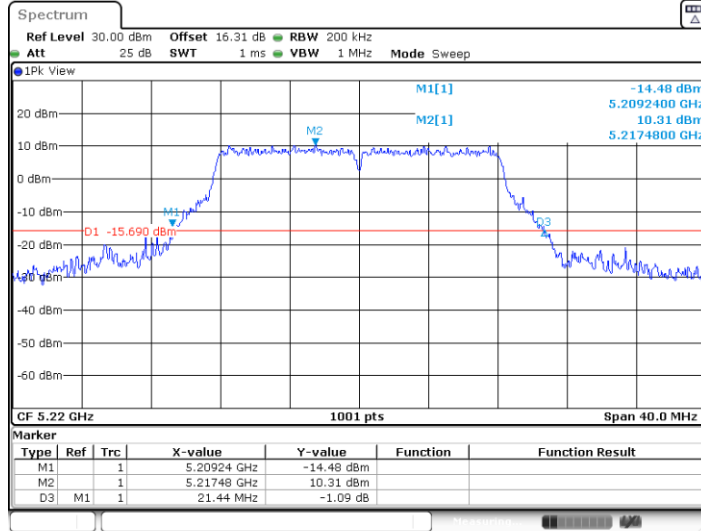


Date: 20.APR.2023 11:01:41

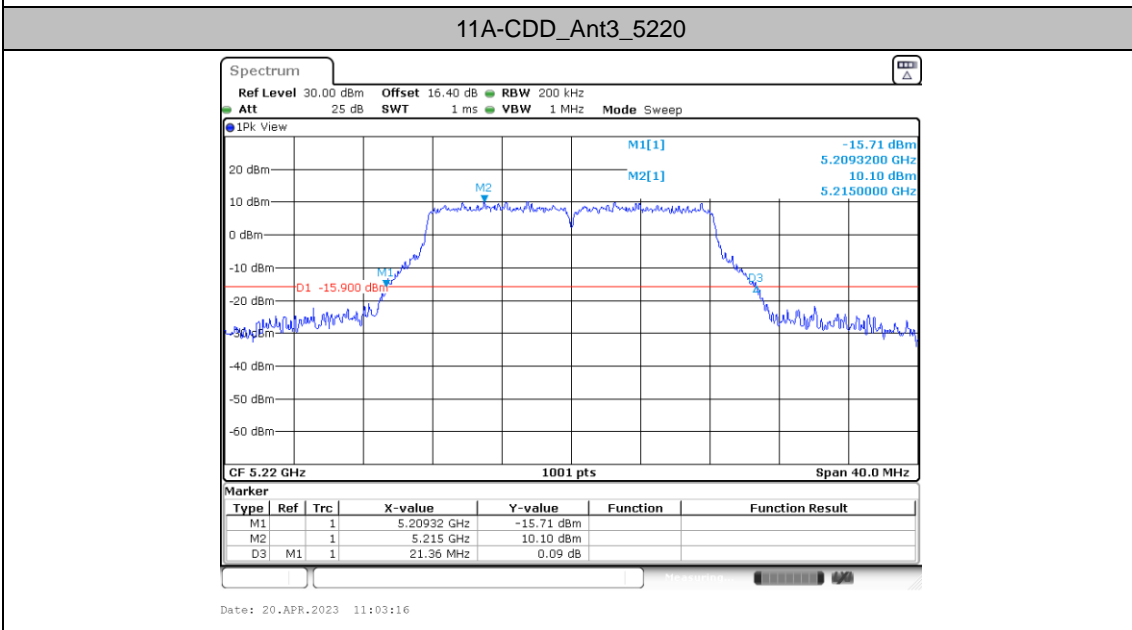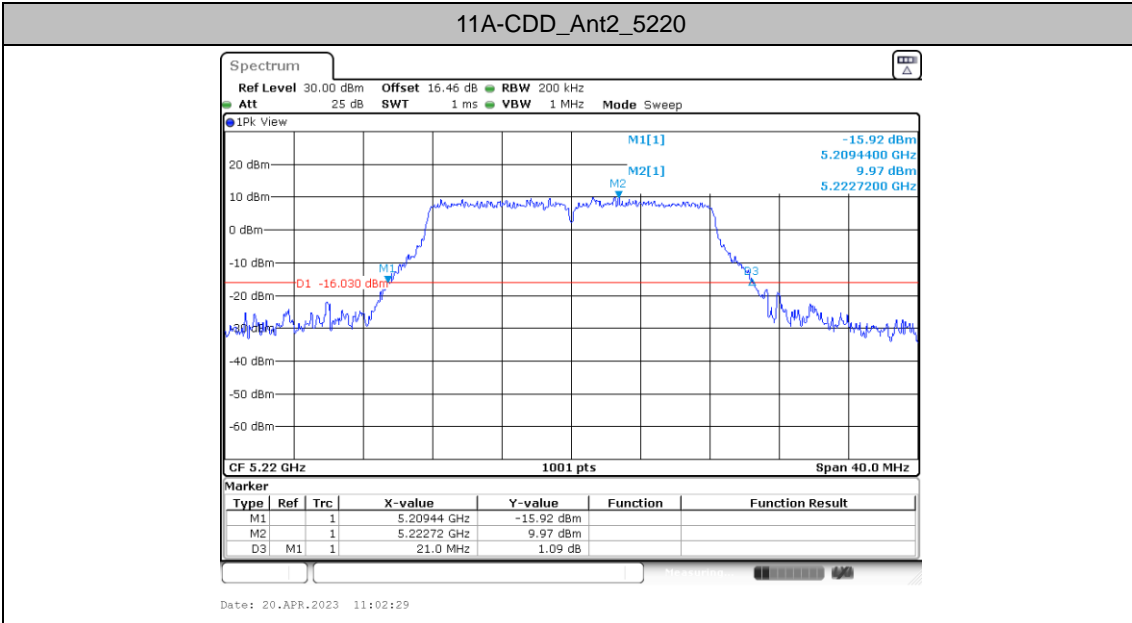

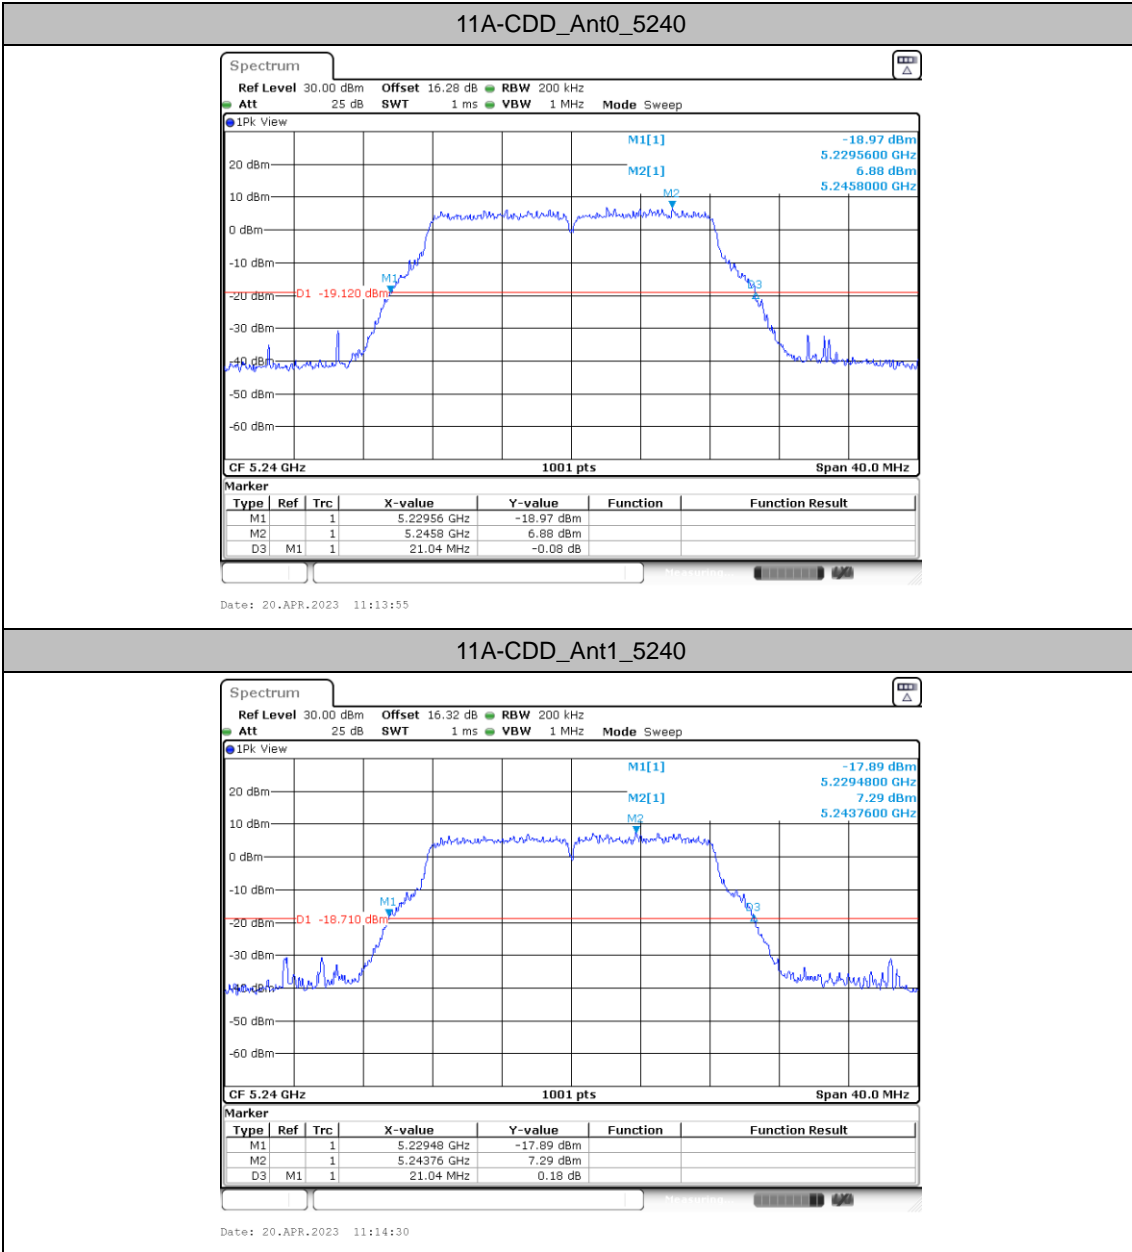




11A-CDD_Ant2_5240

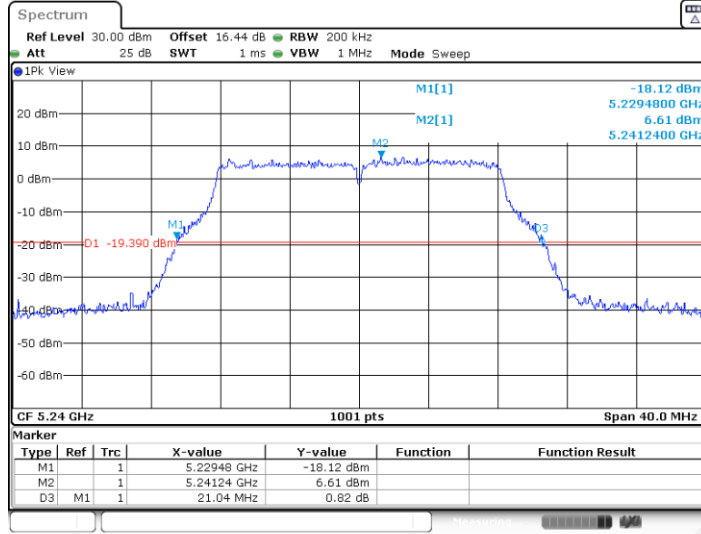


Date: 20.APR.2023 11:15:17

11A-CDD_Ant3_5240

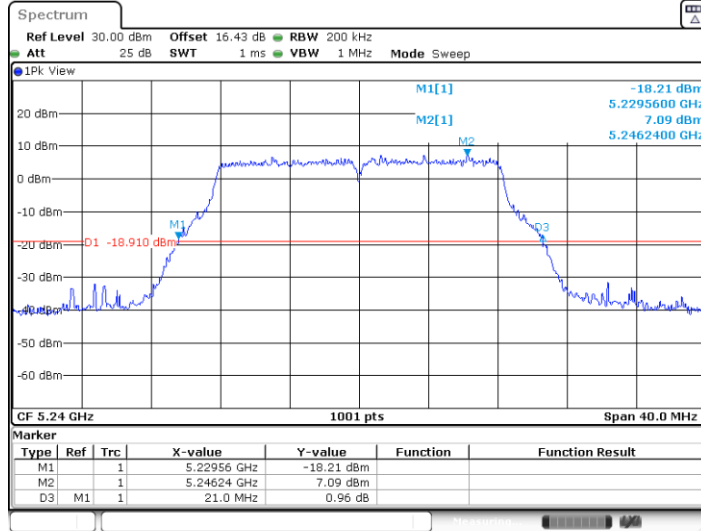


Date: 20.APR.2023 11:16:03

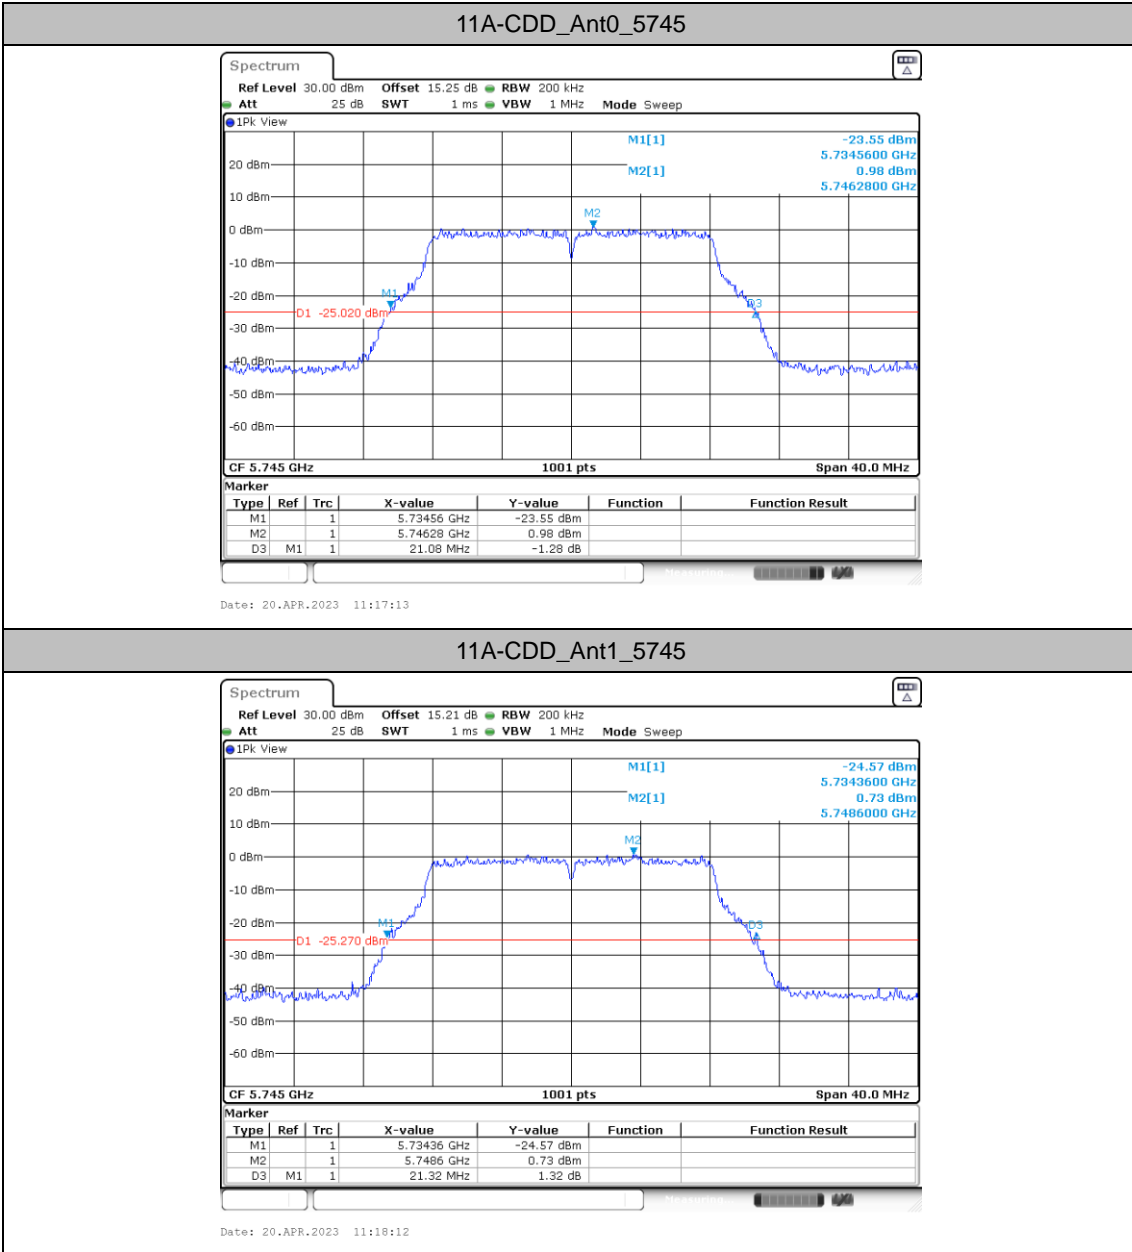




11A-CDD_Ant2_5745

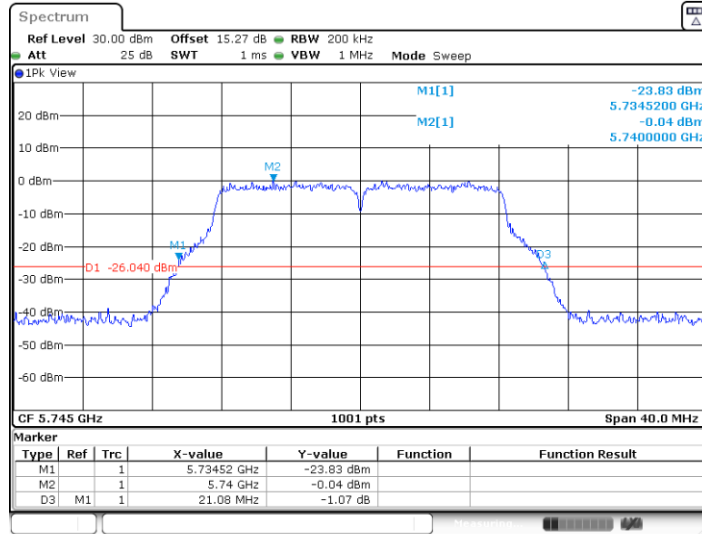


Date: 20.APR.2023 11:19:17

11A-CDD_Ant3_5745

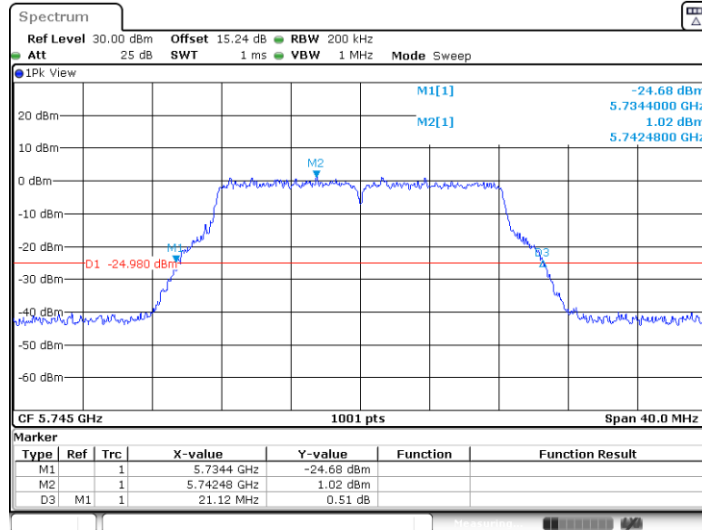


Date: 20.APR.2023 11:20:23

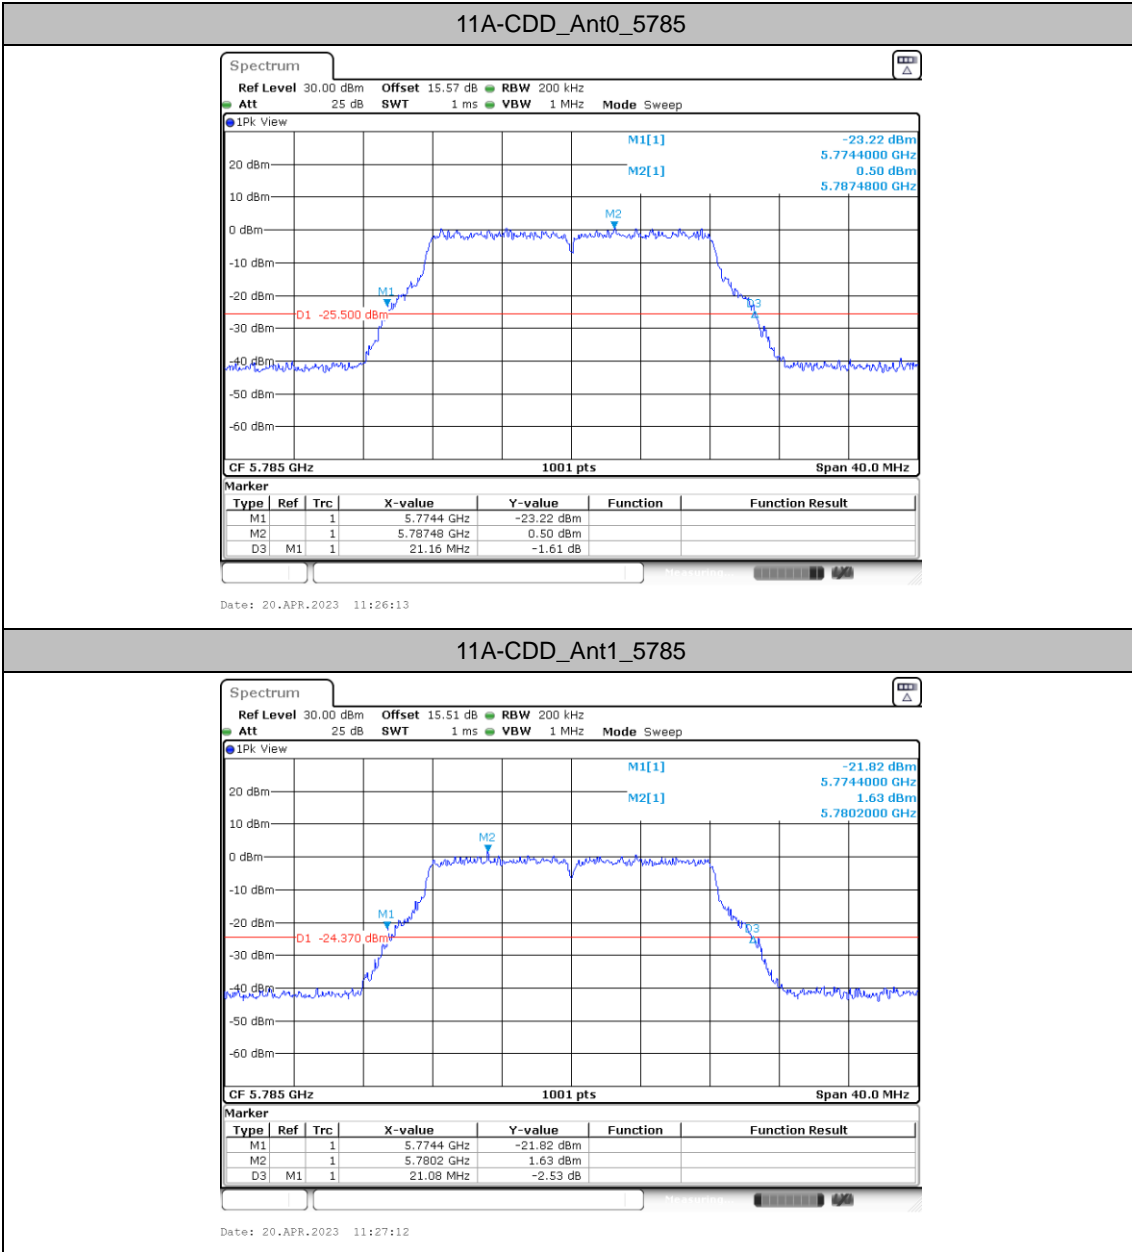
11A-CDD_Ant1_5785




11A-CDD_Ant2_5785

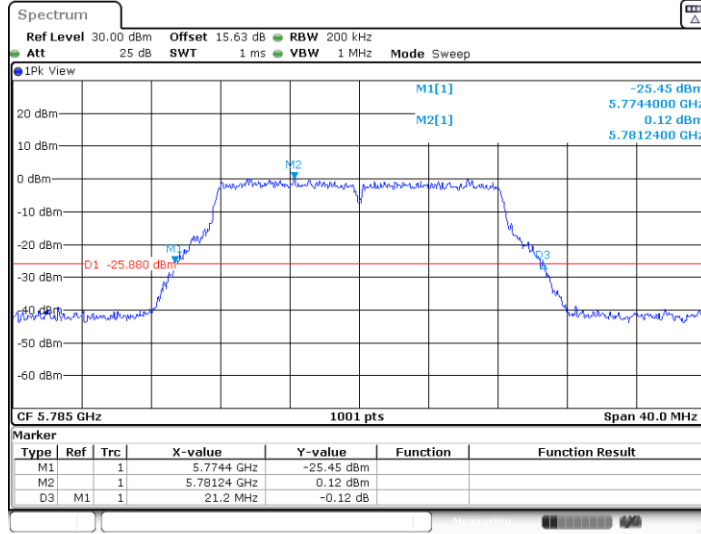




Date: 20.APR.2023 11:28:17

11A-CDD_Ant3_5785

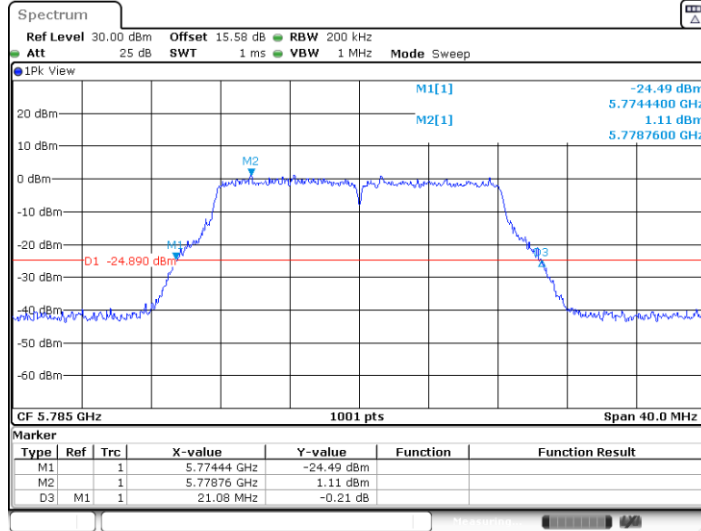


Date: 20.APR.2023 11:29:23

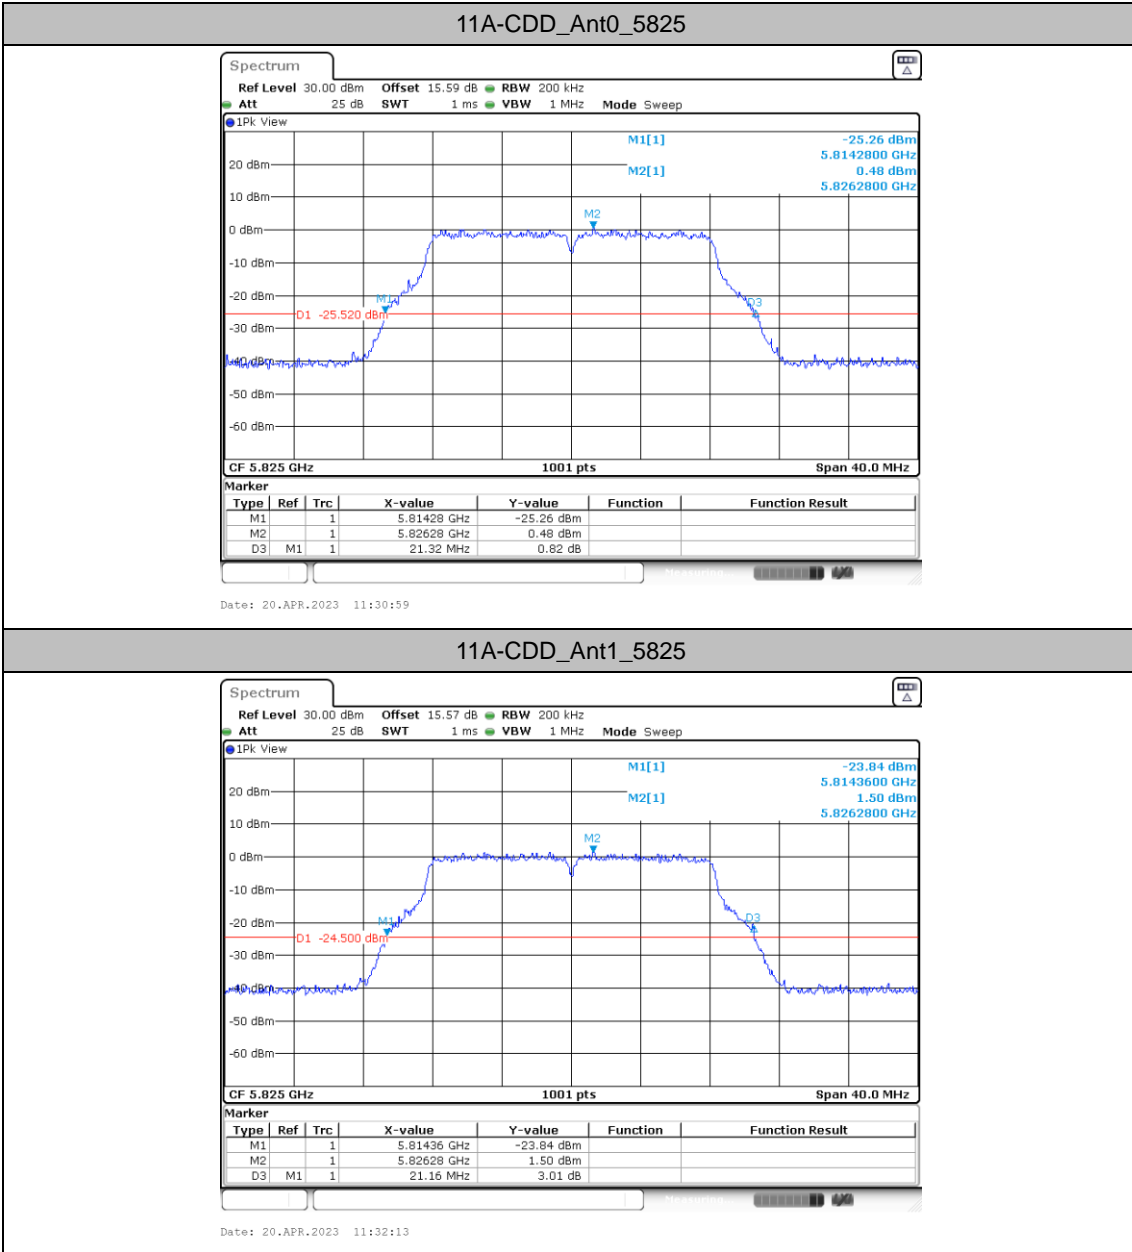

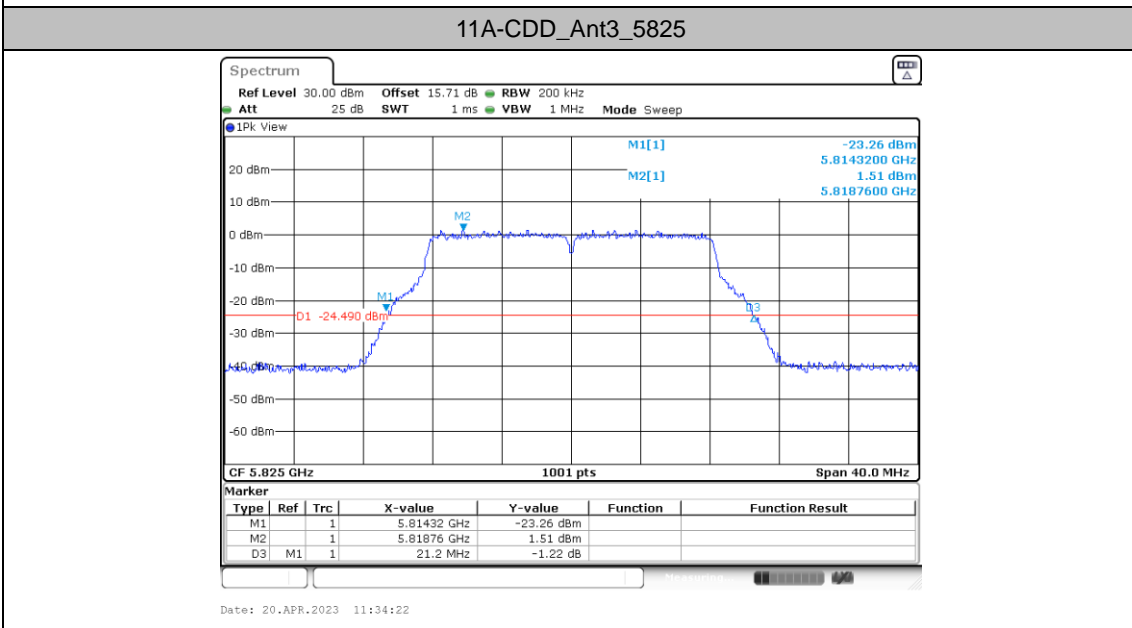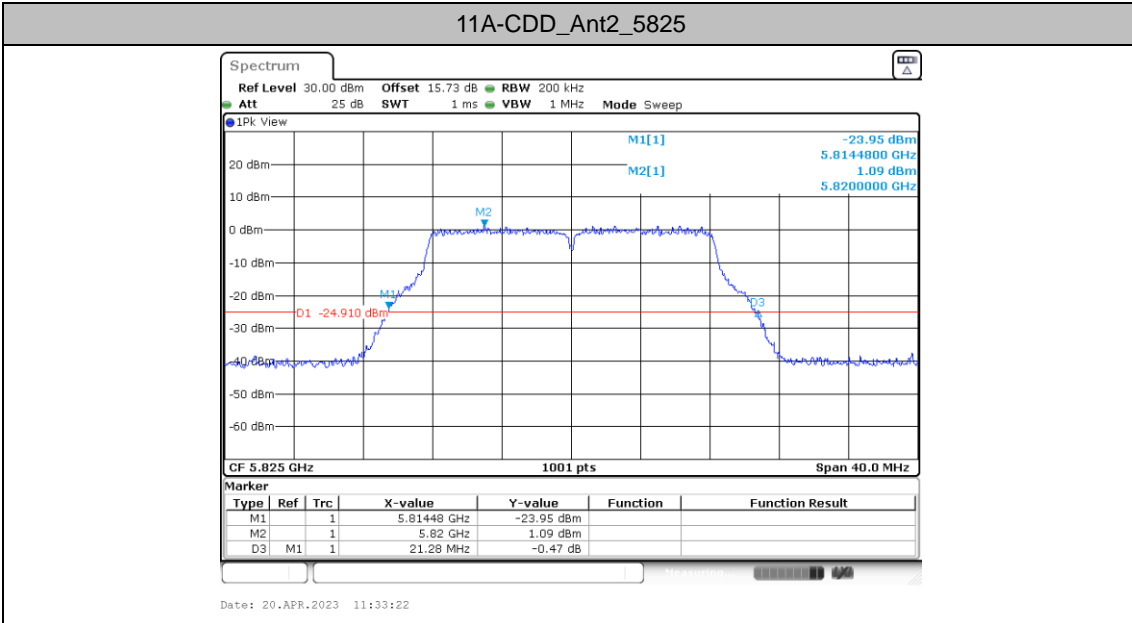




11AX20MIMO_Ant0_5180

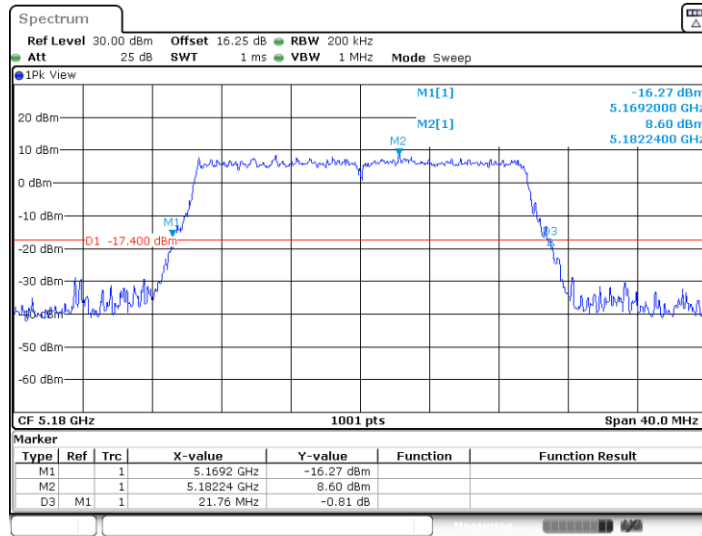

Date: 20.APR.2023 11:36:45


11AX20MIMO_Ant1_5180

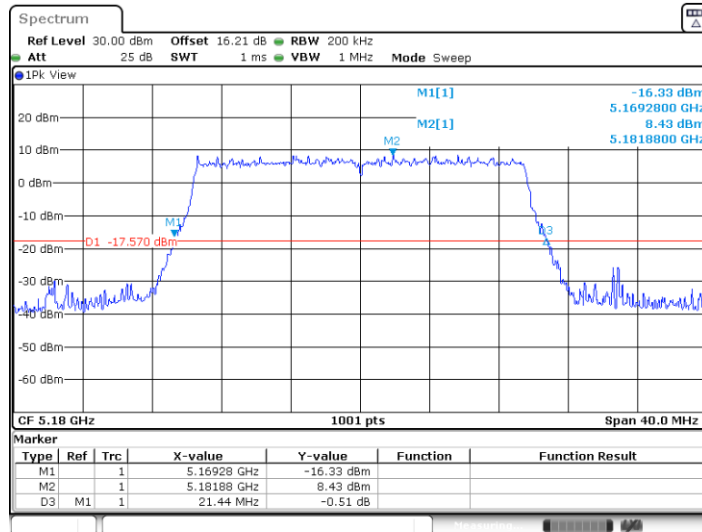

Date: 20.APR.2023 11:37:50




11AX20MIMO_Ant2_5180

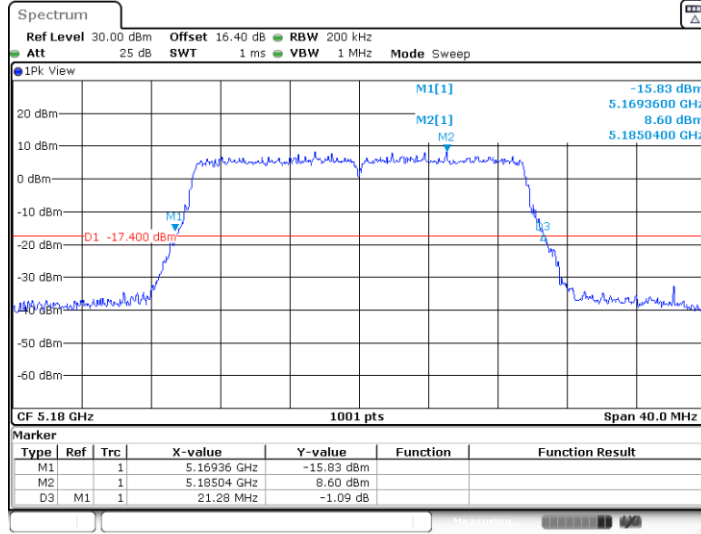


Date: 20.APR.2023 11:38:56

11AX20MIMO_Ant3_5180

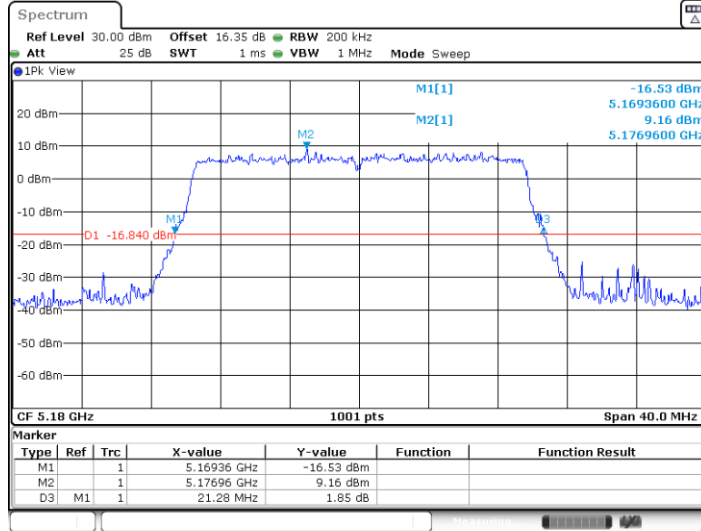


Date: 20.APR.2023 11:40:09

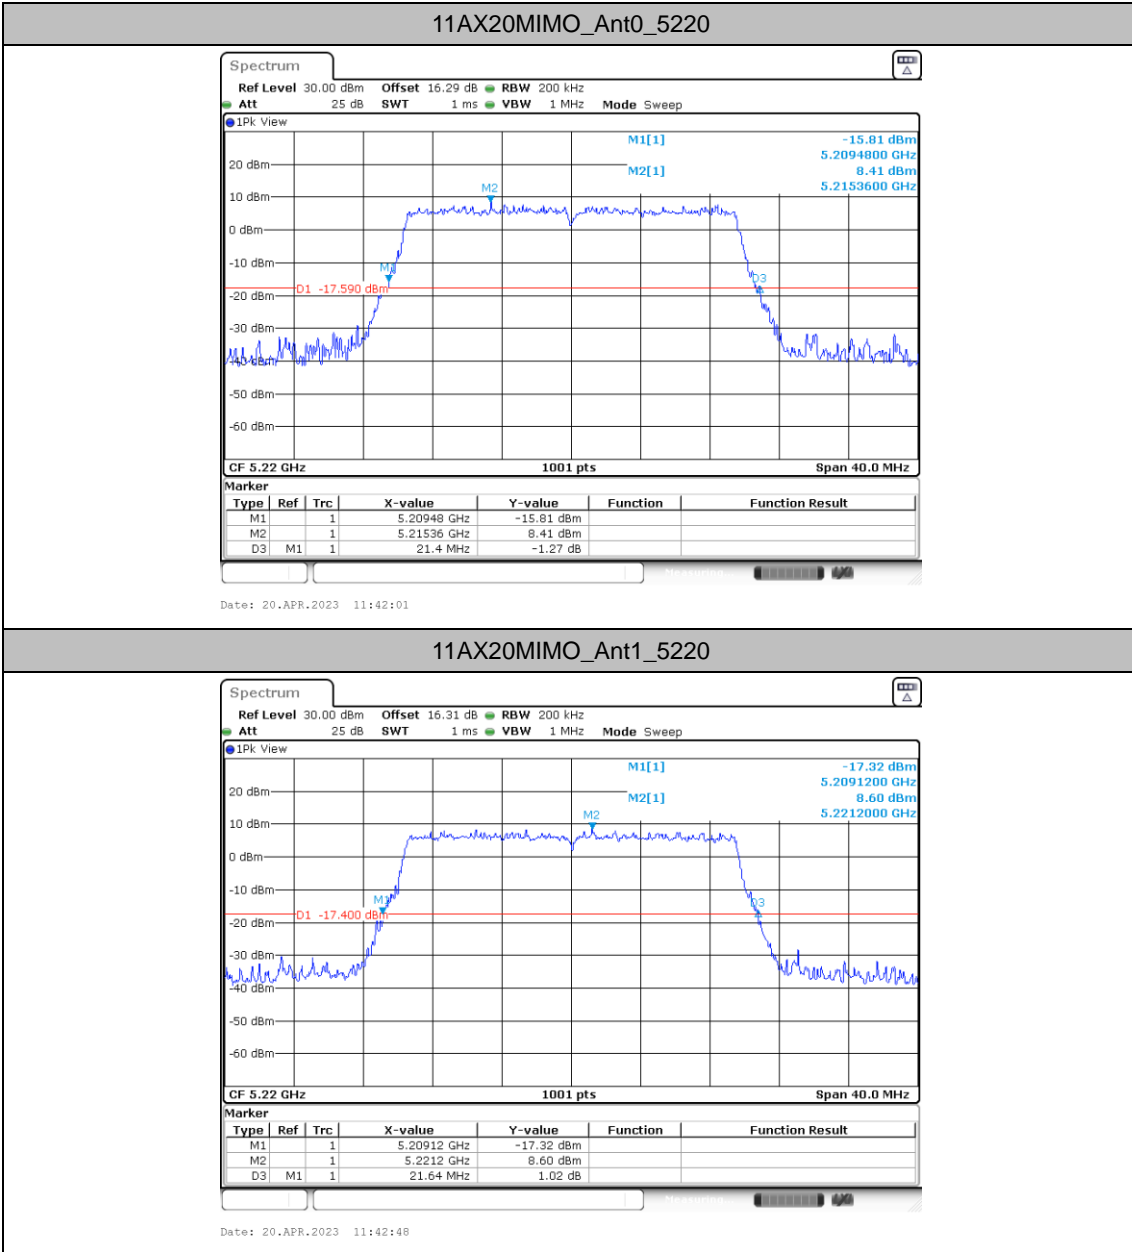




11AX20MIMO_Ant2_5220

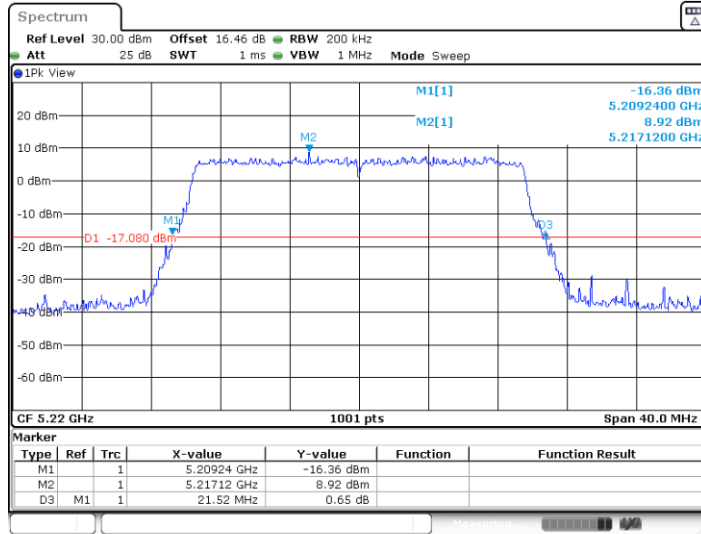


Date: 20.APR.2023 11:43:39

11AX20MIMO_Ant3_5220

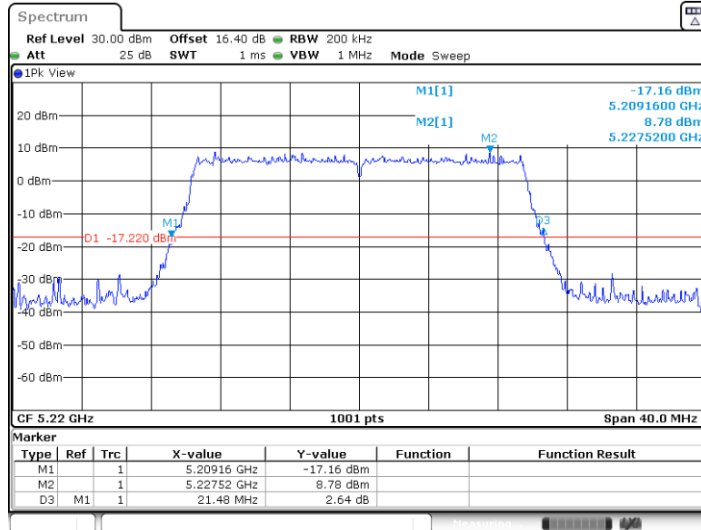


Date: 20.APR.2023 11:44:24

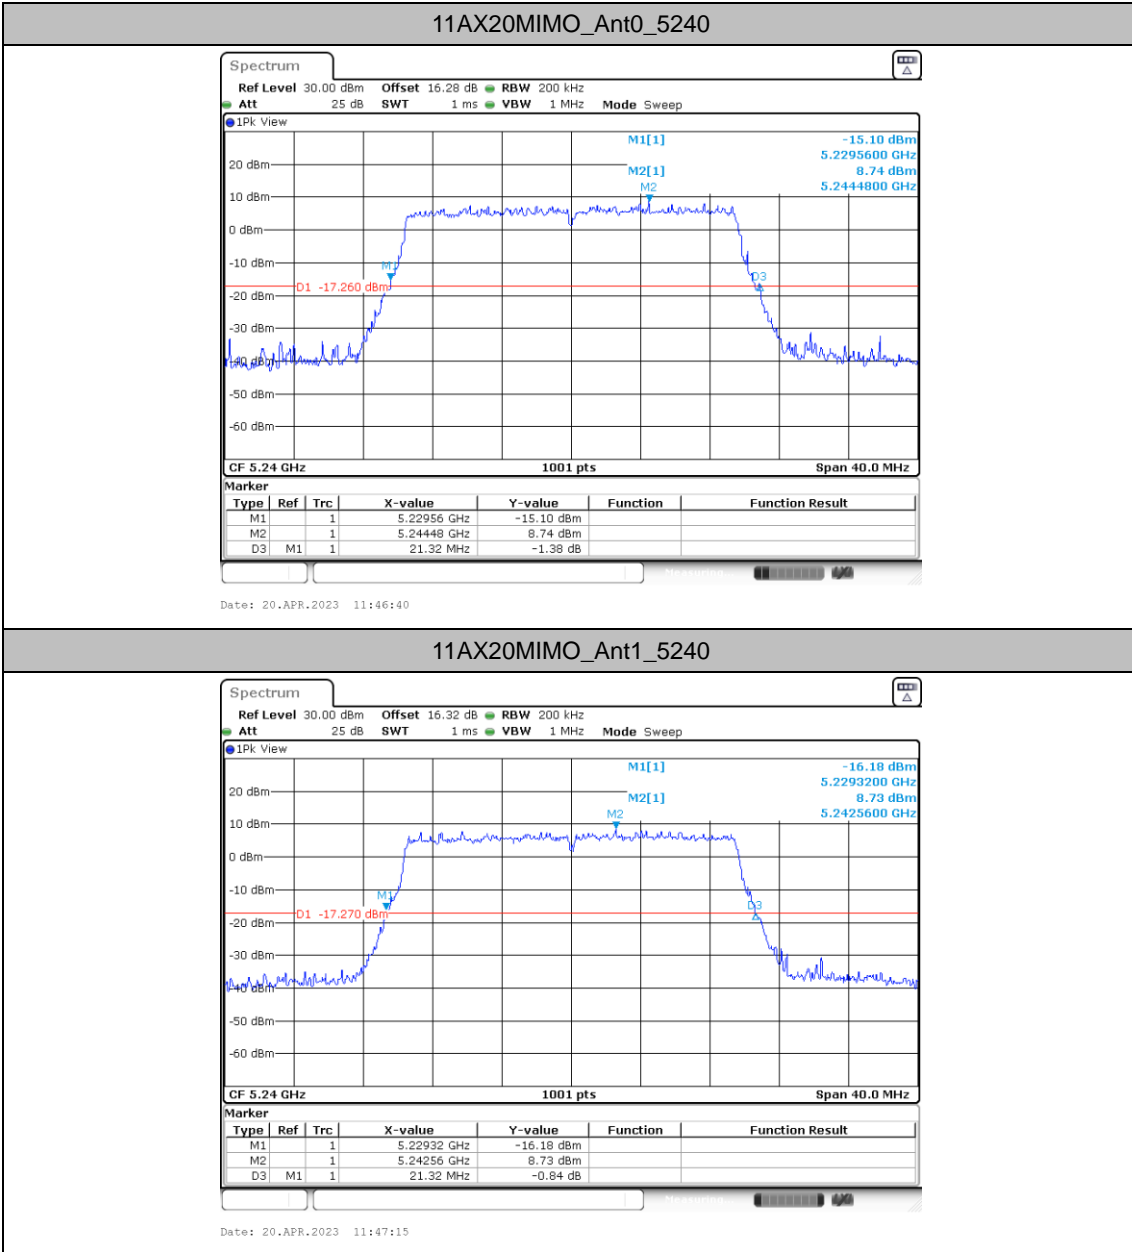




11AX20MIMO_Ant2_5240

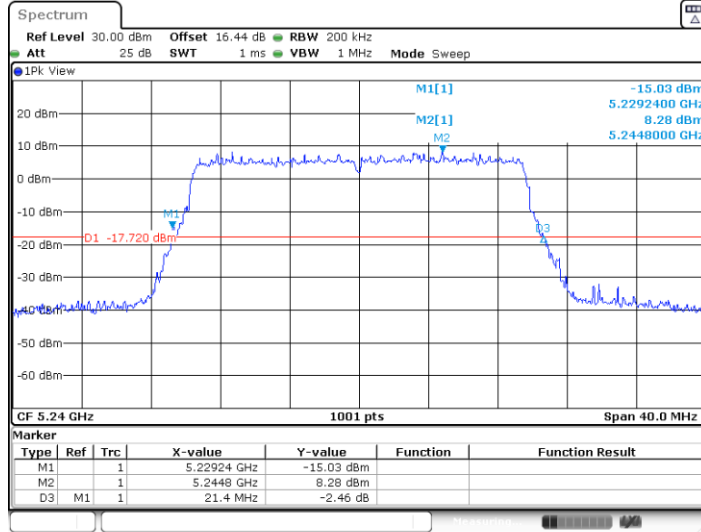

Date: 20.APR.2023 11:48:06


11AX20MIMO_Ant3_5240

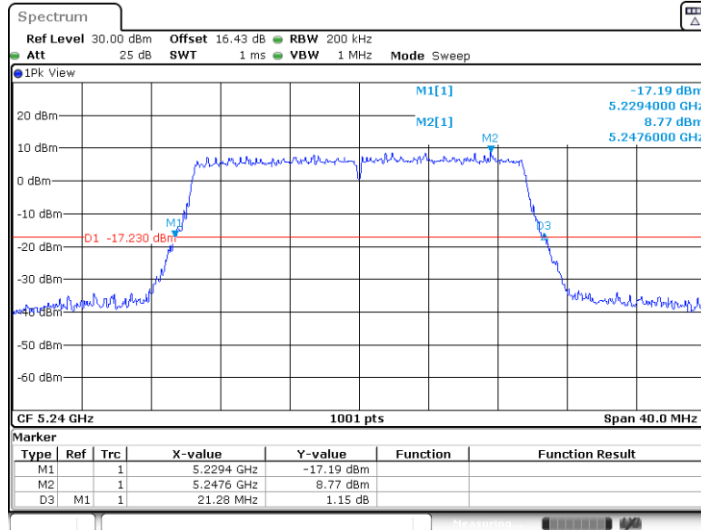

Date: 20.APR.2023 11:48:53




11AX20MIMO_Ant0_5745

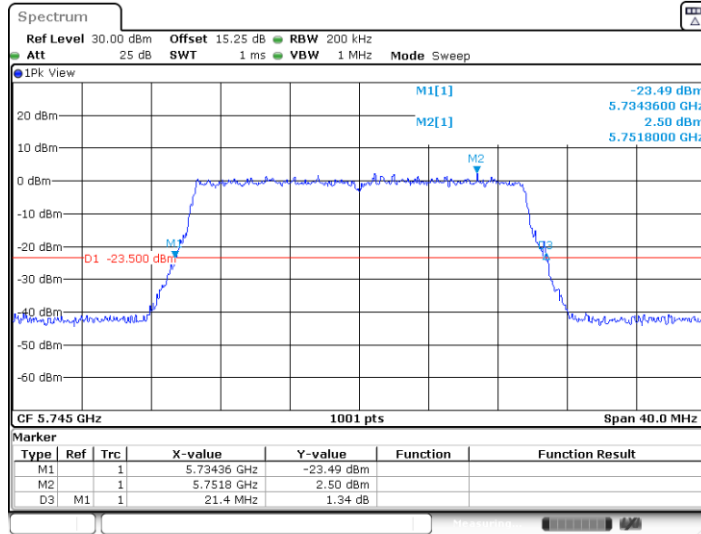

Date: 20.APR.2023 11:50:23


11AX20MIMO_Ant1_5745

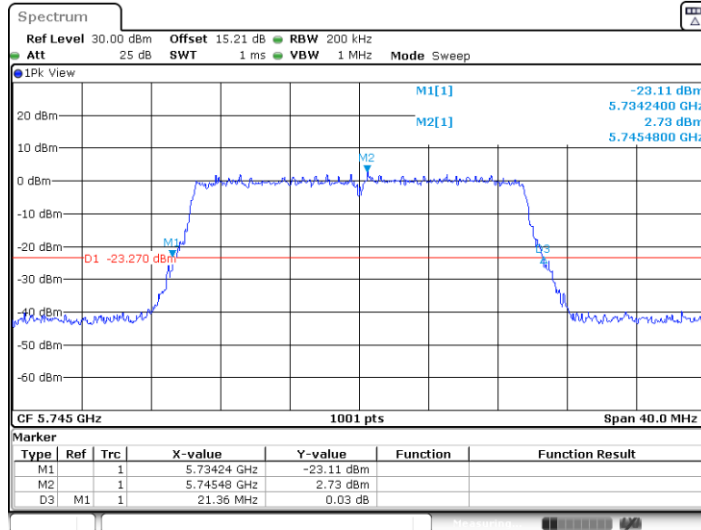

Date: 20.APR.2023 11:51:28




11AX20MIMO_Ant2_5745

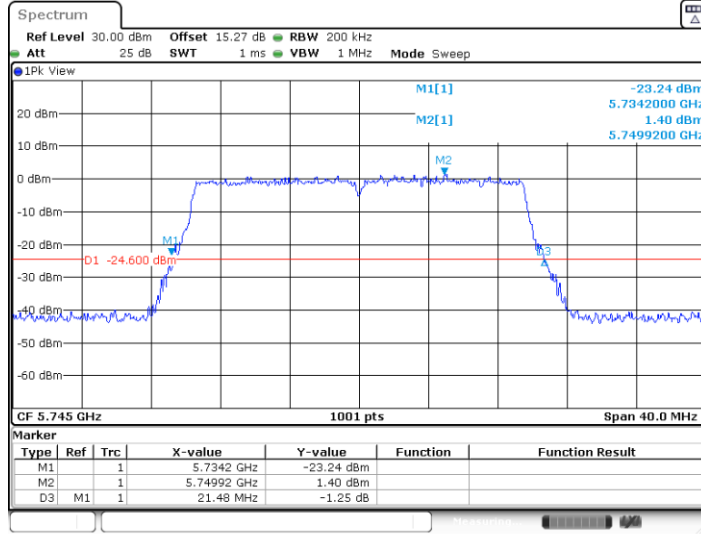


Date: 20.APR.2023 11:52:25

11AX20MIMO_Ant3_5745

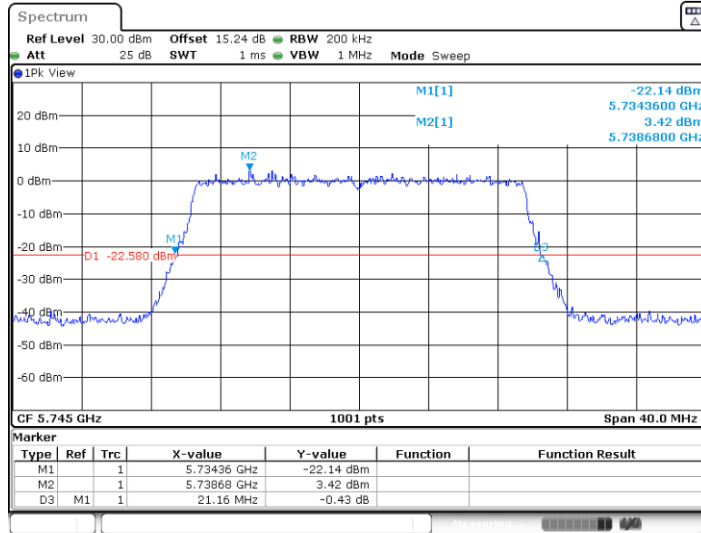


Date: 20.APR.2023 11:53:31

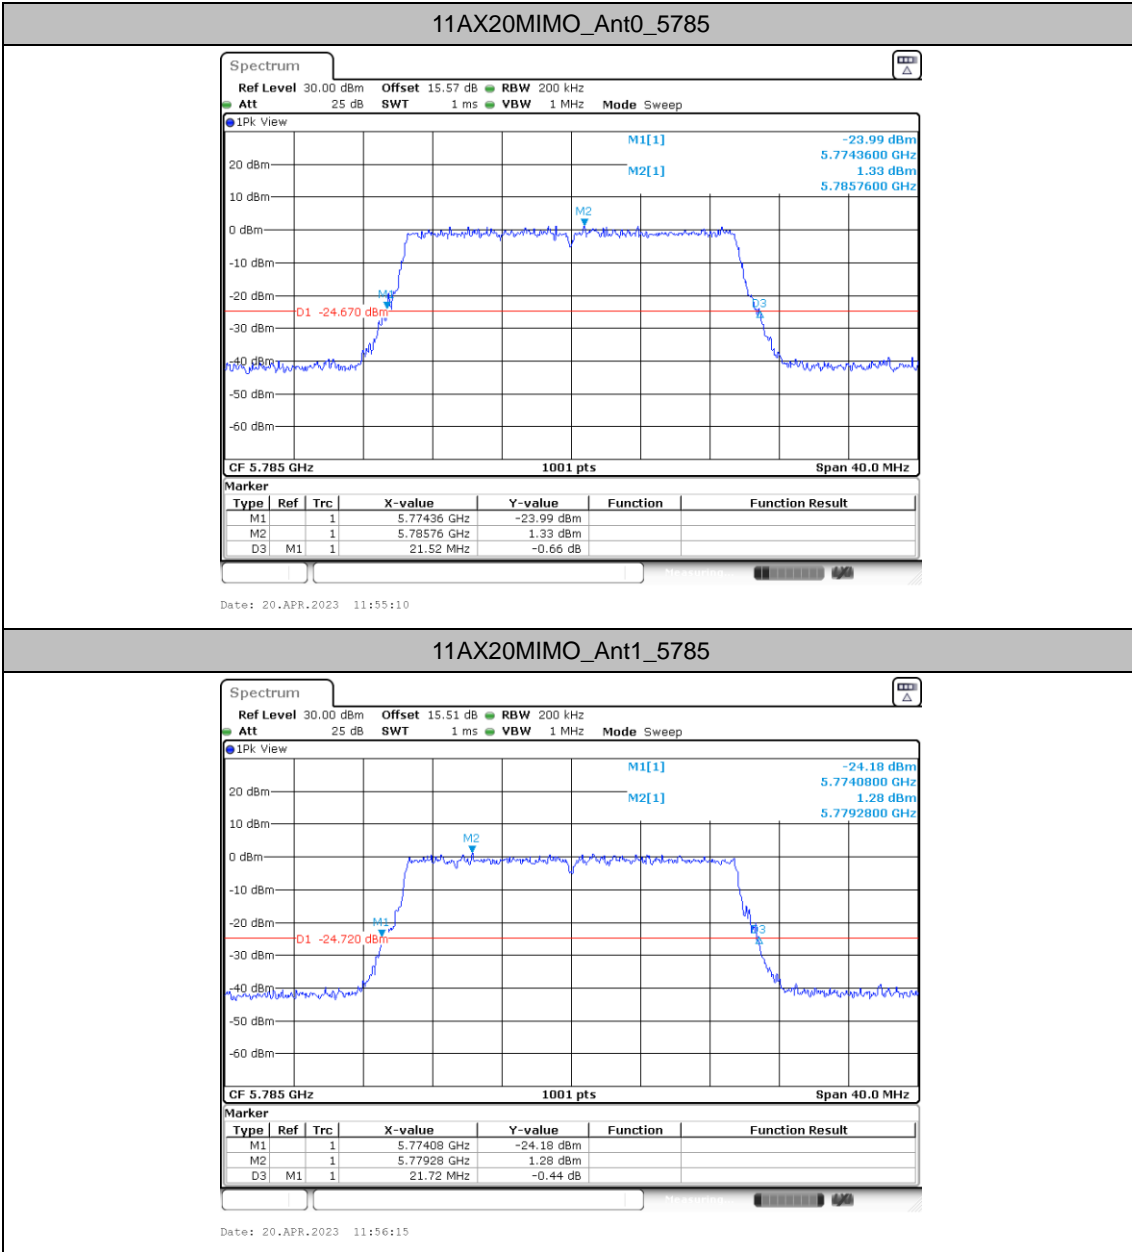




11AX20MIMO_Ant2_5785

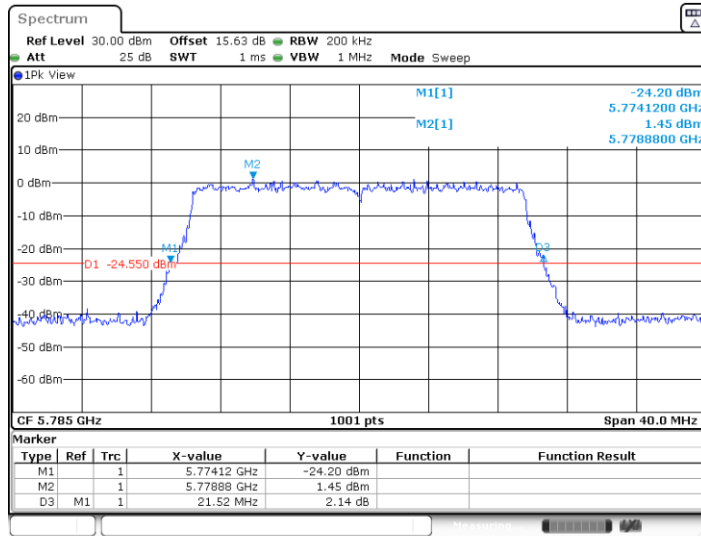

Date: 20.APR.2023 11:57:21


11AX20MIMO_Ant3_5785

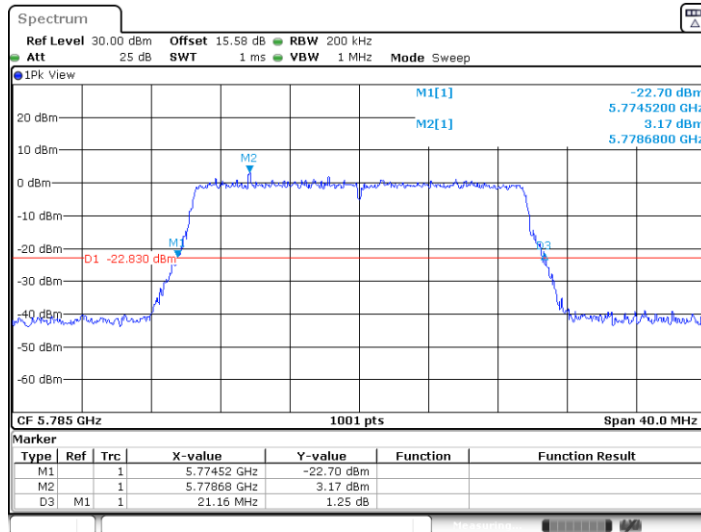

Date: 20.APR.2023 11:58:21




11AX20MIMO_Ant0_5825

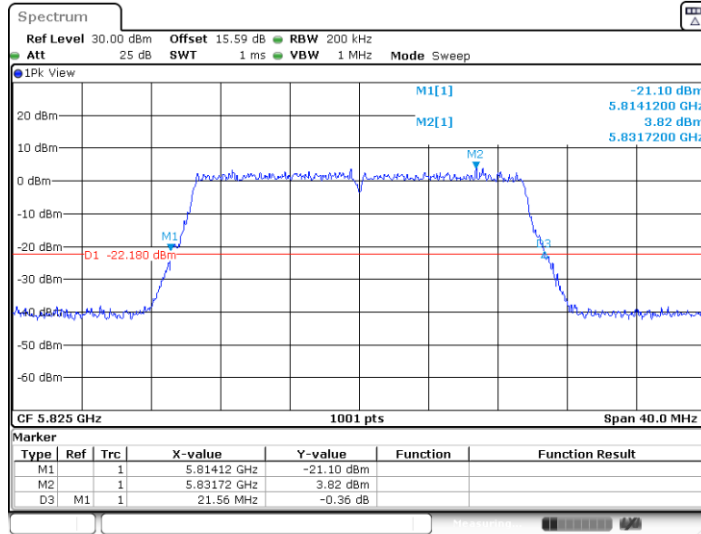


Date: 20.APR.2023 11:59:35

11AX20MIMO_Ant1_5825

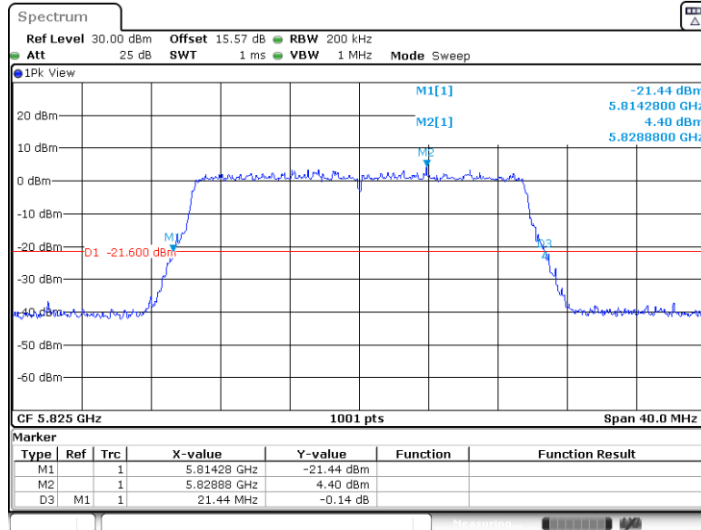


Date: 20.APR.2023 12:00:32

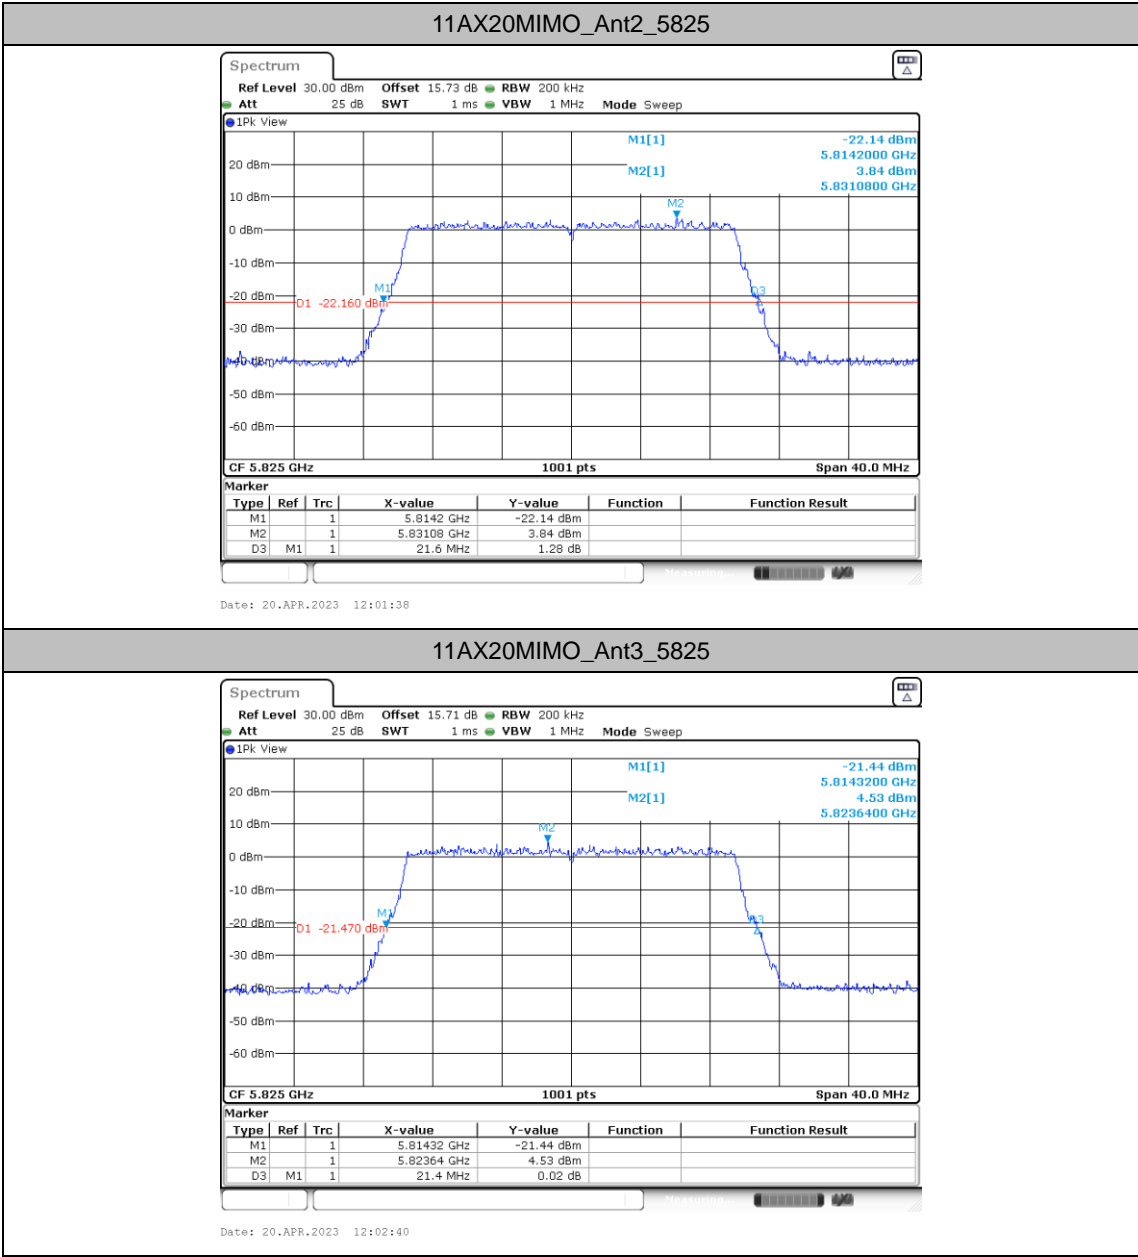




11AX40MIMO_Ant0_5190

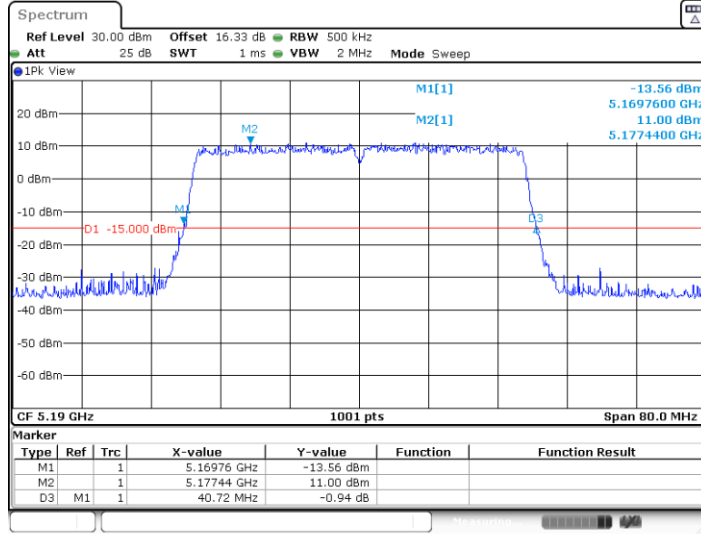



Date: 20.APR.2023 12:04:22

11AX40MIMO_Ant1_5190

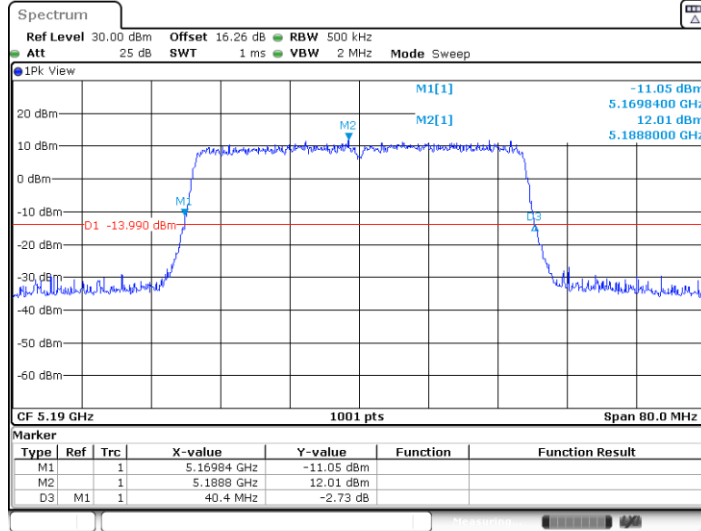


Date: 20.APR.2023 12:05:24

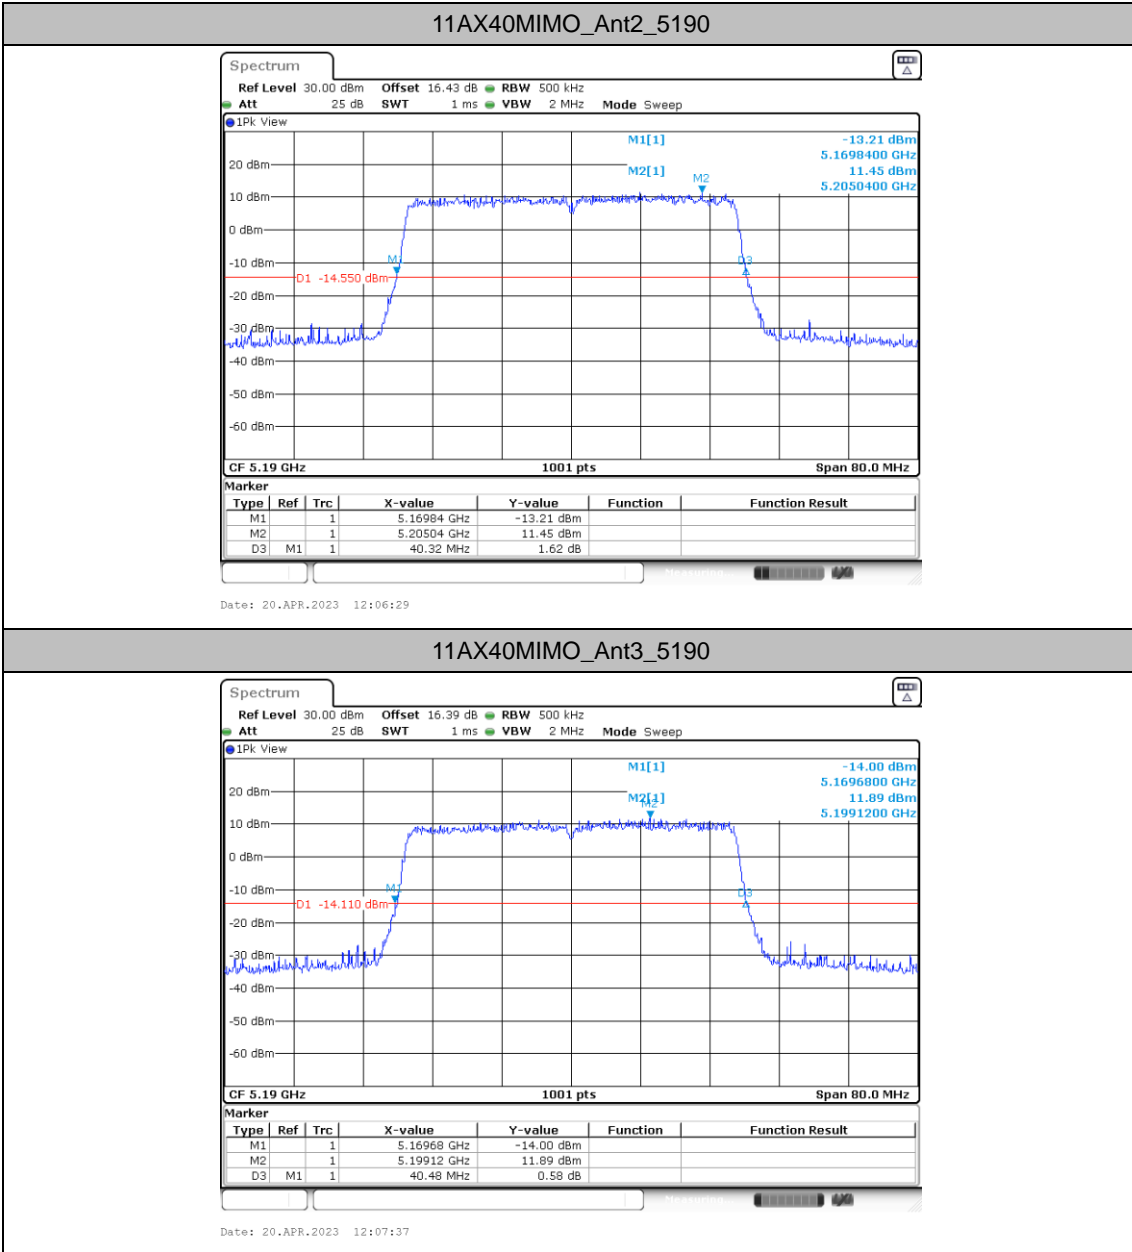

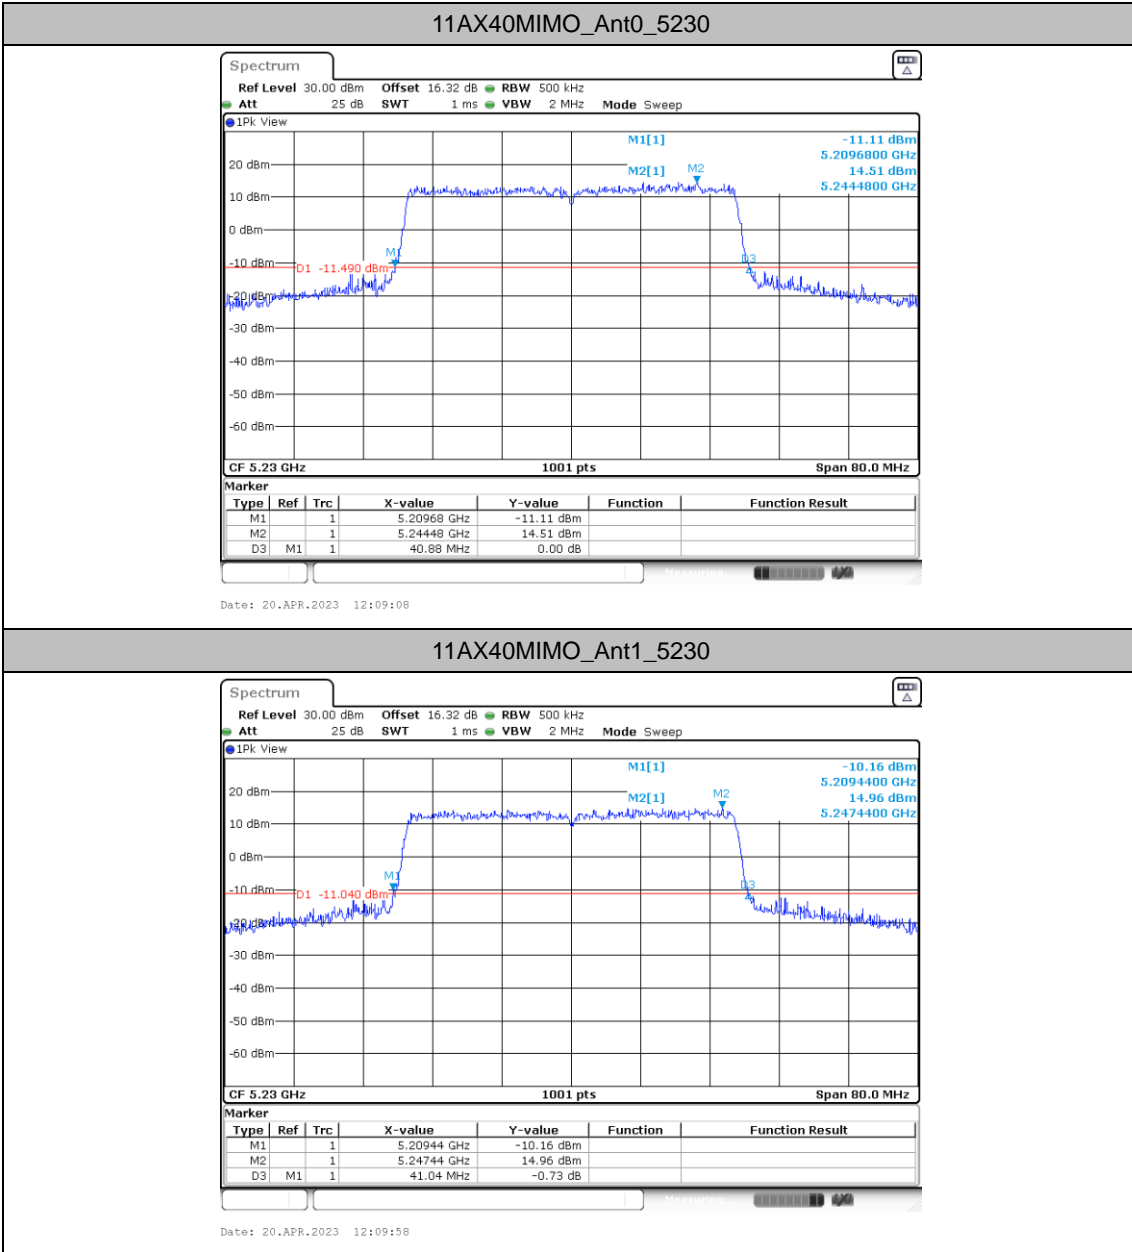





11AX40MIMO_Ant2_5230

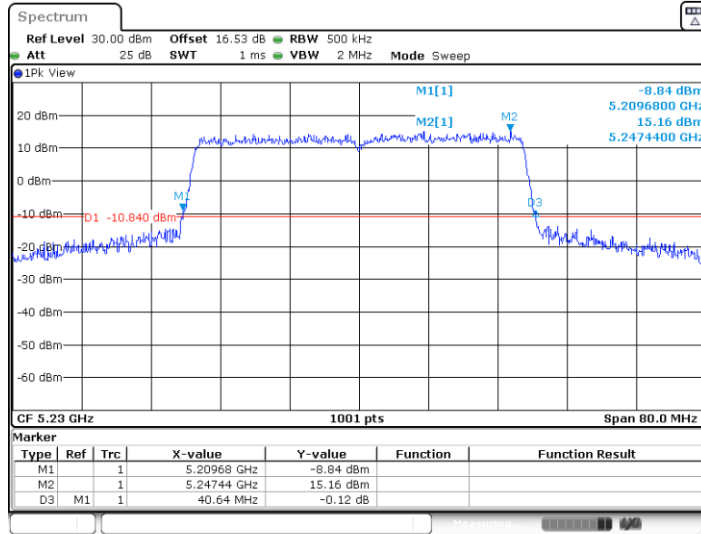

11AX40MIMO_Ant3_5230

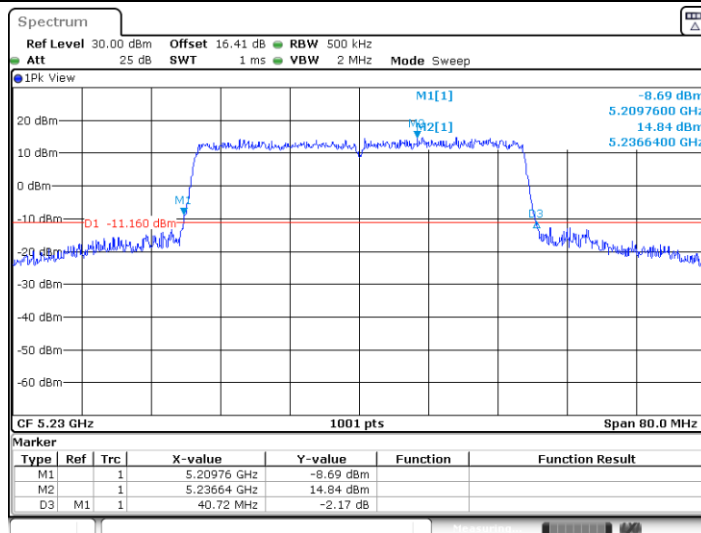

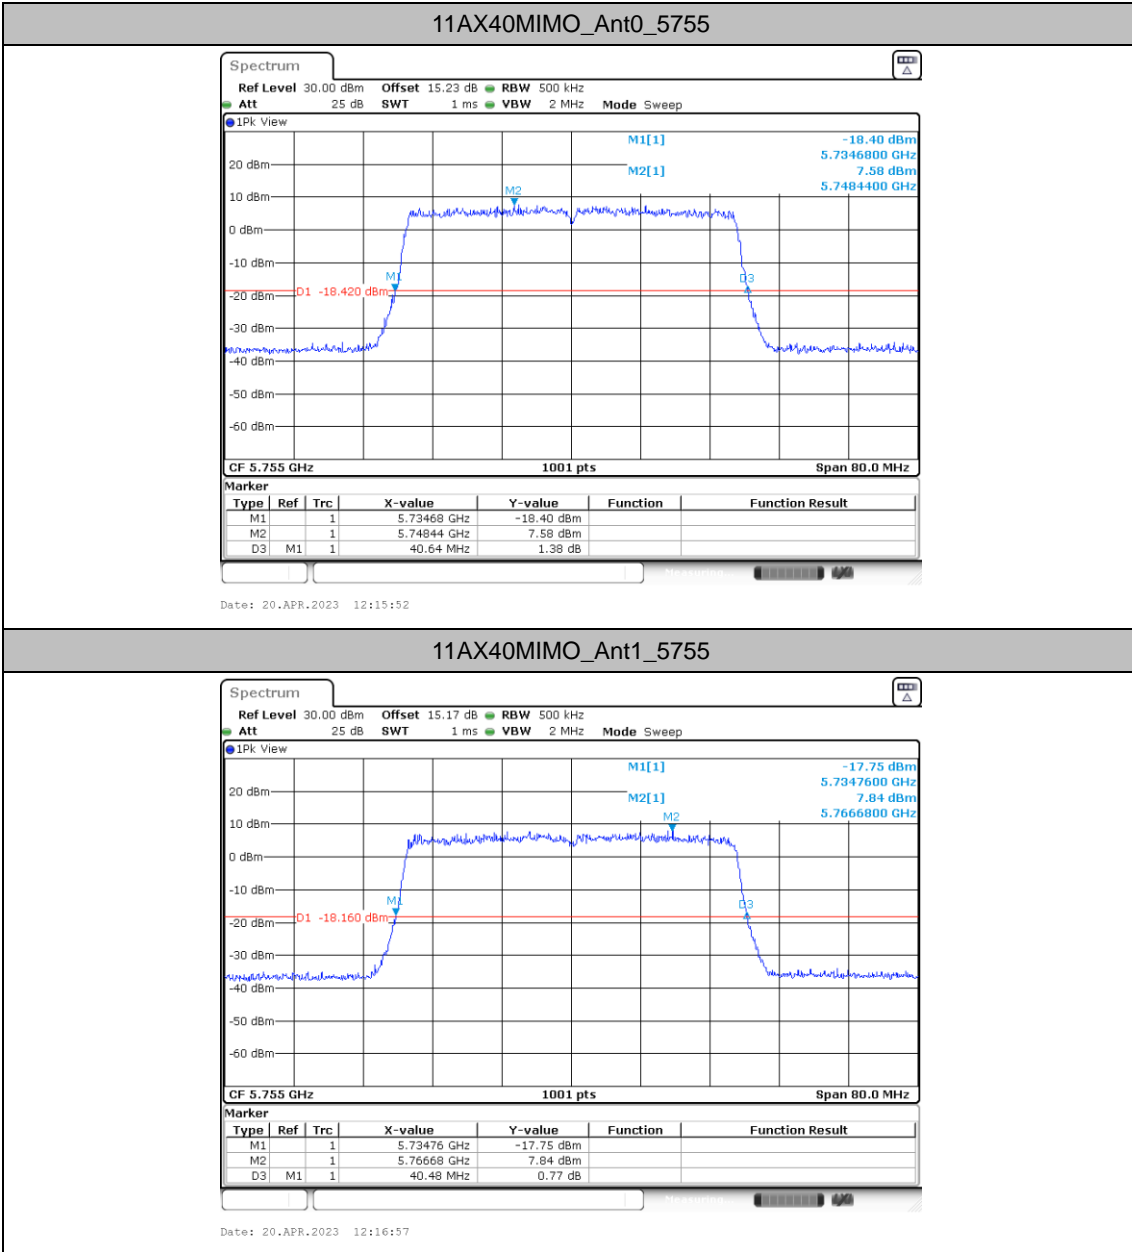
11AX40MIMO_Ant1_5755

