

TEST REPORT

Product : New Energy Vehicle Detection
Tool
Trade mark : SmartSafe
Model/Type reference : iSmartEV P01
Serial Number : N/A
Report Number : EED32O81173002
FCC ID : 2AYAN EVP01
Date of Issue : Sep. 23, 2022
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

SHENZHEN SMARTSAFE TECH CO., LTD.
3F, Building B, Qiao'an Technology Industrial Park, Guanlan, Longhua
New District, Shenzhen, China

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Compiled by:

Frazer Li

Frazer Li

Reviewed by:

Tom Chen

Tom Chen

Approved by:

Aaron Ma

Aaron Ma

Date:

Sep. 23, 2022



Check No.: 5634020822

1 Contents

	Page
1 CONTENTS.....	2
2 VERSION.....	3
3 TEST SUMMARY.....	4
4 GENERAL INFORMATION.....	5
4.1 CLIENT INFORMATION.....	5
4.2 GENERAL DESCRIPTION OF EUT.....	5
4.3 TEST CONFIGURATION.....	7
4.4 TEST ENVIRONMENT.....	8
4.5 DESCRIPTION OF SUPPORT UNITS.....	8
5 TEST RESULTS AND MEASUREMENT DATA.....	13
5.1 ANTENNA REQUIREMENT.....	13
5.2 AC POWER LINE CONDUCTED EMISSIONS.....	14
5.3 MAXIMUM CONDUCTED OUTPUT POWER.....	18
5.4 20DB EMISSION BANDWIDTH.....	19
5.5 CARRIER FREQUENCY SEPARATION.....	20
5.6 NUMBER OF HOPPING CHANNEL.....	21
5.7 TIME OF OCCUPANCY.....	22
5.8 BAND EDGE MEASUREMENTS.....	23
5.9 CONDUCTED SPURIOUS EMISSIONS.....	24
5.10 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....	25
5.11 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS.....	27
6 APPENDIX A.....	49
7 PHOTOGRAPHS OF TEST SETUP.....	50
8 PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS.....	52

2 Version

Version No.	Date	Description
00	Sep. 23, 2022	Original

3 Test Summary

Test Item	Test Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	PASS
Maximum Conducted Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	PASS
20dB Emission Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	PASS
Carrier Frequency Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	PASS
Number of Hopping Channels	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	PASS
Time of Occupancy	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)	PASS
Band Edge Measurements	47 CFR Part 15, Subpart C Section 15.247(d)	PASS
Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	PASS
Restricted bands around fundamental frequency	47 CFR Part 15, Subpart C Section 15.205/15.209	PASS
Remark: Company Name and Address shown on Report, the sample(s) and sample Information were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.		

4 General Information

4.1 Client Information

Applicant:	SHENZHEN SMARTSAFE TECH CO., LTD.
Address of Applicant:	3F,Building B, Qiao'an Technology Industrial Park, Guanlan, Longhua New District, Shenzhen, China
Manufacturer:	SHENZHEN SMARTSAFE TECH CO., LTD.
Address of Manufacturer:	3F,Building B, Qiao'an Technology Industrial Park, Guanlan, Longhua New District, Shenzhen, China
Factory:	SHENZHEN SMARTSAFE TECH CO., LTD.
Address of Factory:	3F,Building B, Qiao'an Technology Industrial Park, Guanlan, Longhua New District, Shenzhen, China

4.2 General Description of EUT

Product Name:	New Energy Vehicle Detection Tool	
Model No.:	iSmartEV P01	
Trade Mark:	SmartSafe	
Product Type:	Portable	
Operation Frequency:	2402MHz~2480MHz	
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)	
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK	
Number of Channel:	79	
Hopping Channel Type:	Adaptive Frequency Hopping systems	
Antenna Type:	internal antenna	
Antenna Gain:	3.64dBi	
Power Supply:	Adapter:	model: C1902XZ/C1902XA/C1902XJ input: 100-240V~50/60Hz,0.5A output: PD:5.0V,3.0A/9.0V,2.22A/12.0V,1.67A, MAX:20.0W
	Battery:	DC 3.8V,9360mAh,35.568Wh
Test Voltage:	DC 3.8V	
Sample Received Date:	Aug. 19, 2022	
Sample tested Date:	Aug. 19, 2022 to Sep. 07, 2022	

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

4.3 Test Configuration

EUT Test Software Settings:		
Software:	RF test	
EUT Power Grade:	Default (Power level is built-in set parameters and cannot be changed and selected)	
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.		
Mode	Channel	Frequency(MHz)
DH1/DH3/DH5	CH0	2402
	CH39	2441
	CH78	2480
2DH1/2DH3/2DH5	CH0	2402
	CH39	2441
	CH78	2480
3DH1/3DH3/3DH5	CH0	2402
	CH39	2441
	CH78	2480

4.4 Test Environment

Operating Environment:	
Radiated Spurious Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
Conducted Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
RF Conducted:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar

4.5 Description of Support Units

The EUT has been tested independently.

4.6 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

4.7 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-40GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz)
		4.3dB (30MHz-1GHz)
		4.5dB (1GHz-18GHz)
		3.4dB (18GHz-40GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

4.8 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	12-24-2021	12-23-2022
Signal Generator	Keysight	N5182B	MY53051549	12-24-2021	12-23-2022
Spectrum Analyzer	R&S	FSV40	101200	07-29-2022	07-28-2023
Signal Generator	Agilent	N5181A	MY46240094	12-24-2021	12-23-2022
DC Power	Keysight	E3642A	MY56376072	12-24-2021	12-23-2022
Power unit	R&S	OSP120	101374	12-24-2021	12-23-2022
RF control unit	JS Tonscend	JS0806-2	158060006	12-24-2021	12-23-2022
Communication test set	R&S	CMW500	120765	12-22-2021	12-21-2022
high-low temperature test chamber	Dong Guang Qin Zhuo	LK-80GA	QZ20150611879	12-24-2021	12-23-2022
Temperature/Humidity Indicator	biaozhi	HM10	1804186	06-16-2022	06-15-2023
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	2.6.77.0518	---	---

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	05-04-2022	05-05-2023
Temperature/Humidity Indicator	Defu	TH128	/	---	---
LISN	R&S	ENV216	100098	03-01-2022	02-28-2023
Barometer	changchun	DYM3	1188	---	---

3M Semi-anechoic Chamber (2)- Radiated disturbance Test					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Due Date
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05/22/2022	05/21/2025
Receiver	R&S	ESC17	100938-003	10/14/2021	10/13/2022
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	9163-618	05/22/2022	05/21/2023
Multi device Controller	matureo	NCD/070/10711112	---	---	---
Horn Antenna	ETS-LINGREN	BBHA 9120D	9120D-1869	04/15/2021	04/14/2024
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04/17/2021	04/16/2024
Microwave Preamplifier	Agilent	8449B	3008A02425	06/20/2022	06/19/2023


3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	---	---
Receiver	Keysight	N9038A	MY57290136	03-01-2022	02-28-2023
Spectrum Analyzer	Keysight	N9020B	MY57111112	02-23-2022	02-22-2023
Spectrum Analyzer	Keysight	N9030B	MY57140871	02-23-2022	02-22-2023
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-28-2021	04-27-2024
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-15-2021	04-14-2024
Horn Antenna	ETS-LINDGREN	3117	57407	07-04-2021	07-03-2024
Preamplifier	EMCI	EMC184055SE	980597	04-20-2022	04-19-2023
Preamplifier	EMCI	EMC001330	980563	04-01-2022	03-31-2023
Preamplifier	JS Tonscend	980380	EMC051845SE	12-24-2021	12-23-2022
Communication test set	R&S	CMW500	102898	12-24-2021	12-23-2022
Temperature/Humidity Indicator	biaozhi	GM1360	EE1186631	04-11-2022	04-10-2023
Fully Anechoic Chamber	TDK	FAC-3	---	01-09-2021	01-08-2024
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	
EUT Antenna:	Please see Internal photos
The antenna is integral antenna. The best case gain of the antenna is 3.64dBi.	


5.2 AC Power Line Conducted Emissions

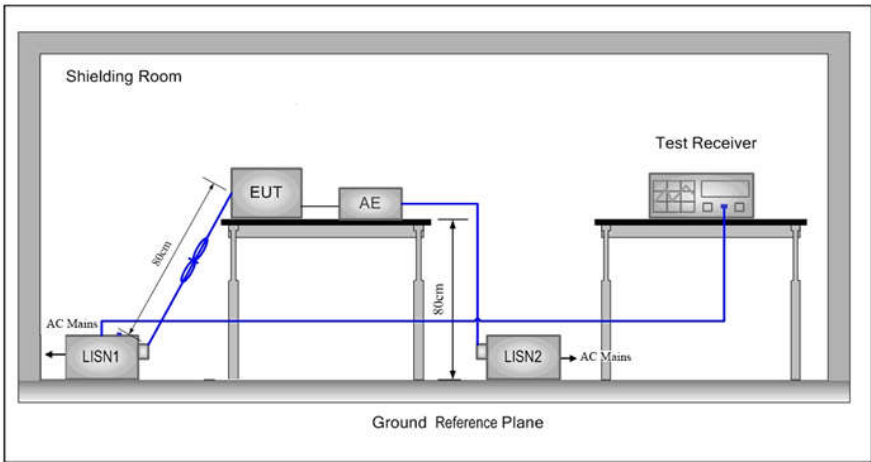Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Setup:			
Test Procedure:	<ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of 		

	equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.
Final Test Mode:	Through Pre-scan, find the DH5 of data type and GFSK modulation at the lowest channel is the worst case. Only the worst case is recorded in the report.
Test Results:	Pass

Measurement Data

Live line:

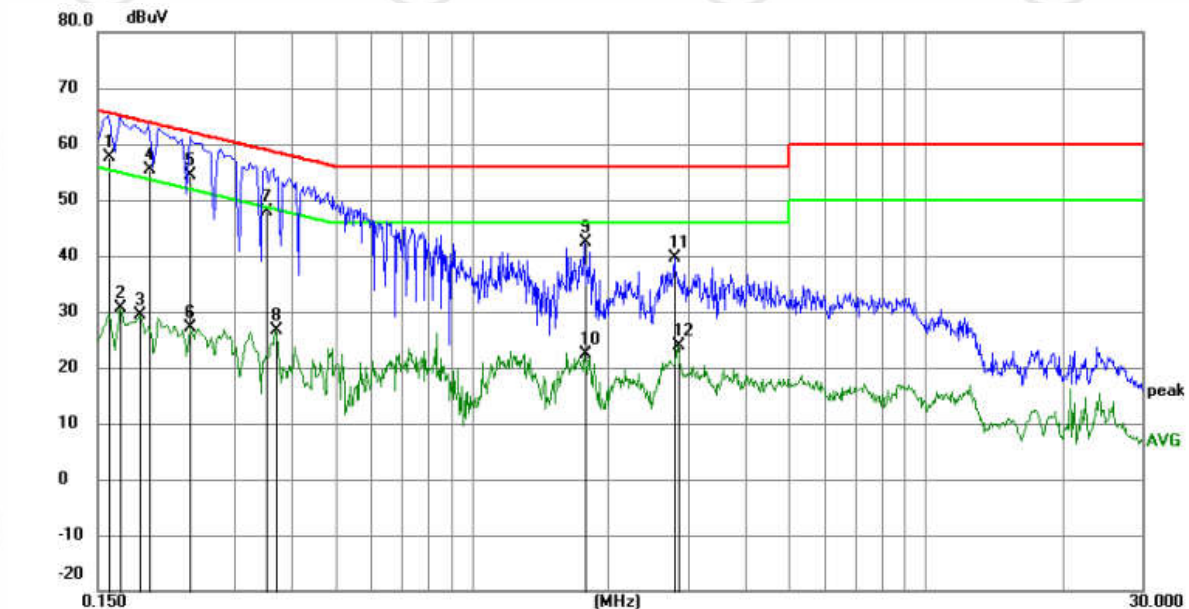


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1590	47.73	9.87	57.60	65.52	-7.92	QP	
2	0.1680	20.83	9.87	30.70	55.06	-24.36	AVG	
3	0.1860	19.55	9.87	29.42	54.21	-24.79	AVG	
4	0.1949	45.63	9.87	55.50	63.83	-8.33	QP	
5 *	0.2400	44.55	9.95	54.50	62.10	-7.60	QP	
6	0.2400	17.18	9.95	27.13	52.10	-24.97	AVG	
7	0.3525	37.88	10.02	47.90	58.90	-11.00	QP	
8	0.3704	16.72	10.00	26.72	48.49	-21.77	AVG	
9	1.7745	32.54	9.80	42.34	56.00	-13.66	QP	
10	1.7745	12.53	9.80	22.33	46.00	-23.67	AVG	
11	2.8005	29.90	9.79	39.69	56.00	-16.31	QP	
12	2.8455	14.12	9.79	23.91	46.00	-22.09	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

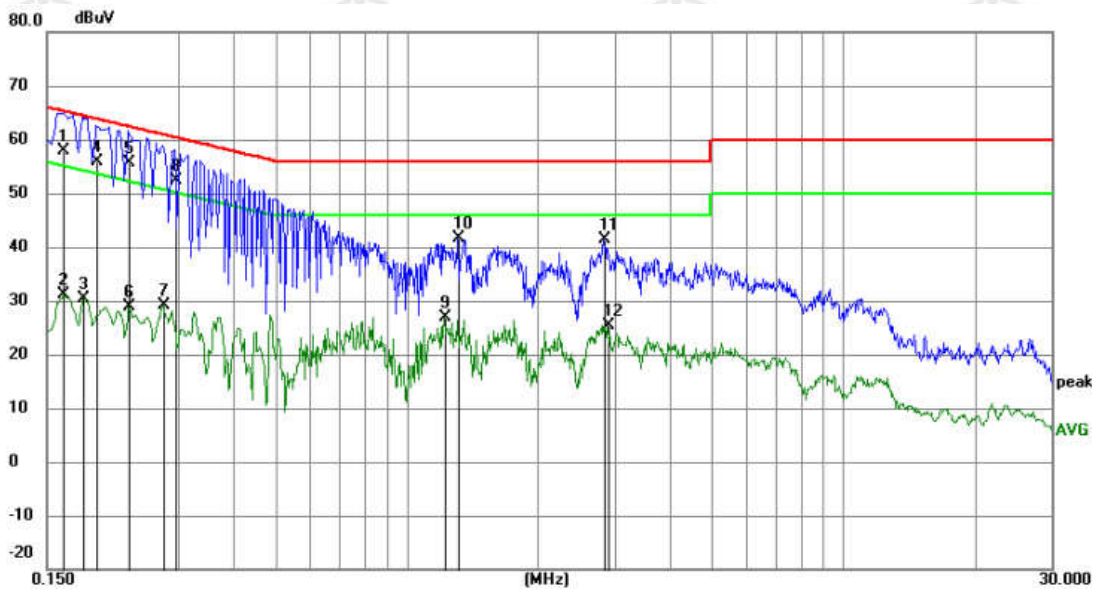


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1635	48.03	9.87	57.90	65.28	-7.38	QP	
2		0.1635	21.15	9.87	31.02	55.28	-24.26	AVG	
3		0.1815	20.49	9.87	30.36	54.42	-24.06	AVG	
4		0.1949	45.93	9.87	55.80	63.83	-8.03	QP	
5	*	0.2310	45.77	9.93	55.70	62.41	-6.71	QP	
6		0.2310	19.01	9.93	28.94	52.41	-23.47	AVG	
7		0.2760	19.08	10.02	29.10	50.94	-21.84	AVG	
8		0.2940	42.24	10.06	52.30	60.41	-8.11	QP	
9		1.2210	17.11	9.82	26.93	46.00	-19.07	AVG	
10		1.3110	31.71	9.82	41.53	56.00	-14.47	QP	
11		2.8320	31.61	9.79	41.40	56.00	-14.60	QP	
12		2.8860	15.69	9.79	25.48	46.00	-20.52	AVG	


Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.


5.3 Maximum Conducted Output Power

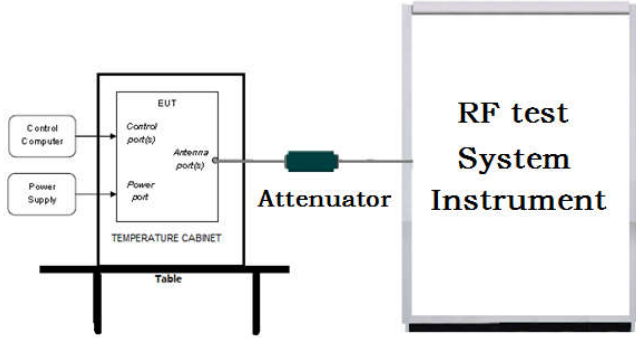Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<p>Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel RBW > the 20 dB bandwidth of the emission being measured VBW ≥ RBW Sweep = auto Detector function = peak Trace = max hold <p>Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.</p>
Limit:	21dBm
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Test Results:	Refer to Appendix BT Classic of module 1


5.4 20dB Emission Bandwidth

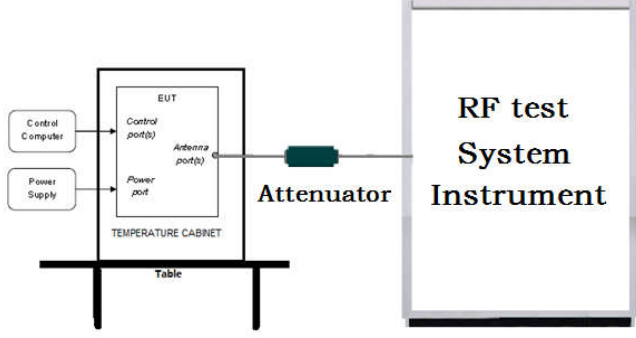Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel; $1\% \leq RBW \leq 5\%$ of the 20 dB bandwidth; $VBW \geq 3RBW$; Sweep = auto; Detector function = peak; Trace = max hold. 4. Measure and record the results in the test report.
Limit:	NA
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Test Results:	Refer to Appendix BT Classic of module 1


5.5 Carrier Frequency Separation

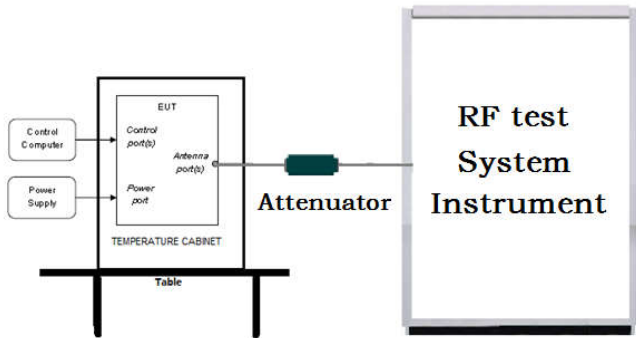Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Enable the EUT hopping function. 4. Use the following spectrum analyzer settings: Span = wide enough to capture the peaks of two adjacent channels; RBW is set to approximately 30% of the channel spacing, adjust as necessary to best identify the center of each individual channel; VBW\geqRBW; Sweep = auto; Detector function = peak; Trace = max hold. 5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Record the value in report.
Limit:	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Test Results:	Refer to Appendix BT Classic of module 1


5.6 Number of Hopping Channel

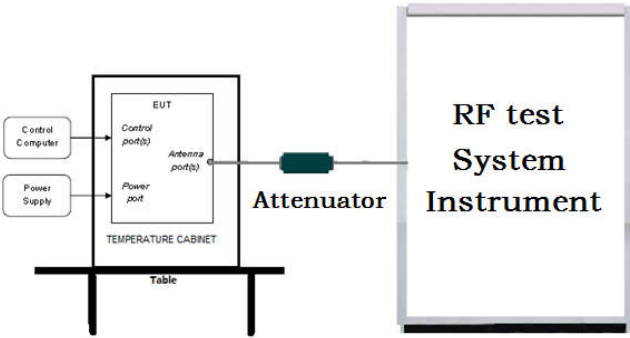Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Enable the EUT hopping function. 4. Use the following spectrum analyzer settings: Span = the frequency band of operation; set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller; VBW≥RBW; Sweep= auto; Detector function = peak; Trace = max hold. 5. The number of hopping frequency used is defined as the number of total channel. 6. Record the measurement data in report.
Limit:	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Hopping transmitting with all kind of modulation
Test Results:	Refer to Appendix BT Classic of module 1


5.7 Time of Occupancy

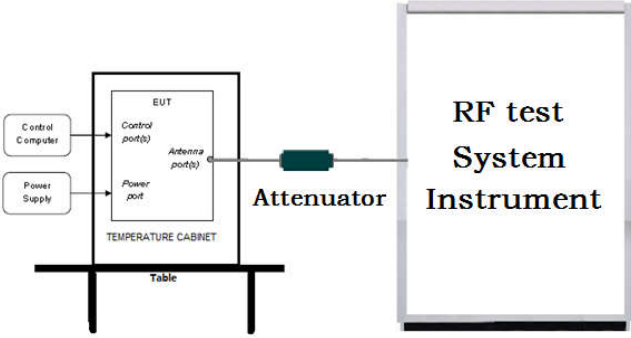Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Enable the EUT hopping function. 4. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold. 5. Measure and record the results in the test report.
Limit:	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.
Test Results:	Refer to Appendix BT Classic of module 1

5.8 Band edge Measurements

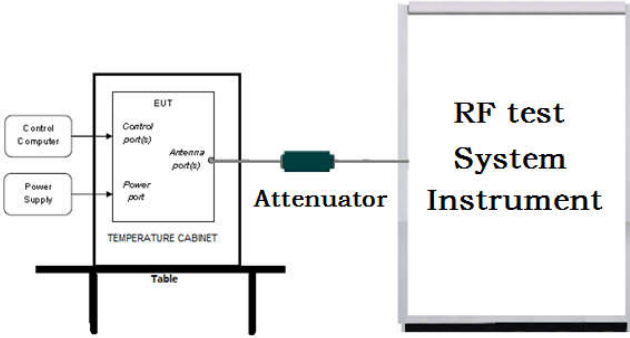Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> 1. Set to the maximum power setting and enable the EUT transmit continuously. 2. Set RBW = 100 kHz, VBW = 300 kHz (\geqRBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used. 3. Enable hopping function of the EUT and then repeat step 2 and 3. 4. Measure and record the results in the test report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Test Results:	Refer to Appendix BT Classic of module 1

5.9 Conducted Spurious Emissions

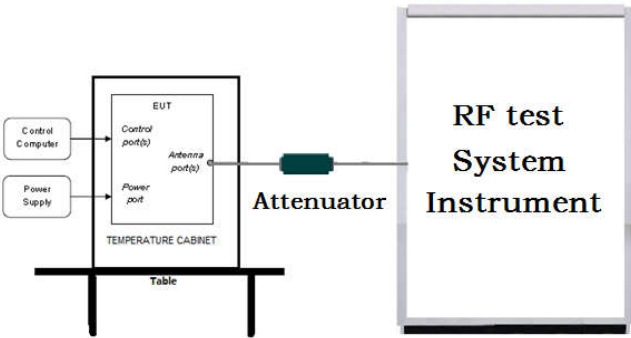Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ol style="list-style-type: none"> 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. 4. Measure and record the results in the test report. 5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Test Results:	Refer to Appendix BT Classic of module 1

5.10 Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:
<p>The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p> <p>Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.</p> <p>The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.</p>	
<p>Compliance for section 15.247(a)(1)</p>	
<p>According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <div data-bbox="301 1435 1355 1581" style="text-align: center;"> </div> <p style="text-align: center;"><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <div data-bbox="276 1675 1262 1827" style="text-align: center;"> </div> <p>Each frequency used equally on the average by each transmitter. According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.</p>	
<p>Compliance for section 15.247(g)</p>	
<p>According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom</p>	

hopping frequency system.



Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

5.11 Radiated Spurious Emission & Restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Peak	100 kHz	300kHz	Peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10kHz	Average	
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
<p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p>					

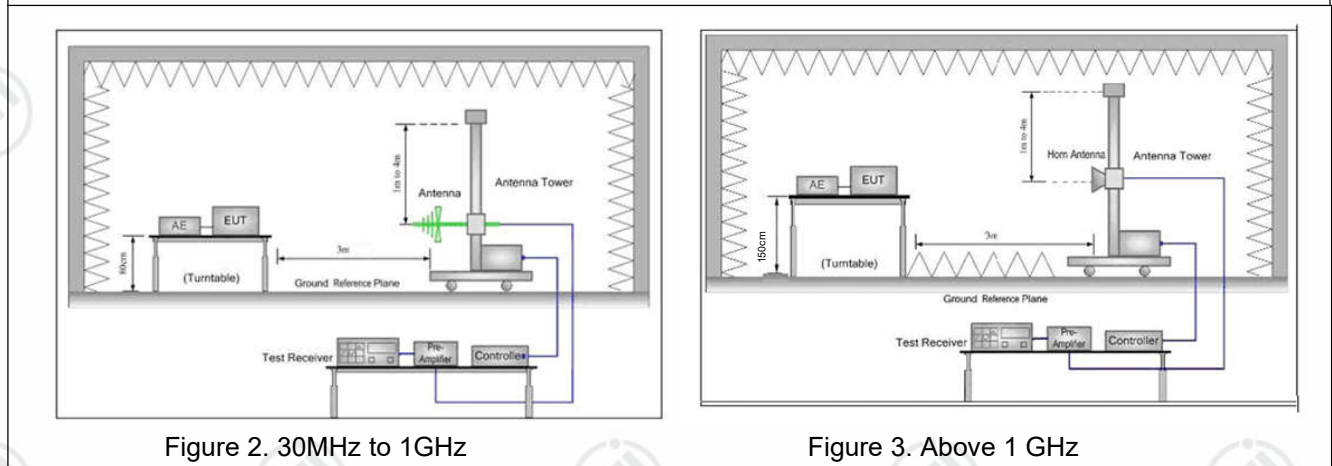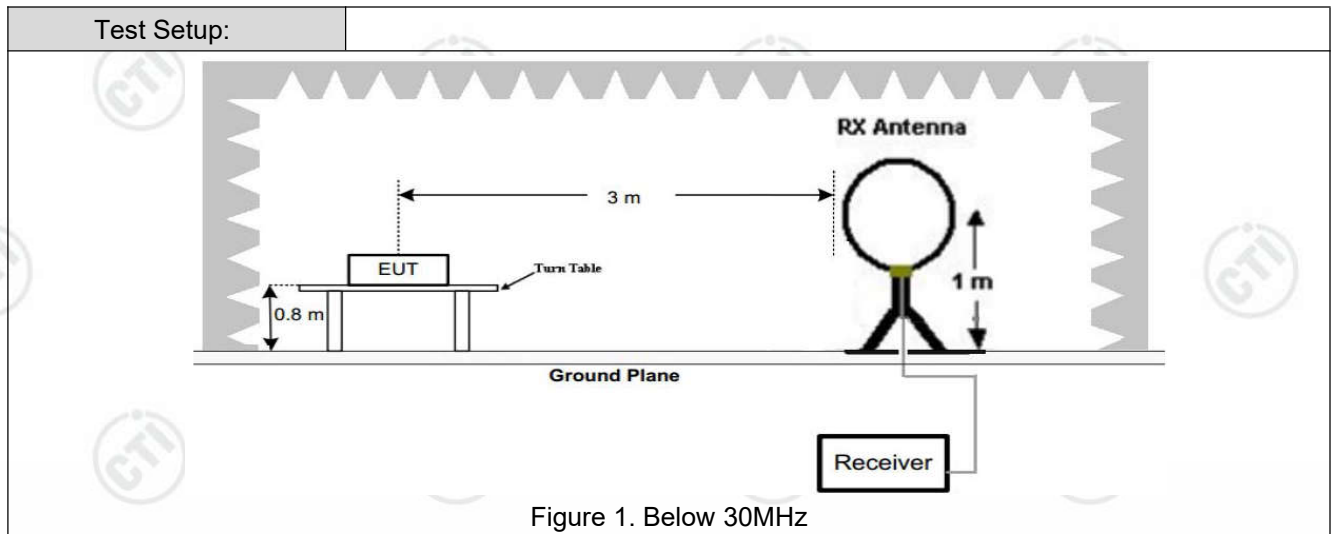


<p>Test Procedure:</p>	<ol style="list-style-type: none"> a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. <p>Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <ol style="list-style-type: none"> b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the
------------------------	--

	<p>measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz)</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p>
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case. Pretest the EUT at Transmitting mode, For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Test Results:	Pass

Radiated Spurious Emission below 1GHz:


During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes, only the worst case lowest channel of DH5 for GFSK was recorded in the report.

Test Graph

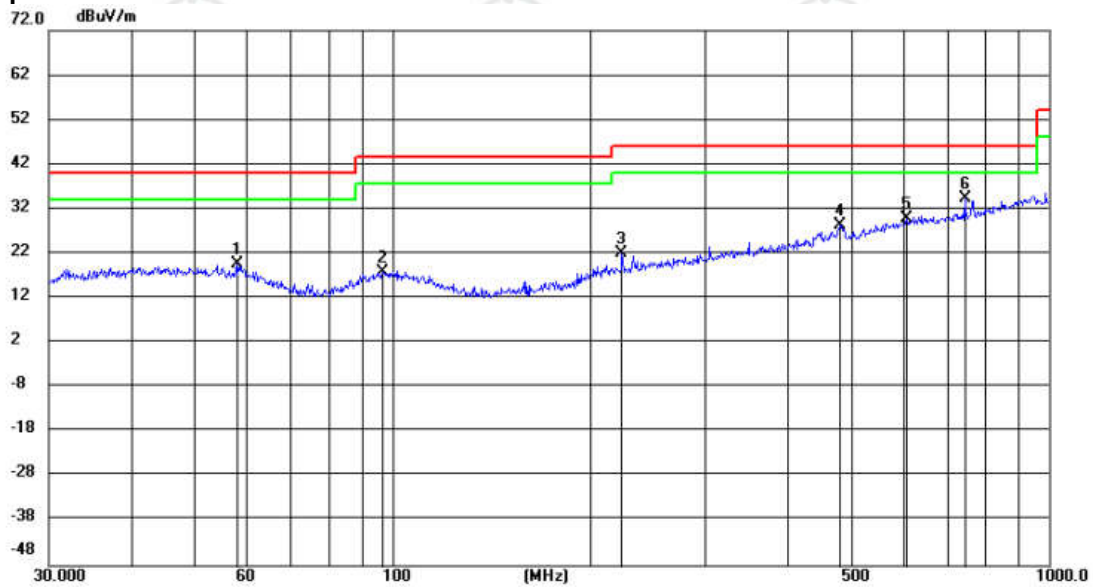

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		57.9992	5.90	13.71	19.61	40.00	-20.39	QP 200	76	
2		96.7749	4.33	13.60	17.93	43.50	-25.57	QP 200	65	
3		223.7333	7.43	14.60	22.03	46.00	-23.97	QP 200	187	
4		480.5276	7.22	21.12	28.34	46.00	-17.66	QP 100	171	
5		607.7867	5.80	24.08	29.88	46.00	-16.12	QP 200	356	
6	*	744.8660	8.91	25.48	34.39	46.00	-11.61	QP 200	116	

Test Graph

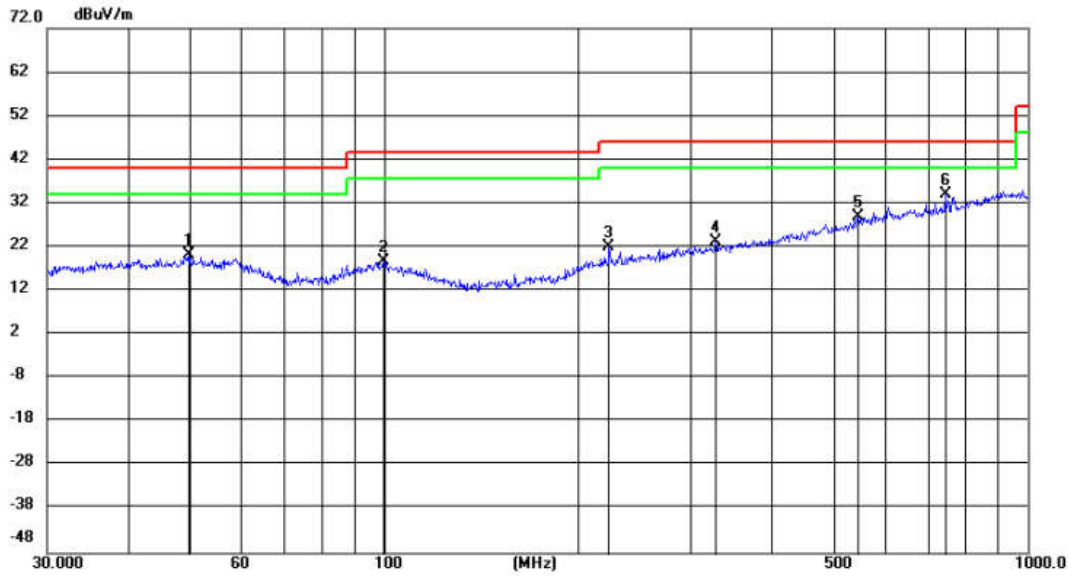

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		49.8814	5.86	14.27	20.13	40.00	-19.87	QP	100	356
2		99.8777	4.69	14.03	18.72	43.50	-24.78	QP	100	230
3		223.7333	7.58	14.60	22.18	46.00	-23.82	QP	100	356
4		327.8872	5.54	17.84	23.38	46.00	-22.62	QP	200	4
5		545.1825	6.38	22.67	29.05	46.00	-16.95	QP	100	356
6	*	744.8660	8.67	25.48	34.15	46.00	-11.85	QP	100	356

Radiated Spurious Emission above 1GHz:

Mode:			GFSK Transmitting			Channel:		2402 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1332.2332	1.17	44.20	45.37	74.00	28.63	Pass	H	PK
2	1900.4900	4.03	42.82	46.85	74.00	27.15	Pass	H	PK
3	4804.1203	-16.23	58.25	42.02	74.00	31.98	Pass	H	PK
4	6205.2137	-13.19	53.68	40.49	74.00	33.51	Pass	H	PK
5	9220.4147	-7.89	51.66	43.77	74.00	30.23	Pass	H	PK
6	12629.6420	-4.34	50.84	46.50	74.00	27.50	Pass	H	PK
7	1332.8333	1.17	45.17	46.34	74.00	27.66	Pass	V	PK
8	1900.2900	4.03	47.18	51.21	74.00	22.79	Pass	V	PK
9	3983.0655	-18.93	63.44	44.51	74.00	29.49	Pass	V	PK
10	4804.1203	-16.23	60.06	43.83	74.00	30.17	Pass	V	PK
11	5997.1998	-12.98	60.13	47.15	74.00	26.85	Pass	V	PK
12	8995.3997	-8.50	54.00	45.50	74.00	28.50	Pass	V	PK

Mode:			GFSK Transmitting			Channel:		2441 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1327.8328	1.15	41.88	43.03	74.00	30.97	Pass	H	PK
2	1899.6900	4.03	42.32	46.35	74.00	27.65	Pass	H	PK
3	4882.1255	-16.21	57.26	41.05	74.00	32.95	Pass	H	PK
4	6432.2288	-12.81	52.83	40.02	74.00	33.98	Pass	H	PK
5	10199.4800	-7.13	50.84	43.71	74.00	30.29	Pass	H	PK
6	13148.6766	-3.40	51.05	47.65	74.00	26.35	Pass	H	PK
7	1331.8332	1.17	44.96	46.13	74.00	27.87	Pass	V	PK
8	1899.6900	4.03	45.32	49.35	74.00	24.65	Pass	V	PK
9	3327.0218	-19.91	64.88	44.97	74.00	29.03	Pass	V	PK
10	4998.1332	-15.83	59.78	43.95	74.00	30.05	Pass	V	PK
11	5993.1995	-13.00	59.97	46.97	74.00	27.03	Pass	V	PK
12	8990.3994	-8.54	53.47	44.93	74.00	29.07	Pass	V	PK

Mode:			GFSK Transmitting			Channel:		2480 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1291.4291	1.04	40.67	41.71	74.00	32.29	Pass	H	PK
2	1900.4900	4.03	42.69	46.72	74.00	27.28	Pass	H	PK
3	4960.1307	-15.97	58.96	42.99	74.00	31.01	Pass	H	PK
4	6234.2156	-13.11	53.16	40.05	74.00	33.95	Pass	H	PK
5	7656.3104	-11.12	52.84	41.72	74.00	32.28	Pass	H	PK
6	10752.5168	-6.34	51.17	44.83	74.00	29.17	Pass	H	PK
7	1332.0332	1.17	40.99	42.16	74.00	31.84	Pass	V	PK
8	1899.6900	4.03	46.89	50.92	74.00	23.08	Pass	V	PK
9	4792.1195	-16.26	62.24	45.98	74.00	28.02	Pass	V	PK
10	5993.1995	-13.00	59.14	46.14	74.00	27.86	Pass	V	PK
11	8984.3990	-8.59	53.45	44.86	74.00	29.14	Pass	V	PK
12	11844.5896	-5.99	51.78	45.79	74.00	28.21	Pass	V	PK

Mode:			π/4DQPSK Transmitting			Channel:		2402 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1332.2332	1.17	43.24	44.41	74.00	29.59	Pass	H	PK
2	1899.4899	4.03	42.34	46.37	74.00	27.63	Pass	H	PK
3	4804.1203	-16.23	57.31	41.08	74.00	32.92	Pass	H	PK
4	7076.2718	-11.64	52.52	40.88	74.00	33.12	Pass	H	PK
5	10232.4822	-6.91	50.16	43.25	74.00	30.75	Pass	H	PK
6	13719.7146	-1.74	51.21	49.47	74.00	24.53	Pass	H	PK
7	1329.0329	1.16	45.36	46.52	74.00	27.48	Pass	V	PK
8	1994.0994	4.52	46.23	50.75	74.00	23.25	Pass	V	PK
9	4791.1194	-16.26	62.20	45.94	74.00	28.06	Pass	V	PK
10	5993.1995	-13.00	59.53	46.53	74.00	27.47	Pass	V	PK
11	8997.3998	-8.49	52.83	44.34	74.00	29.66	Pass	V	PK
12	13151.6768	-3.39	50.05	46.66	74.00	27.34	Pass	V	PK

Mode:			$\pi/4$ DQPSK Transmitting			Channel:		2441 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1457.4457	1.44	40.55	41.99	74.00	32.01	Pass	H	PK
2	1991.4992	4.51	39.13	43.64	74.00	30.36	Pass	H	PK
3	4864.1243	-16.21	59.10	42.89	74.00	31.11	Pass	H	PK
4	7625.3084	-11.17	53.25	42.08	74.00	31.92	Pass	H	PK
5	10841.5228	-6.29	50.43	44.14	74.00	29.86	Pass	H	PK
6	13095.6730	-3.69	50.97	47.28	74.00	26.72	Pass	H	PK
7	1328.6329	1.15	44.33	45.48	74.00	28.52	Pass	V	PK
8	1997.4998	4.54	43.53	48.07	74.00	25.93	Pass	V	PK
9	4795.1197	-16.25	61.85	45.60	74.00	28.40	Pass	V	PK
10	5993.1995	-13.00	59.97	46.97	74.00	27.03	Pass	V	PK
11	8991.3994	-8.53	54.53	46.00	74.00	28.00	Pass	V	PK
12	11754.5836	-6.17	51.92	45.75	74.00	28.25	Pass	V	PK

Mode:			$\pi/4$ DQPSK Transmitting			Channel:		2480 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1330.0330	1.16	42.55	43.71	74.00	30.29	Pass	H	PK
2	1979.4980	4.44	39.55	43.99	74.00	30.01	Pass	H	PK
3	4598.1065	-16.70	54.61	37.91	74.00	36.09	Pass	H	PK
4	7110.2740	-11.61	52.69	41.08	74.00	32.92	Pass	H	PK
5	9605.4404	-7.36	50.65	43.29	74.00	30.71	Pass	H	PK
6	12429.6286	-4.73	50.95	46.22	74.00	27.78	Pass	H	PK
7	1333.2333	1.17	43.47	44.64	74.00	29.36	Pass	V	PK
8	1999.7000	4.55	44.16	48.71	74.00	25.29	Pass	V	PK
9	3330.0220	-19.92	62.34	42.42	74.00	31.58	Pass	V	PK
10	4796.1197	-16.24	62.15	45.91	74.00	28.09	Pass	V	PK
11	5993.1995	-13.00	60.22	47.22	74.00	26.78	Pass	V	PK
12	8991.3994	-8.53	53.90	45.37	74.00	28.63	Pass	V	PK

Mode:			8DPSK Transmitting			Channel:		2402 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1332.8333	1.17	44.62	45.79	74.00	28.21	Pass	H	PK
2	1998.2998	4.54	41.75	46.29	74.00	27.71	Pass	H	PK
3	4804.1203	-16.23	57.55	41.32	74.00	32.68	Pass	H	PK
4	7737.3158	-11.17	53.21	42.04	74.00	31.96	Pass	H	PK
5	10292.4862	-6.51	50.50	43.99	74.00	30.01	Pass	H	PK
6	13714.7143	-1.75	51.08	49.33	74.00	24.67	Pass	H	PK
7	1333.4333	1.17	43.38	44.55	74.00	29.45	Pass	V	PK
8	1991.4992	4.51	43.87	48.38	74.00	25.62	Pass	V	PK
9	4992.1328	-15.85	60.15	44.30	74.00	29.70	Pass	V	PK
10	5991.1994	-13.02	58.68	45.66	74.00	28.34	Pass	V	PK
11	8999.4000	-8.47	54.37	45.90	74.00	28.10	Pass	V	PK
12	13701.7134	-1.77	50.72	48.95	74.00	25.05	Pass	V	PK

Mode:			8DPSK Transmitting			Channel:		2441 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1329.0329	1.16	43.10	44.26	74.00	29.74	Pass	H	PK
2	1849.2849	3.65	40.54	44.19	74.00	29.81	Pass	H	PK
3	4415.0943	-17.03	55.24	38.21	74.00	35.79	Pass	H	PK
4	7129.2753	-11.66	52.03	40.37	74.00	33.63	Pass	H	PK
5	9166.4111	-8.15	51.84	43.69	74.00	30.31	Pass	H	PK
6	12370.6247	-4.99	51.71	46.72	74.00	27.28	Pass	H	PK
7	1253.0253	0.94	41.05	41.99	74.00	32.01	Pass	V	PK
8	1939.4939	4.24	39.81	44.05	74.00	29.95	Pass	V	PK
9	4793.1195	-16.25	61.11	44.86	74.00	29.14	Pass	V	PK
10	5990.1993	-13.02	59.37	46.35	74.00	27.65	Pass	V	PK
11	8995.3997	-8.50	54.29	45.79	74.00	28.21	Pass	V	PK
12	13694.7130	-1.76	50.75	48.99	74.00	25.01	Pass	V	PK

Mode:			8DPSK Transmitting			Channel:		2480 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1330.8331	1.16	42.03	43.19	74.00	30.81	Pass	H	PK
2	2020.5021	4.62	39.69	44.31	74.00	29.69	Pass	H	PK
3	4960.1307	-15.97	56.48	40.51	74.00	33.49	Pass	H	PK
4	7642.3095	-11.14	52.92	41.78	74.00	32.22	Pass	H	PK
5	10209.4806	-7.07	50.86	43.79	74.00	30.21	Pass	H	PK
6	13675.7117	-1.74	50.42	48.68	74.00	25.32	Pass	H	PK
7	1332.8333	1.17	41.09	42.26	74.00	31.74	Pass	V	PK
8	1991.4992	4.51	39.49	44.00	74.00	30.00	Pass	V	PK
9	4985.1323	-15.88	59.76	43.88	74.00	30.12	Pass	V	PK
10	5992.1995	-13.01	59.46	46.45	74.00	27.55	Pass	V	PK
11	8993.3996	-8.52	55.07	46.55	74.00	27.45	Pass	V	PK
12	12419.6280	-4.72	51.22	46.50	74.00	27.50	Pass	V	PK

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 2) Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

Restricted bands:

Test plot as follows:

Mode:	GFSK Transmitting	Channel:	2402
Remark:			

Test Graph

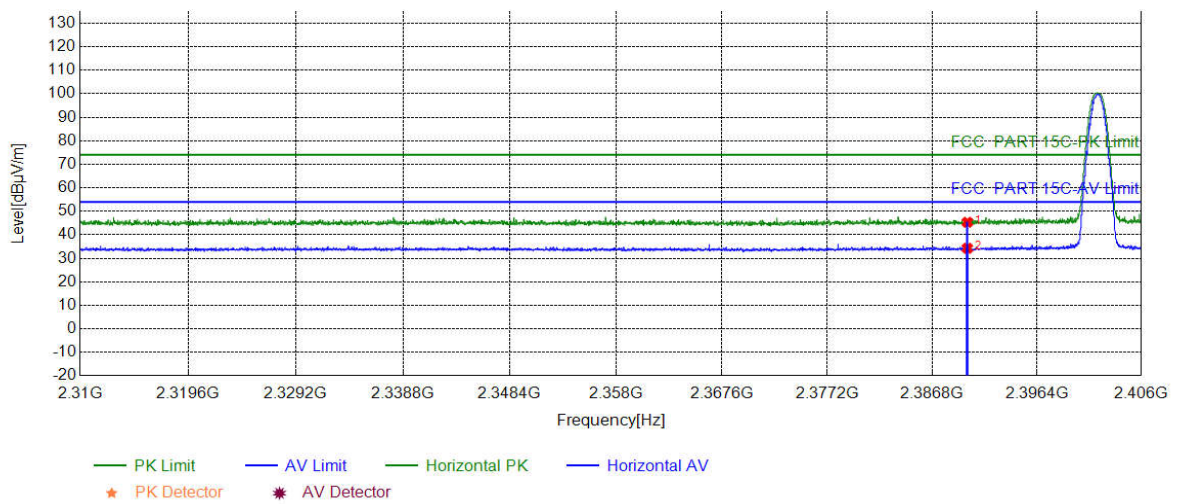


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	39.58	45.35	74.00	28.65	PASS	Horizontal	PK
2	2390.0000	5.77	28.49	34.26	54.00	19.74	PASS	Horizontal	AV

Mode:	GFSK Transmitting	Channel:	2402
Remark:			

Test Graph

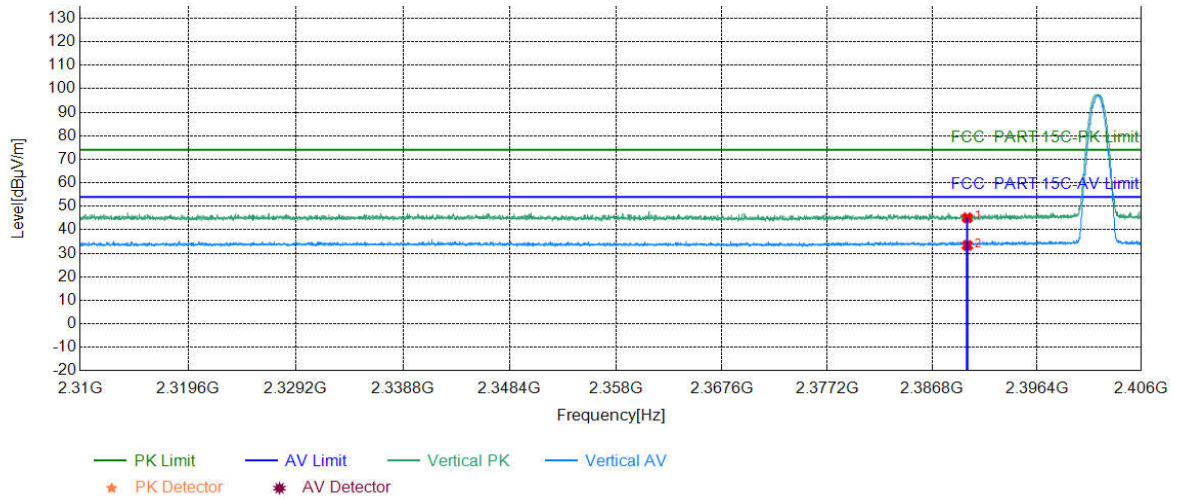


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	39.34	45.11	74.00	28.89	PASS	Vertical	PK
2	2390.0000	5.77	27.59	33.36	54.00	20.64	PASS	Vertical	AV

Mode:	GFSK Transmitting	Channel:	2480
Remark:			


Test Graph

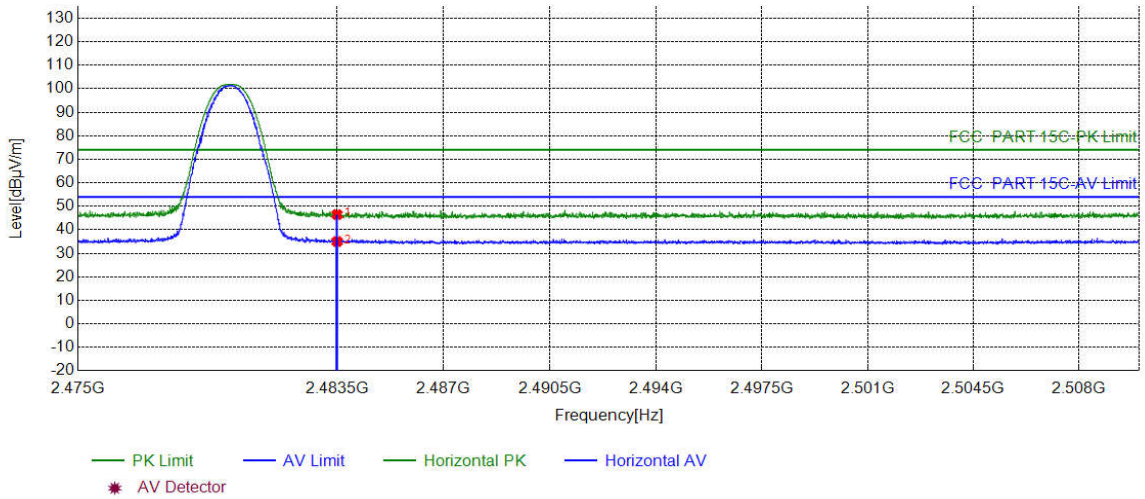

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	39.90	46.47	74.00	27.53	PASS	Horizontal	PK
2	2483.5000	6.57	28.43	35.00	54.00	19.00	PASS	Horizontal	AV

Mode:	GFSK Transmitting	Channel:	2480
Remark:			


Test Graph

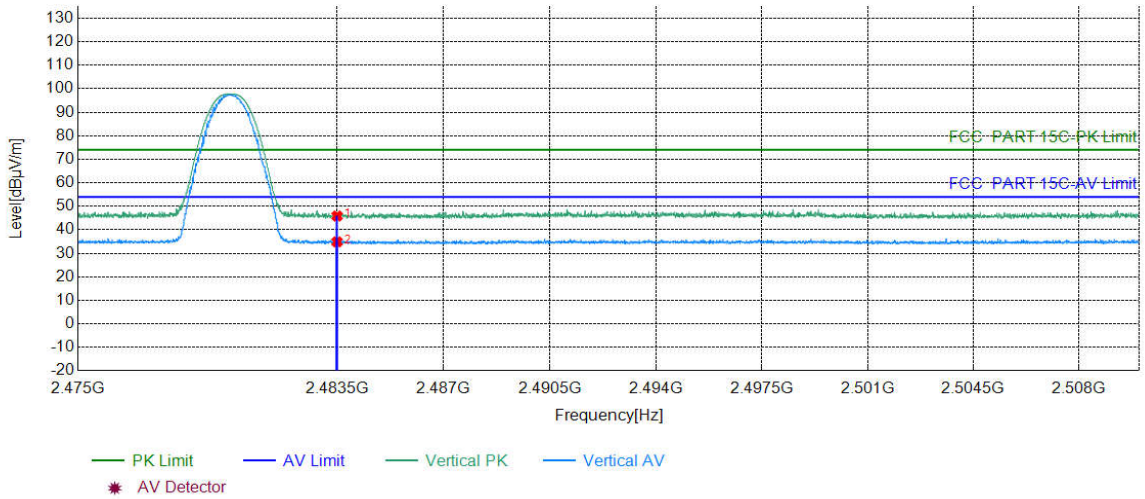

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	39.31	45.88	74.00	28.12	PASS	Vertical	PK
2	2483.5000	6.57	28.30	34.87	54.00	19.13	PASS	Vertical	AV

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:			

Test Graph

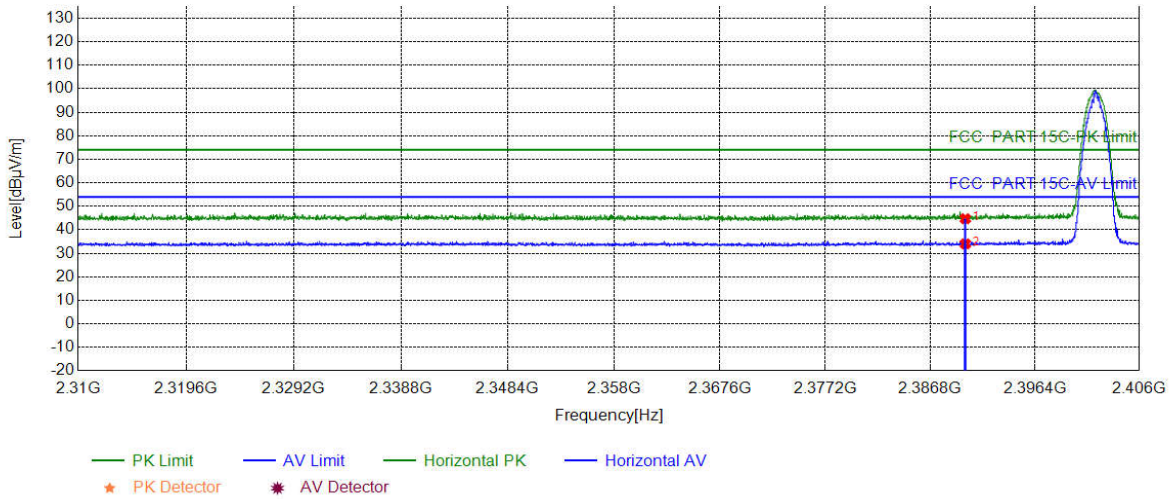


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	38.94	44.71	74.00	29.29	PASS	Horizontal	PK
2	2390.0000	5.77	28.25	34.02	54.00	19.98	PASS	Horizontal	AV

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:			


Test Graph

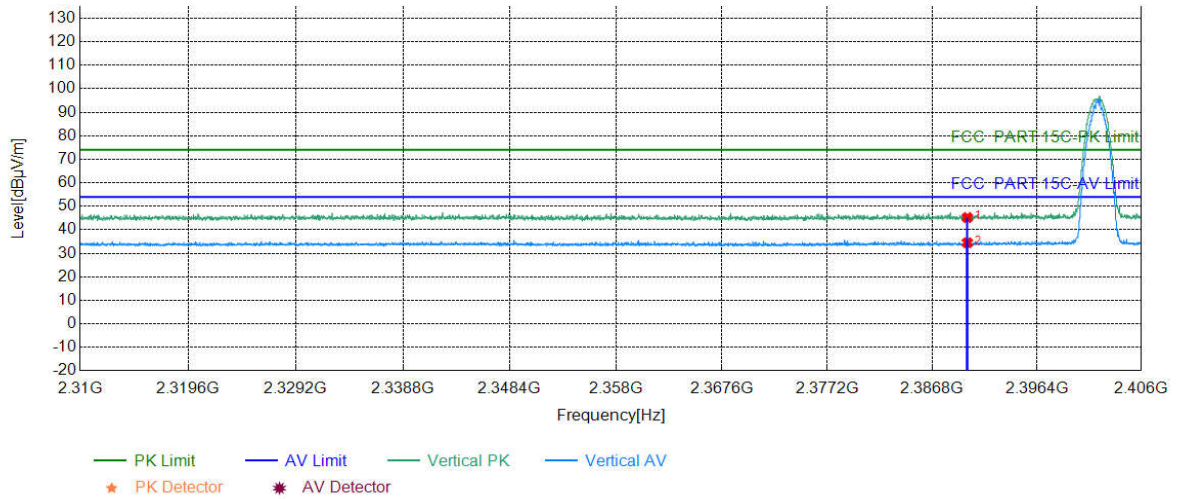

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	39.44	45.21	74.00	28.79	PASS	Vertical	PK
2	2390.0000	5.77	28.71	34.48	54.00	19.52	PASS	Vertical	AV

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:			


Test Graph

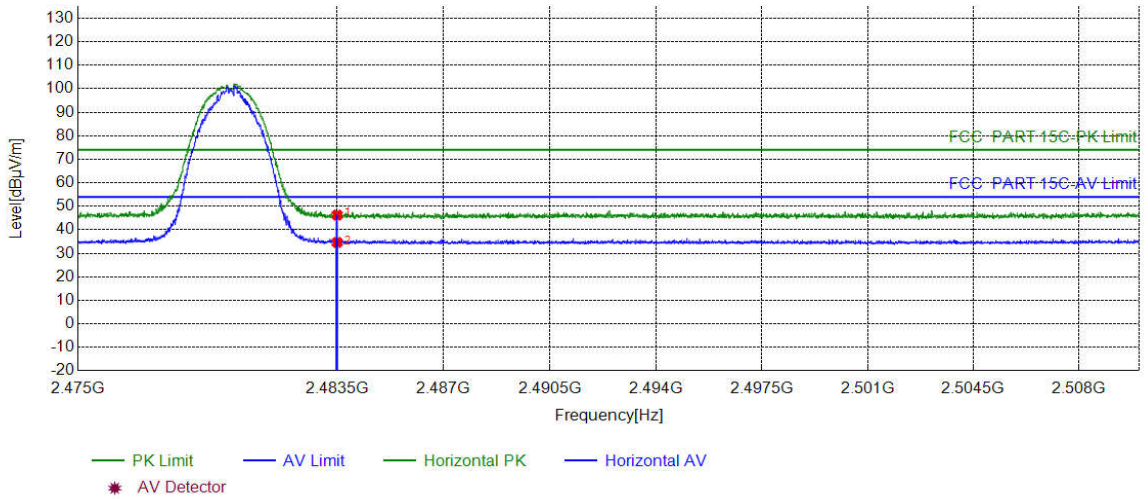

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	39.71	46.28	74.00	27.72	PASS	Horizontal	PK
2	2483.5000	6.57	28.07	34.64	54.00	19.36	PASS	Horizontal	AV

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:			


Test Graph

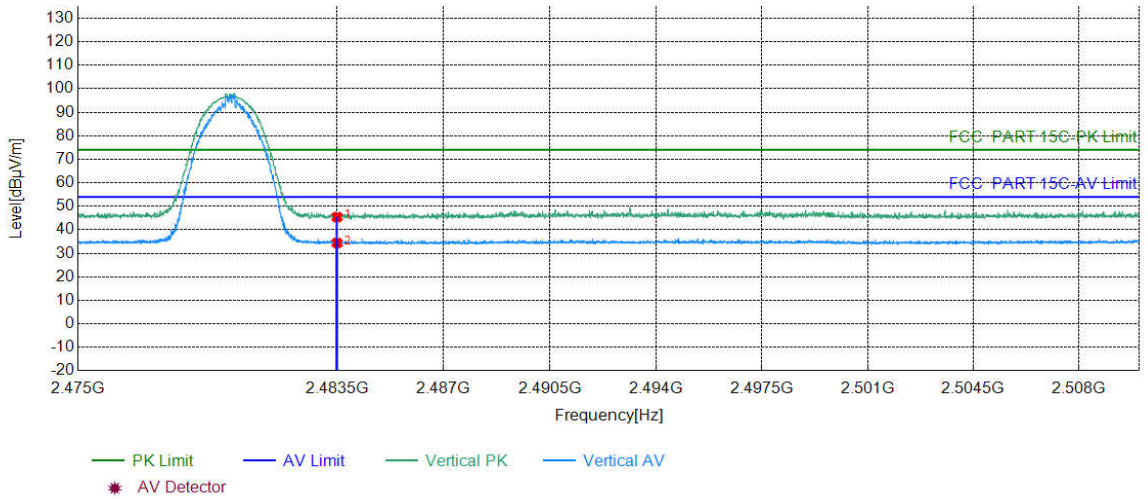

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	38.85	45.42	74.00	28.58	PASS	Vertical	PK
2	2483.5000	6.57	27.84	34.41	54.00	19.59	PASS	Vertical	AV

Mode:	8DPSK Transmitting	Channel:	2402
Remark:			


Test Graph

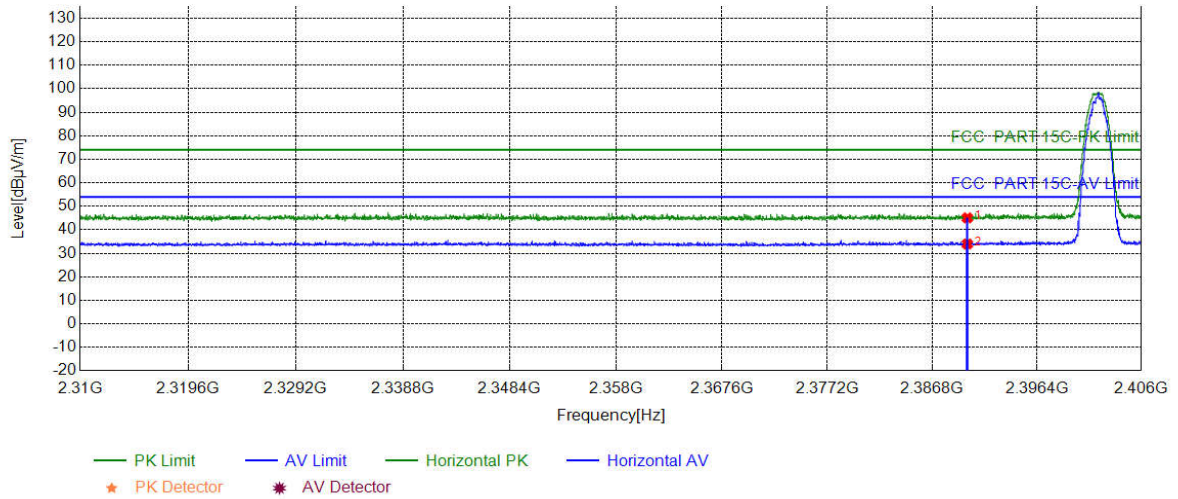

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	39.33	45.10	74.00	28.90	PASS	Horizontal	PK
2	2390.0000	5.77	28.20	33.97	54.00	20.03	PASS	Horizontal	AV

Mode:	8DPSK Transmitting	Channel:	2402
Remark:			


Test Graph

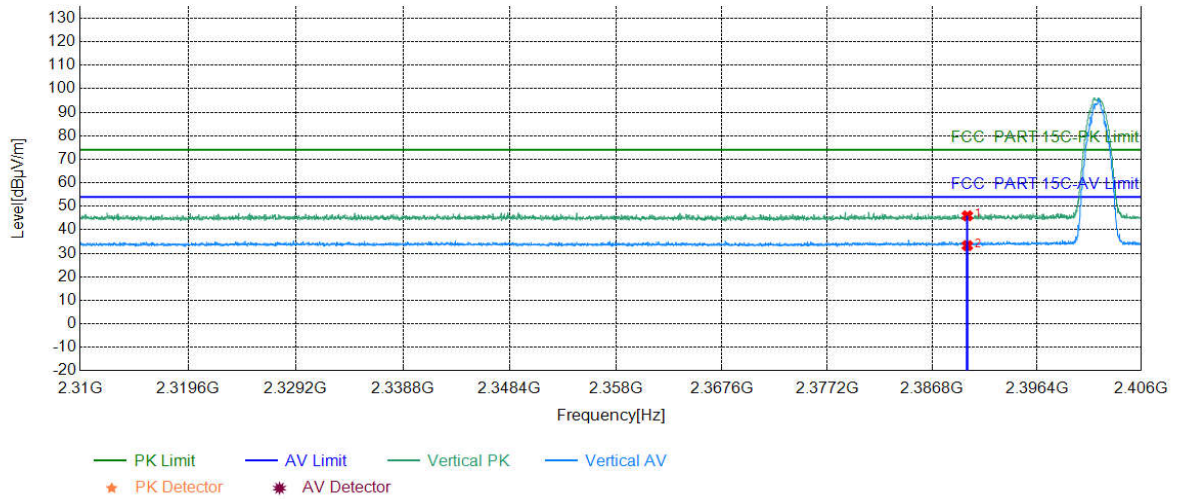

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	40.18	45.95	74.00	28.05	PASS	Vertical	PK
2	2390.0000	5.77	27.51	33.28	54.00	20.72	PASS	Vertical	AV

Mode:	8DPSK Transmitting	Channel:	2480
Remark:			


Test Graph

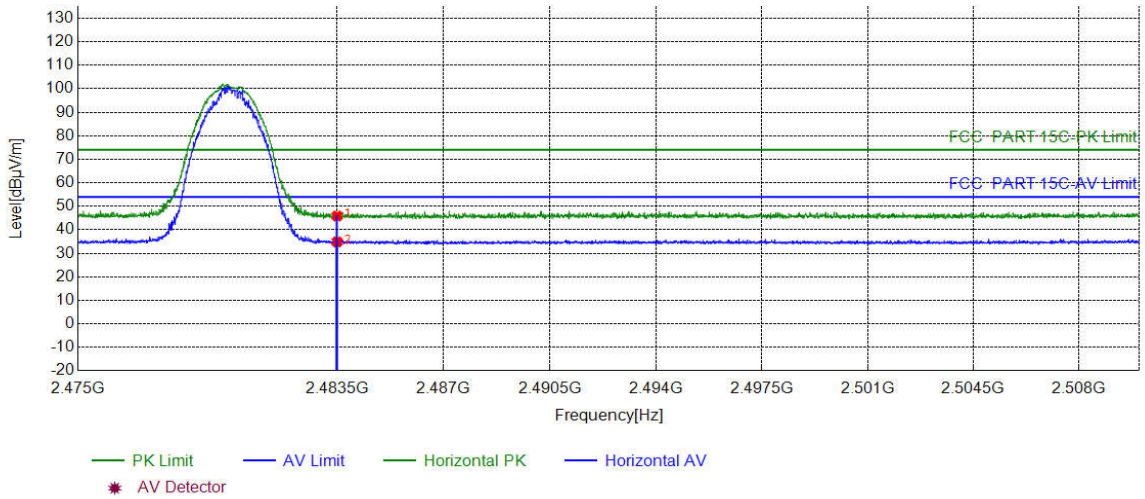

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	39.30	45.87	74.00	28.13	PASS	Horizontal	PK
2	2483.5000	6.57	28.28	34.85	54.00	19.15	PASS	Horizontal	AV

Mode:	8DPSK Transmitting	Channel:	2480
Remark:			

Test Graph

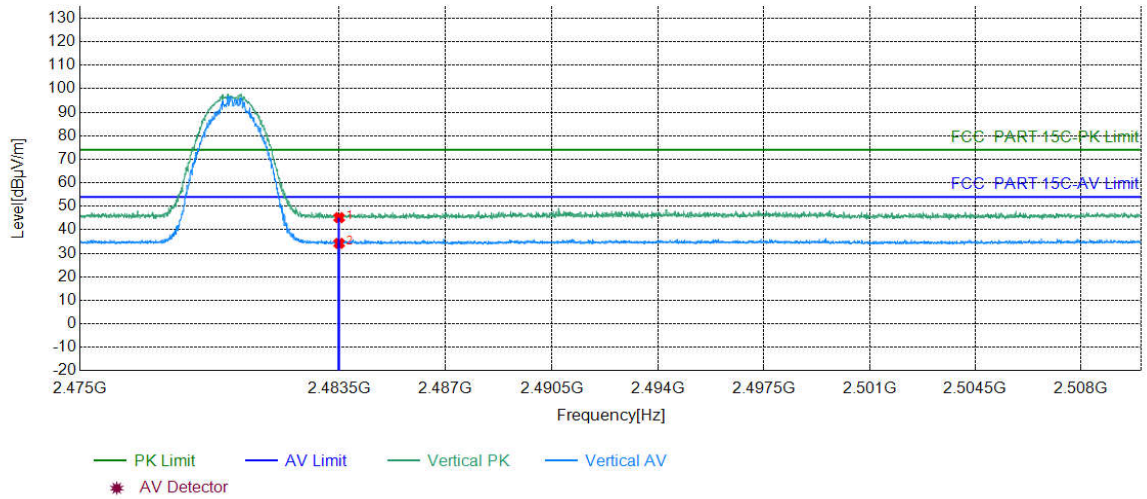

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	38.61	45.18	74.00	28.82	PASS	Vertical	PK
2	2483.5000	6.57	27.66	34.23	54.00	19.77	PASS	Vertical	AV

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

6 Appendix A

Refer to Appendix: Bluetooth Classic of module 1 of EED32O81173002