

The slim and refined lines of Sahale bring a refreshing change to today's kitchens. Bright ENERGY STAR® certified LED lighting complements your cooking experience and three fan speeds make cooking more enjoyable. The LED modules included with this hood are the latest in LED cooktop illumination technology specially designed to operate in the elevated temperatures of cooking - offering bright lighting and lasting up to 25 times as long as a standard bulb and greater reliability than typical replacement LED bulbs.

SIZE	BLACK	STAINLESS	WHITE	GREASE FILTERS (replacement)	NON-DUCTED FILTERS	
30 in.	BKDEG130BL	BKDEG130SS	BKDEG130WW	HPFA3A30 (Type "C3")	HPF30 (Type "Xc")	

FEATURES						
Max. Blower CFM †	375					
Control type	3-speed Capacitive Touch					
Delay off	no					
Filter Clean Reminder	yes					
Heat Sentry™	no					
ADA Capable	yes					
Lighting	2-level ENERGY STAR® LED (included)					
Grease Filters	Deluxe Micro Mesh (Qty. 2)					
Installation Hardware	EZ1 brackets					
ENERGY STAR®	yes (no if installed non-ducted)					
Recirculation	Non-ducted filters sold separately					

AC INPUT

120 V, 60 Hz - 0.65 AMPS

OPTIONAL ACCESSORIES 7-in Round Damper | BP870

7-III. Roulid Dailipei	Drora
ADA Wiring Kit	HAWRK3
Make-up Air Dampers	MD6TU, MD8TU and MD10TU

MOUNTING HEIGHT

18 in. to 24 in. from cooktop to bottom of hood

LIMITED WARRANTY

1-year

3-year (LED modules only)

(See installation manual for full warranty text.)

FOR INDOOR USE ONLY


† Max. blower CFM indicates the performance of the hood blower in open air and is not HVI certified.












SPECIFICATION SHEET



HVI PERFORMANCE										
	Size	Damper	Sones			CFM				
Duct Orientation			Normal	Medium*	High	Normal	Medium*	High 0.25 in. w.g.	High 0.1 in. w.g.	
Vertical - Rectangular	3¼ in. x 10 in.	Included	1.5	3.0	6.0	120	160	140	230	
Horizontal - Rectangular	3¼ in. x 10 in.	Included	1.5	3.0	6.5	110	160	150	230	
Round - Vertical	7 in.	Sold Separately	1.5	3.0	5.5	130	180	115	260	

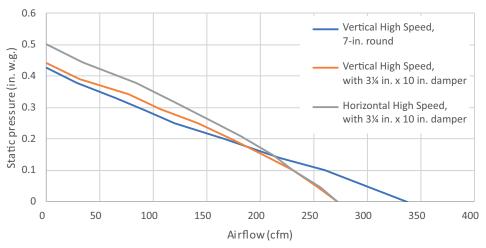



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 and 0.25 in. static pressure at high speed based on tests conducted in an HVI-approved state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

* Where noted performance rating is not HVI certified but was established in accordance with HVI Standardized test procedure.

SPECIFICATION SHEET