




Powered by MIDLAND

## POCKET GUIDE

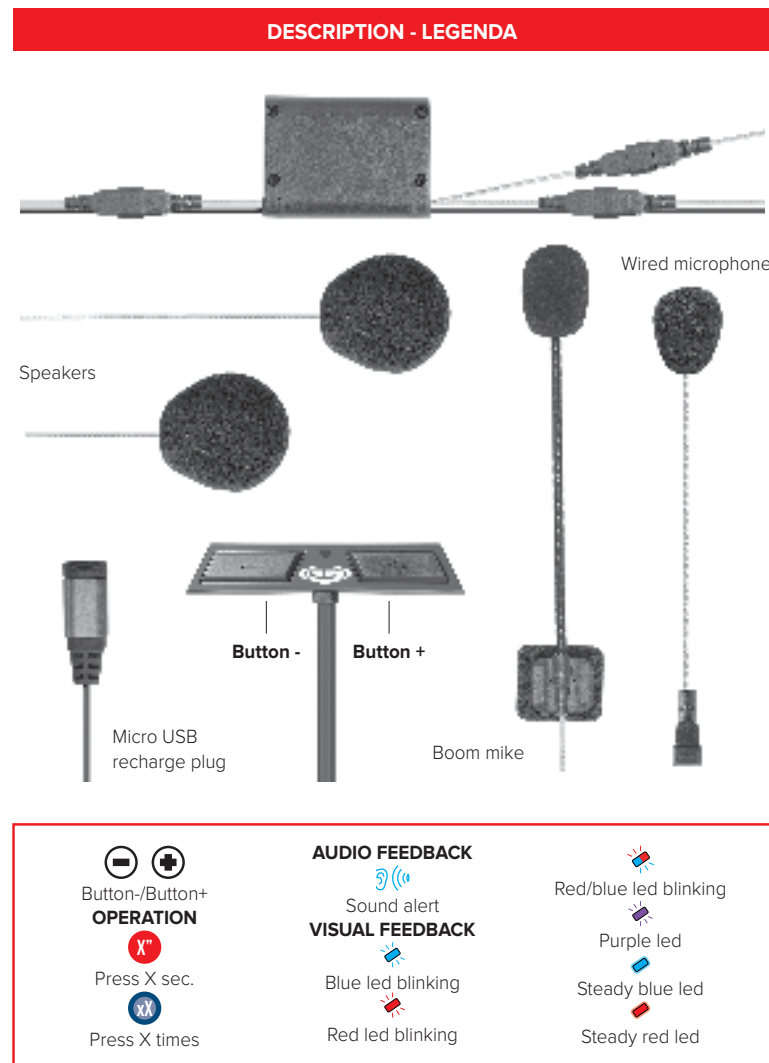

**Button-/Button+ OPERATION**

Press X sec.

Press X times

**AUDIO FEEDBACK**

Sound alert

**VISUAL FEEDBACK**

Blue led blinking

Red led blinking

Red/blue led blinking

Purple led

Steady blue led

Steady red led

### DESCRIPTION - LEGENDA

### POWER ON

- Press 3 sec.
- Led Blinking
- "Power on"
- Battery status

### POWER OFF

- Pres 3 sec.
- Led Blinking
- "Power off"

### PAIRING ANOTHER CABERG PRO SPEAK EVO

Status: Both units powered on

- Press 5 sec. on both devices
- "Pairing"

Led blinks alternately on both devices

Three led blinkings on both devices

"Pairing successful"

### PAIRING TO A DIFFERENT MODEL/BRAND UNIT

Status: Both units powered on

- Press 5 sec.
- Led blinks alternately
- "Pairing"



Follow the "phone" pairing procedure

Both units stop flashing

"Pairing successful"

### OPEN/CLOSE INTERCOM

Status: units on and paired

- Press once
- "Beep"

Led blinks: audio active

### RESET ALL PAIRINGS

Status: power off

- Press 7 sec.
- Steady led for 3 sec.
- "Beep"

### VOICE CALL

Status: unit on and connected to a phone

- Press twice
- Voice assistant (Google assistant, Siri)
- Press twice to end the call

Note: Double click on + control -> Redial.

### ANSWER A CALL

Status: phone rings

- Press once to answer a call
- Press once to end a call
- Press 3 sec. to reject a call

Note: if the automatic reply is activated, after 8 seconds the call automatically starts.

### VOLUME ADJUSTMENT

Status: while listening to an audio source (intercom, music, phone call...)

- Keep pressed to increase the volume
- Keep pressed to decrease the volume

Frequency 2.4GHz  
Max power 2.5mW

### MUSIC

Status: unit on and connected to the phone

- Select a music APP from the phone
- Press once Play/Pause
- Blinking
- Press twice Song forward
- Press twice Song backward

### CHANGE LANGUAGE

Status: unit on

- Keep pressed for more than 7 seconds
- "Battery status" in the various languages. Release + button to select the desired one.



Distributed by:  
**CABERG S.P.A.**  
Via Emilia, 11 - 24052 Azzano S.Paolo  
Bergamo (Italy)  
[www.caberg.it](http://www.caberg.it)

Read the instructions carefully before installation and use.

Produced or imported by:  
**MIDLAND EUROPE srl**  
Via R. Sevardi 7 - 42124 Reggio Emilia - Italy

Distributed in Canada by:

To download the complete user manual please visit [www.caberg.it/en](http://www.caberg.it/en)

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.  
(2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) L' appareil ne doit pas produire de brouillage;  
(2) L' appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d' en compromettre le fonctionnement.