

ThinkServer **W.E.**

Product Specifications Reference



Version 471, April 2015

ThinkServer® Servers

lenovo **FOR**
THOSE
WHO DO.

Visit www.lenovo.com/psref/we for the latest version

Contents

Summary of Changes	1
ThinkServer Servers	4
ThinkServer TS140	4
ThinkServer TS140 - Overview	4
ThinkServer TS140 Platform Specifications - System Specifications (I of III)	5
ThinkServer TS140 Platform Specifications (II of III)	6
ThinkServer TS140 Platform Specifications - System Specifications (III of III)	7
ThinkServer TS140 (70A4) - TopSeller (September 2013)	8
ThinkServer TS140 (70A4) - TopSeller (September 2013) - II	9
ThinkServer TS140 (70A4) - TopSeller (March 2015)	10
ThinkServer TS140 (70A4) - TopSeller (March 2015) - II	11
ThinkServer TS140 (70A5) - TopSeller (September 2013)	12
ThinkServer TS140 (70A5) - TopSeller (September 2013) - II	13
ThinkServer TS140 (70A5) - TopSeller (March 2015)	14
ThinkServer TS140 (70A5) - TopSeller (March 2015) - II	15
ThinkServer TS140 (70A0) - September 2013	16
ThinkServer TS140 (70A1) - September 2013	17
ThinkServer TS440	18
ThinkServer TS440 - Overview	18
ThinkServer TS440 Platform Specifications - I of III	19
ThinkServer TS440 Platform Specifications - II of III	20
ThinkServer TS440 Platform Specifications - III of III	21
ThinkServer TS440 (70AQ) - TopSeller (September 2013)	22
ThinkServer TS440 (70AQ) - TopSeller (November 2013)	23
ThinkServer TS440 (70AQ) - TopSeller (December 2013)	24
ThinkServer TS440 (70AQ) - TopSeller (March 2015)	25
ThinkServer TS440 (70AN) - TopSeller (September 2013)	26
ThinkServer TS440 (70AN) - TopSeller (November 2013)	27
ThinkServer TS440 (70AN) - TopSeller (March 2015)	28
ThinkServer TD350	29
ThinkServer TD350 Platform Specifications	29
ThinkServer TD350 TopSeller Model(s) - 70DG (September 2014) - I	30
ThinkServer TD350 TopSeller Model(s) - 70DG (September 2014) - II	31
ThinkServer TD350 TopSeller Model(s) - 70DJ (September 2014) - I	32
ThinkServer TD350 TopSeller Model(s) - 70DJ (September 2014) - II	33
ThinkServer TD350 TopSeller Model(s) - 70DJ (September 2014) - III	34
ThinkServer TD350 TopSeller Model(s) - For Switzerland (March 2015)	35
ThinkServer TD340	36
ThinkServer TD340 Overview	36
ThinkServer TD340 TopSeller Models - 70B7 (January 2014)	37
ThinkServer TD340 TopSeller Models - 70B5 (January 2014)	38
ThinkServer TD340 Platform Systems Specifications - I of II	39
ThinkServer TD340 Platform Systems Specifications - II of II	40
ThinkServer TD340 Optional Configurations	41
ThinkServer TD340 Operating System and Virtualization Supportability Matrix	42
ThinkServer RS140	43
ThinkServer RS140 with 3.5" Disk Bay TopSeller Models - 70F9 (June 2014)	44
ThinkServer RS140 with 2.5" Disk Bay TopSeller Models - 70F3 (June 2014)	45
ThinkServer RD350	46
ThinkServer RD350 with 3.5" Disk Drive Bay Platform Specifications	46
ThinkServer RD350 with 3.5" Disk Drive Bay - TopSeller Models	47
ThinkServer RD350 with 2.5" Disk Drive Bay Platform Specifications	48
ThinkServer RD350 with 2.5" Disk Drive Bay - TopSeller Models	49
ThinkServer RD450	50
ThinkServer RD450 with 3.5" Disk Drive Bay Platform Specifications	50
ThinkServer RD450 with 3.5" Disk Drive Bay - TopSeller Models	51
ThinkServer RD450 with 2.5" Disk Drive Bay Platform Specifications	52
ThinkServer RD450 with 2.5" Disk Drive Bay - TopSeller Models - I	53
ThinkServer RD450 with 2.5" Disk Drive Bay - TopSeller Models - II	54
ThinkServer RD340	55
ThinkServer RD340 Overview	55
ThinkServer RD340 Platform Systems Specifications - I of II	56
ThinkServer RD340 Platform Systems Specifications - II of II	57
ThinkServer RD340 Optional Configurations - Processor and Memory	58
ThinkServer RD340 Optional Configurations - Storage and RAID	59
ThinkServer RD340 Optional Configurations - Network, System Management, Power Supply	60
ThinkServer RD340 Operating System and Virtualization Supportability Matrix	61
ThinkServer RD340 (70AB) - TopSeller - January 2014	62
ThinkServer RD340 (70AC) - TopSeller - January 2014	63

Contents

ThinkServer RD340 (70AD) - TopSeller - January 2014	64
ThinkServer RD440.....	65
ThinkServer RD440 Overview	65
ThinkServer RD440 Platform Systems Specifications - I of II.....	66
ThinkServer RD440 Platform Systems Specifications - II of II.....	67
ThinkServer RD440 Optional Configurations - Processor and Memory	68
ThinkServer RD440 Optional Configurations - Storage and RAID	69
ThinkServer RD440 Optional Configurations - Network, System Management, Power Supply.....	70
ThinkServer RD440 Operating System and Virtualization Supportability Matrix	71
ThinkServer RD440 (70AH) - TopSeller - January 2014.....	72
ThinkServer RD440 (70AJ) - TopSeller - January 2014.....	73
ThinkServer RD440 (70B3) - TopSeller - January 2014.....	74
ThinkServer RD550.....	75
ThinkServer RD550 with 3.5" Disk Bay Platform Specifications	75
ThinkServer RD550 with 3.5" Disk Bay - TopSeller - 70CV	76
ThinkServer RD550 with 2.5" Disk Bay Platform Specifications	77
ThinkServer RD550 with 2.5" Disk Bay - TopSeller - 70CX - I	78
ThinkServer RD550 with 2.5" Disk Bay - TopSeller - 70CX - II	79
ThinkServer RD550 Options.....	80
ThinkServer RD650 Overview	81
ThinkServer RD650.....	82
ThinkServer RD650 with 3.5" Disk Bay Platform Specifications	82
ThinkServer RD650 with 3.5" Disk Bay - TopSeller - 70D0.....	83
ThinkServer RD650 with 2.5" + 3.5" Disk Bay Platform Specifications.....	84
ThinkServer RD650 with 2.5" + 3.5" Disk Bay - TopSeller - 70D4	85
ThinkServer RD650 with 2.5" Disk Bay Platform Specifications	86
ThinkServer RD650 with 2.5" Disk Bay - TopSeller - 70DR	87
ThinkServer RD650 with 2.5" Disk Bay - TopSeller - 70D2.....	88
ThinkServer RD650 Options.....	89
ThinkServer RD540.....	90
ThinkServer RD540 Overview - Front and Rear	90
ThinkServer RD540 Overview - Internal	91
ThinkServer RD540 Platform Specifications.....	92
ThinkServer RD540 (70AU) - TopSeller (October 2013).....	93
ThinkServer RD540 (70AU) - TopSeller (October 2013) - II.....	94
ThinkServer RD540 (70AU) - TopSeller (November 2013)	95
ThinkServer RD540 (70AU) - TopSeller (November 2013) - II	96
ThinkServer RD540 (70AU) - TopSeller (December 2013)	97
ThinkServer RD540 (70AU) - TopSeller (December 2013) - II	98
ThinkServer RD540 Optional Configurations - Processor and Memory	99
ThinkServer RD540 Optional Configurations - Storage and RAID	100
ThinkServer RD540 Optional Configurations - Network, System Management, Power Supply.....	101
ThinkServer RD640.....	102
ThinkServer RD640 Overview - Front and Rear	102
ThinkServer RD640 Overview - Internal	103
ThinkServer RD640 Platform Specifications.....	104
ThinkServer RD640 (70B0) - TopSeller (October 2013)	105
ThinkServer RD640 (70B0) - TopSeller (November 2013).....	106
ThinkServer RD640 (70B0) - TopSeller (December 2013).....	107
ThinkServer RD640 (70AW) - October 2013	108
ThinkServer RD640 (70AW) - November 2013.....	109
ThinkServer RD640 (70AW) - December 2013.....	110
ThinkServer RD640 Optional Configurations - Processor and Memory	111
ThinkServer RD640 Optional Configurations - Storage and RAID	112
ThinkServer RD640 Optional Configurations - Network, System Management, Power Supply.....	113
ThinkServer Storage	114
ThinkServer SA120.....	114
ThinkServer SA120 Direct Attached Storage Photography	114
ThinkServer SA120 Direct Attached Storage - Standard Models	115
Withdrawn Product Books.....	116
Legal Information and Trademarks	117

Summary of Changes

This section describes the changes made in this version of ThinkServer PSREF and in previous version. This edition might also include minor corrections and editorial changes which are not identified.

April 15, 2015 - Version 471

Additions in this update

- ▶ New ThinkServer TD350 models announced March 2015 .

March 25, 2015 - Version 470

Additions in this update

- ▶ New ThinkServer TS140 and TS440 models announced March 2015 .

January 28, 2015 - Version 467

Additions in this update

- ▶ New ThinkServer RD550 models announced November and December 2014 .
- ▶ Add 2nd CPU PN on RD550

January 7, 2015 - Version 466

Additions in this update

- ▶ New ThinkServer RD650 models announced November 2014 .
- ▶ New ThinkServer RD650 Options sheet.
- ▶ New ThinkServer RD550 Options sheet.

Changes in this update

- ▶ Update specifications:
 - Add M.2 SSD support on RD650 and RD550.
 - Add chassis intrusion switch on RD650 and RD550.
 - Update AnyRAID support information on RD650 and RD550
 - Update expansion slots specification on RD650 and RD550.
 - Update rear disk bay spec on RD650 and RD550.
 - Add internal storage supporting list for RD650 and RD550
 - Add 2nd CPU PN on RD650
- ▶ Remove some RD650 and RD550 SVT models.

December 3, 2014 - Version 464

Additions in this update

- ▶ New product
ThinkServer RD450 ann December 2, 2014.
- ▶ New product
ThinkServer RD350 ann December 2, 2014.
- ▶ On RD450, RD350 pages, add 2nd CPU option PN on single processor models

November 12, 2014 - Version 463

Changes in this update

- ▶ Updates TD350 environmental specifications, updates 45 ° C continuous operation configuration limitation.
- ▶ Updates RD650 and RD550 network interface specifications

September 30, 2014 - Version 460

Changes in this update

- ▶ Updates RD650/RD550/TD350 environmental specifications, add 45 ° C continuous operation configuration limitation.

September 10, 2014 - Version 459

Additions in this update

- ▶ New product(s)
New ThinkServer TD350 announced September 2014 (TD350-SPEC, 70DG-1E, 70DG-2, 70DJ-1, 70DJ-2, 70DJ-3)
New ThinkServer RD650 announced September 2014 (RD650-SPEC, 70D0-1E, 70D2-1E, 70D4-1E, 70DR-1E)
New ThinkServer RD550 announced September 2014 (RD550-SPEC, 70CV-1, 70CX-1, 70CX-2)

June 18, 2014 - Version 455

Additions in this update

- ▶ New product
ThinkServer RS140 ann June 10, 2014. Includes the following pages:
ThinkServer RS140 with 3.5" Disk Bay TopSeller Models - 70F9 (June 2014)
ThinkServer RS140 with 2.5" Disk Bay TopSeller Models - 70F3 (June 2014)

Withdrawals in this update

- ▶ ThinkServer RD330, RD430, RD530, RD630 withdrawn, moved to lswbook_WE

February 25, 2014 - Version 450


Additions in this update

- ▶ New section
ThinkServer Servers, contains all ThinkServer servers pages
- ▶ New section
ThinkServer Storage, contains ThinkServer storage pages
- ▶ New section
Summary of changes, contains changes list for the three most recent versions
- ▶ New product
ThinkServer TD340 ann January 21, 2014. Includes the following pages:
ThinkServer TD340 Overview
ThinkServer TD340 TopSeller Models - 70B7 (January 2014)
ThinkServer TD340 TopSeller Models - 70B5 (January 2014)
ThinkServer TD340 Platform Systems Specifications - I of II
ThinkServer TD340 Platform Systems Specifications - II of II
ThinkServer TD340 Optional Configurations
ThinkServer TD340 Operating System and Virtualization Supportability Matrix
- ▶ New product
ThinkServer SA120 ann February 11, 2014. Includes the following pages:
ThinkServer SA120 Direct Attached Storage Photography
ThinkServer SA120 Direct Attached Storage - Standard Models

Changes in this update


- ▶ Updates Expansion slots informations on ThinkServer RD330 and RD340

ThinkServer TS140 - Overview

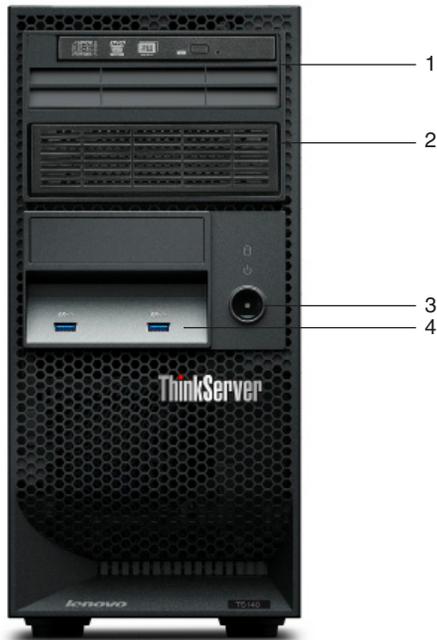

Front view

1. Optional slim optical + 3.5" drive bay in standard 5.25" bay
2. Optional 3.5" hard drive bay
3. Power Button
4. Front I/O: 2 USB 3.0 (blue)

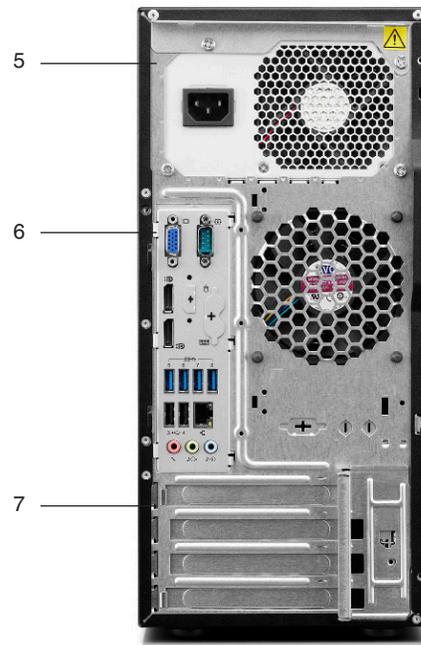

Rear view

5. Power Supply:
280 watts 80 PLUS Bronze/450 watts 80 PLUS Platinum
6. Rear I/O: 2 USB 2.0
4 USB 3.0 (blue)
1 serial (9-pin)
1 RJ-45 (GbE)
1 line-in
1 line-out
1 microphone-in
2 DisplayPort (for Intel HD Graphics)
1 VGA (for Intel HD Graphics)
7. 1 PCIe 3.0 x16
1 PCIe 2.0 x1
1 PCIe 2.0 x16 (x4 elec)
1 PCI


Internal

- One LGA1150 socket, supports one processor from Intel Xeon E3-1200 v3, Core-i3 4000, and Pentium families
- 4 DIMM sockets, supports up to 32GB ECC UDIMM memory
- Up to four 3.5" hard drive bays, two 3.5" hard drive bays standard

Mechanical

- Raven black color; metal case
- Rack-mountable to 4U
- 6.89"W x 16.97"D x 14.76"H
- 175mm W x 431mm D x 375mm H
- 28.66 lb (13kg) max configuration
- 25-liter

ThinkServer TS140 Platform Specifications - System Specifications (I of III)

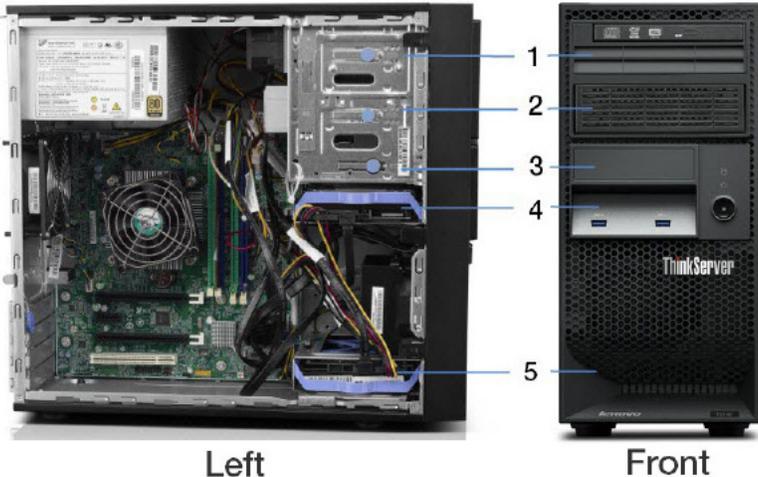Components	Specification																																																																																																																																																
Form factor	Tower, rack-mountable to 4U via ThinkServer Tower to Rack Shelf Conversion Kit (<i>Option PN: 0C19515</i>)																																																																																																																																																
Chipset	Intel C226 Chipset																																																																																																																																																
Systems management	<ul style="list-style-type: none"> Intel Active Management Technology 9 on models with Xeon processor (KVM function needs Intel Xeon E3-12x5 v3 processors) EasyStartup EasyUpdate 																																																																																																																																																
Processor	<p>One LGA1150 socket, supports one processor from Intel Xeon E3-1200 v3, Core-i3 4000, and Pentium G3000 families, integrated 2-channel DDR3 memory controller, optional integrated processor graphics on selected processors.</p> <p>The following processors are supported:</p> <table border="1"> <thead> <tr> <th>Processor Number</th> <th># of Cores</th> <th># of Threads</th> <th>Clock Speed</th> <th>Max Turbo Frequency</th> <th>Cache</th> <th>Memory speed</th> <th>ECC Memory Supported</th> <th>Processor Graphics</th> </tr> </thead> <tbody> <tr> <td>Xeon E3-1285 v3</td> <td>4</td> <td>8</td> <td>3.6 GHz</td> <td>4 GHz</td> <td>8 MB</td> <td>DDR3-1600</td> <td>Yes</td> <td>Intel HD Graphics 4700</td> </tr> <tr> <td>Xeon E3-1280 v3</td> <td>4</td> <td>8</td> <td>3.6 GHz</td> <td>4 GHz</td> <td>8 MB</td> <td>DDR3-1600</td> <td>Yes</td> <td></td> </tr> <tr> <td>Xeon E3-1275 v3</td> <td>4</td> <td>8</td> <td>3.5 GHz</td> <td>3.9 GHz</td> <td>8 MB</td> <td>DDR3-1600</td> <td>Yes</td> <td>Intel HD Graphics 4600</td> </tr> <tr> <td>Xeon E3-1270 v3</td> <td>4</td> <td>8</td> <td>3.5 GHz</td> <td>3.9 GHz</td> <td>8 MB</td> <td>DDR3-1600</td> <td>Yes</td> <td></td> </tr> <tr> <td>Xeon E3-1245 v3</td> <td>4</td> <td>8</td> <td>3.4 GHz</td> <td>3.8 GHz</td> <td>8 MB</td> <td>DDR3-1600</td> <td>Yes</td> <td>Intel HD Graphics 4600</td> </tr> <tr> <td>Xeon E3-1240 v3</td> <td>4</td> <td>8</td> <td>3.4 GHz</td> <td>3.8 GHz</td> <td>8 MB</td> <td>DDR3-1600</td> <td>Yes</td> <td></td> </tr> <tr> <td>Xeon E3-1230 v3</td> <td>4</td> <td>8</td> <td>3.3 GHz</td> <td>3.7 GHz</td> <td>8 MB</td> <td>DDR3-1600</td> <td>Yes</td> <td></td> </tr> <tr> <td>Xeon E3-1225 v3</td> <td>4</td> <td>4</td> <td>3.2 GHz</td> <td>3.6 GHz</td> <td>8 MB</td> <td>DDR3-1600</td> <td>Yes</td> <td>Intel HD Graphics 4600</td> </tr> <tr> <td>Xeon E3-1220 v3</td> <td>4</td> <td>4</td> <td>3.1 GHz</td> <td>3.5 GHz</td> <td>8 MB</td> <td>DDR3-1600</td> <td>Yes</td> <td></td> </tr> <tr> <td>Core i3-4340</td> <td>2</td> <td>4</td> <td>3.6 GHz</td> <td></td> <td>4 MB</td> <td>DDR3-1600</td> <td>Yes</td> <td>Intel HD Graphics 4600</td> </tr> <tr> <td>Core i3-4330</td> <td>2</td> <td>4</td> <td>3.5 GHz</td> <td></td> <td>4 MB</td> <td>DDR3-1600</td> <td>Yes</td> <td>Intel HD Graphics 4600</td> </tr> <tr> <td>Core i3-4130</td> <td>2</td> <td>4</td> <td>3.4 GHz</td> <td></td> <td>3 MB</td> <td>DDR3-1600</td> <td>Yes</td> <td>Intel HD Graphics 4400</td> </tr> <tr> <td>Pentium G3430</td> <td>2</td> <td>2</td> <td>3.3 GHz</td> <td></td> <td>3 MB</td> <td>DDR3-1600</td> <td>Yes</td> <td>Intel HD Graphics</td> </tr> <tr> <td>Pentium G3420</td> <td>2</td> <td>2</td> <td>3.2 GHz</td> <td></td> <td>3 MB</td> <td>DDR3-1600</td> <td>Yes</td> <td>Intel HD Graphics</td> </tr> <tr> <td>Pentium G3220</td> <td>2</td> <td>2</td> <td>3 GHz</td> <td></td> <td>3 MB</td> <td>DDR3-1333</td> <td>Yes</td> <td>Intel HD Graphics</td> </tr> </tbody> </table> <p><i>Notes:</i> All information is provided by Intel and may be changed at any time without notice. The information herein is provided "as-is". Intel may update this information in non-scheduled. For latest information, please see http://ark.intel.com/</p>	Processor Number	# of Cores	# of Threads	Clock Speed	Max Turbo Frequency	Cache	Memory speed	ECC Memory Supported	Processor Graphics	Xeon E3-1285 v3	4	8	3.6 GHz	4 GHz	8 MB	DDR3-1600	Yes	Intel HD Graphics 4700	Xeon E3-1280 v3	4	8	3.6 GHz	4 GHz	8 MB	DDR3-1600	Yes		Xeon E3-1275 v3	4	8	3.5 GHz	3.9 GHz	8 MB	DDR3-1600	Yes	Intel HD Graphics 4600	Xeon E3-1270 v3	4	8	3.5 GHz	3.9 GHz	8 MB	DDR3-1600	Yes		Xeon E3-1245 v3	4	8	3.4 GHz	3.8 GHz	8 MB	DDR3-1600	Yes	Intel HD Graphics 4600	Xeon E3-1240 v3	4	8	3.4 GHz	3.8 GHz	8 MB	DDR3-1600	Yes		Xeon E3-1230 v3	4	8	3.3 GHz	3.7 GHz	8 MB	DDR3-1600	Yes		Xeon E3-1225 v3	4	4	3.2 GHz	3.6 GHz	8 MB	DDR3-1600	Yes	Intel HD Graphics 4600	Xeon E3-1220 v3	4	4	3.1 GHz	3.5 GHz	8 MB	DDR3-1600	Yes		Core i3-4340	2	4	3.6 GHz		4 MB	DDR3-1600	Yes	Intel HD Graphics 4600	Core i3-4330	2	4	3.5 GHz		4 MB	DDR3-1600	Yes	Intel HD Graphics 4600	Core i3-4130	2	4	3.4 GHz		3 MB	DDR3-1600	Yes	Intel HD Graphics 4400	Pentium G3430	2	2	3.3 GHz		3 MB	DDR3-1600	Yes	Intel HD Graphics	Pentium G3420	2	2	3.2 GHz		3 MB	DDR3-1600	Yes	Intel HD Graphics	Pentium G3220	2	2	3 GHz		3 MB	DDR3-1333	Yes	Intel HD Graphics
Processor Number	# of Cores	# of Threads	Clock Speed	Max Turbo Frequency	Cache	Memory speed	ECC Memory Supported	Processor Graphics																																																																																																																																									
Xeon E3-1285 v3	4	8	3.6 GHz	4 GHz	8 MB	DDR3-1600	Yes	Intel HD Graphics 4700																																																																																																																																									
Xeon E3-1280 v3	4	8	3.6 GHz	4 GHz	8 MB	DDR3-1600	Yes																																																																																																																																										
Xeon E3-1275 v3	4	8	3.5 GHz	3.9 GHz	8 MB	DDR3-1600	Yes	Intel HD Graphics 4600																																																																																																																																									
Xeon E3-1270 v3	4	8	3.5 GHz	3.9 GHz	8 MB	DDR3-1600	Yes																																																																																																																																										
Xeon E3-1245 v3	4	8	3.4 GHz	3.8 GHz	8 MB	DDR3-1600	Yes	Intel HD Graphics 4600																																																																																																																																									
Xeon E3-1240 v3	4	8	3.4 GHz	3.8 GHz	8 MB	DDR3-1600	Yes																																																																																																																																										
Xeon E3-1230 v3	4	8	3.3 GHz	3.7 GHz	8 MB	DDR3-1600	Yes																																																																																																																																										
Xeon E3-1225 v3	4	4	3.2 GHz	3.6 GHz	8 MB	DDR3-1600	Yes	Intel HD Graphics 4600																																																																																																																																									
Xeon E3-1220 v3	4	4	3.1 GHz	3.5 GHz	8 MB	DDR3-1600	Yes																																																																																																																																										
Core i3-4340	2	4	3.6 GHz		4 MB	DDR3-1600	Yes	Intel HD Graphics 4600																																																																																																																																									
Core i3-4330	2	4	3.5 GHz		4 MB	DDR3-1600	Yes	Intel HD Graphics 4600																																																																																																																																									
Core i3-4130	2	4	3.4 GHz		3 MB	DDR3-1600	Yes	Intel HD Graphics 4400																																																																																																																																									
Pentium G3430	2	2	3.3 GHz		3 MB	DDR3-1600	Yes	Intel HD Graphics																																																																																																																																									
Pentium G3420	2	2	3.2 GHz		3 MB	DDR3-1600	Yes	Intel HD Graphics																																																																																																																																									
Pentium G3220	2	2	3 GHz		3 MB	DDR3-1333	Yes	Intel HD Graphics																																																																																																																																									
Memory type	1600MHz UDIMM, DDR3, ECC, 2-channel capable; 2GB, 4GB, and 8GB ECC UDIMMs are available																																																																																																																																																
Memory DIMM sockets	Four 240-pin DIMM sockets																																																																																																																																																
Memory capacity	Up to 32GB (8GBx4)																																																																																																																																																
Memory protection	ECC																																																																																																																																																
Additional memory disclaimers	<ul style="list-style-type: none"> Actual memory operating speed depends on processor memory controller speed, installed memory speed, and quantity of memory DIMMs 																																																																																																																																																
Onboard SATA controller	Onboard ThinkServer RAID 100 SATA controller in chipset, SATA 6.0Gb/s, RAID 0, 1, 5, 10 support																																																																																																																																																
Drive bays	<p>Supports one 5.25" optical and two 3.5" disk drive bays in standard models, direct cable, no hot-swap up to one slim optical and four 3.5"/2.5" disk drive bays (pending 2.5" disk drives availability):</p>  <p>1: Standard 5.25", 1.6" high optical or optional slim optical + 4th 3.5" drive bay</p> <p>2: Optional 3rd 3.5" drive bay or optional 4th 2.5" drive bay</p> <p>3: Optional 3rd 2.5" drive bay</p> <p>4: Standard 3.5"/2.5" primary drive bay</p> <p>5: Standard 3.5"/2.5" 2nd drive bay</p> <p><i>Notes:</i></p> <ul style="list-style-type: none"> Standard optical and hard drive bays are included in models; optional optical and hard drive bays are available on models with the corresponding drives only Image above is for reference only. Model in this image contains optional slim optical + 3.5" 2nd hard drive bay with supplemental fan (Bay 1) and optional 3.5" 3rd hard drive bay (Bay 2) Optional slim optical + 3.5" drive bay (Bay 1) and optional 3rd 2.5" drive bay (Bay 3) can not be supported concurrently on one model. 																																																																																																																																																

ThinkServer TS140 Platform Specifications (II of III)

Components	Specification		
Optical	Supports DVD±RW or DVD ROM, 1.6" high or slim, SATA interface		
Graphics	<ul style="list-style-type: none"> Integrated Intel HD Graphics on Xeon E3-12x5 v3, Core i3, and Pentium processors, uses main memory, works along with discrete graphics to support multi-display, enables three display connectors (2 DisplayPort, 1 VGA) on rear ports (detailed information please see Rear ports section) Also supports the following optional discrete graphics adapters: <ul style="list-style-type: none"> NVIDIA Quadro NVS 300, PCIe x16 adapter, 512MB NVIDIA Quadro 600, PCIe x16 adapter, 1GB 		
Front ports	Two USB 3.0 (blue)		
Rear ports	One VGA and two DisplayPort for models with Intel HD Graphics, two USB 2.0, four USB 3.0 (blue), one serial (9-pin), one ethernet (RJ-45), three analog audio ports (line-in, line-out, mic-in)		
Expansion Slots	Slot 1: half-length, full-height, PCIe 3.0 x16 (near CPU) Slot 2: half-length, full-height, PCIe 2.0 x1 Slot 3: half-length, full-height, PCIe 2.0 x16 (x4 elec) Slot 4: half-length, full-height, PCI 2.3		
Onboard Ethernet	One onboard gigabit ethernet, Intel I217		
Discrete Ethernet (optional)	Supports the following: <ul style="list-style-type: none"> Intel Gigabit CT Desktop Adapter (1xGbE, RJ-45) Intel Ethernet Server Adapter I350-T2 (2xGbE, RJ-45) Intel Ethernet Server Adapter I350-T4 (4xGbE, RJ-45) 		
Keyboard/mouse	None (use USB port)		
Power supply	Supports one of the following, depending on models: <ul style="list-style-type: none"> One fixed 280 watts, autosensing, 85% PSU, 80 PLUS Bronze qualified One fixed 450 watts, autosensing, 92% PSU, 80 PLUS Platinum qualified 		
Security	<ul style="list-style-type: none"> Security chip: ST33ZP24AR28PVSP for TPM function, TCG 1.2-compliant Padlock loop (in rear for opt padlock; padlock prohibits side cover removal) Security slot (in rear for optional Kensington Microsaver cable; prohibits side cover removal) Power-on password Boot sequence control Boot without keyboard, mouse, diskette Serial port I/O control USB port disablement (front or all) 		
Mechanical	<ul style="list-style-type: none"> Raven black color; metal case 6.89"W x 16.97"D x 14.76"H 175mm W x 431mm D x 375mm H 28.66 lb (13kg) max configuration 25-liter 		
Serviceability	<ul style="list-style-type: none"> Toolless side cover removal Toolless disk and optical drive removal (standard bays) Toolless adapter retention Illuminated front icons 		
Environmental certifications	<ul style="list-style-type: none"> GREENGUARD® certified Energy Star Server 1.1 qualified RoHS-compliant 		
EMC	FCC Class A		
240VA	Supports		
Temperature - operating	50 °F to 95 °F (10 °C to 35 °C)		
Temperature - non operating (no package)	-10 °C to 60 °C		
Temperature - non operating (with package)	-40 °C to 70 °C		
Altitude - operating	Supported Altitude (unpressurized): 0-10000ft (0-3048m)		
Humidity - operating	10%~80%, non-condensing		
Humidity - non operating (no package)	10%~90%, non-condensing		
Humidity - non operating (with package)	10%~90%, non-condensing		
Acoustic noise (idle/working mode)	Category	Min Configuration	Best Configuration
	CPU	1 CPU	1 CPU
	Optical Drive	0 DVD	1 DVD
	Drive Bays	Up to one	Up to three
	HDD	1x 500GB SATA	3x 500GB SATA
	Memory	1x 2GB UDIMM	1x 2GB UDIMM
	PSU	280W	450W
	RAID	Embedded SATA	Embedded RAID
	Add-on card	No	1xVGA
	Sound Pressure (operating)	26 dB(A)	35 dB(A)
Sound Pressure (idle)	25 dB(A)	34 dB(A)	

ThinkServer TS140 Platform Specifications - System Specifications (III of III)

Components	Specification
Warranty	1 or 3-year limited warranty, parts and labor, more services information see S-TS1 and S-TS3 sheet
Preloaded operating systems	<ul style="list-style-type: none">• Windows Server® 2012 Foundation• Windows Server 2012 Essentials• Windows Server 2012 Standard
Supported operating systems and virtualization software	<ul style="list-style-type: none">• Windows 7• Windows 8• Windows Server 2008 R2 Standard• Windows Server 2008 R2 Enterprise• Windows Small Business Server 2011 Essentials• Windows Small Business Server 2011 Standard• Windows Small Business Server 2011 Premium Add-On <p><i>Notes:</i> 1. Supported only, no preloaded models 2. Windows 7 and Windows 8 are not supported by EasyStartup</p>

ThinkServer TS140 (70A4) - TopSeller (September 2013)


Product Specifications Reference (PSREF)

Type-model*	Processor	Memory type	Memory DIMMs	Graphics	Pre-conf RAID	Storage	Optical	Add-on ports	Discrete ethernet	Power Supply	Rack kit	Windows Server 2012 Preloaded	Base on-site warranty (-year)
70A4000K++	Pentium G3220 (2C/3GHz/3MB/1333MHz)	1600MHz ECC	4GBx1	Intel HD	No	2x500GB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	No	280W	No	No	1
70A4000L++	Pentium G3220 (2C/3GHz/3MB/1333MHz)	1600MHz ECC	4GBx1	Intel HD	No	1x500GB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	No	280W	No	No	1
70A4000M++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	No	1x500GB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	No	280W	No	No	1
70A4000N++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	8GBx1	Intel HD P4600	No	2x500GB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	No	280W	No	No	1
70A4000P++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	8GBx2	Intel HD P4600	No	2x1TB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	No	280W	No	No	1
70A4000Q++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	No	2x500GB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	No	280W	No	No	1

* Model in *italics* shows that this is a Global Model.
Country Code "+-": WE models listed above might not be available in all WE countries

• For detailed ThinkServer TS140 platform specifications, please see [ThinkServer TS140 Platform Specifications sheet](#)

Systems management	EasyStartup, EasyUpdate on all models; Intel Active Management Technology 9 on models with Xeon processor (KVM function needs Intel Xeon E3-12x5 v3 processors)
Chipset	Intel C226 Chipset
Processor	One LGA1150 socket, integrated 2-channel DDR3 memory controller, optional integrated processor graphics on selected processors
Memory type	1600MHz UDIMM, DDR3, ECC, 2-channel capable; 2GB, 4GB, and 8GB ECC UDIMMs are available
Memory DIMM sockets	Four 240-pin DIMM sockets, up to 32GB ECC UDIMM <i>(Actual memory operating speed depends on processor memory controller speed, installed memory speed, and quantity of memory DIMMs)</i>
Graphics	<ul style="list-style-type: none"> Integrated Intel HD Graphics on Xeon E3-12x5 v3, Core i3, and Pentium processors, uses main memory, works along with discrete graphics to support multi-display, enables three display connectors (2 DisplayPort, 1 VGA) on rear ports (detailed information please see Rear ports section) Also supports the following optional discrete graphics adapters: <ul style="list-style-type: none"> NVIDIA Quadro NVS 300, PCIe x16 adapter, 512MB NVIDIA Quadro 600, PCIe x16 adapter, 1GB
Onboard SATA controller	Onboard ThinkServer RAID 100 SATA controller in chipset, SATA 6.0Gb/s, RAID 0, 1, 5, 10 support
Drive bays	Up to four 3.5" hard drive bays (see right)
Storage	3.5" SATA 6.0Gb/s hard drives, 7200 rpm
Optical	Supports DVD-ROM or DVD±RW, 1.6" high or slim, SATA interface
Front ports	Two USB 3.0 (blue)
Rear ports	One VGA and two DisplayPort for models with Intel HD Graphics, two USB 2.0, four USB 3.0 (blue), one serial (9-pin), one ethernet (RJ-45), three analog audio ports (line-in, line-out, mic-in)
Add-on ports (optional)	Supports the following: <ul style="list-style-type: none"> Single Parallel Port PCI Adapter (1xParallel) Single Serial Port PCI Adapter (1xSerial) Dual Serial Ports PCI Adapter (2xSerial PCI) Dual Serial Ports PCIe Adapter (2xSerial PCIe)
Onboard Ethernet	One onboard gigabit ethernet, Intel I217
Discrete Ethernet (optional)	Supports the following: <ul style="list-style-type: none"> Intel Gigabit CT Desktop Adapter (1xGbE, RJ-45) Intel Ethernet Server Adapter I350-T2 (2xGbE, RJ-45) Intel Ethernet Server Adapter I350-T4 (4xGbE, RJ-45)
Keyboard/Mouse	None (use USB port)
Power supply	Supports one of the following, depending on models: <ul style="list-style-type: none"> One fixed 280 watts, autosensing, 85%, 80 PLUS Bronze qualified One fixed 450 watts, autosensing, 92%, 80 PLUS Platinum qualified
Form factor/ Rack-mountable	Tower, rack-mountable to 4U via optional ThinkServer Tower to Rack Shelf Conversion Kit (<i>Option PN: 0C19515</i>)
Mechanical	<ul style="list-style-type: none"> 25-liter, raven black color; metal case (WxDxH) 6.89"x 16.97"x 14.76"/175mm x 431mm x 375mm 28.66 lb (13kg) max configuration
Serviceability	<ul style="list-style-type: none"> Toolless side cover removal Toolless disk and optical drive removal (standard bays) Toolless adapter retention Illuminated front icons
Base warranty	1 or 3-year parts and labor limited warranty ¹
Environmental certifications	<ul style="list-style-type: none"> GREENGUARD® certified Energy Star Server 1.1 qualified/ RoHS-compliant More environmental information and requirements, please see ThinkServer TS140 Platform Specifications sheet

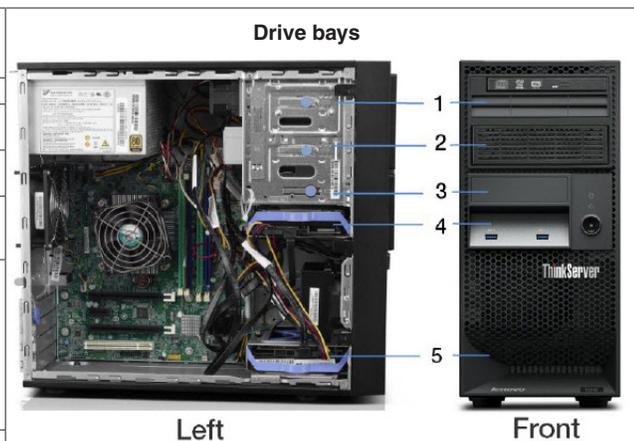

- Left**
- Front**
- Standard 5.25", 1.6" high optical or optional slim optical + 4th 3.5" drive bay
 - Optional 3rd 3.5" drive bay or optional 4th 2.5" drive bay
 - Optional 3rd 2.5" drive bay
 - Standard 3.5"/2.5" primary drive bay
 - Standard 3.5"/2.5" 2nd drive bay

Note:
4x3.5" bays models: Bay 1, 2, 4, 5 are included in models
3x3.5" bays models: Bay 2, 4, 5 are included in models
2x3.5" bays models: Bay 4, 5 are included in models

- Expansion Slots**
- Slot 1: half-length, full-height, PCIe 3.0 x16 (near CPU)
 - Slot 2: half-length, full-height, PCIe 2.0 x1
 - Slot 3: half-length, full-height, PCIe 2.0 x16 (x4 elec)
 - Slot 4: half-length, full-height, PCI 2.3

- Security**
- Security chip: ST33ZP24AR28PVSP for TPM function, TCG 1.2-compliant
 - Padlock loop (in rear for opt padlock; padlock prohibits side cover removal)
 - Security slot (in rear for optional Kensington Microsaver cable; prohibits side cover removal)
 - Power-on password
 - Boot sequence control
 - Boot without keyboard, mouse, diskette
 - Serial port I/O control
 - USB port disablement (front or all)

See footnotes for important warranty information
Model(s) announced September 10, 2013

© Lenovo
(70A4-1E) September 2013

ThinkServer TS140 (70A4) - TopSeller (September 2013) - II

Product Specifications Reference (PSREF)


Type-model*	Processor	Memory type	Memory DIMMs	Graphics	Pre-conf RAID	Storage	Optical	Add-on ports	Discrete ethernet	Power Supply	Rack kit	Windows Server 2012 Preloaded	Base on-site warranty (-year)
70A4000R++	Core i3-4330 (2C/3.5GHz/4MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD 4600	No	1x500GB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	No	280W	No	No	1
70A4000S++	Core i3-4330 (2C/3.5GHz/4MB/1600MHz)	1600MHz ECC	8GBx1	Intel HD 4600	No	2x500GB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	No	280W	No	No	1
70A4000T++	Core i3-4330 (2C/3.5GHz/4MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD 4600	No	1x1TB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	No	280W	No	No	1
70A4000U++	Core i3-4330 (2C/3.5GHz/4MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD 4600	No	Open (4x3.5" Bay)	Slim DVD±RW	No	No	280W	No	No	1
70A4000V++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	No	Open (4x3.5" Bay)	Slim DVD±RW	No	No	280W	No	No	1
70A4001K++	Pentium G3220 (2C/3GHz/3MB/1333MHz)	1600MHz ECC	4GBx1	Intel HD	No	Open (4x3.5" Bay)	Slim DVD±RW	No	No	280W	No	No	1

* Model in italics shows that this is a Global Model.

Country Code "+": WE models listed above might not be available in all WE countries

• For detailed ThinkServer TS140 platform specifications, please see [ThinkServer TS140 Platform Specifications sheet](#)

Systems management	EasyStartup, EasyUpdate on all models; Intel Active Management Technology 9 on models with Xeon processor (KVM function needs Intel Xeon E3-12x5 v3 processors)
Chipset	Intel C226 Chipset
Processor	One LGA1150 socket, integrated 2-channel DDR3 memory controller, optional integrated processor graphics on selected processors
Memory type	1600MHz UDIMM, DDR3, ECC, 2-channel capable; 2GB, 4GB, and 8GB ECC UDIMMs are available
Memory DIMM sockets	Four 240-pin DIMM sockets, up to 32GB ECC UDIMM (Actual memory operating speed depends on processor memory controller speed, installed memory speed, and quantity of memory DIMMs)
Graphics	<ul style="list-style-type: none"> Integrated Intel HD Graphics on Xeon E3-12x5 v3, Core i3, and Pentium processors, uses main memory, works along with discrete graphics to support multi-display, enables three display connectors (2 DisplayPort, 1 VGA) on rear ports (detailed information please see Rear ports section) Also supports the following optional discrete graphics adapters: <ul style="list-style-type: none"> NVIDIA Quadro NVS 300, PCIe x16 adapter, 512MB NVIDIA Quadro 600, PCIe x16 adapter, 1GB
Onboard SATA controller	Onboard ThinkServer RAID 100 SATA controller in chipset, SATA 6.0Gb/s, RAID 0, 1, 5, 10 support
Drive bays	Up to four 3.5" hard drive bays (see right)
Storage	3.5" SATA 6.0Gb/s hard drives, 7200 rpm
Optical	Supports DVD-ROM or DVD±RW, 1.6" high or slim, SATA interface
Front ports	Two USB 3.0 (blue)
Rear ports	One VGA and two DisplayPort for models with Intel HD Graphics, two USB 2.0, four USB 3.0 (blue), one serial (9-pin), one ethernet (RJ-45), three analog audio ports (line-in, line-out, mic-in)
Add-on ports (optional)	Supports the following: <ul style="list-style-type: none"> Single Parallel Port PCI Adapter (1xParallel) Single Serial Port PCI Adapter (1xSerial) Dual Serial Ports PCI Adapter (2xSerial PCI) Dual Serial Ports PCIe Adapter (2xSerial PCIe)
Onboard Ethernet	One onboard gigabit ethernet, Intel I217
Discrete Ethernet (optional)	Supports the following: <ul style="list-style-type: none"> Intel Gigabit CT Desktop Adapter (1xGbE, RJ-45) Intel Ethernet Server Adapter I350-T2 (2xGbE, RJ-45) Intel Ethernet Server Adapter I350-T4 (4xGbE, RJ-45)
Keyboard/Mouse	None (use USB port)
Power supply	Supports one of the following, depending on models: <ul style="list-style-type: none"> One fixed 280 watts, autosensing, 85%, 80 PLUS Bronze qualified One fixed 450 watts, autosensing, 92%, 80 PLUS Platinum qualified
Form factor/ Rack-mountable	Tower, rack-mountable to 4U via optional ThinkServer Tower to Rack Shelf Conversion Kit (Option PN: 0C19515)
Mechanical	<ul style="list-style-type: none"> 25-liter, raven black color; metal case (WxDxH) 6.89"x 16.97"x 14.76"/175mm x 431mm x 375mm 28.66 lb (13kg) max configuration
Serviceability	<ul style="list-style-type: none"> Toolless side cover removal Toolless disk and optical drive removal (standard bays) Toolless adapter retention Illuminated front icons
Base warranty	1 or 3-year parts and labor limited warranty ¹
Environmental certifications	<ul style="list-style-type: none"> GREENGUARD® certified Energy Star Server 1.1 qualified/ RoHS-compliant More environmental information and requirements, please see ThinkServer TS140 Platform Specifications sheet

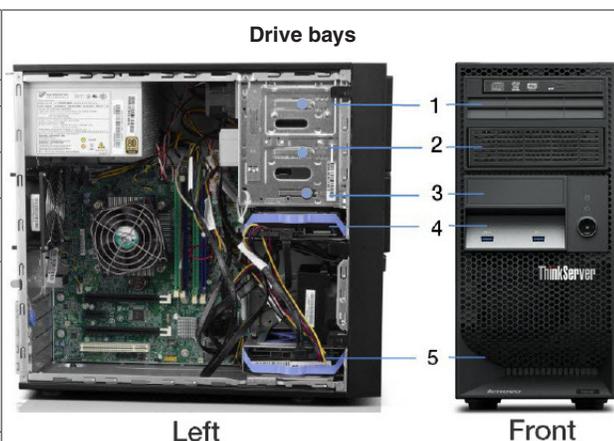

- Drive bays**
- 1: Standard 5.25", 1.6" high optical or optional slim optical + 4th 3.5" drive bay
 2: Optional 3rd 3.5" drive bay or optional 4th 2.5" drive bay
 3: Optional 3rd 2.5" drive bay
 4: Standard 3.5"/2.5" primary drive bay
 5: Standard 3.5"/2.5" 2nd drive bay

Note:
 4x3.5" bays models: Bay 1, 2, 4, 5 are included in models
 3x3.5" bays models: Bay 2, 4, 5 are included in models
 2x3.5" bays models: Bay 4, 5 are included in models

- Expansion Slots**
- Slot 1: half-length, full-height, PCIe 3.0 x16 (near CPU)
 Slot 2: half-length, full-height, PCIe 2.0 x1
 Slot 3: half-length, full-height, PCIe 2.0 x16 (x4 elec)
 Slot 4: half-length, full-height, PCI 2.3


- Security**
- Security chip: ST33ZP24AR28PVSP for TPM function, TCG 1.2-compliant
 - Padlock loop (in rear for opt padlock; padlock prohibits side cover removal)
 - Security slot (in rear for optional Kensington Microsaver cable; prohibits side cover removal)
 - Power-on password
 - Boot sequence control
 - Boot without keyboard, mouse, diskette
 - Serial port I/O control
 - USB port disablement (front or all)

Type-model*	Processor	Memory type	Memory DIMMs	Graphics	Pre-conf RAID	Storage	Optical	Add-on ports	Discrete ethernet	Power Supply	Rack kit	Windows Server 2012 Preloaded	Base on-site warranty (-year)
70A4003A++	Xeon E3-1226 v3 4C/3.3GHz/8MB/1600MHz/ Intel HD P4600	1600MHz ECC	4GBx1	Integrated	No	Open	Slim DVD±RW	No	No	280W	No	No	1
70A4003J++	Xeon E3-1226 v3 4C/3.3GHz/8MB/1600MHz/ Intel HD P4600	1600MHz ECC	4GBx1	Integrated	No	1x1TB 3.5" SATA	Slim DVD±RW	No	No	280W	No	No	1
70A4003K++	Pentium G3240 2C/3.1GHz/3MB/1333MHz/ Intel HD	1600MHz ECC	4GBx1	Integrated	No	Open	Slim DVD±RW	No	No	280W	No	No	1
70A4003L++	Core i3-4350 2C/3.6GHz/4MB/1600MHz/ Intel HD 4600	1600MHz ECC	8GBx1	Integrated	No	2x1TB 3.5" SATA	Slim DVD±RW	No	No	280W	No	No	1
70A4003M++	Xeon E3-1226 v3 4C/3.3GHz/8MB/1600MHz/ Intel HD P4600	1600MHz ECC	8GBx1	Integrated	No	2x1TB 3.5" SATA	Slim DVD±RW	No	No	280W	No	No	1
70A4003N++	Xeon E3-1226 v3 4C/3.3GHz/8MB/1600MHz/ Intel HD P4600	1600MHz ECC	4GBx1	Integrated	No	2x1TB 3.5" SATA	Slim DVD±RW	No	No	280W	No	No	1

* Model in italics shows that this is a Global Model.
Country Code "++": WE models listed above might not be available in all WE countries

• For detailed ThinkServer TS140 platform specifications, please see [ThinkServer TS140 Platform Specifications sheet](#)

Systems management	EasyStartup, EasyUpdate on all models; Intel Active Management Technology 9 on models with Xeon processor (KVM function needs Intel Xeon E3-12x5 v3 processors)
Chipset	Intel C226 Chipset
Processor	One LGA1150 socket, integrated 2-channel DDR3 memory controller, optional integrated processor graphics on selected processors
Memory type	1600MHz UDIMM, DDR3, ECC, 2-channel capable; 2GB, 4GB, and 8GB ECC UDIMMs are available
Memory DIMM sockets	Four 240-pin DIMM sockets, up to 32GB ECC UDIMM <i>(Actual memory operating speed depends on processor memory controller speed, installed memory speed, and quantity of memory DIMMs)</i>
Graphics	<ul style="list-style-type: none"> Integrated Intel HD Graphics on Xeon E3-12x5 v3, Core i3, and Pentium processors, uses main memory, works along with discrete graphics to support multi-display, enables three display connectors (2 DisplayPort, 1 VGA) on rear ports (detailed information please see Rear ports section) Also supports the following optional discrete graphics adapters: <ul style="list-style-type: none"> NVIDIA Quadro NVS 300, PCIe x16 adapter, 512MB NVIDIA Quadro 600, PCIe x16 adapter, 1GB
Onboard SATA controller	Onboard ThinkServer RAID 100 SATA controller in chipset, SATA 6.0Gb/s, RAID 0, 1, 5, 10 support
Drive bays	Up to four 3.5" hard drive bays (see right)
Storage	3.5" SATA 6.0Gb/s hard drives, 7200 rpm
Optical	Supports DVD-ROM or DVD±RW, 1.6" high or slim, SATA interface
Front ports	Two USB 3.0 (blue)
Rear ports	One VGA and two DisplayPort for models with Intel HD Graphics, two USB 2.0, four USB 3.0 (blue), one serial (9-pin), one ethernet (RJ-45), three analog audio ports (line-in, line-out, mic-in)
Add-on ports (optional)	Supports the following: <ul style="list-style-type: none"> Single Parallel Port PCI Adapter (1xParallel) Single Serial Port PCI Adapter (1xSerial) Dual Serial Ports PCI Adapter (2xSerial PCI) Dual Serial Ports PCIe Adapter (2xSerial PCIe)
Onboard Ethernet	One onboard gigabit ethernet, Intel I217
Discrete Ethernet (optional)	Supports the following: <ul style="list-style-type: none"> Intel Gigabit CT Desktop Adapter (1xGbE, RJ-45) Intel Ethernet Server Adapter I350-T2 (2xGbE, RJ-45) Intel Ethernet Server Adapter I350-T4 (4xGbE, RJ-45)
Keyboard/Mouse	None (use USB port)
Power supply	Supports one of the following, depending on models: <ul style="list-style-type: none"> One fixed 280 watts, autosensing, 85%, 80 PLUS Bronze qualified One fixed 450 watts, autosensing, 92%, 80 PLUS Platinum qualified
Form factor/ Rack-mountable	Tower, rack-mountable to 4U via optional ThinkServer Tower to Rack Shelf Conversion Kit (<i>Option PN: 0C19515</i>)
Mechanical	<ul style="list-style-type: none"> 25-liter, raven black color; metal case (WxDxH) 6.89"x 16.97"x 14.76"/175mm x 431mm x 375mm 28.66 lb (13kg) max configuration
Serviceability	<ul style="list-style-type: none"> Toolless side cover removal Toolless disk and optical drive removal (standard bays) Toolless adapter retention Illuminated front icons
Base warranty	1 or 3-year parts and labor limited warranty ¹
Environmental certifications	<ul style="list-style-type: none"> GREENGUARD® certified Energy Star Server 1.1 qualified/ RoHS-compliant More environmental information and requirements, please see ThinkServer TS140 Platform Specifications sheet

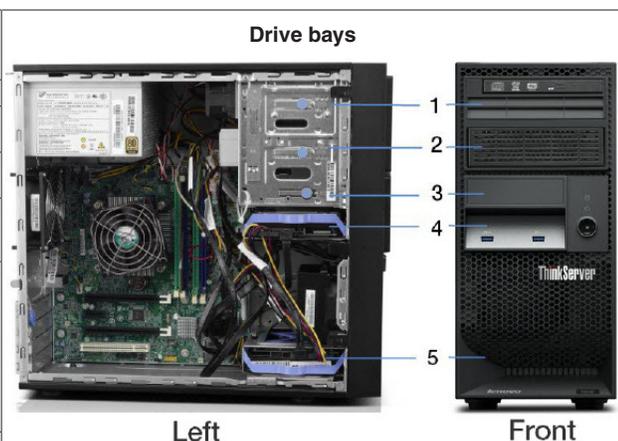

- Left**
- Front**
- Standard 5.25", 1.6" high optical or optional slim optical + 4th 3.5" drive bay
 - Optional 3rd 3.5" drive bay or optional 4th 2.5" drive bay
 - Optional 3rd 2.5" drive bay
 - Standard 3.5"/2.5" primary drive bay
 - Standard 3.5"/2.5" 2nd drive bay

Note:
4x3.5" bays models: Bay 1, 2, 4, 5 are included in models
3x3.5" bays models: Bay 2, 4, 5 are included in models
2x3.5" bays models: Bay 4, 5 are included in models

- Expansion Slots**
- Slot 1: half-length, full-height, PCIe 3.0 x16 (near CPU)
 - Slot 2: half-length, full-height, PCIe 2.0 x1
 - Slot 3: half-length, full-height, PCIe 2.0 x16 (x4 elec)
 - Slot 4: half-length, full-height, PCI 2.3

- Security**
- Security chip: ST33ZP24AR28PVSP for TPM function, TCG 1.2-compliant
 - Padlock loop (in rear for opt padlock; padlock prohibits side cover removal)
 - Security slot (in rear for optional Kensington Microsaver cable; prohibits side cover removal)
 - Power-on password
 - Boot sequence control
 - Boot without keyboard, mouse, diskette
 - Serial port I/O control
 - USB port disablement (front or all)

Type-model*	Processor	Memory type	Memory DIMMs	Graphics	Pre-conf RAID	Storage	Optical	Add-on ports	Discrete ethernet	Power Supply	Rack kit	Windows Server 2012 Preloaded	Base on-site warranty (-year)
70A4003P++	Pentium G3240 2C/3.1GHz/3MB/1333MHz/ Intel HD	1600MHz ECC	4GBx1	Integrated	No	1x1TB 3.5" SATA	Slim DVD±RW	No	No	280W	No	No	1
70A4003Q++	Xeon E3-1226 v3 4C/3.3GHz/8MB/1600MHz/ Intel HD P4600	1600MHz ECC	8GBx2	Integrated	No	2x1TB 3.5" SATA	Slim DVD±RW	No	No	280W	No	No	1
70A4003R++	Core i3-4350 2C/3.6GHz/4MB/1600MHz/ Intel HD 4600	1600MHz ECC	4GBx1	Integrated	No	Open	Slim DVD±RW	No	No	280W	No	No	1
70A4003S++	Pentium G3240 2C/3.1GHz/3MB/1333MHz/ Intel HD	1600MHz ECC	4GBx1	Integrated	No	2x1TB 3.5" SATA	Slim DVD±RW	No	No	280W	No	No	1
70A4003T++	Core i3-4350 2C/3.6GHz/4MB/1600MHz/ Intel HD 4600	1600MHz ECC	4GBx1	Integrated	No	1x1TB 3.5" SATA	Slim DVD±RW	No	No	280W	No	No	1
70A4003U++	Celeron G1850 2C/2.9GHz/2MB/1333MHz/ Intel HD	1600MHz ECC	4GBx1	Integrated	No	Open	Slim DVD±RW	No	No	280W	No	No	1

* Model in italics shows that this is a Global Model.
Country Code "++": WE models listed above might not be available in all WE countries

• For detailed ThinkServer TS140 platform specifications, please see [ThinkServer TS140 Platform Specifications sheet](#)

Systems management	EasyStartup, EasyUpdate on all models; Intel Active Management Technology 9 on models with Xeon processor (KVM function needs Intel Xeon E3-12x5 v3 processors)
Chipset	Intel C226 Chipset
Processor	One LGA1150 socket, integrated 2-channel DDR3 memory controller, optional integrated processor graphics on selected processors
Memory type	1600MHz UDIMM, DDR3, ECC, 2-channel capable; 2GB, 4GB, and 8GB ECC UDIMMs are available
Memory DIMM sockets	Four 240-pin DIMM sockets, up to 32GB ECC UDIMM <i>(Actual memory operating speed depends on processor memory controller speed, installed memory speed, and quantity of memory DIMMs)</i>
Graphics	<ul style="list-style-type: none"> Integrated Intel HD Graphics on Xeon E3-12x5 v3, Core i3, and Pentium processors, uses main memory, works along with discrete graphics to support multi-display, enables three display connectors (2 DisplayPort, 1 VGA) on rear ports (detailed information please see Rear ports section) Also supports the following optional discrete graphics adapters: <ul style="list-style-type: none"> NVIDIA Quadro NVS 300, PCIe x16 adapter, 512MB NVIDIA Quadro 600, PCIe x16 adapter, 1GB
Onboard SATA controller	Onboard ThinkServer RAID 100 SATA controller in chipset, SATA 6.0Gb/s, RAID 0, 1, 5, 10 support
Drive bays	Up to four 3.5" hard drive bays (see right)
Storage	3.5" SATA 6.0Gb/s hard drives, 7200 rpm
Optical	Supports DVD-ROM or DVD±RW, 1.6" high or slim, SATA interface
Front ports	Two USB 3.0 (blue)
Rear ports	One VGA and two DisplayPort for models with Intel HD Graphics, two USB 2.0, four USB 3.0 (blue), one serial (9-pin), one ethernet (RJ-45), three analog audio ports (line-in, line-out, mic-in)
Add-on ports (optional)	Supports the following: <ul style="list-style-type: none"> Single Parallel Port PCI Adapter (1xParallel) Single Serial Port PCI Adapter (1xSerial) Dual Serial Ports PCI Adapter (2xSerial PCI) Dual Serial Ports PCIe Adapter (2xSerial PCIe)
Onboard Ethernet	One onboard gigabit ethernet, Intel I217
Discrete Ethernet (optional)	Supports the following: <ul style="list-style-type: none"> Intel Gigabit CT Desktop Adapter (1xGbE, RJ-45) Intel Ethernet Server Adapter I350-T2 (2xGbE, RJ-45) Intel Ethernet Server Adapter I350-T4 (4xGbE, RJ-45)
Keyboard/Mouse	None (use USB port)
Power supply	Supports one of the following, depending on models: <ul style="list-style-type: none"> One fixed 280 watts, autosensing, 85%, 80 PLUS Bronze qualified One fixed 450 watts, autosensing, 92%, 80 PLUS Platinum qualified
Form factor/ Rack-mountable	Tower, rack-mountable to 4U via optional ThinkServer Tower to Rack Shelf Conversion Kit (<i>Option PN: 0C19515</i>)
Mechanical	<ul style="list-style-type: none"> 25-liter, raven black color; metal case (WxDxH) 6.89"x 16.97"x 14.76"/175mm x 431mm x 375mm 28.66 lb (13kg) max configuration
Serviceability	<ul style="list-style-type: none"> Toolless side cover removal Toolless disk and optical drive removal (standard bays) Toolless adapter retention Illuminated front icons
Base warranty	1 or 3-year parts and labor limited warranty ¹
Environmental certifications	<ul style="list-style-type: none"> GREENGUARD® certified Energy Star Server 1.1 qualified/ RoHS-compliant More environmental information and requirements, please see ThinkServer TS140 Platform Specifications sheet

Drive bays

Left **Front**

1: Standard 5.25", 1.6" high optical or optional slim optical + 4th 3.5" drive bay

2: Optional 3rd 3.5" drive bay or optional 4th 2.5" drive bay

3: Optional 3rd 2.5" drive bay

4: Standard 3.5"/2.5" primary drive bay

5: Standard 3.5"/2.5" 2nd drive bay

Note:
4x3.5" bays models: Bay 1, 2, 4, 5 are included in models
3x3.5" bays models: Bay 2, 4, 5 are included in models
2x3.5" bays models: Bay 4, 5 are included in models

Expansion Slots

Slot 1: half-length, full-height, PCIe 3.0 x16 (near CPU)

Slot 2: half-length, full-height, PCIe 2.0 x1

Slot 3: half-length, full-height, PCIe 2.0 x16 (x4 elec)

Slot 4: half-length, full-height, PCI 2.3

Security

- Security chip: ST33ZP24AR28PVSP for TPM function, TCG 1.2-compliant
- Padlock loop (in rear for opt padlock; padlock prohibits side cover removal)
- Security slot (in rear for optional Kensington Microsaver cable; prohibits side cover removal)
- Power-on password
- Boot sequence control
- Boot without keyboard, mouse, diskette
- Serial port I/O control
- USB port disablement (front or all)

ThinkServer TS140 (70A5) - TopSeller (September 2013)


Product Specifications Reference (PSREF)

Type-model ¹	Processor	Memory type	Memory DIMMs	Graphics	Pre-conf RAID	Storage	Optical	Add-on ports	Discrete ethernet	Power Supply	Rack kit	Windows Server 2012 Preloaded	Base on-site warranty (-year)
70A50000++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	RAID 1	2x500GB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	No	450W	No	Foundation	1
70A50001++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	RAID 1	2x500GB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	No	450W	No	Foundation	3
70A50005++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx2	Intel HD P4600	RAID 1	2x500GB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	No	450W	No	Foundation	3
70A50007++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	RAID 1	2x500GB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	No	450W	No	Essentials	3
70A50008++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	RAID 1	2x1 TB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	No	450W	No	Foundation	3
70A5000H++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	No	Open (4x3.5" Bay)	Slim DVD±RW	No	No	450W	No	No	1
70A5000J++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	No	Open (4x3.5" Bay)	Slim DVD±RW	No	No	450W	No	No	3
70A5000K++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	No	1x500GB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	No	450W	No	No	1

¹ Model in italics shows that this is a Global Model.
Country Code "+": WE models listed above might not be available in all WE countries

• For detailed ThinkServer TS140 platform specifications, please see [ThinkServer TS140 Platform Specifications sheet](#)

Systems management	EasyStartup, EasyUpdate on all models; Intel Active Management Technology 9 on models with Xeon processor (KVM function needs Intel Xeon E3-12x5 v3 processors)
Chipset	Intel C226 Chipset
Processor	One LGA1150 socket, integrated 2-channel DDR3 memory controller, optional integrated processor graphics on selected processors
Memory type	1600MHz UDIMM, DDR3, ECC, 2-channel capable; 2GB, 4GB, and 8GB ECC UDIMMs are available
Memory DIMM sockets	Four 240-pin DIMM sockets, up to 32GB ECC UDIMM (Actual memory operating speed depends on processor memory controller speed, installed memory speed, and quantity of memory DIMMs)
Graphics	<ul style="list-style-type: none"> Integrated Intel HD Graphics on Xeon E3-12x5 v3, Core i3, and Pentium processors, uses main memory, works along with discrete graphics to support multi-display, enables three display connectors (2 DisplayPort, 1 VGA) on rear ports (detailed information please see Rear ports section) Also supports the following optional discrete graphics adapters: <ul style="list-style-type: none"> NVIDIA Quadro NVS 300, PCIe x16 adapter, 512MB NVIDIA Quadro 600, PCIe x16 adapter, 1GB
Onboard SATA controller	Onboard ThinkServer RAID 100 SATA controller in chipset, SATA 6.0Gb/s, RAID 0, 1, 5, 10 support
Drive bays	Up to four 3.5" hard drive bays (see right)
Storage	3.5" SATA 6.0Gb/s hard drives, 7200 rpm
Optical	Supports DVD-ROM or DVD±RW, 1.6" high or slim, SATA interface
Front ports	Two USB 3.0 (blue)
Rear ports	One VGA and two DisplayPort for models with Intel HD Graphics, two USB 2.0, four USB 3.0 (blue), one serial (9-pin), one ethernet (RJ-45), three analog audio ports (line-in, line-out, mic-in)
Add-on ports (optional)	Supports the following: <ul style="list-style-type: none"> Single Parallel Port PCI Adapter (1xParallel) Single Serial Port PCI Adapter (1xSerial) Dual Serial Ports PCI Adapter (2xSerial PCI) Dual Serial Ports PCIe Adapter (2xSerial PCIe)
Onboard Ethernet	One onboard gigabit ethernet, Intel I217
Discrete Ethernet (optional)	Supports the following: <ul style="list-style-type: none"> Intel Gigabit CT Desktop Adapter (1xGbE, RJ-45) Intel Ethernet Server Adapter I350-T2 (2xGbE, RJ-45) Intel Ethernet Server Adapter I350-T4 (4xGbE, RJ-45)
Keyboard/Mouse	None (use USB port)
Power supply	Supports one of the following, depending on models: <ul style="list-style-type: none"> One fixed 280 watts, autosensing, 85%, 80 PLUS Bronze qualified One fixed 450 watts, autosensing, 92%, 80 PLUS Platinum qualified
Form factor/ Rack-mountable	Tower, rack-mountable to 4U via optional ThinkServer Tower to Rack Shelf Conversion Kit (Option PN: 0C19515)
Mechanical	<ul style="list-style-type: none"> 25-liter, raven black color; metal case (WxDxH) 6.89" x 16.97" x 14.76"/175mm x 431mm x 375mm 28.66 lb (13kg) max configuration
Serviceability	<ul style="list-style-type: none"> Toolless side cover removal Toolless disk and optical drive removal (standard bays) Toolless adapter retention Illuminated front icons
Base warranty	1 or 3-year parts and labor limited warranty ¹
Environmental certifications	<ul style="list-style-type: none"> GREENGUARD[®] certified Energy Star Server 1.1 qualified/ RoHS-compliant More environmental information and requirements, please see ThinkServer TS140 Platform Specifications sheet

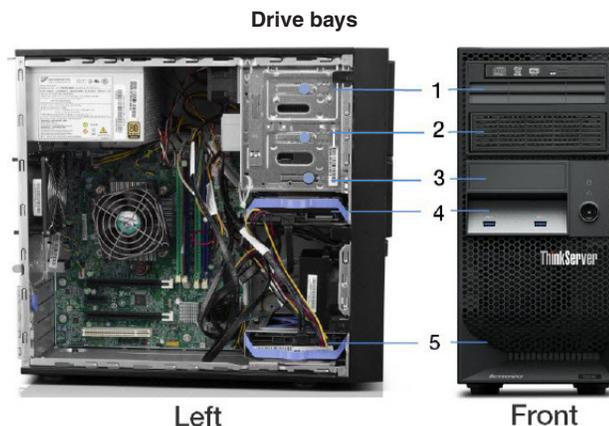

- 1: Standard 5.25", 1.6" high optical or optional slim optical + 4th 3.5" drive bay
 2: Optional 3rd 3.5" drive bay or optional 4th 2.5" drive bay
 3: Optional 3rd 2.5" drive bay
 4: Standard 3.5"/2.5" primary drive bay
 5: Standard 3.5"/2.5" 2nd drive bay

Note:
 4x3.5" bays models: Bay 1, 2, 4, 5 are included in models
 3x3.5" bays models: Bay 2, 4, 5 are included in models
 2x3.5" bays models: Bay 4, 5 are included in models

Expansion Slots

- Slot 1: half-length, full-height, PCIe 3.0 x16 (near CPU)
 Slot 2: half-length, full-height, PCIe 2.0 x1
 Slot 3: half-length, full-height, PCIe 2.0 x16 (x4 elec)
 Slot 4: half-length, full-height, PCI 2.3

Security

- Security chip: ST33ZP24AR28PVSP for TPM function, TCG 1.2-compliant
- Padlock loop (in rear for opt padlock; padlock prohibits side cover removal)
- Security slot (in rear for optional Kensington Microsaver cable; prohibits side cover removal)
- Power-on password
- Boot sequence control
- Boot without keyboard, mouse, diskette
- Serial port I/O control
- USB port disablement (front or all)

See footnotes for important warranty information
 Model(s) announced September 10, 2013


© Lenovo
 (70A5-1E) September 2013

Type-model	Processor	Memory type	Memory DIMMs	Graphics	Pre-conf RAID	Storage	Optical	Add-on ports	Discrete ethernet	Power Supply	Rack kit	Windows Server 2012 Preloaded	Base on-site warranty (-year)
70A5000V++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	RAID 0	2x500GB 3.5" SATA (4x3.5" Bay)	Slim DVD	No	No	450W	No	Foundation	1
70A5000W++	Xeon E3-1245 v3 (4C/3.4GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	RAID 1	2x500GB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	No	450W	No	No	3
70A5000X++	Xeon E3-1245 v3 (4C/3.4GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	RAID 1	2x500GB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	No	450W	No	No	1
70A5000Y++	Xeon E3-1275 v3 (4C/3.5GHz/8MB/1600MHz)	1600MHz ECC	4GBx2	Intel HD P4600	RAID 1	2x1TB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	No	450W	No	No	3
70A50010++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx2	Intel HD P4600	RAID 1	2x500GB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	No	450W	No	No	3
70A50011++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	RAID 1	2x500GB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	No	450W	No	No	3
70A50012++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	RAID 1	2x500GB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	No	450W	No	No	1
70A50013++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	RAID 1	2x1TB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	No	450W	No	No	3
70A50014++	Xeon E3-1275 v3 (4C/3.5GHz/8MB/1600MHz)	1600MHz ECC	4GBx2	Intel HD P4600	No	Open (4x3.5" Bay)	Slim DVD±RW	No	No	450W	No	No	3

* Model in italics shows that this is a Global Model.
Country Code "+": WE models listed above might not be available in all WE countries

• For detailed ThinkServer TS140 platform specifications, please see [ThinkServer TS140 Platform Specifications sheet](#)

Systems management	EasyStartup, EasyUpdate on all models; Intel Active Management Technology 9 on models with Xeon processor (KVM function needs Intel Xeon E3-12x5 v3 processors)
Chipset	Intel C226 Chipset
Processor	One LGA1150 socket, integrated 2-channel DDR3 memory controller, optional integrated processor graphics on selected processors
Memory type	1600MHz UDIMM, DDR3, ECC, 2-channel capable; 2GB, 4GB, and 8GB ECC UDIMMs are available
Memory DIMM sockets	Four 240-pin DIMM sockets, up to 32GB ECC UDIMM (Actual memory operating speed depends on processor memory controller speed, installed memory speed, and quantity of memory DIMMs)
Graphics	<ul style="list-style-type: none"> Integrated Intel HD Graphics on Xeon E3-12x5 v3, Core i3, and Pentium processors, uses main memory, works along with discrete graphics to support multi-display, enables three display connectors (2 DisplayPort, 1 VGA) on rear ports (detailed information please see Rear ports section) Also supports the following optional discrete graphics adapters: <ul style="list-style-type: none"> NVIDIA Quadro NVS 300, PCIe x16 adapter, 512MB NVIDIA Quadro 600, PCIe x16 adapter, 1GB
Onboard SATA controller	Onboard ThinkServer RAID 100 SATA controller in chipset, SATA 6.0Gb/s, RAID 0, 1, 5, 10 support
Drive bays	Up to four 3.5" hard drive bays (see right)
Storage	3.5" SATA 6.0Gb/s hard drives, 7200 rpm
Optical	Supports DVD-ROM or DVD±RW, 1.6" high or slim, SATA interface
Front ports	Two USB 3.0 (blue)
Rear ports	One VGA and two DisplayPort for models with Intel HD Graphics, two USB 2.0, four USB 3.0 (blue), one serial (9-pin), one ethernet (RJ-45), three analog audio ports (line-in, line-out, mic-in)
Add-on ports (optional)	Supports the following: <ul style="list-style-type: none"> Single Parallel Port PCI Adapter (1xParallel) Single Serial Port PCI Adapter (1xSerial) Dual Serial Ports PCI Adapter (2xSerial PCI) Dual Serial Ports PCIe Adapter (2xSerial PCIe)
Onboard Ethernet	One onboard gigabit ethernet, Intel I217
Discrete Ethernet (optional)	Supports the following: <ul style="list-style-type: none"> Intel Gigabit CT Desktop Adapter (1xGbE, RJ-45) Intel Ethernet Server Adapter I350-T2 (2xGbE, RJ-45) Intel Ethernet Server Adapter I350-T4 (4xGbE, RJ-45)
Keyboard/Mouse	None (use USB port)
Power supply	Supports one of the following, depending on models: <ul style="list-style-type: none"> One fixed 280 watts, autosensing, 85%, 80 PLUS Bronze qualified One fixed 450 watts, autosensing, 92%, 80 PLUS Platinum qualified
Form factor/Rack-mountable	Tower, rack-mountable to 4U via optional ThinkServer Tower to Rack Shelf Conversion Kit (Option PN: OC19515)
Mechanical	<ul style="list-style-type: none"> 25-liter, raven black color; metal case (WxDxH) 6.89"x 16.97"x 14.76"/175mm x 431mm x 375mm 28.66 lb (13kg) max configuration
Serviceability	<ul style="list-style-type: none"> Toolless side cover removal Toolless disk and optical drive removal (standard bays) Toolless adapter retention Illuminated front icons
Base warranty	1 or 3-year parts and labor limited warranty ¹
Environmental certifications	<ul style="list-style-type: none"> GREENGUARD® certified Energy Star Server 1.1 qualified/ RoHS-compliant More environmental information and requirements, please see ThinkServer TS140 Platform Specifications sheet

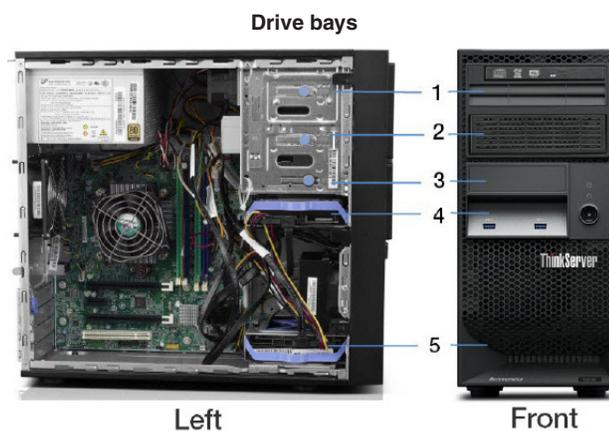

- 1: Standard 5.25", 1.6" high optical or optional slim optical + 4th 3.5" drive bay
- 2: Optional 3rd 3.5" drive bay or optional 4th 2.5" drive bay
- 3: Optional 3rd 2.5" drive bay
- 4: Standard 3.5"/2.5" primary drive bay
- 5: Standard 3.5"/2.5" 2nd drive bay

Note:
4x3.5" bays models: Bay 1, 2, 4, 5 are included in models
3x3.5" bays models: Bay 2, 4, 5 are included in models
2x3.5" bays models: Bay 4, 5 are included in models

Expansion Slots

- Slot 1: half-length, full-height, PCIe 3.0 x16 (near CPU)
- Slot 2: half-length, full-height, PCIe 2.0 x1
- Slot 3: half-length, full-height, PCIe 2.0 x16 (x4 elec)
- Slot 4: half-length, full-height, PCI 2.3

Security


- Security chip: ST33ZP24AR28PVSP for TPM function, TCG 1.2-compliant
- Padlock loop (in rear for opt padlock; padlock prohibits side cover removal)
- Security slot (in rear for optional Kensington Microsaver cable; prohibits side cover removal)
- Power-on password
- Boot sequence control
- Boot without keyboard, mouse, diskette
- Serial port I/O control
- USB port disablement (front or all)

Type-model	Processor	Memory type	Memory DIMMs	Graphics	Pre-conf RAID	Storage	Optical	Add-on ports	Discrete ethernet	Power Supply	Rack kit	Windows Server 2012 Preloaded	Base on-site warranty (-year)
70A5001N++	Xeon E3-1226 v3 4C/3.3GHz/8MB/1600MHz/ Intel HD P4600 Xeon E3-1226 v3	1600MHz ECC	4GBx1	Integrated	No	Open	Slim DVD±RW	No	No	450W	No	No	1
70A5001R++	4C/3.3GHz/8MB/1600MHz/ Intel HD P4600 Xeon E3-1246 v3	1600MHz ECC	4GBx1	Integrated	No	Open	Slim DVD±RW	No	No	450W	No	No	3
70A5001T++	4C/3.5GHz/8MB/1600MHz/ Intel HD P4600 Xeon E3-1246 v3	1600MHz ECC	4GBx1	Integrated	RAID 1	2x1TB 3.5" SATA	Slim DVD±RW	No	No	450W	No	No	3
70A5001U++	4C/3.5GHz/8MB/1600MHz/ Intel HD P4600 Xeon E3-1226 v3	1600MHz ECC	4GBx1	Integrated	RAID 1	2x1TB 3.5" SATA	Slim DVD±RW	No	No	450W	No	No	1
70A5001V++	4C/3.3GHz/8MB/1600MHz/ Intel HD P4600 Xeon E3-1276 v3	1600MHz ECC	4GBx2	Integrated	RAID 1	2x1TB 3.5" SATA	Slim DVD±RW	No	No	450W	No	No	3
70A5001W++	4C/3.6GHz/8MB/1600MHz/ Intel HD P4600 Xeon E3-1226 v3	1600MHz ECC	4GBx2	Integrated	No	Open	Slim DVD±RW	No	No	450W	No	No	3
70A5001Y++	4C/3.3GHz/8MB/1600MHz/ Intel HD P4600	1600MHz ECC	4GBx1	Integrated	RAID 1	2x1TB 3.5" SATA	Slim DVD±RW	No	No	450W	No	No	3

* Model in italics shows that this is a Global Model.
Country Code "++": WE models listed above might not be available in all WE countries

• For detailed ThinkServer TS140 platform specifications, please see [ThinkServer TS140 Platform Specifications sheet](#)

Systems management	EasyStartup, EasyUpdate on all models; Intel Active Management Technology 9 on models with Xeon processor (KVM function needs Intel Xeon E3-12x5 v3 processors)
Chipset	Intel C226 Chipset
Processor	One LGA1150 socket, integrated 2-channel DDR3 memory controller, optional integrated processor graphics on selected processors
Memory type	1600MHz UDIMM, DDR3, ECC, 2-channel capable; 2GB, 4GB, and 8GB ECC UDIMMs are available
Memory DIMM sockets	Four 240-pin DIMM sockets, up to 32GB ECC UDIMM <i>(Actual memory operating speed depends on processor memory controller speed, installed memory speed, and quantity of memory DIMMs)</i>
Graphics	<ul style="list-style-type: none"> Integrated Intel HD Graphics on Xeon E3-12x5 v3, Core i3, and Pentium processors, uses main memory, works along with discrete graphics to support multi-display, enables three display connectors (2 DisplayPort, 1 VGA) on rear ports (detailed information please see Rear ports section) Also supports the following optional discrete graphics adapters: <ul style="list-style-type: none"> NVIDIA Quadro NVS 300, PCIe x16 adapter, 512MB NVIDIA Quadro 600, PCIe x16 adapter, 1GB
Onboard SATA controller	Onboard ThinkServer RAID 100 SATA controller in chipset, SATA 6.0Gb/s, RAID 0, 1, 5, 10 support
Drive bays	Up to four 3.5" hard drive bays (see right)
Storage	3.5" SATA 6.0Gb/s hard drives, 7200 rpm
Optical	Supports DVD-ROM or DVD±RW, 1.6" high or slim, SATA interface
Front ports	Two USB 3.0 (blue)
Rear ports	One VGA and two DisplayPort for models with Intel HD Graphics, two USB 2.0, four USB 3.0 (blue), one serial (9-pin), one ethernet (RJ-45), three analog audio ports (line-in, line-out, mic-in)
Add-on ports (optional)	Supports the following: <ul style="list-style-type: none"> Single Parallel Port PCI Adapter (1xParallel) Single Serial Port PCI Adapter (1xSerial) Dual Serial Ports PCI Adapter (2xSerial PCI) Dual Serial Ports PCIe Adapter (2xSerial PCIe)
Onboard Ethernet	One onboard gigabit ethernet, Intel I217
Discrete Ethernet (optional)	Supports the following: <ul style="list-style-type: none"> Intel Gigabit CT Desktop Adapter (1xGbE, RJ-45) Intel Ethernet Server Adapter I350-T2 (2xGbE, RJ-45) Intel Ethernet Server Adapter I350-T4 (4xGbE, RJ-45)
Keyboard/Mouse	None (use USB port)
Power supply	Supports one of the following, depending on models: <ul style="list-style-type: none"> One fixed 280 watts, autosensing, 85%, 80 PLUS Bronze qualified One fixed 450 watts, autosensing, 92%, 80 PLUS Platinum qualified
Form factor/Rack-mountable	Tower, rack-mountable to 4U via optional ThinkServer Tower to Rack Shelf Conversion Kit (Option PN: 0C19515)
Mechanical	<ul style="list-style-type: none"> 25-liter, raven black color; metal case (WxDxH) 6.89"x 16.97"x 14.76"/175mm x 431mm x 375mm 28.66 lb (13kg) max configuration
Serviceability	<ul style="list-style-type: none"> Toolless side cover removal Toolless disk and optical drive removal (standard bays) Toolless adapter retention Illuminated front icons
Base warranty	1 or 3-year parts and labor limited warranty ¹
Environmental certifications	<ul style="list-style-type: none"> GREENGUARD® certified Energy Star Server 1.1 qualified/ RoHS-compliant More environmental information and requirements, please see ThinkServer TS140 Platform Specifications sheet

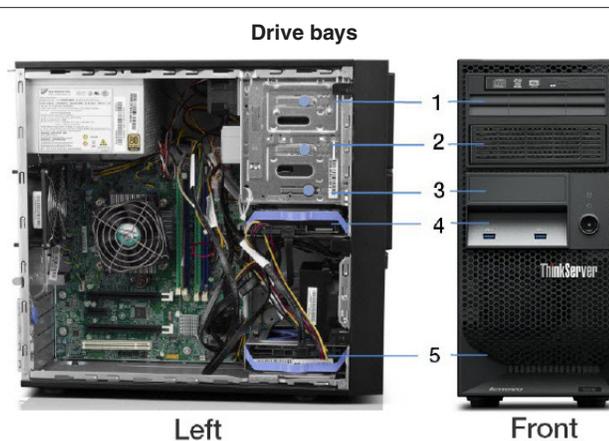

- 1: Standard 5.25", 1.6" high optical or optional slim optical + 4th 3.5" drive bay
- 2: Optional 3rd 3.5" drive bay or optional 4th 2.5" drive bay
- 3: Optional 3rd 2.5" drive bay
- 4: Standard 3.5"/2.5" primary drive bay
- 5: Standard 3.5"/2.5" 2nd drive bay

Note:
4x3.5" bays models: Bay 1, 2, 4, 5 are included in models
3x3.5" bays models: Bay 2, 4, 5 are included in models
2x3.5" bays models: Bay 4, 5 are included in models

<p>Expansion Slots</p> <p>Slot 1: half-length, full-height, PCIe 3.0 x16 (near CPU) Slot 2: half-length, full-height, PCIe 2.0 x1 Slot 3: half-length, full-height, PCIe 2.0 x16 (x4 elec) Slot 4: half-length, full-height, PCI 2.3</p>
<p>Security</p> <ul style="list-style-type: none"> Security chip: ST33ZP24AR28VPSP for TPM function, TCG 1.2-compliant Padlock loop (in rear for opt padlock; padlock prohibits side cover removal) Security slot (in rear for optional Kensington Microsaver cable; prohibits side cover removal) Power-on password Boot sequence control Boot without keyboard, mouse, diskette Serial port I/O control USB port disablement (front or all)


See footnotes for important warranty information
Model(s) announced March 10, 2015

Type-model	Processor	Memory type	Memory DIMMs	Graphics	Pre-conf RAID	Storage	Optical	Add-on ports	Discrete ethernet	Power Supply	Rack kit	Windows Server 2012 Preloaded	Base on-site warranty (-year)
70A50021++	Xeon E3-1276 v3 4C/3.6GHz/8MB/1600MHz/ Intel HD P4600 Xeon E3-1226 v3	1600MHz ECC	4GBx2	Integrated	RAID 1	2x1TB 3.5" SATA	Slim DVD±RW	No	No	450W	No	No	3
70A50022++	4C/3.3GHz/8MB/1600MHz/ Intel HD P4600 Xeon E3-1226 v3	1600MHz ECC	4GBx1	Integrated	No	1x1TB 3.5" SATA	Slim DVD±RW	No	No	450W	No	No	1
70A50024++	4C/3.3GHz/8MB/1600MHz/ Intel HD P4600 Xeon E3-1226 v3	1600MHz ECC	4GBx1	Integrated	RAID 1	2x1TB 3.5" SATA	Slim DVD±RW	No	No	450W	No	No	1
70A50025++	4C/3.3GHz/8MB/1600MHz/ Intel HD P4600 Xeon E3-1226 v3	1600MHz ECC	4GBx1	Integrated	RAID 1	2x1TB 3.5" SATA	Slim DVD±RW	No	No	450W	No	2012 R2 Foundation	3
70A50026++	4C/3.3GHz/8MB/1600MHz/ Intel HD P4600 Xeon E3-1226 v3	1600MHz ECC	4GBx2	Integrated	RAID 1	2x1TB 3.5" SATA	Slim DVD±RW	No	No	450W	No	2012 R2 Foundation	3
70A50027++	4C/3.3GHz/8MB/1600MHz/ Intel HD P4600 Xeon E3-1226 v3	1600MHz ECC	4GBx1	Integrated	RAID 1	2x1TB 3.5" SATA	Slim DVD±RW	No	No	450W	No	2012 R2 Foundation	1
70A50028++	4C/3.3GHz/8MB/1600MHz/ Intel HD P4600	1600MHz ECC	4GBx1	Integrated	RAID 1	2x1TB 3.5" SATA	Slim DVD±RW	No	No	450W	No	2012 R2 Essentials	3

* Model in italics shows that this is a Global Model.
Country Code "++": WE models listed above might not be available in all WE countries

• For detailed ThinkServer TS140 platform specifications, please see [ThinkServer TS140 Platform Specifications sheet](#)

Systems management	EasyStartup, EasyUpdate on all models; Intel Active Management Technology 9 on models with Xeon processor (KVM function needs Intel Xeon E3-12x5 v3 processors)
Chipset	Intel C226 Chipset
Processor	One LGA1150 socket, integrated 2-channel DDR3 memory controller, optional integrated processor graphics on selected processors
Memory type	1600MHz UDIMM, DDR3, ECC, 2-channel capable; 2GB, 4GB, and 8GB ECC UDIMMs are available
Memory DIMM sockets	Four 240-pin DIMM sockets, up to 32GB ECC UDIMM <i>(Actual memory operating speed depends on processor memory controller speed, installed memory speed, and quantity of memory DIMMs)</i>
Graphics	<ul style="list-style-type: none"> Integrated Intel HD Graphics on Xeon E3-12x5 v3, Core i3, and Pentium processors, uses main memory, works along with discrete graphics to support multi-display, enables three display connectors (2 DisplayPort, 1 VGA) on rear ports (detailed information please see Rear ports section) Also supports the following optional discrete graphics adapters: <ul style="list-style-type: none"> NVIDIA Quadro NVS 300, PCIe x16 adapter, 512MB NVIDIA Quadro 600, PCIe x16 adapter, 1GB
Onboard SATA controller	Onboard ThinkServer RAID 100 SATA controller in chipset, SATA 6.0Gb/s, RAID 0, 1, 5, 10 support
Drive bays	Up to four 3.5" hard drive bays (see right)
Storage	3.5" SATA 6.0Gb/s hard drives, 7200 rpm
Optical	Supports DVD-ROM or DVD±RW, 1.6" high or slim, SATA interface
Front ports	Two USB 3.0 (blue)
Rear ports	One VGA and two DisplayPort for models with Intel HD Graphics, two USB 2.0, four USB 3.0 (blue), one serial (9-pin), one ethernet (RJ-45), three analog audio ports (line-in, line-out, mic-in)
Add-on ports (optional)	Supports the following: <ul style="list-style-type: none"> Single Parallel Port PCI Adapter (1xParallel) Single Serial Port PCI Adapter (1xSerial) Dual Serial Ports PCI Adapter (2xSerial PCI) Dual Serial Ports PCIe Adapter (2xSerial PCIe)
Onboard Ethernet	One onboard gigabit ethernet, Intel I217
Discrete Ethernet (optional)	Supports the following: <ul style="list-style-type: none"> Intel Gigabit CT Desktop Adapter (1xGbE, RJ-45) Intel Ethernet Server Adapter I350-T2 (2xGbE, RJ-45) Intel Ethernet Server Adapter I350-T4 (4xGbE, RJ-45)
Keyboard/Mouse	None (use USB port)
Power supply	Supports one of the following, depending on models: <ul style="list-style-type: none"> One fixed 280 watts, autosensing, 85%, 80 PLUS Bronze qualified One fixed 450 watts, autosensing, 92%, 80 PLUS Platinum qualified
Form factor/Rack-mountable	Tower, rack-mountable to 4U via optional ThinkServer Tower to Rack Shelf Conversion Kit (Option PN: 0C19515)
Mechanical	<ul style="list-style-type: none"> 25-liter, raven black color; metal case (WxDxH) 6.89"x 16.97"x 14.76"/175mm x 431mm x 375mm 28.66 lb (13kg) max configuration
Serviceability	<ul style="list-style-type: none"> Toolless side cover removal Toolless disk and optical drive removal (standard bays) Toolless adapter retention Illuminated front icons
Base warranty	1 or 3-year parts and labor limited warranty ¹
Environmental certifications	<ul style="list-style-type: none"> GREENGUARD® certified Energy Star Server 1.1 qualified/ RoHS-compliant More environmental information and requirements, please see ThinkServer TS140 Platform Specifications sheet

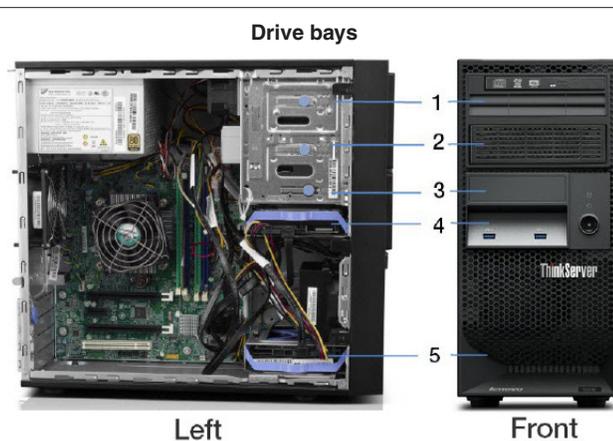

- 1: Standard 5.25", 1.6" high optical or optional slim optical + 4th 3.5" drive bay
- 2: Optional 3rd 3.5" drive bay or optional 4th 2.5" drive bay
- 3: Optional 3rd 2.5" drive bay
- 4: Standard 3.5"/2.5" primary drive bay
- 5: Standard 3.5"/2.5" 2nd drive bay

Note:
4x3.5" bays models: Bay 1, 2, 4, 5 are included in models
3x3.5" bays models: Bay 2, 4, 5 are included in models
2x3.5" bays models: Bay 4, 5 are included in models

<p>Expansion Slots</p> <p>Slot 1: half-length, full-height, PCIe 3.0 x16 (near CPU) Slot 2: half-length, full-height, PCIe 2.0 x1 Slot 3: half-length, full-height, PCIe 2.0 x16 (x4 elec) Slot 4: half-length, full-height, PCI 2.3</p>
<p>Security</p> <ul style="list-style-type: none"> Security chip: ST33ZP24AR28VPSP for TPM function, TCG 1.2-compliant Padlock loop (in rear for opt padlock; padlock prohibits side cover removal) Security slot (in rear for optional Kensington Microsaver cable; prohibits side cover removal) Power-on password Boot sequence control Boot without keyboard, mouse, diskette Serial port I/O control USB port disablement (front or all)


See footnotes for important warranty information
Model(s) announced March 10, 2015

Type-model*	Processor	Memory type	Memory DIMMs	Graphics	Pre-conf RAID	Storage (Drive bays)	Optical	Add-on ports	Discrete ethernet	Power Supply	Rack kit	Windows Server 2012 Preloaded	Base on-site warranty (-year)
70A00003++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	2GBx4	Intel HD P4600	RAID 0	4x500GB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	1xParallel	1xI350-T2	280W	No	Foundation	1
70A00006++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	2GBx4	Intel HD P4600	RAID 0	4x500GB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	2xIntel CT	280W	No	Foundation	1
70A00007++	Xeon E3-1230 v3 (4C/3.3GHz/8MB/1600MHz)	1600MHz ECC	4GBx3	NVS 300	RAID 1	2x4TB 3.5" SATA (2x3.5" Bay)	DVD±RW	No	1xI350-T4	280W	No	No	1
70A0001B++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	2GBx4	Intel HD P4600	RAID 0	4x500GB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	1xParallel	1xI350-T2	280W	No	Foundation	1

* Model in *italics* shows that this is a Global Model.
Country Code "+": WE models listed above might not be available in all WE countries

• For detailed ThinkServer TS140 platform specifications, please see [ThinkServer TS140 Platform Specifications sheet](#)

Systems management	EasyStartup, EasyUpdate on all models; Intel Active Management Technology 9 on models with Xeon processor (KVM function needs Intel Xeon E3-12x5 v3 processors)
Chipset	Intel C226 Chipset
Processor	One LGA1150 socket, integrated 2-channel DDR3 memory controller, optional integrated processor graphics on selected processors
Memory type	1600MHz UDIMM, DDR3, ECC, 2-channel capable; 2GB, 4GB, and 8GB ECC UDIMMs are available
Memory DIMM sockets	Four 240-pin DIMM sockets, up to 32GB ECC UDIMM (Actual memory operating speed depends on processor memory controller speed, installed memory speed, and quantity of memory DIMMs)
Graphics	<ul style="list-style-type: none"> Integrated Intel HD Graphics on Xeon E3-12x5 v3, Core i3, and Pentium processors, uses main memory, works along with discrete graphics to support multi-display, enables three display connectors (2 DisplayPort, 1 VGA) on rear ports (detailed information please see Rear ports section) Also supports the following optional discrete graphics adapters: <ul style="list-style-type: none"> NVIDIA Quadro NVS 300, PCIe x16 adapter, 512MB NVIDIA Quadro 600, PCIe x16 adapter, 1GB
Onboard SATA controller	Onboard ThinkServer RAID 100 SATA controller in chipset, SATA 6.0Gb/s, RAID 0, 1, 5, 10 support
Drive bays	Up to four 3.5" hard drive bays (see right)
Storage	3.5" SATA 6.0Gb/s hard drives, 7200 rpm
Optical	Supports DVD-ROM or DVD±RW, 1.6" high or slim, SATA interface
Front ports	Two USB 3.0 (blue)
Rear ports	One VGA and two DisplayPort for models with Intel HD Graphics, two USB 2.0, four USB 3.0 (blue), one serial (9-pin), one ethernet (RJ-45), three analog audio ports (line-in, line-out, mic-in)
Add-on ports (optional)	Supports the following: <ul style="list-style-type: none"> Single Parallel Port PCI Adapter (1xParallel) Single Serial Port PCI Adapter (1xSerial) Dual Serial Ports PCI Adapter (2xSerial PCI) Dual Serial Ports PCIe Adapter(2xSerial PCIe)
Onboard Ethernet	One onboard gigabit ethernet, Intel I217
Discrete Ethernet (optional)	Supports the following: <ul style="list-style-type: none"> Intel Gigabit CT Desktop Adapter (1xGbE, RJ-45) Intel Ethernet Server Adapter I350-T2 (2xGbE, RJ-45) Intel Ethernet Server Adapter I350-T4 (4xGbE, RJ-45)
Keyboard/Mouse	None (use USB port)
Power supply	Supports one of the following, depending on models: <ul style="list-style-type: none"> One fixed 280 watts, autosensing, 85%, 80 PLUS Bronze qualified One fixed 450 watts, autosensing, 92%, 80 PLUS Platinum qualified
Form factor/ Rack-mountable	Tower, rack-mountable to 4U via optional ThinkServer Tower to Rack Shelf Conversion Kit (Option PN: 0C19515)
Mechanical	<ul style="list-style-type: none"> 25-liter, raven black color; metal case (WxDxH) 6.89"x 16.97"x 14.76"/175mm x 431mm x 375mm 28.66 lb (13kg) max configuration
Serviceability	<ul style="list-style-type: none"> Toolless side cover removal Toolless disk and optical drive removal (standard bays) Toolless adapter retention Illuminated front icons
Base warranty	1 or 3-year parts and labor limited warranty ¹
Environmental certifications	<ul style="list-style-type: none"> GREENGUARD® certified Energy Star Server 1.1 qualified/ RoHS-compliant More environmental information and requirements, please see ThinkServer TS140 Platform Specifications sheet

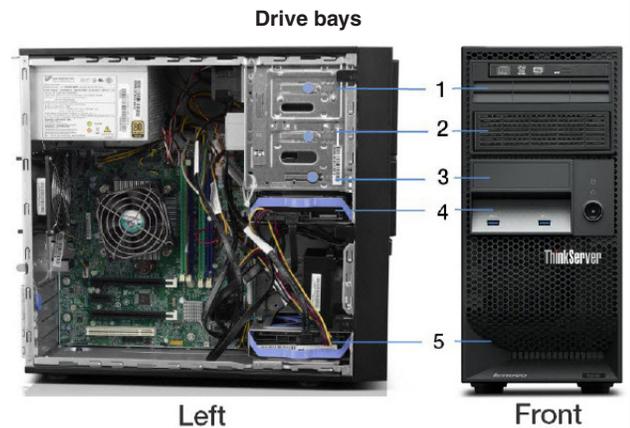

- 1: Standard 5.25", 1.6" high optical or optional slim optical + 4th 3.5" drive bay
 2: Optional 3rd 3.5" drive bay or optional 4th 2.5" drive bay
 3: Optional 3rd 2.5" drive bay
 4: Standard 3.5"/2.5" primary drive bay
 5: Standard 3.5"/2.5" 2nd drive bay

Note:
 4x3.5" bays models: Bay 1, 2, 4, 5 are included in models
 3x3.5" bays models: Bay 2, 4, 5 are included in models
 2x3.5" bays models: Bay 4, 5 are included in models

Expansion Slots

- Slot 1: half-length, full-height, PCIe 3.0 x16 (near CPU)
 Slot 2: half-length, full-height, PCIe 2.0 x1
 Slot 3: half-length, full-height, PCIe 2.0 x16 (x4 elec)
 Slot 4: half-length, full-height, PCI 2.3

Security


- Security chip: ST33ZP24AR28PVSP for TPM function, TCG 1.2-compliant
- Padlock loop (in rear for opt padlock; padlock prohibits side cover removal)
- Security slot (in rear for optional Kensington Microsaver cable; prohibits side cover removal)
- Power-on password
- Boot sequence control
- Boot without keyboard, mouse, diskette
- Serial port I/O control
- USB port disablement (front or all)

Type-model*	Processor	Memory type	Memory DIMMs	Graphics	Pre-conf RAID	Storage (Drive bays)	Optical	Add-on ports	Discrete ethernet	Power Supply	Rack kit	Windows Server 2012 Preloaded	Base on-site warranty (-year)
70A10000++	Xeon E3-1280 v3 (4C/3.6GHz/8MB/1600MHz)	1600MHz ECC	8GBx4	NVS 300	RAID 10	4x4TB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	1xParallel	2xIntel CT	450W	No	Foundation	1
70A10001++	Xeon E3-1280 v3 (4C/3.6GHz/8MB/1600MHz)	1600MHz ECC	8GBx4	Quadro 600	RAID 10	4x2TB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	No	1xIntel CT	450W	No	Foundation	1
70A10002++	Xeon E3-1285 v3 (4C/3.6GHz/8MB/1600MHz)	1600MHz ECC	4GBx4	Intel HD P4700	RAID 5	3x3TB 3.5" SATA (3x3.5" Bay)	DVD±RW	No	I350-T4+ Intel CT	450W	No	No	1
70A10005++	Xeon E3-1280 v3 (4C/3.6GHz/8MB/1600MHz)	1600MHz ECC	8GBx4	NVS 300	RAID 10	4x4TB 3.5" SATA (4x3.5" Bay)	Slim DVD±RW	1xParallel	2xIntel CT	450W	No	Foundation	1

* Model in italics shows that this is a Global Model.
Country Code "++": WE models listed above might not be available in all WE countries

• For detailed ThinkServer TS140 platform specifications, please see [ThinkServer TS140 Platform Specifications sheet](#)

Systems management	EasyStartup, EasyUpdate on all models; Intel Active Management Technology 9 on models with Xeon processor (KVM function needs Intel Xeon E3-12x5 v3 processors)
Chipset	Intel C226 Chipset
Processor	One LGA1150 socket, integrated 2-channel DDR3 memory controller, optional integrated processor graphics on selected processors
Memory type	1600MHz UDIMM, DDR3, ECC, 2-channel capable; 2GB, 4GB, and 8GB ECC UDIMMs are available
Memory DIMM sockets	Four 240-pin DIMM sockets, up to 32GB ECC UDIMM (Actual memory operating speed depends on processor memory controller speed, installed memory speed, and quantity of memory DIMMs)
Graphics	<ul style="list-style-type: none"> Integrated Intel HD Graphics on Xeon E3-12x5 v3, Core i3, and Pentium processors, uses main memory, works along with discrete graphics to support multi-display, enables three display connectors (2 DisplayPort, 1 VGA) on rear ports (detailed information please see Rear ports section) Also supports the following optional discrete graphics adapters: <ul style="list-style-type: none"> NVIDIA Quadro NVS 300, PCIe x16 adapter, 512MB NVIDIA Quadro 600, PCIe x16 adapter, 1GB
Onboard SATA controller	Onboard ThinkServer RAID 100 SATA controller in chipset, SATA 6.0Gb/s, RAID 0, 1, 5, 10 support
Drive bays	Up to four 3.5" hard drive bays (see right)
Storage	3.5" SATA 6.0Gb/s hard drives, 7200 rpm
Optical	Supports DVD-ROM or DVD±RW, 1.6" high or slim, SATA interface
Front ports	Two USB 3.0 (blue)
Rear ports	One VGA and two DisplayPort for models with Intel HD Graphics, two USB 2.0, four USB 3.0 (blue), one serial (9-pin), one ethernet (RJ-45), three analog audio ports (line-in, line-out, mic-in)
Add-on ports (optional)	Supports the following: <ul style="list-style-type: none"> Single Parallel Port PCI Adapter (1xParallel) Single Serial Port PCI Adapter (1xSerial) Dual Serial Ports PCI Adapter (2xSerial PCI) Dual Serial Ports PCIe Adapter(2xSerial PCIe)
Onboard Ethernet	One onboard gigabit ethernet, Intel I217
Discrete Ethernet (optional)	Supports the following: <ul style="list-style-type: none"> Intel Gigabit CT Desktop Adapter (1xGbE, RJ-45) Intel Ethernet Server Adapter I350-T2 (2xGbE, RJ-45) Intel Ethernet Server Adapter I350-T4 (4xGbE, RJ-45)
Keyboard/Mouse	None (use USB port)
Power supply	Supports one of the following, depending on models: <ul style="list-style-type: none"> One fixed 280 watts, autosensing, 85%, 80 PLUS Bronze qualified One fixed 450 watts, autosensing, 92%, 80 PLUS Platinum qualified
Form factor/ Rack-mountable	Tower, rack-mountable to 4U via optional ThinkServer Tower to Rack Shelf Conversion Kit (Option PN: 0C19515)
Mechanical	<ul style="list-style-type: none"> 25-liter, raven black color; metal case (WxDxH) 6.89"x 16.97"x 14.76"/175mm x 431mm x 375mm 28.66 lb (13kg) max configuration
Serviceability	<ul style="list-style-type: none"> Toolless side cover removal Toolless disk and optical drive removal (standard bays) Toolless adapter retention Illuminated front icons
Base warranty	1 or 3-year parts and labor limited warranty ¹
Environmental certifications	<ul style="list-style-type: none"> GREENGUARD® certified Energy Star Server 1.1 qualified/ RoHS-compliant More environmental information and requirements, please see ThinkServer TS140 Platform Specifications sheet

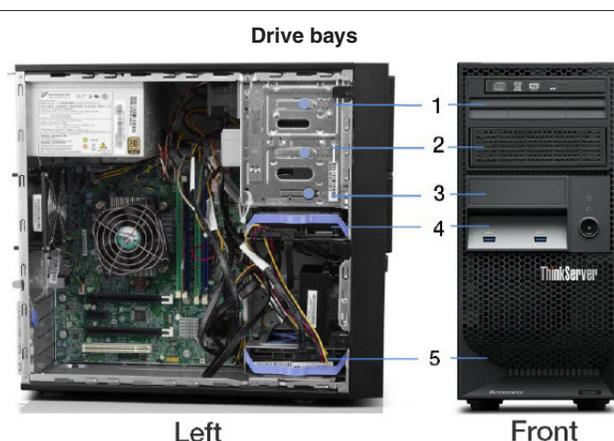

- 1: Standard 5.25", 1.6" high optical or optional slim optical + 4th 3.5" drive bay
 2: Optional 3rd 3.5" drive bay or optional 4th 2.5" drive bay
 3: Optional 3rd 2.5" drive bay
 4: Standard 3.5"/2.5" primary drive bay
 5: Standard 3.5"/2.5" 2nd drive bay

Note:
 4x3.5" bays models: Bay 1, 2, 4, 5 are included in models
 3x3.5" bays models: Bay 2, 4, 5 are included in models
 2x3.5" bays models: Bay 4, 5 are included in models


Expansion Slots

- Slot 1: half-length, full-height, PCIe 3.0 x16 (near CPU)
 Slot 2: half-length, full-height, PCIe 2.0 x1
 Slot 3: half-length, full-height, PCIe 2.0 x16 (x4 elec)
 Slot 4: half-length, full-height, PCI 2.3

Security

- Security chip: ST33ZP24AR28PVSP for TPM function, TCG 1.2-compliant
- Padlock loop (in rear for opt padlock; padlock prohibits side cover removal)
- Security slot (in rear for optional Kensington Microsaver cable; prohibits side cover removal)
- Power-on password
- Boot sequence control
- Boot without keyboard, mouse, diskette
- Serial port I/O control
- USB port disablement (front or all)

ThinkServer TS440 - Overview

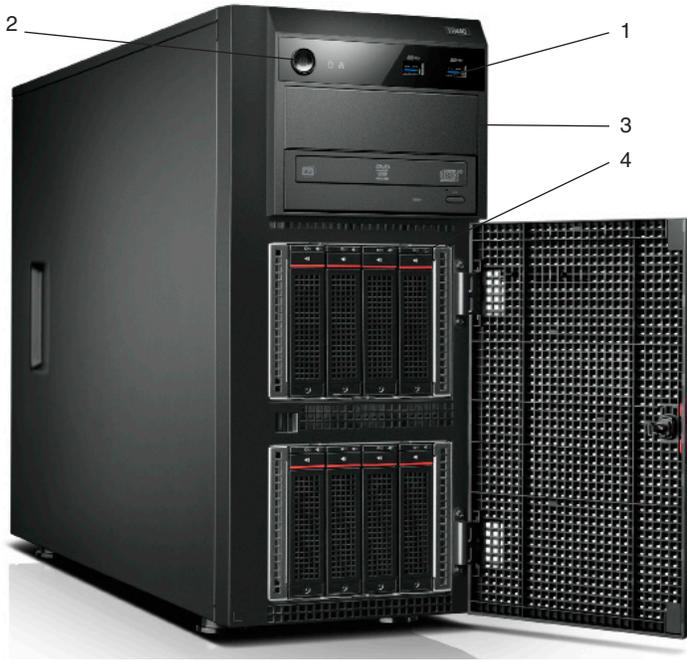


Front view

1. Front I/O: 2 USB 3.0 (blue)
2. Power Button
3. Two 5.25" optical drive bays (up to one optical on models with onboard SATA controller)
4. Eight 3.5" hot-swap drive bays (Also supports:
4 x 3.5" direct cable bays,
or 4 x 3.5" hot-swap bays,
or 8 x 2.5" hot-swap bays)

Rear view

5. Power Supply:
Up to two redundant 450 watts 80 PLUS Gold or
fixed one 450 watts 80 PLUS Platinum
6. Rear I/O: 2 USB 2.0
4 USB 3.0 (blue)
1 serial (9-pin)
1 RJ-45 (GbE)
1 VGA (for Intel HD Graphics)
7. 1 PCIe 3.0 x16 (with optional RAID adapter)
1 PCIe 2.0 x1
1 PCIe 2.0 x16 (x4 elec, with optional ethernet adapter)
1 PCI

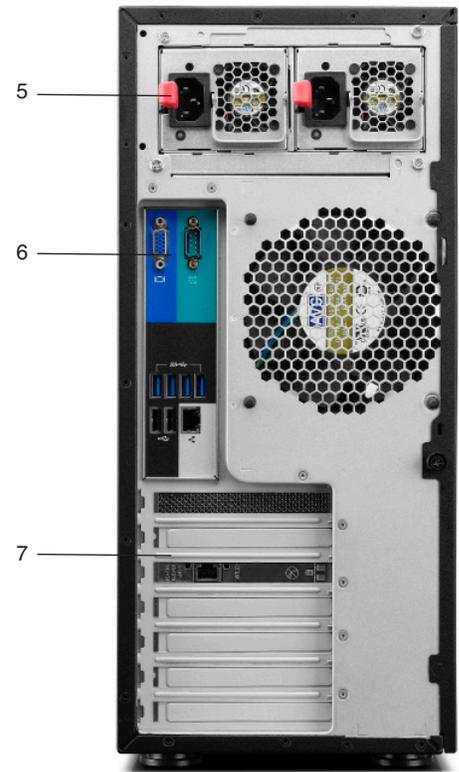

Internal

- One LGA1150 socket, supports one processor from Intel Xeon E3-1200 v3 family
- 4 DIMM sockets, supports up to 32GB ECC UDIMM memory
- Up to eight hard drive bays

Mechanical

- Tower, business black color, metal case
- Rack-mountable to 5U
- W x H (without foot) x D = 7.68"/195mm x 16.9"/430mm x 23.4"/595mm
- 61.7 lb (28kg) max configuration

ThinkServer TS440 Platform Specifications - I of III

Components	Specification																																																																																										
Form factor	Tower, rack-mountable to 5U via ThinkServer Tower to Rack Shelf Conversion Kit (<i>Option PN: 0C19515</i>)																																																																																										
Chipset	Intel C226 Chipset																																																																																										
Systems management	<ul style="list-style-type: none"> Intel Active Management Technology 9 (KVM function needs Intel Xeon E3-12X5 v3 processors) EasyStartup EasyUpdate 																																																																																										
Processor	<p>One LGA1150 socket, supports one processor from Intel Xeon E3-1200 v3 family, integrated 2-channel DDR3 memory controller, optional integrated processor graphics on Xeon E5-12X5 v3 processors.</p> <p>The following processors are supported:</p> <table border="1"> <thead> <tr> <th>Processor Number</th> <th># of Cores</th> <th># of Threads</th> <th>Clock Speed</th> <th>Max Turbo Frequency</th> <th>Cache</th> <th>Memory speed</th> <th>ECC Memory Supported</th> <th>Processor Graphics</th> </tr> </thead> <tbody> <tr> <td>Xeon E3-1285 v3</td> <td>4</td> <td>8</td> <td>3.6 GHz</td> <td>4 GHz</td> <td>8 MB</td> <td>DDR3-1600</td> <td>Yes</td> <td>Intel HD Graphics P4700</td> </tr> <tr> <td>Xeon E3-1280 v3</td> <td>4</td> <td>8</td> <td>3.6 GHz</td> <td>4 GHz</td> <td>8 MB</td> <td>DDR3-1600</td> <td>Yes</td> <td></td> </tr> <tr> <td>Xeon E3-1275 v3</td> <td>4</td> <td>8</td> <td>3.5 GHz</td> <td>3.9 GHz</td> <td>8 MB</td> <td>DDR3-1600</td> <td>Yes</td> <td>Intel HD Graphics P4600</td> </tr> <tr> <td>Xeon E3-1270 v3</td> <td>4</td> <td>8</td> <td>3.5 GHz</td> <td>3.9 GHz</td> <td>8 MB</td> <td>DDR3-1600</td> <td>Yes</td> <td></td> </tr> <tr> <td>Xeon E3-1245 v3</td> <td>4</td> <td>8</td> <td>3.4 GHz</td> <td>3.8 GHz</td> <td>8 MB</td> <td>DDR3-1600</td> <td>Yes</td> <td>Intel HD Graphics P4600</td> </tr> <tr> <td>Xeon E3-1240 v3</td> <td>4</td> <td>8</td> <td>3.4 GHz</td> <td>3.8 GHz</td> <td>8 MB</td> <td>DDR3-1600</td> <td>Yes</td> <td></td> </tr> <tr> <td>Xeon E3-1230 v3</td> <td>4</td> <td>8</td> <td>3.3 GHz</td> <td>3.7 GHz</td> <td>8 MB</td> <td>DDR3-1600</td> <td>Yes</td> <td></td> </tr> <tr> <td>Xeon E3-1225 v3</td> <td>4</td> <td>4</td> <td>3.2 GHz</td> <td>3.6 GHz</td> <td>8 MB</td> <td>DDR3-1600</td> <td>Yes</td> <td>Intel HD Graphics P4600</td> </tr> <tr> <td>Xeon E3-1220 v3</td> <td>4</td> <td>4</td> <td>3.1 GHz</td> <td>3.5 GHz</td> <td>8 MB</td> <td>DDR3-1600</td> <td>Yes</td> <td></td> </tr> </tbody> </table> <p><i>Notes:</i> All information is provided by Intel and may be changed at any time without notice. The information herein is provided "as-is". Intel may update this information in non-scheduled. For latest information, please see http://ark.intel.com/</p>	Processor Number	# of Cores	# of Threads	Clock Speed	Max Turbo Frequency	Cache	Memory speed	ECC Memory Supported	Processor Graphics	Xeon E3-1285 v3	4	8	3.6 GHz	4 GHz	8 MB	DDR3-1600	Yes	Intel HD Graphics P4700	Xeon E3-1280 v3	4	8	3.6 GHz	4 GHz	8 MB	DDR3-1600	Yes		Xeon E3-1275 v3	4	8	3.5 GHz	3.9 GHz	8 MB	DDR3-1600	Yes	Intel HD Graphics P4600	Xeon E3-1270 v3	4	8	3.5 GHz	3.9 GHz	8 MB	DDR3-1600	Yes		Xeon E3-1245 v3	4	8	3.4 GHz	3.8 GHz	8 MB	DDR3-1600	Yes	Intel HD Graphics P4600	Xeon E3-1240 v3	4	8	3.4 GHz	3.8 GHz	8 MB	DDR3-1600	Yes		Xeon E3-1230 v3	4	8	3.3 GHz	3.7 GHz	8 MB	DDR3-1600	Yes		Xeon E3-1225 v3	4	4	3.2 GHz	3.6 GHz	8 MB	DDR3-1600	Yes	Intel HD Graphics P4600	Xeon E3-1220 v3	4	4	3.1 GHz	3.5 GHz	8 MB	DDR3-1600	Yes	
Processor Number	# of Cores	# of Threads	Clock Speed	Max Turbo Frequency	Cache	Memory speed	ECC Memory Supported	Processor Graphics																																																																																			
Xeon E3-1285 v3	4	8	3.6 GHz	4 GHz	8 MB	DDR3-1600	Yes	Intel HD Graphics P4700																																																																																			
Xeon E3-1280 v3	4	8	3.6 GHz	4 GHz	8 MB	DDR3-1600	Yes																																																																																				
Xeon E3-1275 v3	4	8	3.5 GHz	3.9 GHz	8 MB	DDR3-1600	Yes	Intel HD Graphics P4600																																																																																			
Xeon E3-1270 v3	4	8	3.5 GHz	3.9 GHz	8 MB	DDR3-1600	Yes																																																																																				
Xeon E3-1245 v3	4	8	3.4 GHz	3.8 GHz	8 MB	DDR3-1600	Yes	Intel HD Graphics P4600																																																																																			
Xeon E3-1240 v3	4	8	3.4 GHz	3.8 GHz	8 MB	DDR3-1600	Yes																																																																																				
Xeon E3-1230 v3	4	8	3.3 GHz	3.7 GHz	8 MB	DDR3-1600	Yes																																																																																				
Xeon E3-1225 v3	4	4	3.2 GHz	3.6 GHz	8 MB	DDR3-1600	Yes	Intel HD Graphics P4600																																																																																			
Xeon E3-1220 v3	4	4	3.1 GHz	3.5 GHz	8 MB	DDR3-1600	Yes																																																																																				
Memory type	1600MHz UDIMM, DDR3, ECC, 2-channel capable; 2GB, 4GB, and 8GB ECC UDIMMs are available																																																																																										
Memory DIMM sockets	Four 240-pin DIMM sockets																																																																																										
Memory capacity	Up to 32GB (8GBx4)																																																																																										
Memory protection	ECC																																																																																										
Additional memory disclaimers	<ul style="list-style-type: none"> Actual memory operating speed depends on processor memory controller speed, installed memory speed, and quantity of memory DIMMs 																																																																																										
Onboard SATA controller	Onboard ThinkServer RAID 100 SATA controller in chipset, SATA 6.0Gb/s, RAID 0, 1, 5, 10 support																																																																																										
Discreted SATA/SAS controller (optional)	<p>Supports the following:</p> <ul style="list-style-type: none"> ThinkServer RAID 500 adapter (LSI SAS 9240-8i), PCI Express bus, SATA 6.0Gb/s, SAS 6.0Gb/s, RAID 0, 1, 10 support; optional upgrade key for ThinkServer RAID 500 adapter, add RAID 5, 50 support ThinkServer RAID 700 adapter (LSI SAS 9260-8i), PCI Express bus, SATA 6.0Gb/s, SAS 6.0Gb/s, RAID 0, 1, 5, 6, 10, 50, 60 support; optional Intelligent Battery Backup Unit (iBBU08) for ThinkServer RAID 700 adapter <p><i>Notes:</i> RAID 50 and 60 are supported on 8 hard drive bays models only</p>																																																																																										
Drive bays	<p>Supports two 5.25" optical bays, up to two optical drives (up to one optical on models with onboard SATA controller); supports up to eight hard drive bays, one of the following are supported:</p> <ul style="list-style-type: none"> 4 x 3.5" DC: Four 3.5" hard drive bays, no hot-swap, direct cable (onboard RAID 100 controller, SATA only) 4 x 3.5" HS: Four 3.5" hot-swap hard drive bays (onboard RAID 100 controller for SATA, discrete RAID adapter for SATA/SAS) 8 x 3.5" HS: Eight 3.5" hot-swap hard drive bays (needs discreted RAID adapter, supports SATA/SAS) 8 x 2.5" HS: Eight 2.5" hot-swap hard drive bays (needs discreted RAID adapter, supports SATA/SAS) <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>8 x 2.5" hot-swap</p> </div> <div style="text-align: center;">  <p>4 x 3.5" hot-swap</p> </div> <div style="text-align: center;">  <p>8 x 3.5" hot-swap</p> </div> </div> <p><i>Notes:</i> Hard drive bays are behind front cover</p>																																																																																										

ThinkServer TS440 Platform Specifications - II of III

Components	Specification		
Optical	Supports DVD±RW or DVD ROM, 1.6" high, SATA interface		
Graphics	<ul style="list-style-type: none"> Integrated Intel HD Graphics on Xeon E3-12X5 v3 processors, uses main memory, works along with discrete graphics to support multi-display, enables VGA connector on rear (detailed information please see Rear ports section) Also supports the following optional discrete graphics adapters: <ul style="list-style-type: none"> NVIDIA NVS 300, PCIe x1 adapter, 512MB 		
Front ports	Two USB 3.0 (blue)		
Rear ports	One VGA for models with Intel HD Graphics, two USB 2.0, four USB 3.0 (blue), one serial (9-pin), one ethernet (RJ-45)		
Add-on ports (optional)	Supports the following: <ul style="list-style-type: none"> Single Parallel Port PCI Adapter (1xParallel) Single Serial Port PCI Adapter (1xSerial) Dual Serial Ports PCI Adapter (2xSerial PCI) Dual Serial Ports PCIe Adapter(2xSerial PCIe) 		
Expansion Slots	Slot 1: half-length, full-height, PCIe 3.0 x16 (near CPU) Slot 2: half-length, full-height, PCIe 2.0 x1 Slot 3: half-length, full-height, PCIe 2.0 x16 (x4 elec) Slot 4: half-length, full-height, PCI 2.3		
Onboard Ethernet	One onboard gigabit ethernet, Intel I217		
Discrete Ethernet (optional)	Supports the following: <ul style="list-style-type: none"> Intel Gigabit CT Desktop Adapter (1xGbE, RJ-45) Intel Ethernet Server Adapter I350-T2 (2xGbE, RJ-45) Intel Ethernet Server Adapter I350-T4 (4xGbE, RJ-45) 		
Keyboard/mouse	None (use USB port)		
Power supply	Supports one of the following, depending on models: <ul style="list-style-type: none"> One fixed 450 watts, universal, 80 PLUS® Platinum qualified Up to two redundant 450 watts, two maximum, rear access, hot-swap, 80 PLUS Gold qualified, redundant with two power supplies 		
Security	<ul style="list-style-type: none"> Security chip: ST33ZP24AR28PVSP for TPM function, TCG 1.2-compliant Administrator password User password Front panel key lock Boot sequence control Boot without keyboard, mouse, diskette Serial port I/O control USB port disablement (front or all) 		
Mechanical	<ul style="list-style-type: none"> Tower, business black color, metal case W x H (without foot) x D = 7.68"/195mm x 16.9"/430mm x 23.4"/595mm 61.7 lb (28kg) max configuration Rack-mountable to 5U 		
Serviceability	<ul style="list-style-type: none"> Toolless side cover removal Toolless disk and optical drive removal Toolless adapter retention Illuminated front icons 		
Environmental certifications	<ul style="list-style-type: none"> GREENGUARD® certified Energy Star Server 1.1 qualified RoHS-compliant 		
EMC	FCC Class A		
240VA	Supports		
Temperature - operating	50 °F to 95 °F (10 °C to 35 °C)		
Temperature - non operating (no package)	-10 °C to 60 °C		
Temperature - non operating (with package)	-40 °C to 70 °C		
Altitude - operating	Supported Altitude (unpressurized): 0-10000ft (0-3048m)		
Humidity - operating	10%-80%, non-condensing		
Humidity - non operating (no package)	10%-90%, non-condensing		
Humidity - non operating (with package)	10%-90%, non-condensing		
Acoustic noise (idle/working mode)	Category	Mainstream Configuration	Full Configuration
	CPU	Xeon	Xeon
	Optical Drive	DVD-ROM	DVD-ROM
	HDD Controller	onboard SATA	SAS Controller
	HDD Bays	4 x 3.5" SATA (direct cable)	8 x 3.5" SAS (hot-swap)
	HDD	4x 1TB SATA	8x 600GB SAS
	Memory	1 x 2GB UDIMM ECC	4 x 4GB UDIMM ECC
	PSU	Fixed	Redundant
	Management	Basic IPMI mgmt, reporting	Basic IPMI mgmt, reporting
	RAID	SATA RAID 0/1	SAS RAID 5
	Sound Pressure (operating)	40.5 dB(A)	42.0 dB(A)
	Sound Pressure (idle)	32.0 dB(A)	38.0 dB(A)

ThinkServer TS440 Platform Specifications - III of III

Components	Specification
Warranty	1 or 3-year limited warranty, parts and labor, more services information see S-TS1 and S-TS3 sheet
Preloaded operating systems	<ul style="list-style-type: none">• Windows Server® 2012 Foundation• Windows Server 2012 Essentials• Windows Server 2012 Standard
Supported operating systems and virtualization software	<ul style="list-style-type: none">• Windows Server 2008 R2 Standard• Windows Server 2008 R2 Enterprise• Windows Server 2012 Datacenter• Windows Small Business Server 2011 Essentials• Windows Small Business Server 2011 Standard• Windows Small Business Server 2011 Premium Add-On• Red Hat Enterprise Linux 6.4• VMware ESXi 5.1 U1 (Discrete RAID controller, add-on ethernet controller, and Intel Xeon E3-12x5 v3 processors are needed) <p><i>Notes:</i></p> <ol style="list-style-type: none">1. Supported only, no preloaded models2. For latest VMware compatibility list for ThinkServer, please see http://www.vmware.com/resources/compatibility/search.php3. For latest Red Hat compatibility list for ThinkServer, please see https://hardware.redhat.com/4. These supported operating systems are also supported by EasyStartup

Type-model ¹	Processor	Memory type	Memory DIMMs	Graphics	Disk Bays ²	RAID controller	Pre-conf RAID	Storage	Optical	Add-on ports	Discrete ethernet	Windows Server 2012 Preloaded	Power Supply	Base on-site warranty (-year)
70AQ000A++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	4x3.5 HS	RAID 100 (onboard, 0/1/5/10)	No	Open	1xDVD±RW	No	No	No	1x450W (hot-swap, redundant with 2)	3
70AQ000B++	Xeon E3-1245 v3 (4C/3.4GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	4x3.5 HS	RAID 100 (onboard, 0/1/5/10)	No	Open	1xDVD±RW	No	No	No	1x450W (hot-swap, redundant with 2)	3
70AQ000J++	Xeon E3-1245 v3 (4C/3.4GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	4x3.5 HS	RAID 500 (discrete, 0/1/10)	No	Open	1xDVD±RW	No	No	No	1x450W (hot-swap, redundant with 2)	3
70AQ000K++	Xeon E3-1275 v3 (4C/3.5GHz/8MB/1600MHz)	1600MHz ECC	8GBx1	Intel HD P4600	4x3.5 HS	RAID 700+Battery (discrete, 0/1/5/6/10/50/60)	No	Open	1xDVD±RW	No	No	No	1x450W (hot-swap, redundant with 2)	3
70AQ000L++	Xeon E3-1245 v3 (4C/3.4GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	4x3.5 HS	RAID 100 (onboard, 0/1/5/10)	No	Open	1xDVD±RW	No	No	No	1x450W (hot-swap, redundant with 2)	1
70AQ000M++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	8x2.5 HS	RAID 500 (discrete, 0/1/10)	No	Open	1xDVD±RW	No	No	No	2x450W (hot-swap, redundant with 2)	3

1. Model in italics shows that this is a Global Model. 2. HS = Hot-swap, DC = Direct cable, non-hot swap Country Code "++": WE models listed above might not be available in all WE countries

• For detailed ThinkServer TS440 platform specifications, please see [ThinkServer TS440 Platform Specifications sheet](#)

Systems management	<ul style="list-style-type: none"> Intel Active Management Technology 9 (KVM function needs Intel Xeon E3-12X5 v3 processors) EasyStartup EasyUpdate 	<p>Optical Bays</p> <ul style="list-style-type: none"> Two 5.25" optical bays for all models (Up to one optical on onboard SATA controller models) <p>Hard Drive Bays</p> <ul style="list-style-type: none"> Four 3.5" hard drive bays, no hot-swap, direct cable (4x3.5" DC) Four 3.5" hot-swap hard drive bays (4x3.5" HS) Eight 3.5" hot-swap hard drive bays (8x3.5" HS) Eight 2.5" hot-swap hard drive bays (8x2.5" HS)  <p>8 x 2.5" HS 4 x 3.5" HS 8 x 3.5" HS</p>
Chipset	Intel C226 Chipset	
Processor	One LGA1150 socket, integrated 2-channel DDR3 memory controller, optional integrated Intel HD Graphics on selected processors	
Memory type	1600MHz UDIMM, DDR3, ECC, 2-channel capable	
Memory DIMM sockets	Four 240-pin DIMM sockets, up to 32GB ECC UDIMM (Actual memory operating speed depends on processor memory controller speed, installed memory speed, and quantity of memory DIMMs)	
Graphics	<ul style="list-style-type: none"> Integrated Intel HD Graphics on Xeon E3-12X5 v3 processors, uses main memory, works along with discrete graphics to support multi-display, enables VGA connector on rear (detailed information please see Rear ports section) Supports optional discrete NVIDIA NVS 300 adapter, PCIe x1, 512MB 	
Onboard SATA controller	Onboard ThinkServer RAID 100 SATA controller in chipset, SATA 6.0Gb/s, RAID 0, 1, 5, 10 support	
Discreted SATA/SAS controller (optional)	Supports the following: <ul style="list-style-type: none"> ThinkServer RAID 500 adapter (LSI SAS 9240-8i), PCI Express bus, SATA 6.0Gb/s, SAS 6.0Gb/s, RAID 0, 1, 10 support; optional upgrade key for ThinkServer RAID 500 adapter, add RAID 5, 50 support ThinkServer RAID 700 adapter (LSI SAS 9260-8i), PCI Express bus, SATA 6.0Gb/s, SAS 6.0Gb/s, RAID 0, 1, 5, 6, 10, 50, 60 support; optional Intelligent Battery Backup Unit (iBBU08) for ThinkServer RAID 700 adapter Notes: RAID 50 and 60 are supported on 8 hard drive bays models only	
Optical	Supports DVD±RW or DVD ROM, 1.6" high, SATA interface	
Front ports	Two USB 3.0 (blue)	
Rear ports	One VGA for models with Intel HD Graphics, two USB 2.0, four USB 3.0 (blue), one serial (9-pin), one ethernet (RJ-45)	
Add-on ports (optional)	Supports the following: <ul style="list-style-type: none"> Single Parallel Port PCI Adapter (1xParallel) Single Serial Port PCI Adapter (1xSerial) Dual Serial Ports PCI Adapter (2xSerial PCI) Dual Serial Ports PCIe Adapter (2xSerial PCIe) 	
Onboard Ethernet	One onboard gigabit ethernet, Intel I217	
Discrete Ethernet (optional)	Supports the following: <ul style="list-style-type: none"> Intel Gigabit CT Desktop Adapter (1xGbE, RJ-45) Intel Ethernet Server Adapter I350-T2 (2xGbE, RJ-45) Intel Ethernet Server Adapter I350-T4 (4xGbE, RJ-45) 	
Keyboard/Mouse	None (use USB port)	
Power supply	Supports one of the following, depending on models: <ul style="list-style-type: none"> One fixed 450 watts, universal, 80 PLUS® Platinum qualified Up to two redundant 450 watts, two maximum, rear access, hot-swap, 80 PLUS Gold qualified, redundant with two power supplies 	
Base warranty	1 or 3-year parts and labor limited warranty ¹	
Environmental certifications	<ul style="list-style-type: none"> GREENGUARD® certified Energy Star Server 1.1 qualified RoHS-compliant More environmental information and requirements, please see ThinkServer TS440 Platform Specifications sheet	
		<p>Mechanical</p> <ul style="list-style-type: none"> Tower, business black color, metal case W x H x D = 7.68"/195mm x 16.9"/430mm x 23.4"/595mm 61.7 lb (28kg) max configuration Rack-mountable to 5U (via optional Tower to Rack Shelf Conversion Kit, not included in standard model) Toolless side cover removal Toolless disk and optical drive removal Toolless adapter retention Illuminated front icons <p>Expansion Slots</p> <p>Slot 1: half-length, full-height, PCIe 3.0 x16 (near CPU) Slot 2: half-length, full-height, PCIe 2.0 x1 Slot 3: half-length, full-height, PCIe 2.0 x16 (x4 elec) Slot 4: half-length, full-height, PCI 2.3</p> <p>Security</p> <ul style="list-style-type: none"> Security chip: ST33ZP24AR28PVSP for TPM function, TCG 1.2-compliant Administrator password User password Front panel key lock Boot sequence control Boot without keyboard, mouse, diskette Serial port I/O control USB port disablement (front or all)

See footnotes for important warranty information Model(s) announced September 24, 2013

ThinkServer TS440 (70AQ) - TopSeller (November 2013)

Product Specifications Reference (PSREF)

Type-model ¹	Processor	Memory type	Memory DIMMs	Graphics	Disk Bays ²	RAID controller	Pre-conf RAID	Storage	Optical	Add-on ports	Discrete ethernet	Windows Server 2012 Preloaded	Power Supply	Base on-site warranty (-year)
70AQ0010++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	8x2.5" HS SATA/SAS	RAID 500 (discrete, 0/1/10)	No	Open	DVD±RW	No	No	No	2x450W (hot-swap, redundant with 2)	3
70AQ0011++	Xeon E3-1245 v3 (4C/3.4GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	4x3.5" HS SATA	RAID 100 (onboard, 0/1/5/10)	No	Open	DVD±RW	No	No	No	1x450W (hot-swap, redundant with 2)	3
70AQ0012++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	4x3.5" HS SATA	RAID 100 (onboard, 0/1/5/10)	No	Open	DVD±RW	No	No	No	1x450W (hot-swap, redundant with 2)	3
70AQ0013++	Xeon E3-1275 v3 (4C/3.5GHz/8MB/1600MHz)	1600MHz ECC	8GBx1	Intel HD P4600	4x3.5" HS SATA/SAS	RAID 700+Battery (discrete, 0/1/5/6/10/50/60)	No	Open	DVD±RW	No	No	No	1x450W (hot-swap, redundant with 2)	3
70AQ0014++	Xeon E3-1245 v3 (4C/3.4GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	4x3.5" HS SATA/SAS	RAID 500 (discrete, 0/1/10)	No	Open	DVD±RW	No	No	No	1x450W (hot-swap, redundant with 2)	3
70AQ0015++	Xeon E3-1245 v3 (4C/3.4GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	4x3.5" HS SATA	RAID 100 (onboard, 0/1/5/10)	No	Open	DVD±RW	No	No	No	1x450W (hot-swap, redundant with 2)	1

1. Model in italics shows that this is a Global Model. 2. HS = Hot-swap, DC = Direct cable, non-hot swap Country Code "++": WE models listed above might not be available in all WE countries

• For detailed ThinkServer TS440 platform specifications, please see [ThinkServer TS440 Platform Specifications sheet](#)

Systems management	<ul style="list-style-type: none"> Intel Active Management Technology 9 (KVM function needs Intel Xeon E3-12X5 v3 processors) EasyStartup EasyUpdate 	<p>Optical Bays</p> <ul style="list-style-type: none"> Two 5.25" optical bays for all models (Up to one optical on onboard SATA controller models) <p>Hard Drive Bays</p> <ul style="list-style-type: none"> Four 3.5" hard drive bays, no hot-swap, direct cable (4x3.5" DC) Four 3.5" hot-swap hard drive bays (4x3.5" HS) Eight 3.5" hot-swap hard drive bays (8x3.5" HS) Eight 2.5" hot-swap hard drive bays (8x2.5" HS)  <p>8 x 2.5" HS 4 x 3.5" HS 8 x 3.5" HS</p>
Chipset	Intel C226 Chipset	
Processor	One LGA1150 socket, integrated 2-channel DDR3 memory controller, optional integrated Intel HD Graphics on selected processors	
Memory type	1600MHz UDIMM, DDR3, ECC, 2-channel capable	
Memory DIMM sockets	Four 240-pin DIMM sockets, up to 32GB ECC UDIMM (Actual memory operating speed depends on processor memory controller speed, installed memory speed, and quantity of memory DIMMs)	
Graphics	<ul style="list-style-type: none"> Integrated Intel HD Graphics on Xeon E3-12X5 v3 processors, uses main memory, works along with discrete graphics to support multi-display, enables VGA connector on rear (detailed information please see Rear ports section) Supports optional discrete NVIDIA NVS 300 adapter, PCIe x1, 512MB 	
Onboard SATA controller	Onboard ThinkServer RAID 100 SATA controller in chipset, SATA 6.0Gb/s, RAID 0, 1, 5, 10 support	
Discreted SATA/SAS controller (optional)	Supports the following: <ul style="list-style-type: none"> ThinkServer RAID 500 adapter (LSI SAS 9240-8i), PCI Express bus, SATA 6.0Gb/s, SAS 6.0Gb/s, RAID 0, 1, 10 support; optional upgrade key for ThinkServer RAID 500 adapter, add RAID 5, 50 support ThinkServer RAID 700 adapter (LSI SAS 9260-8i), PCI Express bus, SATA 6.0Gb/s, SAS 6.0Gb/s, RAID 0, 1, 5, 6, 10, 50, 60 support; optional Intelligent Battery Backup Unit (iBBU08) for ThinkServer RAID 700 adapter <p><i>Notes:</i> RAID 50 and 60 are supported on 8 hard drive bays models only</p>	
Optical	Supports DVD±RW or DVD ROM, 1.6" high, SATA interface	
Front ports	Two USB 3.0 (blue)	
Rear ports	One VGA for models with Intel HD Graphics, two USB 2.0, four USB 3.0 (blue), one serial (9-pin), one ethernet (RJ-45)	
Add-on ports (optional)	Supports the following: <ul style="list-style-type: none"> Single Parallel Port PCI Adapter (1xParallel) Single Serial Port PCI Adapter (1xSerial) Dual Serial Ports PCI Adapter (2xSerial PCI) Dual Serial Ports PCIe Adapter (2xSerial PCIe) 	
Onboard Ethernet	One onboard gigabit ethernet, Intel I217	
Discrete Ethernet (optional)	Supports the following: <ul style="list-style-type: none"> Intel Gigabit CT Desktop Adapter (1xGbE, RJ-45) Intel Ethernet Server Adapter I350-T2 (2xGbE, RJ-45) Intel Ethernet Server Adapter I350-T4 (4xGbE, RJ-45) 	
Keyboard/Mouse	None (use USB port)	
Power supply	Supports one of the following, depending on models: <ul style="list-style-type: none"> One fixed 450 watts, universal, 80 PLUS® Platinum qualified Up to two redundant 450 watts, two maximum, rear access, hot-swap, 80 PLUS Gold qualified, redundant with two power supplies 	
Base warranty	1 or 3-year parts and labor limited warranty ¹	
Environmental certifications	<ul style="list-style-type: none"> GREENGUARD® certified Energy Star Server 1.1 qualified RoHS-compliant More environmental information and requirements, please see ThinkServer TS440 Platform Specifications sheet	
		<p>Mechanical</p> <ul style="list-style-type: none"> Tower, business black color, metal case W x H x D = 7.68"/195mm x 16.9"/430mm x 23.4"/595mm 61.7 lb (28kg) max configuration Rack-mountable to 5U (via optional Tower to Rack Shelf Conversion Kit, not included in standard model) Toolless side cover removal Toolless disk and optical drive removal Toolless adapter retention Illuminated front icons <p>Expansion Slots</p> <p>Slot 1: half-length, full-height, PCIe 3.0 x16 (near CPU) Slot 2: half-length, full-height, PCIe 2.0 x1 Slot 3: half-length, full-height, PCIe 2.0 x16 (x4 elec) Slot 4: half-length, full-height, PCI 2.3</p> <p>Security</p> <ul style="list-style-type: none"> Security chip: ST33ZP24AR28PVSP for TPM function, TCG 1.2-compliant Administrator password User password Front panel key lock Boot sequence control Boot without keyboard, mouse, diskette Serial port I/O control USB port disablement (front or all)

See footnotes for important warranty information Model(s) announced November 26, 2013

© Lenovo (70AQ-2E) January 2014

ThinkServer TS440 (70AQ) - TopSeller (December 2013)

Product Specifications Reference (PSREF)

Type-model ¹	Processor	Memory type	Memory DIMMs	Graphics	Disk Bays ²	RAID controller	Pre-conf RAID	Storage	Optical	Add-on ports	Discrete ethernet	Windows Server 2012 Preloaded	Power Supply	Base on-site warranty (-year)
70AQ000C++	Xeon E3-1245 v3 (4C/3.4GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	8xHS SATA/SAS	RAID 500 (discrete, 0/1/10)	No	Open	1xDVD±RW	No	No	No	1x450W (hot-swap, redundant with 2)	3
70AQ000D++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	8xHS SATA/SAS	RAID 500 (discrete, 0/1/10)	No	Open	1xDVD±RW	No	No	No	1x450W (hot-swap, redundant with 2)	3
70AQ000X++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	8xHS SATA/SAS	RAID 500 (discrete, 0/1/10)	No	Open	1xDVD±RW	No	No	No	1x450W (hot-swap, redundant with 2)	1
70AQ000Y++	Xeon E3-1245 v3 (4C/3.4GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	8xHS SATA/SAS	RAID 500 (discrete, 0/1/10)	No	Open	1xDVD±RW	No	No	No	1x450W (hot-swap, redundant with 2)	1

1. Model in italics shows that this is a Global Model. 2. HS = Hot-swap, DC = Direct cable, non-hot swap Country Code "++": WE models listed above might not be available in all WE countries

• For detailed ThinkServer TS440 platform specifications, please see [ThinkServer TS440 Platform Specifications sheet](#)

Systems management	<ul style="list-style-type: none"> Intel Active Management Technology 9 (KVM function needs Intel Xeon E3-12X5 v3 processors) EasyStartup EasyUpdate 	<p>Optical Bays</p> <ul style="list-style-type: none"> Two 5.25" optical bays for all models (Up to one optical on onboard SATA controller models) <p>Hard Drive Bays</p> <ul style="list-style-type: none"> Four 3.5" hard drive bays, no hot-swap, direct cable (4x3.5" DC) Four 3.5" hot-swap hard drive bays (4x3.5" HS) Eight 3.5" hot-swap hard drive bays (8x3.5" HS) Eight 2.5" hot-swap hard drive bays (8x2.5" HS)
Chipset	Intel C226 Chipset	
Processor	One LGA1150 socket, integrated 2-channel DDR3 memory controller, optional integrated Intel HD Graphics on selected processors	 <p>8 x 2.5" HS 4 x 3.5" HS 8 x 3.5" HS</p>
Memory type	1600MHz UDIMM, DDR3, ECC, 2-channel capable	
Memory DIMM sockets	Four 240-pin DIMM sockets, up to 32GB ECC UDIMM (Actual memory operating speed depends on processor memory controller speed, installed memory speed, and quantity of memory DIMMs)	
Graphics	<ul style="list-style-type: none"> Integrated Intel HD Graphics on Xeon E3-12X5 v3 processors, uses main memory, works along with discrete graphics to support multi-display, enables VGA connector on rear (detailed information please see Rear ports section) Supports optional discrete NVIDIA NVS 300 adapter, PCIe x1, 512MB 	
Onboard SATA controller	Onboard ThinkServer RAID 100 SATA controller in chipset, SATA 6.0Gb/s, RAID 0, 1, 5, 10 support	
Discreted SATA/SAS controller (optional)	Supports the following: <ul style="list-style-type: none"> ThinkServer RAID 500 adapter (LSI SAS 9240-8i), PCI Express bus, SATA 6.0Gb/s, SAS 6.0Gb/s, RAID 0, 1, 10 support; optional upgrade key for ThinkServer RAID 500 adapter, add RAID 5, 50 support ThinkServer RAID 700 adapter (LSI SAS 9260-8i), PCI Express bus, SATA 6.0Gb/s, SAS 6.0Gb/s, RAID 0, 1, 5, 6, 10, 50, 60 support; optional Intelligent Battery Backup Unit (iBBU08) for ThinkServer RAID 700 adapter <p><i>Notes:</i> RAID 50 and 60 are supported on 8 hard drive bays models only</p>	
Optical	Supports DVD±RW or DVD ROM, 1.6" high, SATA interface	
Front ports	Two USB 3.0 (blue)	
Rear ports	One VGA for models with Intel HD Graphics, two USB 2.0, four USB 3.0 (blue), one serial (9-pin), one ethernet (RJ-45)	
Add-on ports (optional)	Supports the following: <ul style="list-style-type: none"> Single Parallel Port PCI Adapter (1xParallel) Single Serial Port PCI Adapter (1xSerial) Dual Serial Ports PCI Adapter (2xSerial PCI) Dual Serial Ports PCIe Adapter (2xSerial PCIe) 	
Onboard Ethernet	One onboard gigabit ethernet, Intel I217	
Discrete Ethernet (optional)	Supports the following: <ul style="list-style-type: none"> Intel Gigabit CT Desktop Adapter (1xGbE, RJ-45) Intel Ethernet Server Adapter I350-T2 (2xGbE, RJ-45) Intel Ethernet Server Adapter I350-T4 (4xGbE, RJ-45) 	
Keyboard/Mouse	None (use USB port)	
Power supply	Supports one of the following, depending on models: <ul style="list-style-type: none"> One fixed 450 watts, universal, 80 PLUS® Platinum qualified Up to two redundant 450 watts, two maximum, rear access, hot-swap, 80 PLUS Gold qualified, redundant with two power supplies 	
Base warranty	1 or 3-year parts and labor limited warranty ¹	
Environmental certifications	<ul style="list-style-type: none"> GREENGUARD® certified Energy Star Server 1.1 qualified RoHS-compliant More environmental information and requirements, please see ThinkServer TS440 Platform Specifications sheet	
		<p>Mechanical</p> <ul style="list-style-type: none"> Tower, business black color, metal case W x H x D = 7.68"/195mm x 16.9"/430mm x 23.4"/595mm 61.7 lb (28kg) max configuration Rack-mountable to 5U (via optional Tower to Rack Shelf Conversion Kit, not included in standard model) Toolless side cover removal Toolless disk and optical drive removal Toolless adapter retention Illuminated front icons <p>Expansion Slots</p> <p>Slot 1: half-length, full-height, PCIe 3.0 x16 (near CPU) Slot 2: half-length, full-height, PCIe 2.0 x1 Slot 3: half-length, full-height, PCIe 2.0 x16 (x4 elec) Slot 4: half-length, full-height, PCI 2.3</p> <p>Security</p> <ul style="list-style-type: none"> Security chip: ST33ZP24AR28PVSP for TPM function, TCG 1.2-compliant Administrator password User password Front panel key lock Boot sequence control Boot without keyboard, mouse, diskette Serial port I/O control USB port disablement (front or all)

See footnotes for important warranty information Model(s) announced December 17, 2013

© Lenovo (70AQ-3E) December 2013

ThinkServer TS440 (70AQ) - TopSeller (March 2015)

Product Specifications Reference (PSREF)

Type-model ¹	Processor	Memory type	Memory DIMMs	Graphics	Disk Bays ²	RAID controller	Pre-conf RAID	Storage	Optical	Add-on ports	Discrete ethernet	Windows Server 2012 Preloaded	Power Supply	Base on-site warranty (year)
70AQ001Q++	Xeon E3-1246 v3 4C/3.5GHz/8MB/1600MHz/ Intel HD P4600	1600MHz ECC	4GBx1	Integrated	4x3.5" HS	RAID 100	No	Open	DVD±RW	No	No	No	1x450W (hot-swap, redundant with 2)	1
70AQ001R++	Xeon E3-1246 v3 4C/3.5GHz/8MB/1600MHz/ Intel HD P4600	1600MHz ECC	4GBx1	Integrated	8x3.5" HS	RAID 500	No	Open	DVD±RW	No	No	No	1x450W (hot-swap, redundant with 2)	1
70AQ001V++	Xeon E3-1226 v3 4C/3.3GHz/8MB/1600MHz/ Intel HD P4600	1600MHz ECC	4GBx1	Integrated	4x3.5" HS	RAID 100	No	Open	DVD±RW	No	No	No	1x450W (hot-swap, redundant with 2)	3
70AQ001W++	Xeon E3-1226 v3 4C/3.3GHz/8MB/1600MHz/ Intel HD P4600	1600MHz ECC	4GBx1	Integrated	8x2.5" HS	RAID 500	No	Open	DVD±RW	No	No	No	2x450W (hot-swap, redundant with 2)	3
70AQ001X++	Xeon E3-1246 v3 4C/3.5GHz/8MB/1600MHz/ Intel HD P4600	1600MHz ECC	4GBx1	Integrated	8x3.5" HS	RAID 500	No	Open	DVD±RW	No	No	No	1x450W (hot-swap, redundant with 2)	3
70AQ001Y++	Xeon E3-1246 v3 4C/3.5GHz/8MB/1600MHz/ Intel HD P4600	1600MHz ECC	4GBx1	Integrated	4x3.5" HS	RAID 100	No	Open	DVD±RW	No	No	No	1x450W (hot-swap, redundant with 2)	3
70AQ0020++	Xeon E3-1276 v3 4C/3.6GHz/8MB/1600MHz/ Intel HD P4600	1600MHz ECC	8GBx1	Integrated	4x3.5" HS	RAID 700 +Battery	No	Open	DVD±RW	No	No	No	1x450W (hot-swap, redundant with 2)	3
70AQ0021++	Xeon E3-1246 v3 4C/3.5GHz/8MB/1600MHz/ Intel HD P4600	1600MHz ECC	4GBx1	Integrated	4x3.5" HS	RAID 500	No	Open	DVD±RW	No	No	No	1x450W (hot-swap, redundant with 2)	3

1. Model in italics shows that this is a Global Model. 2. HS = Hot-swap, DC = Direct cable, non-hot swap 3. Country Code "++": WE models listed above might not be available in all WE countries

• For detailed ThinkServer TS440 platform specifications, please see [ThinkServer TS440 Platform Specifications sheet](#)

Systems management	<ul style="list-style-type: none"> Intel Active Management Technology 9 (KVM function needs Intel Xeon E3-12X5 v3 processors) EasyStartup EasyUpdate 	<p>Optical Bays</p> <ul style="list-style-type: none"> Two 5.25" optical bays for all models (Up to one optical on onboard SATA controller models) <p>Hard Drive Bays</p> <ul style="list-style-type: none"> Four 3.5" hard drive bays, no hot-swap, direct cable (4x3.5" DC) Four 3.5" hot-swap hard drive bays (4x3.5" HS) Eight 3.5" hot-swap hard drive bays (8x3.5" HS) Eight 2.5" hot-swap hard drive bays (8x2.5" HS)
Chipset	Intel C226 Chipset	 <p>8 x 2.5" HS 4 x 3.5" HS 8 x 3.5" HS</p>
Processor	One LGA1150 socket, integrated 2-channel DDR3 memory controller, optional integrated Intel HD Graphics on selected processors	
Memory type	1600MHz UDIMM, DDR3, ECC, 2-channel capable	
Memory DIMM sockets	Four 240-pin DIMM sockets, up to 32GB ECC UDIMM (Actual memory operating speed depends on processor memory controller speed, installed memory speed, and quantity of memory DIMMs)	
Graphics	<ul style="list-style-type: none"> Integrated Intel HD Graphics on Xeon E3-12X5 v3 processors, uses main memory, works along with discrete graphics to support multi-display, enables VGA connector on rear (detailed information please see Rear ports section) Supports optional discrete NVIDIA NVS 300 adapter, PCIe x1, 512MB 	
Onboard SATA controller	Onboard ThinkServer RAID 100 SATA controller in chipset, SATA 6.0Gb/s, RAID 0, 1, 5, 10 support	
Discreted SATA/SAS controller (optional)	Supports the following: <ul style="list-style-type: none"> ThinkServer RAID 500 adapter (LSI SAS 9240-8i), PCI Express bus, SATA 6.0Gb/s, SAS 6.0Gb/s, RAID 0, 1, 10 support; optional upgrade key for ThinkServer RAID 500 adapter, add RAID 5, 50 support ThinkServer RAID 700 adapter (LSI SAS 9260-8i), PCI Express bus, SATA 6.0Gb/s, SAS 6.0Gb/s, RAID 0, 1, 5, 6, 10, 50, 60 support; optional Intelligent Battery Backup Unit (iBBU08) for ThinkServer RAID 700 adapter Notes: RAID 50 and 60 are supported on 8 hard drive bays models only	
Optical	Supports DVD±RW or DVD ROM, 1.6" high, SATA interface	
Front ports	Two USB 3.0 (blue)	
Rear ports	One VGA for models with Intel HD Graphics, two USB 2.0, four USB 3.0 (blue), one serial (9-pin), one ethernet (RJ-45)	
Add-on ports (optional)	Supports the following: <ul style="list-style-type: none"> Single Parallel Port PCI Adapter (1xParallel) Single Serial Port PCI Adapter (1xSerial) Dual Serial Ports PCI Adapter (2xSerial PCI) Dual Serial Ports PCIe Adapter (2xSerial PCIe) 	
Onboard Ethernet	One onboard gigabit ethernet, Intel I217	
Discrete Ethernet (optional)	Supports the following: <ul style="list-style-type: none"> Intel Gigabit CT Desktop Adapter (1xGbE, RJ-45) Intel Ethernet Server Adapter I350-T2 (2xGbE, RJ-45) Intel Ethernet Server Adapter I350-T4 (4xGbE, RJ-45) 	
Keyboard/Mouse	None (use USB port)	
Power supply	Supports one of the following, depending on models: <ul style="list-style-type: none"> One fixed 450 watts, universal, 80 PLUS® Platinum qualified Up to two redundant 450 watts, two maximum, rear access, hot-swap, 80 PLUS Gold qualified, redundant with two power supplies 	
Base warranty	1 or 3-year parts and labor limited warranty ¹	
Environmental certifications	<ul style="list-style-type: none"> GREENGUARD® certified Energy Star Server 1.1 qualified RoHS-compliant More environmental information and requirements, please see ThinkServer TS440 Platform Specifications sheet	
		<p>Mechanical</p> <ul style="list-style-type: none"> Tower, business black color, metal case W x H x D = 7.68"/195mm x 16.9"/430mm x 23.4"/595mm 61.7 lb (28kg) max configuration Rack-mountable to 5U (via optional Tower to Rack Shelf Conversion Kit, not included in standard model) Toolless side cover removal Toolless disk and optical drive removal Toolless adapter retention Illuminated front icons <p>Expansion Slots</p> Slot 1: half-length, full-height, PCIe 3.0 x16 (near CPU) Slot 2: half-length, full-height, PCIe 2.0 x1 Slot 3: half-length, full-height, PCIe 2.0 x16 (x4 elec) Slot 4: half-length, full-height, PCI 2.3
		<p>Security</p> <ul style="list-style-type: none"> Security chip: ST33ZP24AR28PVSP for TPM function, TCG 1.2-compliant Administrator password User password Front panel key lock Boot sequence control Boot without keyboard, mouse, diskette Serial port I/O control USB port disablement (front or all)

See footnotes for important warranty information
 Model(s) announced March 10, 2015

© Lenovo
 (70AQ-4E) March 2015

Type-model ¹	Processor	Memory type	Memory DIMMs	Graphics	Disk Bays ²	RAID controller	Pre-conf RAID	Storage	Optical	Add-on ports	Discrete ethernet	Windows Server 2012 Preloaded	Power Supply	Base on-site warranty (-year)
70AN0000++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	4x3.5 DC	RAID 100 (onboard, 0/1/5/10)	No	Open	1xDVD±RW	No	No	No	Fixed 450W (no redundant)	1
70AN0003++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	4x3.5 DC	RAID 100 (onboard, 0/1/5/10)	RAID 1	2x500GB 3.5 SATA	1xDVD±RW	No	No	No	Fixed 450W (no redundant)	1
70AN0004++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	4x3.5 DC	RAID 100 (onboard, 0/1/5/10)	RAID 1	2x500GB 3.5 SATA	1xDVD±RW	No	No	No	Fixed 450W (no redundant)	3
70AN0005++	Xeon E3-1275 v3 (4C/3.5GHz/8MB/1600MHz)	1600MHz ECC	8GBx1	Intel HD P4600	4x3.5 DC	RAID 100 (onboard, 0/1/5/10)	No	Open	1xDVD±RW	No	No	No	Fixed 450W (no redundant)	3
70AN0006++	Xeon E3-1275 v3 (4C/3.5GHz/8MB/1600MHz)	1600MHz ECC	8GBx1	Intel HD P4600	4x3.5 DC	RAID 100 (onboard, 0/1/5/10)	No	Open	1xDVD±RW	No	No	No	Fixed 450W (no redundant)	1

1. Model in italics shows that this is a Global Model. 2. HS = Hot-swap, DC = Direct cable, non-hot swap Country Code "++": WE models listed above might not be available in all WE countries

• For detailed ThinkServer TS440 platform specifications, please see [ThinkServer TS440 Platform Specifications sheet](#)

Systems management	<ul style="list-style-type: none"> Intel Active Management Technology 9 (KVM function needs Intel Xeon E3-12X5 v3 processors) EasyStartup EasyUpdate 	<p>Optical Bays</p> <ul style="list-style-type: none"> Two 5.25" optical bays for all models (Up to one optical on onboard SATA controller models) <p>Hard Drive Bays</p> <ul style="list-style-type: none"> Four 3.5" hard drive bays, no hot-swap, direct cable (4x3.5" DC) Four 3.5" hot-swap hard drive bays (4x3.5" HS) Eight 3.5" hot-swap hard drive bays (8x3.5" HS) Eight 2.5" hot-swap hard drive bays (8x2.5" HS)
Chipset	Intel C226 Chipset	
Processor	One LGA1150 socket, integrated 2-channel DDR3 memory controller, optional integrated Intel HD Graphics on selected processors	
Memory type	1600MHz UDIMM, DDR3, ECC, 2-channel capable	
Memory DIMM sockets	Four 240-pin DIMM sockets, up to 32GB ECC UDIMM (Actual memory operating speed depends on processor memory controller speed, installed memory speed, and quantity of memory DIMMs)	
Graphics	<ul style="list-style-type: none"> Integrated Intel HD Graphics on Xeon E3-12X5 v3 processors, uses main memory, works along with discrete graphics to support multi-display, enables VGA connector on rear (detailed information please see Rear ports section) Supports optional discrete NVIDIA NVS 300 adapter, PCIe x1, 512MB 	
Onboard SATA controller	Onboard ThinkServer RAID 100 SATA controller in chipset, SATA 6.0Gb/s, RAID 0, 1, 5, 10 support	
Discreted SATA/SAS controller (optional)	Supports the following: <ul style="list-style-type: none"> ThinkServer RAID 500 adapter (LSI SAS 9240-8i), PCI Express bus, SATA 6.0Gb/s, SAS 6.0Gb/s, RAID 0, 1, 10 support; optional upgrade key for ThinkServer RAID 500 adapter, add RAID 5, 50 support ThinkServer RAID 700 adapter (LSI SAS 9260-8i), PCI Express bus, SATA 6.0Gb/s, SAS 6.0Gb/s, RAID 0, 1, 5, 6, 10, 50, 60 support; optional Intelligent Battery Backup Unit (iBBU08) for ThinkServer RAID 700 adapter Notes: RAID 50 and 60 are supported on 8 hard drive bays models only	
Optical	Supports DVD±RW or DVD ROM, 1.6" high, SATA interface	
Front ports	Two USB 3.0 (blue)	
Rear ports	One VGA for models with Intel HD Graphics, two USB 2.0, four USB 3.0 (blue), one serial (9-pin), one ethernet (RJ-45)	
Add-on ports (optional)	Supports the following: <ul style="list-style-type: none"> Single Parallel Port PCI Adapter (1xParallel) Single Serial Port PCI Adapter (1xSerial) Dual Serial Ports PCI Adapter (2xSerial PCI) Dual Serial Ports PCIe Adapter (2xSerial PCIe) 	
Onboard Ethernet	One onboard gigabit ethernet, Intel I217	
Discrete Ethernet (optional)	Supports the following: <ul style="list-style-type: none"> Intel Gigabit CT Desktop Adapter (1xGbE, RJ-45) Intel Ethernet Server Adapter I350-T2 (2xGbE, RJ-45) Intel Ethernet Server Adapter I350-T4 (4xGbE, RJ-45) 	
Keyboard/Mouse	None (use USB port)	
Power supply	Supports one of the following, depending on models: <ul style="list-style-type: none"> One fixed 450 watts, universal, 80 PLUS® Platinum qualified Up to two redundant 450 watts, two maximum, rear access, hot-swap, 80 PLUS Gold qualified, redundant with two power supplies 	
Base warranty	1 or 3-year parts and labor limited warranty ¹	
Environmental certifications	<ul style="list-style-type: none"> GREENGUARD® certified Energy Star Server 1.1 qualified RoHS-compliant More environmental information and requirements, please see ThinkServer TS440 Platform Specifications sheet	
		<p>Mechanical</p> <ul style="list-style-type: none"> Tower, business black color, metal case W x H x D = 7.68"/195mm x 16.9"/430mm x 23.4"/595mm 61.7 lb (28kg) max configuration Rack-mountable to 5U (via optional Tower to Rack Shelf Conversion Kit, not included in standard model) Toolless side cover removal Toolless disk and optical drive removal Toolless adapter retention Illuminated front icons <p>Expansion Slots</p> Slot 1: half-length, full-height, PCIe 3.0 x16 (near CPU) Slot 2: half-length, full-height, PCIe 2.0 x1 Slot 3: half-length, full-height, PCIe 2.0 x16 (x4 elec) Slot 4: half-length, full-height, PCI 2.3
		<p>Security</p> <ul style="list-style-type: none"> Security chip: ST33ZP24AR28PVSP for TPM function, TCG 1.2-compliant Administrator password User password Front panel key lock Boot sequence control Boot without keyboard, mouse, diskette Serial port I/O control USB port disablement (front or all)



Type-model ¹	Processor	Memory type	Memory DIMMs	Graphics	Disk Bays ²	RAID controller	Pre-conf RAID	Storage	Optical	Add-on ports	Discrete ethernet	Windows Server 2012 Preloaded	Power Supply	Base on-site warranty (-year)
70AN0007++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	4x3.5" DC SATA	RAID 100 (onboard, 0/1/5/10)	No	Open	DVD±RW	No	No	No	Fixed 450W (non-hot swap, no redundant)	1
70AN0008++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	4x3.5" DC SATA	RAID 100 (onboard, 0/1/5/10)	1	2x500GB 3.5" SATA	DVD±RW	No	No	No	Fixed 450W (non-hot swap, no redundant)	1
70AN0009++	Xeon E3-1225 v3 (4C/3.2GHz/8MB/1600MHz)	1600MHz ECC	4GBx1	Intel HD P4600	4x3.5" DC SATA	RAID 100 (onboard, 0/1/5/10)	1	2x500GB 3.5" SATA	DVD±RW	No	No	No	Fixed 450W (non-hot swap, no redundant)	3
70AN000A++	Xeon E3-1275 v3 (4C/3.5GHz/8MB/1600MHz)	1600MHz ECC	8GBx1	Intel HD P4600	4x3.5" DC SATA	RAID 100 (onboard, 0/1/5/10)	No	Open	DVD±RW	No	No	No	Fixed 450W (non-hot swap, no redundant)	3
70AN000B++	Xeon E3-1275 v3 (4C/3.5GHz/8MB/1600MHz)	1600MHz ECC	8GBx1	Intel HD P4600	4x3.5" DC SATA	RAID 100 (onboard, 0/1/5/10)	No	Open	DVD±RW	No	No	No	Fixed 450W (non-hot swap, no redundant)	1

1. Model in italics shows that this is a Global Model. 2. HS = Hot-swap, DC = Direct cable, non-hot swap Country Code "++": WE models listed above might not be available in all WE countries

• For detailed ThinkServer TS440 platform specifications, please see [ThinkServer TS440 Platform Specifications sheet](#)

Systems management	<ul style="list-style-type: none"> Intel Active Management Technology 9 (KVM function needs Intel Xeon E3-12X5 v3 processors) EasyStartup EasyUpdate 	<p>Optical Bays</p> <ul style="list-style-type: none"> Two 5.25" optical bays for all models (Up to one optical on onboard SATA controller models) <p>Hard Drive Bays</p> <ul style="list-style-type: none"> Four 3.5" hard drive bays, no hot-swap, direct cable (4x3.5" DC) Four 3.5" hot-swap hard drive bays (4x3.5" HS) Eight 3.5" hot-swap hard drive bays (8x3.5" HS) Eight 2.5" hot-swap hard drive bays (8x2.5" HS)
Chipset	Intel C226 Chipset	
Processor	One LGA1150 socket, integrated 2-channel DDR3 memory controller, optional integrated Intel HD Graphics on selected processors	 <p>8 x 2.5" HS 4 x 3.5" HS 8 x 3.5" HS</p>
Memory type	1600MHz UDIMM, DDR3, ECC, 2-channel capable	
Memory DIMM sockets	Four 240-pin DIMM sockets, up to 32GB ECC UDIMM (Actual memory operating speed depends on processor memory controller speed, installed memory speed, and quantity of memory DIMMs)	<p>Mechanical</p> <ul style="list-style-type: none"> Tower, business black color, metal case W x H x D = 7.68"/195mm x 16.9"/430mm x 23.4"/595mm 61.7 lb (28kg) max configuration Rack-mountable to 5U (via optional Tower to Rack Shelf Conversion Kit, not included in standard model) Toolless side cover removal Toolless disk and optical drive removal Toolless adapter retention Illuminated front icons
Graphics	<ul style="list-style-type: none"> Integrated Intel HD Graphics on Xeon E3-12X5 v3 processors, uses main memory, works along with discrete graphics to support multi-display, enables VGA connector on rear (detailed information please see Rear ports section) Supports optional discrete NVIDIA NVS 300 adapter, PCIe x1, 512MB 	
Onboard SATA controller	Onboard ThinkServer RAID 100 SATA controller in chipset, SATA 6.0Gb/s, RAID 0, 1, 5, 10 support	<p>Expansion Slots</p> <p>Slot 1: half-length, full-height, PCIe 3.0 x16 (near CPU) Slot 2: half-length, full-height, PCIe 2.0 x1 Slot 3: half-length, full-height, PCIe 2.0 x16 (x4 elec) Slot 4: half-length, full-height, PCI 2.3</p>
Discreted SATA/SAS controller (optional)	Supports the following: <ul style="list-style-type: none"> ThinkServer RAID 500 adapter (LSI SAS 9240-8i), PCI Express bus, SATA 6.0Gb/s, SAS 6.0Gb/s, RAID 0, 1, 10 support; optional upgrade key for ThinkServer RAID 500 adapter, add RAID 5, 50 support ThinkServer RAID 700 adapter (LSI SAS 9260-8i), PCI Express bus, SATA 6.0Gb/s, SAS 6.0Gb/s, RAID 0, 1, 5, 6, 10, 50, 60 support; optional Intelligent Battery Backup Unit (iBBU08) for ThinkServer RAID 700 adapter Notes: RAID 50 and 60 are supported on 8 hard drive bays models only	
Optical	Supports DVD±RW or DVD ROM, 1.6" high, SATA interface	<p>Security</p> <ul style="list-style-type: none"> Security chip: ST33ZP24AR28PVSP for TPM function, TCG 1.2-compliant Administrator password User password Front panel key lock Boot sequence control Boot without keyboard, mouse, diskette Serial port I/O control USB port disablement (front or all)
Front ports	Two USB 3.0 (blue)	
Rear ports	One VGA for models with Intel HD Graphics, two USB 2.0, four USB 3.0 (blue), one serial (9-pin), one ethernet (RJ-45)	<p>Security</p> <ul style="list-style-type: none"> Security chip: ST33ZP24AR28PVSP for TPM function, TCG 1.2-compliant Administrator password User password Front panel key lock Boot sequence control Boot without keyboard, mouse, diskette Serial port I/O control USB port disablement (front or all)
Add-on ports (optional)	Supports the following: <ul style="list-style-type: none"> Single Parallel Port PCI Adapter (1xParallel) Single Serial Port PCI Adapter (1xSerial) Dual Serial Ports PCI Adapter (2xSerial PCI) Dual Serial Ports PCIe Adapter (2xSerial PCIe) 	
Onboard Ethernet	One onboard gigabit ethernet, Intel I217	<p>Security</p> <ul style="list-style-type: none"> Security chip: ST33ZP24AR28PVSP for TPM function, TCG 1.2-compliant Administrator password User password Front panel key lock Boot sequence control Boot without keyboard, mouse, diskette Serial port I/O control USB port disablement (front or all)
Discrete Ethernet (optional)	Supports the following: <ul style="list-style-type: none"> Intel Gigabit CT Desktop Adapter (1xGbE, RJ-45) Intel Ethernet Server Adapter I350-T2 (2xGbE, RJ-45) Intel Ethernet Server Adapter I350-T4 (4xGbE, RJ-45) 	
Keyboard/Mouse	None (use USB port)	<p>Security</p> <ul style="list-style-type: none"> Security chip: ST33ZP24AR28PVSP for TPM function, TCG 1.2-compliant Administrator password User password Front panel key lock Boot sequence control Boot without keyboard, mouse, diskette Serial port I/O control USB port disablement (front or all)
Power supply	Supports one of the following, depending on models: <ul style="list-style-type: none"> One fixed 450 watts, universal, 80 PLUS® Platinum qualified Up to two redundant 450 watts, two maximum, rear access, hot-swap, 80 PLUS Gold qualified, redundant with two power supplies 	
Base warranty	1 or 3-year parts and labor limited warranty ¹	<p>Security</p> <ul style="list-style-type: none"> Security chip: ST33ZP24AR28PVSP for TPM function, TCG 1.2-compliant Administrator password User password Front panel key lock Boot sequence control Boot without keyboard, mouse, diskette Serial port I/O control USB port disablement (front or all)
Environmental certifications	<ul style="list-style-type: none"> GREENGUARD® certified Energy Star Server 1.1 qualified RoHS-compliant More environmental information and requirements, please see ThinkServer TS440 Platform Specifications sheet	

See footnotes for important warranty information Model(s) announced November 26, 2013

Type-model ¹	Processor	Memory type	Memory DIMMs	Graphics	Disk Bays ²	RAID controller	Pre-conf RAID	Storage	Optical	Add-on ports	Discrete ethernet	Windows Server 2012 Preloaded	Power Supply	Base on-site warranty (-year)
70AN000L++	Xeon E3-1276 v3 4C/3.6GHz/8MB/1600MHz/ Intel HD P4600	1600MHz ECC	8GBx1	Integrated	4x3.5" DC	RAID 100	No	Open	DVD±RW	No	No	No	Fixed 450W (no redundant)	3
70AN000M++	Xeon E3-1276 v3 4C/3.6GHz/8MB/1600MHz/ Intel HD P4600	1600MHz ECC	8GBx1	Integrated	4x3.5" DC	RAID 100	No	Open	DVD±RW	No	No	No	Fixed 450W (no redundant)	1
70AN000N++	Xeon E3-1226 v3 4C/3.3GHz/8MB/1600MHz/ Intel HD P4600	1600MHz ECC	4GBx1	Integrated	4x3.5" DC	RAID 100	RAID 1	2x1TB 3.5" SATA	DVD±RW	No	No	No	Fixed 450W (no redundant)	1
70AN000P++	Xeon E3-1226 v3 4C/3.3GHz/8MB/1600MHz/ Intel HD P4600	1600MHz ECC	4GBx1	Integrated	4x3.5" DC	RAID 100	No	Open	DVD±RW	No	No	No	Fixed 450W (no redundant)	1
70AN000Q++	Xeon E3-1226 v3 4C/3.3GHz/8MB/1600MHz/ Intel HD P4600	1600MHz ECC	4GBx1	Integrated	4x3.5" DC	RAID 100	RAID 1	2x1TB 3.5" SATA	DVD±RW	No	No	No	Fixed 450W (no redundant)	3

1. Model in italics shows that this is a Global Model. 2. HS = Hot-swap, DC = Direct cable, non-hot swap Country Code "+*": WE models listed above might not be available in all WE countries

• For detailed ThinkServer TS440 platform specifications, please see [ThinkServer TS440 Platform Specifications sheet](#)

Systems management	<ul style="list-style-type: none"> Intel Active Management Technology 9 (KVM function needs Intel Xeon E3-12X5 v3 processors) EasyStartup EasyUpdate
Chipset	Intel C226 Chipset
Processor	One LGA1150 socket, integrated 2-channel DDR3 memory controller, optional integrated Intel HD Graphics on selected processors
Memory type	1600MHz UDIMM, DDR3, ECC, 2-channel capable
Memory DIMM sockets	Four 240-pin DIMM sockets, up to 32GB ECC UDIMM (Actual memory operating speed depends on processor memory controller speed, installed memory speed, and quantity of memory DIMMs)
Graphics	<ul style="list-style-type: none"> Integrated Intel HD Graphics on Xeon E3-12X5 v3 processors, uses main memory, works along with discrete graphics to support multi-display, enables VGA connector on rear (detailed information please see Rear ports section) Supports optional discrete NVIDIA NVS 300 adapter, PCIe x1, 512MB
Onboard SATA controller	Onboard ThinkServer RAID 100 SATA controller in chipset, SATA 6.0Gb/s, RAID 0, 1, 5, 10 support
Discreted SATA/SAS controller (optional)	Supports the following: <ul style="list-style-type: none"> ThinkServer RAID 500 adapter (LSI SAS 9240-8i), PCI Express bus, SATA 6.0Gb/s, SAS 6.0Gb/s, RAID 0, 1, 10 support; optional upgrade key for ThinkServer RAID 500 adapter, add RAID 5, 50 support ThinkServer RAID 700 adapter (LSI SAS 9260-8i), PCI Express bus, SATA 6.0Gb/s, SAS 6.0Gb/s, RAID 0, 1, 5, 6, 10, 50, 60 support; optional Intelligent Battery Backup Unit (iBBU08) for ThinkServer RAID 700 adapter Notes: RAID 50 and 60 are supported on 8 hard drive bays models only
Optical	Supports DVD±RW or DVD ROM, 1.6" high, SATA interface
Front ports	Two USB 3.0 (blue)
Rear ports	One VGA for models with Intel HD Graphics, two USB 2.0, four USB 3.0 (blue), one serial (9-pin), one ethernet (RJ-45)
Add-on ports (optional)	Supports the following: <ul style="list-style-type: none"> Single Parallel Port PCI Adapter (1xParallel) Single Serial Port PCI Adapter (1xSerial) Dual Serial Ports PCI Adapter (2xSerial PCI) Dual Serial Ports PCIe Adapter (2xSerial PCIe)
Onboard Ethernet	One onboard gigabit ethernet, Intel I217
Discrete Ethernet (optional)	Supports the following: <ul style="list-style-type: none"> Intel Gigabit CT Desktop Adapter (1xGbE, RJ-45) Intel Ethernet Server Adapter I350-T2 (2xGbE, RJ-45) Intel Ethernet Server Adapter I350-T4 (4xGbE, RJ-45)
Keyboard/Mouse	None (use USB port)
Power supply	Supports one of the following, depending on models: <ul style="list-style-type: none"> One fixed 450 watts, universal, 80 PLUS® Platinum qualified Up to two redundant 450 watts, two maximum, rear access, hot-swap, 80 PLUS Gold qualified, redundant with two power supplies
Base warranty	1 or 3-year parts and labor limited warranty ¹
Environmental certifications	<ul style="list-style-type: none"> GREENGUARD® certified Energy Star Server 1.1 qualified RoHS-compliant More environmental information and requirements, please see ThinkServer TS440 Platform Specifications sheet

Optical Bays

- Two 5.25" optical bays for all models (Up to one optical on onboard SATA controller models)

Hard Drive Bays

- Four 3.5" hard drive bays, no hot-swap, direct cable (4x3.5" DC)
- Four 3.5" hot-swap hard drive bays (4x3.5" HS)
- Eight 3.5" hot-swap hard drive bays (8x3.5" HS)
- Eight 2.5" hot-swap hard drive bays (8x2.5" HS)



8 x 2.5" HS 4 x 3.5" HS 8 x 3.5" HS

Mechanical

- Tower, business black color, metal case
- W x H x D = 7.68"/195mm x 16.9"/430mm x 23.4"/595mm
- 61.7 lb (28kg) max configuration
- Rack-mountable to 5U (via optional Tower to Rack Shelf Conversion Kit, not included in standard model)
- Toolless side cover removal
- Toolless disk and optical drive removal
- Toolless adapter retention
- Illuminated front icons

Expansion Slots

Slot 1: half-length, full-height, PCIe 3.0 x16 (near CPU)
 Slot 2: half-length, full-height, PCIe 2.0 x1
 Slot 3: half-length, full-height, PCIe 2.0 x16 (x4 elec)
 Slot 4: half-length, full-height, PCI 2.3


Security

- Security chip: ST33ZP24AR28PVSP for TPM function, TCG 1.2-compliant
- Administrator password
- User password
- Front panel key lock
- Boot sequence control
- Boot without keyboard, mouse, diskette
- Serial port I/O control
- USB port disablement (front or all)

See footnotes for important warranty information Model(s) announced March 10, 2015

ThinkServer TD350 Platform Specifications

Components	Specification
Mechanical	<ul style="list-style-type: none"> Tower or 4U rack Minimum configuration: 22 kg (48.5 lb), maximum: 41.4 kg (91.27 lb)
Dimensions (tower)	Height: 459 mm (18.1 in), width: 251 mm (9.9 in), depth: 686 mm (27 in)
Dimensions (rack)	Height: 173 mm (6.8 in), width: 482 mm (19 in), depth: 686 mm (27 in)
Chipset	Intel C612 Platform Controller Hub (PCH)
Processor	Up to two Intel Xeon E5-2600 v3 family processors with 16 cores up to 2.3GHz, 16 cores up to 2.3GHz, 14 cores up to 2.3GHz, 12 cores up to 2.6GHz, 10 cores up to 2.6GHz, 8 cores up to 3.2GHz, 6 cores up to 3.4GHz, 4 cores up to 3.5GHz. Two QPI link up to 9.6 GT/s. Up to 2133MHz memory speed. Up to 40MB cache.
Memory DIMMs	16 DIMM sockets (8 DIMMs per processor), 8-channel capable (4-channel per processor). RDIMM and LRDIMM (cannot be intermixed), DDR4, up to 2133MHz
Memory capacity	256GB (RDIMM, 16GB x 16)/512GB (LRDIMM, 32GB x 16)
Memory protection	ECC, memory mirroring, lockstep, and memory sparing
RAID support	RAID 0, 1, 10 with RAID 110i , 6Gb/s SATA, optional key for RAID 5. RAID 0, 1, 10 with RAID 510i , 6Gb/s SAS/SATA, optional key for RAID 5, 50. RAID 0, 1, 10, 5, 50, 6, 60 with RAID 720i or 720ix , 12Gb/s SAS/SATA, optional 1GB memory or 1GB/2GB/4GB flash with super capacitor RAID 0, 1, 10, 5, 50, 6, 60 with LSI 9286CV-8e , 6Gb/s SAS/SATA, 1GB memory, CacheVault flash cache with super capacitor, optional CacheCade Pro or FastPath upgrade key
Disk drive bays	3.5" bay up to 15, or 2.5" bay up to 16, hot-swap. Or 5 3.5" easy swap bays (non-hot swap)
Optical drive	Two 5.25" bays for optical and tape drives. DVD-ROM or DVDRW
Tape drive bays	Up to one LTO-6 internal SAS tape drive
Network interfaces	One dedicate management port, two gigabit ethernet ports. Supports optional discrete network adapters via PCIe slots
Ports	Front: Two USB 2.0. Rear: One VGA, four USB 3.0, one RJ-45 (dedicate/share mgmt), two ethernet (RJ-45), one serial (9-pin)
Cooling	4 (3+1), hot-swap
Power supply	Up to two redundant hot-swap 450W ac or 550 W ac or 750 W ac or 1100 W ac power supplies. 550 W and 1100 W are 80 PLUS Platinum qualified, 750 W is 80 PLUS Platinum or Titanium qualified, 450 W is 80 PLUS Gold qualified
Graphics	Onboard Aspeed AST2400 with 16MB memory, one VGA on rear. Maximum resolution: 1920x1200@60Hz
Hot-swap parts	Disk drives (hot-swap models), power supplies, and fans
Systems management	UEFI. Onboard Aspeed AST2400 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC). Control Panel LEDs shows the status of power, ID, network, system. Supports ThinkServer Diagnostics, ThinkServer Deployment Manager, ThinkServer Energy Manager, ThinkServer System Manager CLI, Lenovo ThinkServer Partner Pack for VMware vCenter and Microsoft System Center Operations Manager, ThinkServer Power Planner. Optional ThinkServer System Manager (TSM) Premium for for remote presence (graphics, keyboard and mouse, and virtual media)
Security features	Power-on and administrator password, optional Trusted Platform Module (TCG 1.2-compliant)
Operating systems supported	Microsoft Windows Server 2012 R2, 2012, and 2008 R2, Windows Small Business Server 2011, Red Hat Enterprise Linux 6.5, SUSE Linux Enterprise Server 11, VMware vSphere (ESXi) 5.5 U2
Declared noise emissions	Operating: < 6.5 Bels, Idle: < 6 Bels (Maximum configuration)
Limited warranty	1-year or 3-year limited onsite service. For more information and services upgrade options, please see: http://www.lenovo.com/services_warranty/us/en/lenovo-warranty.html

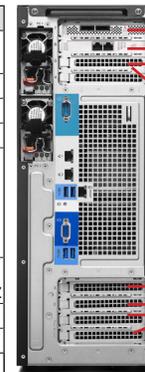

Supports up to 7 PCIe 3.0 x16 slots:
 Slot 1: PCIe 3.0 x16; full height, full length, by CPU 1, double-wide
 Slot 2: PCIe 3.0 x16 (x8 elec); full height, full length, by CPU 1
 Slot 3: PCIe 3.0 x16 (x8 elec); full height, full length, by CPU 1
 Slot 4: PCIe 3.0 x16 (x8 elec); full height, full length, by CPU 2
 Slot 5: PCIe 3.0 x16; full height, full length, by CPU 2
 Slot 6: PCIe 3.0 x16 (x8 elec); full height, full length, by CPU 2
 Slot 7: PCIe 3.0 x16 (x8 elec); full height, full length, by CPU 2

TD350 Environment Specification

Temperature - operating	50 °F to 95 °F (10 °C to 45 °C)
Temperature - storage (no package)	-10 °C to 60 °C
Temperature - storage (with package)	-40 °C to 60 °C
Altitude - operating	(Unpressurized): 0-10000ft (0-3048m)
Humidity - operating	20%~80%, non-condensing
Humidity - storage (with package)	8%~90%, non-condensing

Note:

45 °C continuous operation only supports on 3.5" ES models with max 120W CPU/no tape/redundant PSU required/ No HBA or RAID cards, or 2.5" HS models with max 8 HDD/max 120W CPU/no tape/redundant PSU required/ No HBA or RAID cards.

Core Options for ThinkServer TD350 (partial)

4X70F28590	ThinkServer 16GB DDR4-2133MHz (2Rx4) RDIMM
4X70F28591	ThinkServer 32GB DDR4-2133MHz (4Rx4) LRDIMM
4XB0G45715	ThinkServer Gen 5 3.5" 4TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive
4XB0G45719	ThinkServer Gen 5 3.5" 4TB 7.2K Enterprise SAS 6Gbps Hot Swap Hard Drive
4XB0G45737	ThinkServer 2.5" 240GB Value Read-Optimized SATA 6Gbps Hot Swap SSD
4XB0G45743	ThinkServer 3.5" 240GB Value Read-Optimized SATA 6Gbps Hot Swap SSD
4XB0F28696	ThinkServer RAID 720i 1GB Modular Flash and Supercapacitor Upgrade
4X20F28576	ThinkServer Gen 5 750W Titanium Hot Swap Power Supply
4XF0G45867	ThinkServer System Manager Premium (TSM Premium)
4XF0G45870	ThinkServer TD350 4-Post Static Rack Kit

For a list of all supported options, please see: <http://www.lenovoquickpick.com/usa/home/thinkserver/rack-and-tower-server>

ThinkServer TD350 TopSeller Model(s) - 70DG (September 2014) - I

Product Specifications Reference (PSREF)

Type-model ¹	Processor	Memory	RAID controller	Disk bays	Disk drives	Discrete ethernet	SD module	Optical	TPM	System mgmt	Power	Preloaded OS	Warranty (-year, on-site)
70DG0000++	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	1x4GB 2133MHz RDIMM	110i+key	5x3.5" HS	Open	Opt	Opt	DVDRW	TPM	Opt	750Wx1 Platinum	No	3
70DG0001++	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	1x4GB 2133MHz RDIMM	720ix+4GB Flash	15x3.5" HS	Open	Opt	Opt	DVDRW	TPM	Opt	750Wx1 Platinum	No	3
70DG000D++	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DG000E++	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DG000F++	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	1x8GB 2133MHz RDIMM	110i+key	5x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DG000G++	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	1x8GB 2133MHz RDIMM	110i+key	5x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DG000H++	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	1x8GB 2133MHz RDIMM	720ix+1GB Flash	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DG000J++	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	1x8GB 2133MHz RDIMM	720ix+1GB Flash	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DG000K++	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	1x8GB 2133MHz RDIMM	110i+key	5x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DG000L++	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	1x8GB 2133MHz RDIMM	110i+key	5x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DG000M++	1xE5-2603 v3 6C/1.6GHz/15MB/85W/1600MHz	1x8GB 2133MHz RDIMM	110i+key	5x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DG000N++	1xE5-2603 v3 6C/1.6GHz/15MB/85W/1600MHz	1x8GB 2133MHz RDIMM	110i+key	5x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DG000P++	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DG000Q++	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DG000R++	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	1x4GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DG000S++	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	1x4GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DG000T++	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	1x8GB 2133MHz RDIMM	720ix+1GB Flash	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DG000U++	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	1x8GB 2133MHz RDIMM	720ix+1GB Flash	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DG000V++	1xE5-2603 v3 6C/1.6GHz/15MB/85W/1600MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DG000W++	1xE5-2603 v3 6C/1.6GHz/15MB/85W/1600MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DG000X++	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DG000Y++	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DG0010++	1xE5-2640 v3 8C/2.6GHz/20MB/90W/1866MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DG0011++	1xE5-2640 v3 8C/2.6GHz/20MB/90W/1866MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DG0012++	1xE5-2650 v3 10C/2.3GHz/25MB/105W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DG0013++	1xE5-2650 v3 10C/2.3GHz/25MB/105W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DG0014++	1xE5-2660 v3 10C/2.6GHz/25MB/105W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DG0015++	1xE5-2660 v3 10C/2.6GHz/25MB/105W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1

1. Models listed above might not be available in all EMEA countries

ThinkServer TD350 TopSeller Model(s) - 70DG (September 2014) - II

Product Specifications Reference (PSREF)

Type-model ¹	Processor	Memory	RAID controller	Disk bays	Disk drives	Discrete ethernet	SD module	Optical	TPM	System mgmt	Power	Preloaded OS	Warranty (-year, on-site)
70DG0016++	1xE5-2667 v3 8C/3.2GHz/20MB/135W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DG0017++	1xE5-2667 v3 8C/3.2GHz/20MB/135W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DG0018++	1xE5-2670 v3 12C/2.3GHz/30MB/120W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DG0019++	1xE5-2670 v3 12C/2.3GHz/30MB/120W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DG001A++	1xE5-2680 v3 12C/2.5GHz/30MB/120W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DG001B++	1xE5-2680 v3 12C/2.5GHz/30MB/120W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DG001C++	1xE5-2690 v3 12C/2.6GHz/30MB/135W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DG001D++	1xE5-2690 v3 12C/2.6GHz/30MB/135W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DG001E++	1xE5-2695 v3 14C/2.3GHz/35MB/120W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DG001F++	1xE5-2695 v3 14C/2.3GHz/35MB/120W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DG001G++	1xE5-2698 v3 16C/2.3GHz/40MB/135W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DG001H++	1xE5-2698 v3 16C/2.3GHz/40MB/135W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DG001J++	1xE5-2683 v3 14C/2GHz/35MB/120W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DG001K++	1xE5-2683 v3 14C/2GHz/35MB/120W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1

1. Models listed above might not be available in all EMEA countries

ThinkServer TD350 TopSeller Model(s) - 70DJ (September 2014) - I

Product Specifications Reference (PSREF)

Type-model ¹	Processor	Memory	RAID controller	Disk bays	Disk drives	Discrete ethernet	SD module	Optical	TPM	System mgmt	Power	Preloaded OS	Warranty (-year, on-site)
70DJ0000++	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	1x4GB 2133MHz RDIMM	510i+key	8x2.5" HS	Open	Opt	Opt	DVDRW	TPM	Opt	750Wx1 Platinum	No	3
70DJ0001++	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	1x4GB 2133MHz RDIMM	720ix+4GB Flash	16x2.5" HS	Open	Opt	Opt	DVDRW	TPM	Opt	750Wx1 Platinum	No	3
70DJ0002++	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	1x8GB 2133MHz RDIMM	510i+key	8x2.5" HS	Open	Opt	Opt	DVDRW	TPM	Opt	750Wx1 Platinum	No	3
70DJ0007++	1xE5-2650 v3 10C/2.3GHz/25MB/105W/2133MHz	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ0008++	1xE5-2650 v3 10C/2.3GHz/25MB/105W/2133MHz	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ0009++	1xE5-2650 v3 10C/2.3GHz/25MB/105W/2133MHz	1x8GB 2133MHz RDIMM	720i+1GB RAM	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx2 Platinum	No	3
70DJ000A++	1xE5-2650 v3 10C/2.3GHz/25MB/105W/2133MHz	1x8GB 2133MHz RDIMM	720i+1GB RAM	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx2 Platinum	No	1
70DJ000B++	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ000C++	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ000D++	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	1x8GB 2133MHz RDIMM	720i+1GB RAM	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ000E++	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	1x8GB 2133MHz RDIMM	720i+1GB RAM	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ000F++	1xE5-2650 v3 10C/2.3GHz/25MB/105W/2133MHz	1x8GB 2133MHz RDIMM	720i+1GB RAM	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	TSM	750Wx2 Platinum	No	3
70DJ000G++	1xE5-2650 v3 10C/2.3GHz/25MB/105W/2133MHz	1x8GB 2133MHz RDIMM	720i+1GB RAM	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	TSM	750Wx2 Platinum	No	1
70DJ000H++	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	1x8GB 2133MHz RDIMM	510i+key	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ000J++	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	1x8GB 2133MHz RDIMM	510i+key	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ000K++	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	1x8GB 2133MHz RDIMM	510i+key	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ000L++	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	1x8GB 2133MHz RDIMM	510i+key	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ000M++	1xE5-2603 v3 6C/1.6GHz/15MB/85W/1600MHz	1x8GB 2133MHz RDIMM	510i+key	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ000N++	1xE5-2603 v3 6C/1.6GHz/15MB/85W/1600MHz	1x8GB 2133MHz RDIMM	510i+key	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ000P++	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	1x8GB 2133MHz RDIMM	720ix+1GB Flash	16x2.5" HS	2x300GB 2.5" SAS HS	Opt	Opt	DVDRW	TPM	TSM	750Wx2 Platinum	No	3
70DJ000Q++	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	1x8GB 2133MHz RDIMM	720ix+1GB Flash	16x2.5" HS	2x300GB 2.5" SAS HS	Opt	Opt	DVDRW	TPM	TSM	750Wx2 Platinum	No	1
70DJ000R++	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	2x8GB 2133MHz RDIMM	720ix+1GB Flash	16x2.5" HS	Open	Opt	Opt	DVDRW	TPM	TSM	750Wx2 Platinum	No	3
70DJ000S++	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	2x8GB 2133MHz RDIMM	720ix+1GB Flash	16x2.5" HS	Open	Opt	Opt	DVDRW	TPM	TSM	750Wx2 Platinum	No	1
70DJ000T++	1xE5-2603 v3 6C/1.6GHz/15MB/85W/1600MHz	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ000U++	1xE5-2603 v3 6C/1.6GHz/15MB/85W/1600MHz	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ000V++	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	1x8GB 2133MHz RDIMM	720i+1GB RAM	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx2 Platinum	No	3
70DJ000W++	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	1x8GB 2133MHz RDIMM	720i+1GB RAM	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx2 Platinum	No	1
70DJ000X++	2xE5-2650 v3 10C/2.3GHz/25MB/105W/2133MHz	4x8GB 2133MHz RDIMM	720ix+2GB Flash	16x2.5" HS	Open	Opt	Opt	DVDRW	TPM	TSM	750Wx2 Platinum	No	3

1. Models listed above might not be available in all EMEA countries

ThinkServer TD350 TopSeller Model(s) - 70DJ (September 2014) - II

Product Specifications Reference (PSREF)

Type-model ¹	Processor	Memory	RAID controller	Disk bays	Disk drives	Discrete ethernet	SD module	Optical	TPM	System mgmt	Power	Preloaded OS	Warranty (-year, on-site)
70DJ000Y++	2xE5-2650 v3 10C/2.3GHz/25MB/105W/2133MHz	4x8GB 2133MHz RDIMM	720ix+2GB Flash	16x2.5" HS	Open	Opt	Opt	DVDRW	TPM	TSM	750Wx2 Platinum	No	1
70DJ0010++	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ0011++	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ0012++	2xE5-2640 v3 8C/2.6GHz/20MB/90W/1866MHz	4x8GB 2133MHz RDIMM	720ix+2GB Flash	16x2.5" HS	Open	Opt	Opt	DVDRW	TPM	TSM	750Wx2 Platinum	No	3
70DJ0013++	2xE5-2640 v3 8C/2.6GHz/20MB/90W/1866MHz	4x8GB 2133MHz RDIMM	720ix+2GB Flash	16x2.5" HS	Open	Opt	Opt	DVDRW	TPM	TSM	750Wx2 Platinum	No	1
70DJ0014++	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ0015++	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ0016++	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	1x8GB 2133MHz RDIMM	510i+key	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ0017++	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	1x8GB 2133MHz RDIMM	510i+key	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ0018++	2xE5-2640 v3 8C/2.6GHz/20MB/90W/1866MHz	2x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ0019++	2xE5-2640 v3 8C/2.6GHz/20MB/90W/1866MHz	2x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ001A++	1xE5-2670 v3 12C/2.3GHz/30MB/120W/2133MHz	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ001B++	1xE5-2670 v3 12C/2.3GHz/30MB/120W/2133MHz	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ001C++	1xE5-2680 v3 12C/2.5GHz/30MB/120W/2133MHz	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ001D++	1xE5-2680 v3 12C/2.5GHz/30MB/120W/2133MHz	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ001E++	1xE5-2603 v3 6C/1.6GHz/15MB/85W/1600MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ001F++	1xE5-2603 v3 6C/1.6GHz/15MB/85W/1600MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ001G++	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ001H++	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ001J++	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ001K++	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ001L++	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ001M++	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ001N++	1xE5-2640 v3 8C/2.6GHz/20MB/90W/1866MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ001P++	1xE5-2640 v3 8C/2.6GHz/20MB/90W/1866MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ001Q++	1xE5-2650 v3 10C/2.3GHz/25MB/105W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ001R++	1xE5-2650 v3 10C/2.3GHz/25MB/105W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ001S++	1xE5-2660 v3 10C/2.6GHz/25MB/105W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3

1. Models listed above might not be available in all EMEA countries

ThinkServer TD350 TopSeller Model(s) - 70DJ (September 2014) - III

Product Specifications Reference (PSREF)

Type-model ¹	Processor	Memory	RAID controller	Disk bays	Disk drives	Discrete ethernet	SD module	Optical	TPM	System mgmt	Power	Preloaded OS	Warranty (-year, on-site)
70DJ001T++	1xE5-2660 v3 10C/2.6GHz/25MB/105W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ001U++	1xE5-2667 v3 8C/3.2GHz/20MB/135W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ001V++	1xE5-2667 v3 8C/3.2GHz/20MB/135W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ001W++	1xE5-2670 v3 12C/2.3GHz/30MB/120W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ001X++	1xE5-2670 v3 12C/2.3GHz/30MB/120W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ001Y++	1xE5-2680 v3 12C/2.5GHz/30MB/120W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ0020++	1xE5-2680 v3 12C/2.5GHz/30MB/120W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ0021++	1xE5-2683 v3 14C/2GHz/35MB/120W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ0022++	1xE5-2683 v3 14C/2GHz/35MB/120W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ0023++	1xE5-2685 v3 12C/2.6GHz/30MB/120W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ0024++	1xE5-2685 v3 12C/2.6GHz/30MB/120W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ0025++	1xE5-2690 v3 12C/2.6GHz/30MB/135W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ0026++	1xE5-2690 v3 12C/2.6GHz/30MB/135W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ0027++	1xE5-2695 v3 14C/2.3GHz/35MB/120W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ0028++	1xE5-2695 v3 14C/2.3GHz/35MB/120W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1
70DJ0029++	1xE5-2698 v3 16C/2.3GHz/40MB/135W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	3
70DJ002A++	1xE5-2698 v3 16C/2.3GHz/40MB/135W/2133MHz	1x8GB 2133MHz RDIMM	720ix+1GB RAM	16x2.5" HS	Open	Opt	Opt	DVDRW	Opt	Opt	750Wx1 Platinum	No	1


1. Models listed above might not be available in all EMEA countries

ThinkServer TD350 TopSeller Model(s) - For Switzerland (March 2015)

Product Specifications Reference (PSREF)

Type-model ¹	Processor	2nd CPU	Memory	RAID controller	Disk bays	Disk drives	M.2/SD module	Optical	Discrete ethernet	TPM	Chassis intrusion switch	System mgmt	Preloaded OS	Base wty	Power
70DG0024SE	1xXeon E5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	4XG0F28802	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	No	DVD±RW	No	No	Switch	TSM	No	3-year	750Wx1 Platinum
70DG002ESE	1xXeon E5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	4XG0F28803	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	No	DVD±RW	No	No	Switch	TSM	No	3-year	750Wx1 Platinum
70DG002LSE	1xXeon E5-2603 v3 6C/1.6GHz/15MB/85W/1600MHz	4XG0F28804	1x8GB 2133MHz RDIMM	720ix+1GB RAM	15x3.5" HS	Open	No	DVD±RW	No	No	Switch	TSM	No	3-year	750Wx1 Platinum
70DJ003GSE	1xXeon E5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	4XG0F28803	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	No	DVD±RW	No	No	Switch	TSM	No	3-year	750Wx1 Platinum

ThinkServer TD340 Overview

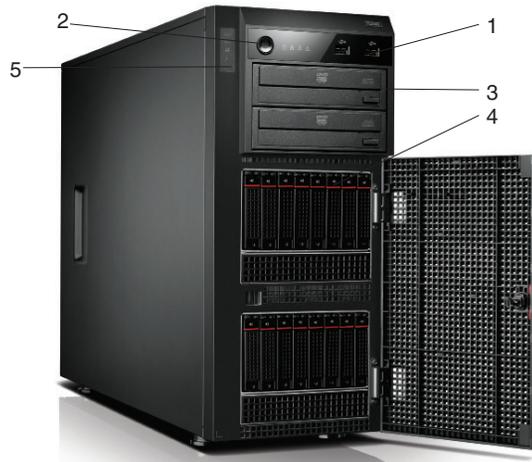

Front view

1. Front I/O: 2 USB 2.0
2. Power Button
3. Two 5.25" optical drive bays
4. 16 x 2.5" hot-swap drive bays (on selected models, also supports one of the following: 4 x 3.5" direct cable bays, or 4 x 3.5" hot-swap bays, or 8 x 3.5" hot-swap bays, or 8 x 2.5" hot-swap bays)
5. Intelligent Diagnostics Module (optional)



Rear view

6. Hot-swap power supplies, 800W, 80 PLUS Gold (on selected models, also supports one fixed power supply, 625W, 80 PLUS Bronze)
7. Rear I/O: 4 USB 2.0
1 Serial (9-pin)
2 RJ-45 (one for dedicate/share management)
1 VGA
8. Expansion slots*:
1 PCIe 3.0 x8 (*near rear I/O, 2nd CPU is needed*)
1 PCIe 3.0 x16
1 PCIe 3.0 x8 (*2nd CPU is needed*)
1 PCIe 3.0 x8 (*2nd CPU is needed*)
1 PCIe 3.0 x8 (x4 elec)
1 PCI
* *Add-on ethernet adapter, RAID adapter, and graphics adapter are optional*

Internal

- Two LGA1356 sockets, supports up to two processors from Intel Xeon E5-2400 v2 and E5-2400 families
- 12 DIMM sockets, supports up to 192GB ECC LV RDIMM or 48GB ECC LV UDIMM memory
- Up to 16 x 2.5" hard drive bays

Mechanical



- Tower, business black color, metal case
- Rack-mountable to 5U
- W x H (without foot) x D = 7.68"/195mm x 16.9"/430mm x 23.4"/595mm
- 57.32 lb (26kg) max configuration

ThinkServer TD340 TopSeller Models - 70B7 (January 2014)

Product Specifications Reference (PSREF)

Type-model	Intel Xeon Processor	2nd CPU	Memory	Disk Bays	RAID controller	Storage	Optical	Discrete ethernet	Intelligent Diagnostics (IDM)	ThinkServer Management Module (TMM) Premium	Tower to Rack kit	Discrete Graphics	TPM	Preloaded OS	Power Supply	Warranty (-year, on-site)
70B7000Axx	Xeon E5-2407 v2 4C/2.4GHz/10MB/1333MHz	No	4GBx1 1600MHz LVRDIMM	4x3.5" HS (SATA/SAS)	RAID300	Open	DVD±RW	No	IDM	No	No	No	No	No	1x800W Redundant	3
70B7000Gxx	Xeon E5-2420 v2 6C/2.2GHz/15MB/1600MHz	No	4GBx1 1600MHz LVRDIMM	8x3.5" HS (SATA/SAS)	RAID300	Open	DVD±RW	No	IDM	No	No	No	No	No	1x800W Redundant	3
70B7000Kxx	Xeon E5-2407 v2 4C/2.4GHz/10MB/1333MHz	No	4GBx1 1600MHz LVRDIMM	8x3.5" HS (SATA/SAS)	RAID500	Open	DVD±RW	No	IDM	No	No	No	No	No	1x800W Redundant	3
70B70017xx	Xeon E5-2420 v2 6C/2.2GHz/15MB/1600MHz	No	8GBx1 1600MHz LVRDIMM	8x3.5" HS (SATA/SAS)	RAID710 +CacheVault	Open	DVD±RW	No	IDM	No	No	No	No	No	1x800W Redundant	3
70B7001Jxx	Xeon E5-2403 v2 4C/1.8GHz/10MB/1333MHz	No	4GBx1 1600MHz LVRDIMM	8x3.5" HS (SATA/SAS)	RAID300	Open	DVD±RW	No	IDM	No	No	No	No	No	1x800W Redundant	1
70B7001Lxx	Xeon E5-2420 v2 6C/2.2GHz/15MB/1600MHz	No	4GBx1 1600MHz LVRDIMM	8x3.5" HS (SATA/SAS)	RAID300	Open	DVD±RW	No	IDM	No	No	No	No	No	1x800W Redundant	1
70B7002Axx	Xeon E5-2450 v2 8C/2.5GHz/20MB/1600MHz	No	8GBx1 1600MHz LVRDIMM	8x2.5" HS (SATA/SAS)	RAID710 +CacheVault	Open	DVD±RW	No	IDM	No	No	No	No	No	1x800W Redundant	1
70B7002Fxx	Xeon E5-2420 v2 6C/2.2GHz/15MB/1600MHz	No	8GBx1 1600MHz LVRDIMM	8x2.5" HS (SATA/SAS)	RAID700	Open	DVD±RW	No	IDM	TMM Premium	No	No	No	No	2x800W Redundant	3

- For detailed platform specifications, please see [ThinkServer TD340 Platform Specifications sheets](#)
- For optional configurations of ThinkServer TD340, please see [ThinkServer TD340 Optional Configurations sheets](#)
- For ThinkServer TD340 operating system and virtualization supportability, please see [ThinkServer TD340 Operating System and Virtualization Supportability Matrix sheets](#)
- For Lenovo services upgrade options for ThinkServer TD340, please see [ThinkServer TD340 Services Upgrade Options sheets](#)

Chipset	Intel C606 Chipset, two LGA1356 sockets for processors	Environmental certifications	<ul style="list-style-type: none"> • Energy Star Server 2.0 qualified for models with 800 watts hot-swap PSU • Energy Star Server 1.1 qualified for models with 625 watts fixed PSU • RoHS-compliant
Memory DIMMs	Twelve DIMM sockets, six DIMM sockets per processor		
Memory capacity	Up to 192GB DDR3 LV RDIMM (16GB x 12), or up to 48GB DDR3 LV UDIMM (4GB x 12)	Front 	Mechanical <ul style="list-style-type: none"> • Tower, rack-mountable to 5U via optional conversion kit (<i>Conversion kit is not included in model</i>) • 7.68" W x 23.4" D x 16.9" H (<i>without foot</i>) • 195mm W x 595mm D x 430mm H (<i>without foot</i>) • 57.3 lb (26kg) max configuration
Memory protection	ECC, memory mirroring, memory sparing		
RAID support	Supports one of the following, depending on models: RAID 100: RAID 0, 1, 10 standard, optional upgrade key for RAID 5 RAID 300: RAID 0, 1, 10 standard, optional upgrade key for RAID 5 RAID 500: RAID 0, 1, 10 standard, optional upgrade key for RAID 5, 50 RAID 700: RAID 0, 1, 10, 5, 50, 6, 60 standard, 512MB cache, optional intelligent Battery Backup Unit RAID 710: RAID 0, 1, 10, 5, 50, 6, 60 standard, 1GB cache, optional CacheVault flash cache with super capacitor/CacheCade Pro 2.0/FastPath key <i>*RAID 50, 60 are functional on 8 or 16 disk bay models only, RAID100 supports SATA drives only</i>	Rear*** 	Disk bay Configurations Supports one of the following, depending on models: <ul style="list-style-type: none"> • 4 x 3.5" non-hot swap SATA disk bays (<i>uses Disk bay area 1</i>) • 4 x 3.5" hot-swap SATA/SAS disk bays (<i>uses Disk bay area 1</i>) • 8 x 3.5" hot-swap SATA/SAS disk bays (<i>uses Disk bay area 1 and 2</i>) • 8 x 2.5" hot-swap SATA/SAS disk bays (<i>uses Disk bay area 1</i>) • 16 x 2.5" hot-swap SATA/SAS disk bays (<i>uses Disk bay area 1 and 2</i>)
Optical drive (optional)	Supports two half-height 5.25" optical bays, up to two optical drives		
Onboard network	Two Gigabit Ethernet port via two Intel 82574L, either port can work as dedicate/share management (via BIOS setting)	Expansion Slots Up to six expansion slots**: Slot 1: half-length, full-height, 32-bit PCI 2.3 Slot 2: half-length, full-height, PCIe 3.0 x8 (<i>x4 elec</i>) Slot 3: half-length, full-height, PCIe 3.0 x8 Slot 4: half-length, full-height, PCIe 3.0 x8 Slot 5: half-length, full-height, PCIe 3.0 x16 Slot 6: half-length, full-height, PCIe 3.0 x8 (<i>near CPU</i>) ** Single processor models: Slot 1, 2, 5 are functional Dual processor models: All six slot are functional	
Discrete network (optional)	Supports the following Intel Server Adapter options on selected models: 1Gbps: 350-T2/I350-T4 10Gbps: X520-SR2/X520-DA2/X540-T2/Fiber Module for X520-DA2		
Intelligent Diagnostics Module (optional)	Supports optional Intelligent Diagnostics Module (IDM) on selected models, IDM LED lights indicate failing component category	Ports Front ports: Two USB 2.0 Rear ports: Four USB 2.0, one serial (9-pin), two ethernet (RJ-45, one for dedicate/share mgmt), one analog VGA DB-15 connector Internal USB: One internal USB port (Type A)	
Systems management (TMM Premium is optional)	<ul style="list-style-type: none"> • Onboard Aspeed AST2300 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC); optional ThinkServer Management Module Premium for iKVM functions • Front control panel LEDs shows the status of power, hard drive activity, network, system • ThinkServer EasyStartup/EasyManage/EasyUpdate 		
Power supply	Supports one of the following, depending on models: • One fixed 625 watts, universal, 80 PLUS Bronze qualified • Up to two redundant 800 watts, two maximum, rear access, hot-swap, 80 PLUS Gold qualified, redundant with two power supplies	*** Some models: one 625W fixed power supply	
Security features (TPM is optional)	Power-on password/administrator password, Trusted Platform Module (TCG 1.2-compliant) on selected models		



See footnotes for more detailed information
Model(s) announced January 21, 2014

© Lenovo
(70B7-1E) February 2014

ThinkServer TD340 TopSeller Models - 70B5 (January 2014)

Type-model	Intel Xeon Processor	2nd CPU	Memory	Disk Bays	RAID controller	Storage	Optical	Discrete ethernet	Intelligent Diagnostics (IDM)	ThinkServer Management Module (TMM) Premium	Tower to Rack kit	Discrete Graphics	TPM	Preloaded OS	Power Supply	Warranty (-year, on-site)
70B50007xx	Xeon E5-2403 v2 4C/1.8GHz/10MB/1333MHz	No	4GBx1 1600MHz LVUDIMM	4x3.5" DC (SATA)	RAID100 +Upgrade	Open	DVD±RW	No	IDM	No	No	No	No	No	625W fixed	3
70B5000Cxx	Xeon E5-2403 v2 4C/1.8GHz/10MB/1333MHz	No	4GBx1 1600MHz LVRDIMM	4x3.5" HS (SATA/SAS)	RAID300	Open	DVD±RW	No	IDM	No	No	No	No	No	625W fixed	3

- For detailed platform specifications, please see [ThinkServer TD340 Platform Specifications sheets](#)
- For optional configurations of ThinkServer TD340, please see [ThinkServer TD340 Optional Configurations sheets](#)
- For ThinkServer TD340 operating system and virtualization supportability, please see [ThinkServer TD340 Operating System and Virtualization Supportability Matrix sheets](#)
- For Lenovo services upgrade options for ThinkServer TD340, please see [ThinkServer TD340 Services Upgrade Options sheets](#)

Chipset	Intel C606 Chipset, two LGA1356 sockets for processors	Environmental certifications	<ul style="list-style-type: none"> • Energy Star Server 2.0 qualified for models with 800 watts hot-swap PSU • Energy Star Server 1.1 qualified for models with 625 watts fixed PSU • RoHS-compliant
Memory DIMMs	Twelve DIMM sockets, six DIMM sockets per processor		
Memory capacity	Up to 192GB DDR3 LV RDIMM (16GB x 12), or up to 48GB DDR3 LV UDIMM (4GB x 12)	Front 	Mechanical <ul style="list-style-type: none"> • Tower, rack-mountable to 5U via optional conversion kit (<i>Conversion kit is not included in model</i>) • 7.68" W x 23.4" D x 16.9" H (<i>without foot</i>) • 195mm W x 595mm D x 430mm H (<i>without foot</i>) • 57.3 lb (26kg) max configuration
Memory protection	ECC, memory mirroring, memory sparing		
RAID support	Supports one of the following, depending on models: RAID 100: RAID 0, 1, 10 standard, optional upgrade key for RAID 5 RAID 300: RAID 0, 1, 10 standard, optional upgrade key for RAID 5 RAID 500: RAID 0, 1, 10 standard, optional upgrade key for RAID 5, 50 RAID 700: RAID 0, 1, 10, 5, 50, 6, 60 standard, 512MB cache, optional intelligent Battery Backup Unit RAID 710: RAID 0, 1, 10, 5, 50, 6, 60 standard, 1GB cache, optional CacheVault flash cache with super capacitor/CacheCade Pro 2.0/FastPath key <i>*RAID 50, 60 are functional on 8 or 16 disk bay models only, RAID100 supports SATA drives only</i>	Disk bay Configurations Supports one of the following, depending on models: <ul style="list-style-type: none"> • 4 x 3.5" non-hot swap SATA disk bays (<i>uses Disk bay area 1</i>) • 4 x 3.5" hot-swap SATA/SAS disk bays (<i>uses Disk bay area 1</i>) • 8 x 3.5" hot-swap SATA/SAS disk bays (<i>uses Disk bay area 1 and 2</i>) • 8 x 2.5" hot-swap SATA/SAS disk bays (<i>uses Disk bay area 1</i>) • 16 x 2.5" hot-swap SATA/SAS disk bays (<i>uses Disk bay area 1 and 2</i>) 	
Optical drive (optional)	Supports two half-height 5.25" optical bays, up to two optical drives		
Onboard network	Two Gigabit Ethernet port via two Intel 82574L, either port can work as dedicate/share management (via BIOS setting)	Rear*** 	Expansion Slots Up to six expansion slots**: Slot 1: half-length, full-height, 32-bit PCI 2.3 Slot 2: half-length, full-height, PCIe 3.0 x8 (<i>x4 elec</i>) Slot 3: half-length, full-height, PCIe 3.0 x8 Slot 4: half-length, full-height, PCIe 3.0 x8 Slot 5: half-length, full-height, PCIe 3.0 x16 Slot 6: half-length, full-height, PCIe 3.0 x8 (<i>near CPU</i>) ** Single processor models: Slot 1, 2, 5 are functional Dual processor models: All six slot are functional
Discrete network (optional)	Supports the following Intel Server Adapter options on selected models: 1Gbps: 350-T2/I350-T4 10Gbps: X520-SR2/X520-DA2/X540-T2/Fiber Module for X520-DA2		
Intelligent Diagnostics Module (optional)	Supports optional Intelligent Diagnostics Module (IDM) on selected models, IDM LED lights indicate failing component category	Ports Front ports: Two USB 2.0 Rear ports: Four USB 2.0, one serial (9-pin), two ethernet (RJ-45, one for dedicate/share mgmt), one analog VGA DB-15 connector Internal USB: One internal USB port (Type A)	
Systems management (TMM Premium is optional)	<ul style="list-style-type: none"> • Onboard Aspeed AST2300 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC); optional ThinkServer Management Module Premium for iKVM functions • Front control panel LEDs shows the status of power, hard drive activity, network, system • ThinkServer EasyStartup/EasyManage/EasyUpdate 		
Power supply	Supports one of the following, depending on models: • One fixed 625 watts, universal, 80 PLUS Bronze qualified • Up to two redundant 800 watts, two maximum, rear access, hot-swap, 80 PLUS Gold qualified, redundant with two power supplies	*** Some models: one 625W fixed power supply	
Security features (TPM is optional)	Power-on password/administrator password, Trusted Platform Module (TCG 1.2-compliant) on selected models		

See footnotes for more detailed information
Model(s) announced January 21, 2014

ThinkServer TD340 Platform Systems Specifications - I of II

Components	Specifications																																																																																																																																													
Mechanical	<ul style="list-style-type: none"> Tower, rack-mountable to 5U via optional conversion kit 7.68" W x 23.4" D x 16.9" H (without foot) 195mm W x 595mm D x 430mm H (without foot) 57.3 lb (26kg) max configuration 																																																																																																																																													
Chipset	Intel C606 Chipset																																																																																																																																													
Processors	Two LGA1356 sockets, supports up to two processors from Intel Xeon E5-2400 v2 or Xeon E5-2400 families, the following processor options are supported:																																																																																																																																													
	<table border="1"> <thead> <tr> <th rowspan="2">Processor Number</th> <th colspan="9">Processors Specifications*</th> <th rowspan="2">Part Number</th> </tr> <tr> <th># of Cores</th> <th># of Threads</th> <th>Clock Speed</th> <th>Max Turbo Frequency</th> <th>Cache</th> <th>QPI Speed</th> <th>Max TDP</th> <th>Memory Speed</th> </tr> </thead> <tbody> <tr> <td colspan="11">Intel Xeon E5-2400 v2 Series</td> </tr> <tr> <td>Xeon E5-2470 v2</td> <td>10</td> <td>20</td> <td>2.4 GHz</td> <td>3.2 GHz</td> <td>25MB</td> <td>8 GT/s</td> <td>95W</td> <td>DDR3-1600</td> <td>0C19561</td> </tr> <tr> <td>Xeon E5-2450L v2</td> <td>10</td> <td>20</td> <td>1.7 GHz</td> <td>2.1 GHz</td> <td>25MB</td> <td>7.2 GT/s</td> <td>60W</td> <td>DDR3-1600</td> <td>0C19568</td> </tr> <tr> <td>Xeon E5-2450 v2</td> <td>8</td> <td>16</td> <td>2.5 GHz</td> <td>3.3 GHz</td> <td>20MB</td> <td>8 GT/s</td> <td>95W</td> <td>DDR3-1600</td> <td>0C19562</td> </tr> <tr> <td>Xeon E5-2440 v2</td> <td>8</td> <td>16</td> <td>1.9 GHz</td> <td>2.4 GHz</td> <td>20MB</td> <td>7.2 GT/s</td> <td>95W</td> <td>DDR3-1600</td> <td>0C19563</td> </tr> <tr> <td>Xeon E5-2430L v2</td> <td>6</td> <td>12</td> <td>2.4 GHz</td> <td>2.8 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>60W</td> <td>DDR3-1600</td> <td>0C19569</td> </tr> <tr> <td>Xeon E5-2430 v2</td> <td>6</td> <td>12</td> <td>2.5 GHz</td> <td>3 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>80W</td> <td>DDR3-1600</td> <td>0C19564</td> </tr> <tr> <td>Xeon E5-2420 v2</td> <td>6</td> <td>12</td> <td>2.2 GHz</td> <td>2.7 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>80W</td> <td>DDR3-1600</td> <td>0C19565</td> </tr> <tr> <td>Xeon E5-2407 v2</td> <td>4</td> <td>4</td> <td>2.4 GHz</td> <td>2.4 GHz</td> <td>10MB</td> <td>6.4 GT/s</td> <td>80W</td> <td>DDR3-1333</td> <td>0C19566</td> </tr> <tr> <td>Xeon E5-2403 v2</td> <td>4</td> <td>4</td> <td>1.8 GHz</td> <td>1.8 GHz</td> <td>10MB</td> <td>6.4 GT/s</td> <td>80W</td> <td>DDR3-1333</td> <td>0C19567</td> </tr> <tr> <td colspan="11">Intel Xeon E5-2400 Series</td> </tr> <tr> <td>Xeon E5-2420</td> <td>6</td> <td>12</td> <td>1.9 GHz</td> <td>2.4 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>95 W</td> <td>DDR3-1333</td> <td>0A89456</td> </tr> </tbody> </table>	Processor Number	Processors Specifications*									Part Number	# of Cores	# of Threads	Clock Speed	Max Turbo Frequency	Cache	QPI Speed	Max TDP	Memory Speed	Intel Xeon E5-2400 v2 Series											Xeon E5-2470 v2	10	20	2.4 GHz	3.2 GHz	25MB	8 GT/s	95W	DDR3-1600	0C19561	Xeon E5-2450L v2	10	20	1.7 GHz	2.1 GHz	25MB	7.2 GT/s	60W	DDR3-1600	0C19568	Xeon E5-2450 v2	8	16	2.5 GHz	3.3 GHz	20MB	8 GT/s	95W	DDR3-1600	0C19562	Xeon E5-2440 v2	8	16	1.9 GHz	2.4 GHz	20MB	7.2 GT/s	95W	DDR3-1600	0C19563	Xeon E5-2430L v2	6	12	2.4 GHz	2.8 GHz	15MB	7.2 GT/s	60W	DDR3-1600	0C19569	Xeon E5-2430 v2	6	12	2.5 GHz	3 GHz	15MB	7.2 GT/s	80W	DDR3-1600	0C19564	Xeon E5-2420 v2	6	12	2.2 GHz	2.7 GHz	15MB	7.2 GT/s	80W	DDR3-1600	0C19565	Xeon E5-2407 v2	4	4	2.4 GHz	2.4 GHz	10MB	6.4 GT/s	80W	DDR3-1333	0C19566	Xeon E5-2403 v2	4	4	1.8 GHz	1.8 GHz	10MB	6.4 GT/s	80W	DDR3-1333	0C19567	Intel Xeon E5-2400 Series											Xeon E5-2420	6	12	1.9 GHz	2.4 GHz	15MB	7.2 GT/s	95 W	DDR3-1333	0A89456
	Processor Number		Processors Specifications*										Part Number																																																																																																																																	
		# of Cores	# of Threads	Clock Speed	Max Turbo Frequency	Cache	QPI Speed	Max TDP	Memory Speed																																																																																																																																					
	Intel Xeon E5-2400 v2 Series																																																																																																																																													
	Xeon E5-2470 v2	10	20	2.4 GHz	3.2 GHz	25MB	8 GT/s	95W	DDR3-1600	0C19561																																																																																																																																				
	Xeon E5-2450L v2	10	20	1.7 GHz	2.1 GHz	25MB	7.2 GT/s	60W	DDR3-1600	0C19568																																																																																																																																				
	Xeon E5-2450 v2	8	16	2.5 GHz	3.3 GHz	20MB	8 GT/s	95W	DDR3-1600	0C19562																																																																																																																																				
	Xeon E5-2440 v2	8	16	1.9 GHz	2.4 GHz	20MB	7.2 GT/s	95W	DDR3-1600	0C19563																																																																																																																																				
	Xeon E5-2430L v2	6	12	2.4 GHz	2.8 GHz	15MB	7.2 GT/s	60W	DDR3-1600	0C19569																																																																																																																																				
	Xeon E5-2430 v2	6	12	2.5 GHz	3 GHz	15MB	7.2 GT/s	80W	DDR3-1600	0C19564																																																																																																																																				
	Xeon E5-2420 v2	6	12	2.2 GHz	2.7 GHz	15MB	7.2 GT/s	80W	DDR3-1600	0C19565																																																																																																																																				
	Xeon E5-2407 v2	4	4	2.4 GHz	2.4 GHz	10MB	6.4 GT/s	80W	DDR3-1333	0C19566																																																																																																																																				
	Xeon E5-2403 v2	4	4	1.8 GHz	1.8 GHz	10MB	6.4 GT/s	80W	DDR3-1333	0C19567																																																																																																																																				
Intel Xeon E5-2400 Series																																																																																																																																														
Xeon E5-2420	6	12	1.9 GHz	2.4 GHz	15MB	7.2 GT/s	95 W	DDR3-1333	0A89456																																																																																																																																					
	<p><i>Notes:</i> All processors specifications is provided by Intel and may be changed at any time without notice. The information herein is provided "as-is". Intel may update this information in non-scheduled. For latest information, please see http://ark.intel.com/</p>																																																																																																																																													
Memory type	1600MHz, LV UDIMM or LV RDIMM, DDR3, 3-channel per processor, 240-pin																																																																																																																																													
Memory DIMMs	Twelve DIMM sockets, six DIMM sockets per processor																																																																																																																																													
Memory capacity	Up to 192GB DDR3 LV RDIMM (16GB x 12) or up to 48GB DDR3 LV UDIMM (4GB x 12)																																																																																																																																													
Memory protection	ECC, memory mirroring, memory sparing																																																																																																																																													
Additional memory disclaimers	<ul style="list-style-type: none"> Actual memory operating speed depends on processor memory controller speed, installed memory speed, and quantity of memory DIMMs Maximum memory operating speed are 1333MT/s on LV UDIMM models Over six DIMMs requires dual processors Mixing of LV UDIMM or LV RDIMM is not supported 																																																																																																																																													
Disk bays configurations	Supports one of the following disk bay configurations: 4 x 3.5" non-hot swap disk bays, supports SATA non-hot swap hard drives 4 x 3.5" hot-swap Disk bays, supports SATA/SAS hot-swap hard drives or SSD drives 8 x 3.5" hot-swap Disk bays, supports SATA/SAS hot-swap hard drives or SSD drives 8 x 2.5" hot-swap Disk bays, supports SATA/SAS hot-swap hard drives or SSD drives 16 x 2.5" hot-swap Disk bays, supports SATA/SAS hot-swap hard drives or SSD drives																																																																																																																																													
RAID support	<table border="1"> <thead> <tr> <th>RAID adapter</th> <th>Disk type</th> <th>RAID support*</th> <th>Cache</th> <th>Transfer rates</th> <th>Optional upgrades</th> </tr> </thead> <tbody> <tr> <td>RAID 100 (onboard)</td> <td>SATA</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5 support</td> </tr> <tr> <td>RAID 300 (onboard)</td> <td>SATA/SAS</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5 support</td> </tr> <tr> <td>RAID 500 (LSI 9240-8i)</td> <td>SATA/SAS</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5, 50 support</td> </tr> <tr> <td>RAID 700 (LSI 9260-8i)</td> <td>SATA/SAS</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>512MB</td> <td>6Gb/s</td> <td>optional intelligent Battery Backup Unit (iBBU08)</td> </tr> <tr> <td>RAID 710 (LSI 9270CV-8i)</td> <td>SATA/SAS</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>1GB</td> <td>6Gb/s</td> <td> <ul style="list-style-type: none"> optional CacheVault (CV) flash cache with super capacitor optional CacheCade Pro 2.0 optional FastPath key </td> </tr> </tbody> </table> <p>*RAID 50, 60 are functional on 8 or 16 disk bay models only, RAID100 supports SATA drives only</p>	RAID adapter	Disk type	RAID support*	Cache	Transfer rates	Optional upgrades	RAID 100 (onboard)	SATA	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5 support	RAID 300 (onboard)	SATA/SAS	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5 support	RAID 500 (LSI 9240-8i)	SATA/SAS	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support	RAID 700 (LSI 9260-8i)	SATA/SAS	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)	RAID 710 (LSI 9270CV-8i)	SATA/SAS	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> optional CacheVault (CV) flash cache with super capacitor optional CacheCade Pro 2.0 optional FastPath key 																																																																																																									
RAID adapter	Disk type	RAID support*	Cache	Transfer rates	Optional upgrades																																																																																																																																									
RAID 100 (onboard)	SATA	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5 support																																																																																																																																									
RAID 300 (onboard)	SATA/SAS	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5 support																																																																																																																																									
RAID 500 (LSI 9240-8i)	SATA/SAS	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support																																																																																																																																									
RAID 700 (LSI 9260-8i)	SATA/SAS	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)																																																																																																																																									
RAID 710 (LSI 9270CV-8i)	SATA/SAS	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> optional CacheVault (CV) flash cache with super capacitor optional CacheCade Pro 2.0 optional FastPath key 																																																																																																																																									
Optical drive (optional)	Supports two half-height 5.25" optical bays, up to two optical drives																																																																																																																																													
Onboard network	Two Gigabit Ethernet port via two Intel 82574L, either port can be set to dedicate/share management via BIOS																																																																																																																																													

ThinkServer TD340 Platform Systems Specifications - II of II

Components	Specifications			
Front ports	Two USB 2.0			
Rear ports	Four USB 2.0, one serial (9-pin), two ethernet (RJ-45, one for dedicate/share mgmt), one analog VGA DB-15 connector			
Internal USB	One internal USB port (Type A)			
Expansion Slots	Up to six PCI-Express slots (only slot 1, 2, 5 are functional for single processor models): Slot 1: half-length, full-height, 32-bit PCI 2.3 Slot 2: half-length, full-height, PCIe 3.0 x8 (<i>x4 elec</i>) Slot 3: half-length, full-height, PCIe 3.0 x8 Slot 4: half-length, full-height, PCIe 3.0 x8 Slot 5: half-length, full-height, PCIe 3.0 x16 Slot 6: half-length, full-height, PCIe 3.0 x8 (<i>near CPU</i>)			
Graphics	Onboard Aspeed AST2300 graphics/management processor, one VGA DB-15 on rear (<i>Maximum resolution: 1600x1200@60Hz</i>). Discrete NVIDIA NVS 300 graphics adapter is available on selected models			
Intelligent Diagnostics Module (optional)	Supports optional Intelligent Diagnostics Module (IDM) on selected models, IDM LED lights indicate failing component category			
Systems management (TMM Premium is optional)	<ul style="list-style-type: none"> Onboard Aspeed AST2300 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC); optional ThinkServer Management Module Premium for iKVM functions Front control panel LEDs shows the status of power, hard drive activity, network, system ThinkServer EasyStartup/EasyManage/EasyUpdate 			
Security features (TPM is optional)	Power-on password/administrator password/ Trusted Platform Module (TCG 1.2-compliant, optional)			
Power supply	Supports one of the following, depending on models: <ul style="list-style-type: none"> One fixed 625 watts, universal, 80 PLUS Bronze qualified Up to two redundant 800 watts, two maximum, rear access, hot-swap, 80 PLUS Gold qualified, redundant with two power supplies 			
Safety, environment, and certifications	Environmental certifications	<ul style="list-style-type: none"> Energy Star Server 2.0 qualified for models with 800 watts hot-swap PSU Energy Star Server 1.1 qualified for models with 625 watts fixed PSU RoHS-compliant 		
	EMC	FCC Class A, CSA, CE		
	240VA	Supports		
	Temperature - operating	50 °F to 95 °F (10 °C to 35 °C)		
	Temperature - non operating (no package)	-10 °C to 60 °C		
	Temperature - non operating (with package)	-40 °C to 60 °C		
	Altitude - operating	Supported Altitude (unpressurized): 0-10000ft (0-3048m)		
	Humidity - operating	10%~80%, non-condensing		
	Humidity - non operating (no package)	8%~90%, non-condensing		
	Humidity - non operating (with package)	8%~90%, non-condensing		
	Acoustic noise (idle/working mode)	System Configuration		
		Category	Entry level	High-end
		CPU	1 x CPU	2 x CPU
		Optical Drive	1 DVD-ROM	1 DVD-ROM
Drive Bays		4 x 3.5" direct cable	8 x 3.5" hot-swap	
HDD		2 x 500GB 3.5" SATA	8 x 2TB 3.5" SAS	
Memory		2GB x 1 (LV UDIMM)	8GB x 12 (LV RDIMM)	
PSU		1 x 625 watts fixed	1 x 800 watts hot-swap	
RAID		RAID 1	RAID 5	
Expansion Adapters		No	1 x RAID 700 2 x Ethernet Adapters	
Sound Pressure (operating)	37.0 dB(A)	42.0 dB(A)		
Sound Pressure (idle)	35.0 dB(A)	38.0 dB(A)		

ThinkServer TD340 Optional Configurations

Partial list of accessories supported on ThinkServer TD340

ThinkServer Ready accessories are available through Lenovo Business Partners. Locate a Business Partner near you at: bplocator.lenovo.com

Option Number	Option Description
Processors	
0A89456	Intel Xeon E5-2420 Processor Option for ThinkServer TD340
0C19561	Intel Xeon E5-2470 v2 Processor Option for ThinkServer TD340
0C19562	Intel Xeon E5-2450 v2 Processor Option for ThinkServer TD340
0C19563	Intel Xeon E5-2440 v2 Processor Option for ThinkServer TD340
0C19564	Intel Xeon E5-2430 v2 Processor Option for ThinkServer TD340
0C19565	Intel Xeon E5-2420 v2 Processor Option for ThinkServer TD340
0C19566	Intel Xeon E5-2407 v2 Processor Option for ThinkServer TD340
0C19567	Intel Xeon E5-2403 v2 Processor Option for ThinkServer TD340
0C19568	Intel Xeon E5-2450L v2 Processor Option for ThinkServer TD340
0C19569	Intel Xeon E5-2430L v2 Processor Option for ThinkServer TD340
Memory	
0C19499	ThinkServer 4GB DDR3L-1600MHz (1Rx8) ECC UDIMM
0C19500	ThinkServer 8GB DDR3L-1600MHz (2Rx8) ECC UDIMM
0C19533	ThinkServer 4GB DDR3L-1600MHz (1Rx8) RDIMM
0C19534	ThinkServer 8GB DDR3L-1600MHz (2Rx8) RDIMM
0C19535	ThinkServer 16GB DDR3L-1600MHz (2Rx4) RDIMM
Drives - 3.5"	
3.5" Cabled SATA Hard Drives	
0C19501	ThinkServer 3.5" 500GB 7.2K Enterprise SATA 6Gbps Hard Drive
0C19502	ThinkServer 3.5" 1TB 7.2K Enterprise SATA 6Gbps Hard Drive
0C19503	ThinkServer 3.5" 2TB 7.2K Enterprise SATA 6Gbps Hard Drive
0C19504	ThinkServer 3.5" 3TB 7.2K Enterprise SATA 6Gbps Hard Drive
0C19505	ThinkServer 3.5" 4TB 7.2K Enterprise SATA 6Gbps Hard Drive
3.5" Hot Swap SATA Hard Drives	
0A89473	ThinkServer 500GB 3.5" 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive
0A89474	ThinkServer 1TB 3.5" 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive
0A89475	ThinkServer 2TB 3.5" 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive
0A89477	ThinkServer 3TB 3.5" 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive
0C19520	ThinkServer 4TB 3.5" 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive
3.5" Hot Swap 7.2K SAS Hard Drives	
0C19530	ThinkServer 3.5" 1TB 7.2K SAS 6Gbps Hot Swap Hard Drive
0C19531	ThinkServer 3.5" 2TB 7.2K SAS 6Gbps Hot Swap Hard Drive
0C19532	ThinkServer 3.5" 3TB 7.2K SAS 6Gbps Hot Swap Hard Drive
3.5" Hot Swap 15K SAS Hard Drives	
67Y2616	ThinkServer 3.5" 300GB 15K SAS 6Gbps Hot Swap Hard Drive
4XB0F28644	ThinkServer 3.5" 600GB 15K SAS 6Gbps Hot Swap Hard Drive
3.5" Hot Swap SATA Solid State Drives	
0C19571	ThinkServer 2.5" 100GB MLC SATA Solid State Drive with 3.5" Kit
0C19572	ThinkServer 2.5" 200GB MLC SATA Solid State Drive with 3.5" Kit
0C19573	ThinkServer 2.5" 400GB MLC SATA Solid State Drive with 3.5" Kit
Drives - 2.5"	
2.5" Hot Swap SATA Hard Drives	
0C19495	ThinkServer 500GB 7.2K 2.5" Enterprise SATA 6Gbps Hot Swap Hard Drive
0C19496	ThinkServer 1TB 7.2K 2.5" Enterprise SATA 6Gbps Hot Swap Hard Drive
2.5" Hot Swap 10K SAS Hard Drives	
67Y2619	ThinkServer 300GB 2.5" 10K SAS 6Gbps Hot Swap Hard Drive
67Y2621	ThinkServer 600GB 2.5" 10K SAS 6Gbps Hot Swap Hard Drive
0A89409	ThinkServer 900GB 2.5" 10K SAS 6Gbps Hot Swap Hard Drive
2.5" Hot Swap SATA Solid State Drives	
0A89418	ThinkServer 2.5" 200GB MLC SATA Solid State Drive (HS)
0A89419	ThinkServer 2.5" 400GB MLC SATA Solid State Drive (HS)
0A89420	ThinkServer 2.5" 100GB MLC SATA Solid State Drive (HS)

Option Number	Option Description
RAID	
0A89422	ThinkServer RAID 300 Upgrade Key for Advanced RAID
0A89464	ThinkServer RAID 500 Adapter II
0A89407	ThinkServer RAID 500 Upgrade Key for Advanced RAID
0A89463	ThinkServer RAID 700 Adapter II
67Y2647	ThinkServer RAID 700 Battery
0C19489	ThinkServer RAID 710 Adapter
0C19490	ThinkServer RAID CacheVault Data Protection for RAID 710
0C19491	ThinkServer RAID FastPath Feature Upgrade Key for RAID 710
0C19492	ThinkServer RAID CacheCade Pro 2.0 Feature Upgrade Key for RAID 710
Ethernet	
0C19506	ThinkServer 1Gbps Ethernet I350-T2 Server Adapter
0C19507	ThinkServer 1Gbps Ethernet I350-T4 Server Adapter
0C19486	Lenovo 10Gbps Ethernet X520-DA2 Server Adapter (SPF+)
0C19487	Lenovo 10Gbps Ethernet X520-SR2 Server Adapter (Fibre)
0C19497	Lenovo 10Gbps Ethernet X540-T2 Server Adapter
0C19488	Lenovo 10Gbps Ethernet Fiber Module
HBA	
0C19476	ThinkServer LPe1250 Single Port 8Gb Fibre Channel HBA by Emulex
0C19478	ThinkServer LPe12002 Dual Port 8Gb Fibre Channel HBA by Emulex
0C19483	ThinkServer QLE8242-CU-CK Dual Port CNA by QLogic
0C19482	ThinkServer QLE2562 Dual Port 8Gb Fibre Channel HBA by QLogic
Redundant Power Supply	
4X20E54691	ThinkServer 800W Gold Hot Swap Redundant Power Supply for Tower
Other	
0C19515	ThinkServer Tower to Rack Shelf Conversion Kit
67Y2624	ThinkServer Management Controller Premium Upgrade
73P5220	Lenovo Preferred Pro Keyboard USB - US English 103P
06P4069	Lenovo Optical Mouse
Microsoft Windows Server ROK	
4XI0E51561	Windows Server 2012 R2 Standard ROK (2 CPU/2VMs)
4XI0E51562	Windows Server 2012 R2 Datacenter ROK (2 CPU)
4XI0E51563	Windows Server 2012 R2 Essentials ROK (1-2 CPU)
82972SM	Windows Server 2012 Standard ROK (2 CPU/2VMs)
82972DM	Windows Server 2012 Datacenter ROK (2 CPU)
82972EM	Windows Server 2012 Essentials ROK (1-2 CPU)

For more information on server accessories, please visit:

www.lenovo.com/support/accessories
www.lenovo.com/support/thinkserveraccessories
www.lenovo.com/support/security

Other accessories at www.lenovo.com/accessories

Accessories Guide pdf at www.lenovo.com/accessoriesguide


ThinkServer TD340 Operating System and Virtualization Supportability Matrix

List of operating system and virtualization software supported on ThinkServer TD340


Operating System/Virtualization	Certified	Support ROK	Supports EasyStartup	Preloaded
Windows Server 2008 x86 Edition				
Windows Server 2008 Standard Edition (x86)			•	
Windows Server 2008 Enterprise Edition (x86)			•	
Windows Server 2008 Datacenter Edition (x86)			•	
Windows Server 2008 x64 Edition				
Windows Server 2008 Standard Edition (x64) (Include Hyper-v)	•		•	
Windows Server 2008 Enterprise Edition (x64) (Include Hyper-v)	•		•	
Windows Server 2008 Datacenter Edition (x64) (Include Hyper-v)	•		•	
Windows Server 2008 R2 (x64) with SP1				
Windows Server 2008 Standard Edition R2 with SP1 (Include Hyper-v)	•	•	•	
Windows Server 2008 Enterprise Edition R2 with SP1 (Include Hyper-v)	•	•	•	
Windows Server 2008 Datacenter Edition R2 with SP1 (Include Hyper-v)	•	•	•	
Windows Small Business Server 2011				
Windows Small Business Server 2011 Essentials	•		•	
Windows Small Business Server 2011 Standard	•	•	•	
Windows Small Business Server Premium Add-On (including Hyper-V)	•	•	•	
Windows Server 2012				
Windows Server 2012 Standard (Include Hyper-v)	•	•	•	•
Windows Server 2012 Datacenter (Include Hyper-v)	•	•	•	•
Windows Server 2012 Essentials	•	•	•	•
Windows Server 2012 R2				
Windows Server 2012 R2 Standard (Include Hyper-v)	•	•	•	•
Windows Server 2012 R2 Datacenter (Include Hyper-v)	•	•	•	•
Windows Server 2012 R2 Essentials	•	•	•	•
Windows Server 2012 R2 Hyper-V	•		•	
SUSE Linux Enterprise Server x86				
SUSE Linux Enterprise Server 10 sp4 (32 bit)			•	
SUSE Linux Enterprise Server 11 sp2 (32 bit)	•		•	
SUSE Linux Enterprise Server x64				
SUSE Linux Enterprise Server 10 sp4 (64 bit)			•	
SUSE Linux Enterprise Server 11 sp2 (64 bit)	•		•	
RedHat Enterprise Linux Server (RHEL) x86				
RedHat RHEL 5.9 (32 bit)	•		•	
RedHat RHEL 5.10 (32 bit)	•		•	
RedHat RHEL 6.4 (32 bit)	•		•	
RedHat RHEL 6.5 (32 bit)	•		•	
RedHat Enterprise Linux Server x64				
RedHat RHEL 5.9 (64 bit)	•		•	
RedHat RHEL 5.10 (64 bit)	•		•	
RedHat RHEL 6.4 (64 bit)	•		•	
RedHat RHEL 6.5 (64 bit)	•		•	
VMware x64				
Vmware ESXi 5.1 U1	•		•	•
Vmware ESXi 5.5	•		•	•
Citrix				
Citrix XenServer 6.1	•		•	
Citrix XenServer 6.02	•		•	

Note:

- For more information on ThinkServer operating system and virtualization software, please visit ThinkServer Software page: <http://shop.lenovo.com/us/en/servers/thinkserver/server-software.html>
- For ThinkServer operating system and virtualization software options, please visit ThinkServer OS and virtualization Options document: http://www.lenovo.com/images/products/server/pdfs/datasheets/ThinkServer_OS_&Virtualization_Options_Datasheet.pdf

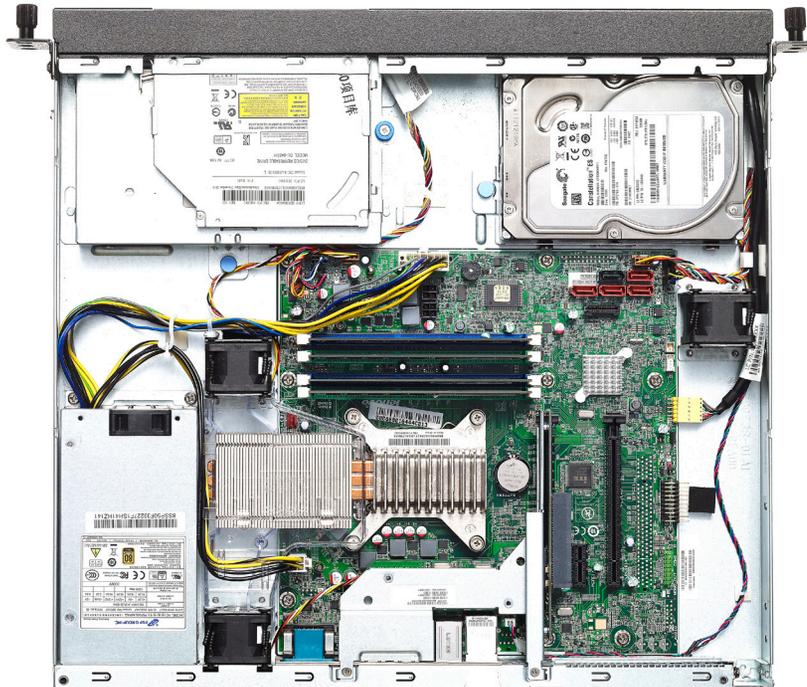

ThinkServer RS140 with 3.5" disk drive bay

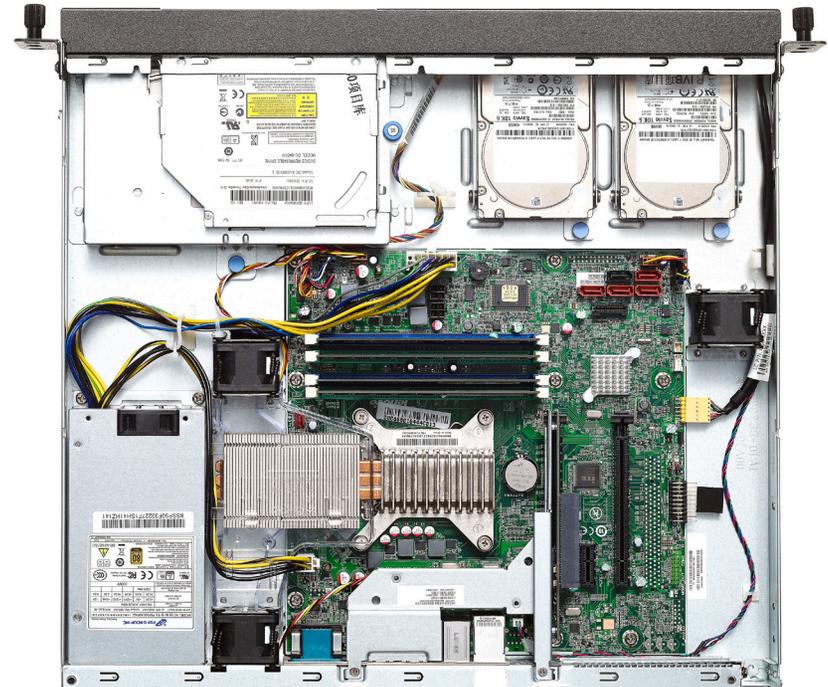


ThinkServer RS140 with 2.5" disk drive bay

Type-model	Processor (Core/GHz/Cache/Memory speed/Intel HD Graphics)	Memory	RAID controller	Pre-conf RAID	Storage	Optical	Discrete ethernet	Rail kit	Preloaded OS	Base warranty (-year, on-site)
70F90003xx	Pentium G3220 2C/3GHz/3MB/1333MHz/Intel HD	1 x 4GB 1600MHz ECC	RAID 100	No	Open	DVD±RW 9.5mm	No	4-Post	No	1
70F90004xx	Celeron G1830 2C/2.8GHz/2MB/1333MHz/Intel HD	1 x 4GB 1600MHz ECC	RAID 100	No	Open	DVD±RW 9.5mm	No	4-Post	No	1
70F90005xx	Xeon E3-1225 v3 4C/3.2GHz/8MB/1600MHz/Intel HD P4600	2 x 4GB 1600MHz ECC	RAID 100	RAID 1	2 x 500GB 3.5" SATA 7.2K	DVD±RW 9.5mm	No	4-Post	No	1
70F90006xx	Xeon E3-1225 v3 4C/3.2GHz/8MB/1600MHz/Intel HD P4600	1 x 4GB 1600MHz ECC	RAID 100	RAID 1	2 x 500GB 3.5" SATA 7.2K	DVD±RW 9.5mm	No	4-Post	No	3
70F90007xx	Core i3-4130 2C/3.4GHz/3MB/1600MHz/Intel HD 4400	1 x 4GB 1600MHz ECC	RAID 100	No	Open	DVD±RW 9.5mm	No	4-Post	No	1
70F90008xx	Xeon E3-1225 v3 4C/3.2GHz/8MB/1600MHz/Intel HD P4600	1 x 4GB 1600MHz ECC	RAID 100	No	Open	DVD±RW 9.5mm	No	4-Post	No	1
70F90009xx	Xeon E3-1245 v3 4C/3.4GHz/8MB/1600MHz/Intel HD P4600	1 x 4GB 1600MHz ECC	RAID 100	No	Open	DVD±RW 9.5mm	No	4-Post	No	1

Components	Specification
Mechanical	<ul style="list-style-type: none"> 1U rack with rail kit (2-post or 4-post, depending on models) 16.9" W x 16.2" D x 1.71" H (with rack handles) 430mm W x 411mm D x 43.5mm H (without foot) 7.36 kg (16.2 lb) when fully configured
Chipset	Intel C226 Chipset, one LGA1150 socket for processor
Processor <i>(Xeon E3-12x6 v3 will be available until Sep 2014)</i>	Supports one of the following, depending on models: <ul style="list-style-type: none"> One quad-core Xeon E3-12x5 v3 processor (up to 4C/3.6GHz/8MB/1600MHz) One quad-core Xeon E3-12x6 v3 processor (up to 4C/3.7GHz/8MB/1600MHz) One dual-core Core i3 processor (up to 2C/3.7GHz/4MB/1600MHz) One dual-core Pentium processor (up to 2C/3.4GHz/3M/1600MHz) One dual-core Celeron processor (up to 2C/2.9GHz/2MB/1333MHz)
Memory DIMMs	Four DDR3 DIMM slots, 2-channel (integrated memory controller in processor)
Memory type/capacity	1600MHz DDR3, UDIMM, ECC; 32GB max
RAID support	RAID 0, 1 with RAID 100, RAID 500, and RAID 700. Optional intelligent Battery Backup Unit (iBBU08) is available for the RAID 700. RAID 100 supports SATA 6.0Gb/s, RAID 500 and RAID 700 supports SATA 6.0Gb/s and SAS 6.0 Gb/s
Optical drive	Supports one 9.5mm optical drive on selected model
Disk drive bays	Up to two 3.5" hard drives, non-hot swap (see right)
Onboard network interfaces	Two Gigabit Ethernet ports by Intel I210 on riser card; one Gigabit Ethernet port by Intel I217, dedicate/share management
Expansion slot	One PCI-Express slot via riser card, half-length, full-height, PCIe 3.0 x8
Front ports	Two USB 2.0
Rear ports	Four USB 3.0, two USB 2.0, one serial (9-pin), two ethernet (RJ-45), one RJ-45 (dedicate/share mgmt), one VGA, one DisplayPort
Power supply	One fixed 300 watts power supply, 80-Plus Gold certified, non-hot swap
Systems management	<ul style="list-style-type: none"> Intel Active Management Technology 9.1 on models with Xeon processor (KVM function needs Intel Xeon E3-12x5 v3/12x6 v3 processors) ThinkServer EasyStartup/EasyUpdate
Security features	Power-on password, administrator password, and TPM (TCG 1.2-compliant)
Graphics	Integrated Intel HD Graphics in processor
Operating systems supported	Microsoft Windows Server 2012 R2, 2012, and 2008 R2, Windows Small Business Server 2011, Red Hat Enterprise Linux 6.5, SUSE Linux Enterprise Server 11, VMware vSphere 5.5 (ESXi)

Components	Specification
Declared Noise Emissions	Operating: < 5.2 Bels, Idle: < 5.0 Bels (Xeon E3-1225 v3/2 x 1TB 3.5" SATA/4GB x 1)
Limited warranty	1-year or 3-year limited onsite service

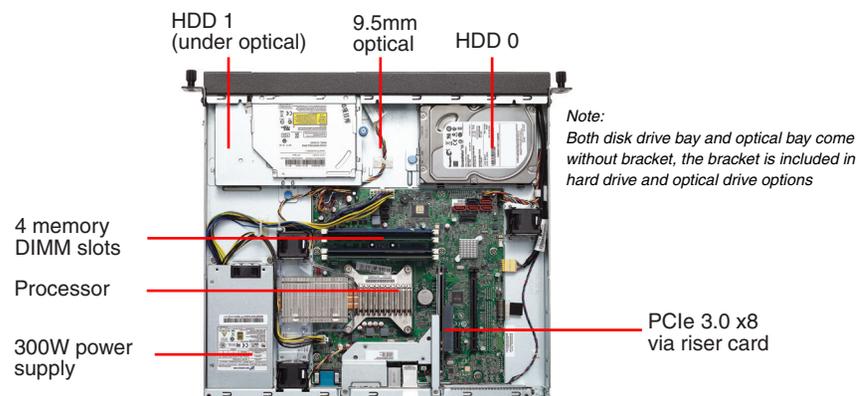

Core Options for ThinkServer RS140 with 3.5" disk bay (partial)


Option	Description
4XB0F28664	ThinkServer 3.5" 500GB 7.2K Enterprise SATA 6Gbps Hard Drive for RS-Series
4XB0F28665	ThinkServer 3.5" 1TB 7.2K Enterprise SATA 6Gbps Hard Drive for RS-Series
4XB0F28666	ThinkServer 3.5" 2TB 7.2K Enterprise SATA 6Gbps Hard Drive for RS-Series
4XB0F28667	ThinkServer 3.5" 3TB 7.2K Enterprise SATA 6Gbps Hard Drive for RS-Series
4XB0F28668	ThinkServer 3.5" 4TB 7.2K Enterprise SATA 6Gbps Hard Drive for RS-Series
4XB0F28669	ThinkServer 3.5" 1TB 7.2K SAS 6Gbps Hard Drive for RS-Series
4XB0F28670	ThinkServer 3.5" 2TB 7.2K SAS 6Gbps Hard Drive for RS-Series
4XB0F28671	ThinkServer 3.5" 3TB 7.2K SAS 6Gbps Hard Drive for RS-Series
4XF0F28767	ThinkServer 2-Post Rail kit for RS-Series
4XF0F28772	ThinkServer 4-Post Rail kit for RS-Series
0C19498	2GB PC3-12800E 1600MHz DDR3 ECC-UDIMM
0C19499	4GB PC3-12800E 1600MHz DDR3 ECC-UDIMM
0C19500	8GB PC3-12800E 1600MHz DDR3 ECC-UDIMM
0A89464	ThinkServer RAID 500 Adapter
0A89463	ThinkServer RAID 700 Adapter
67Y2647	ThinkServer RAID 700 Battery
4XB0F28645	ThinkServer 9280-8e 6G HBA
0C19506	Ethernet Server Adapter Card Dual Port - I350-T2
0C19507	Ethernet Server Adapter Card Quad Port - I350-T4
0C19511	PCI-E to 2 Serial port card

Temperature - operating	50 °F to 95 °F (10 °C to 35 °C)
Temperature - non operating (no package)	-10 °C to 60 °C
Temperature - non operating (with package)	-40 °C to 70 °C
Altitude - operating	Supported Altitude (unpressurized): 0-10000ft (0-3048m)
Humidity - operating	10%~80%, non-condensing
Humidity - non operating (no package)	10%~90%, non-condensing
Humidity - non operating (with package)	10%~90%, non-condensing

Type-model	Processor (Core/GHz/Cache/Memory speed/Intel HD Graphics)	Memory	RAID controller	Pre-conf RAID	Storage	Optical	Discrete ethernet	Rail kit	Preloaded OS	Base warranty (-year, on-site)
70F30002xx	Xeon E3-1245 v3 4C/3.4GHz/8MB/1600MHz/Intel HD P4600	1 x 8GB 1600MHz ECC	RAID 700 + Battery	No	Open	DVD±RW 9.5mm	No	4-Post	No	1
70F30003xx	Xeon E3-1225 v3 4C/3.2GHz/8MB/1600MHz/Intel HD P4600	2 x 4GB 1600MHz ECC	RAID 100	No	Open	DVD±RW 9.5mm	No	4-Post	No	1
70F30004xx	Xeon E3-1245 v3 4C/3.4GHz/8MB/1600MHz/Intel HD P4600	1 x 8GB 1600MHz ECC	RAID 100	No	Open	DVD±RW 9.5mm	No	4-Post	No	3
70F30005xx	Xeon E3-1245 v3 4C/3.4GHz/8MB/1600MHz/Intel HD P4600	1 x 8GB 1600MHz ECC	RAID 500	No	Open	DVD±RW 9.5mm	No	4-Post	No	3
70F3000Axx	Xeon E3-1245 v3 4C/3.4GHz/8MB/1600MHz/Intel HD P4600	1 x 4GB 1600MHz ECC	RAID 500	No	Open	DVD±RW 9.5mm	No	4-Post	No	1

Components	Specification
Mechanical	<ul style="list-style-type: none"> 1U rack with rail kit (2-post or 4-post, depending on models) 16.9" W x 16.2" D x 1.71" H (with rack handles) 430mm W x 411mm D x 43.5mm H (without foot) 6.85 kg (15.1 lb) when fully configured
Chipset	Intel C226 Chipset, one LGA1150 socket for processor
Processor <i>(Xeon E3-12x6 v3 will be available until Sep 2014)</i>	Supports one of the following, depending on models: <ul style="list-style-type: none"> One quad-core Xeon E3-12x5 v3 processor (up to 4C/3.6GHz/8MB/1600MHz) One quad-core Xeon E3-12x6 v3 processor (up to 4C/3.7GHz/8MB/1600MHz) One dual-core Core i3 processor (up to 2C/3.7GHz/4MB/1600MHz) One dual-core Pentium processor (up to 2C/3.4GHz/3M/1600MHz) One dual-core Celeron processor (up to 2C/2.9GHz/2MB/1333MHz)
Memory DIMMs	Four DDR3 DIMM slots, 2-channel (integrated memory controller in processor)
Memory type/capacity	1600MHz DDR3, UDIMM, ECC; 32GB max
RAID support	RAID 0, 1, 5, 10 with RAID 100. RAID 0, 1, 10 with RAID 500. RAID 0, 1, 5, 6, 10 with RAID 700. Optional RAID 5 upgrade key is available for the RAID 500, Optional intelligent Battery Backup Unit (iBBU08) is available for the RAID 700. RAID 100 supports SATA 6.0Gb/s, RAID 500 and RAID 700 supports SATA 6.0Gb/s and SAS 6.0 Gb/s
Optical drive	Supports one 9.5mm optical drive on selected model
Disk drive bays	Up to four 2.5" hard drives, non-hot swap (see right)
Onboard network interfaces	Two Gigabit Ethernet ports by Intel I210 on riser card; one Gigabit Ethernet port by Intel I217, dedicate/share management
Expansion slot	One PCI-Express slot via riser card, half-length, full-height, PCIe 3.0 x8
Front ports	Two USB 2.0
Rear ports	Four USB 3.0, two USB 2.0, one serial (9-pin), two ethernet (RJ-45), one RJ-45 (dedicate/share mgmt), one VGA, one DisplayPort
Power supply	One fixed 300 watts power supply, 80-Plus Gold certified, non-hot swap
Systems management	<ul style="list-style-type: none"> Intel Active Management Technology 9.1 on models with Xeon processor (KVM function needs Intel Xeon E3-12x5 v3/12x6 v3 processors) ThinkServer EasyStartup/EasyUpdate
Security features	Power-on password, administrator password, and TPM (TCG 1.2-compliant)
Graphics	Integrated Intel HD Graphics in processor
Operating systems supported	Microsoft Windows Server 2012 R2, 2012, and 2008 R2, Windows Small Business Server 2011, Red Hat Enterprise Linux 6.5, SUSE Linux Enterprise Server 11, VMware vSphere 5.5 (ESXi)
Temperature - operating	50 °F to 95 °F (10 °C to 35 °C)
Temperature - non operating (no package)	-10 °C to 60 °C
Temperature - non operating (with package)	-40 °C to 70 °C
Altitude - operating	Supported Altitude (unpressurized): 0-10000ft (0-3048m)
Humidity - operating	10%~80%, non-condensing
Humidity - non operating (no package)	10%~90%, non-condensing
Humidity - non operating (with package)	10%~90%, non-condensing

Components	Specification
Declared Noise Emissions	Operating: < 5.2 Bels, Idle: < 5.0 Bels (Xeon E3-1225 v3/2 x 1TB 3.5" SATA/4GB x 1)
Limited warranty	1-year or 3-year limited onsite service

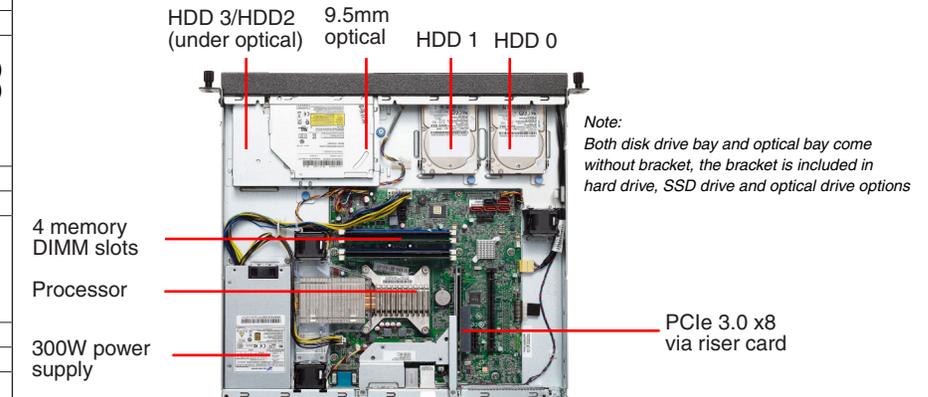

Core Options for ThinkServer RS140 with 2.5" disk bay (partial)

Option	Description
4XB0F28672	ThinkServer 2.5" 300GB 10K SAS 6Gbps Hard Drive for RS-Series
4XB0F28673	ThinkServer 2.5" 600GB 10K SAS 6Gbps Hard Drive for RS-Series
4XB0F28674	ThinkServer 2.5" 900GB 10K SAS 6Gbps Hard Drive for RS-Series
4XB0F28675	ThinkServer 2.5" 300GB 15K SAS 6Gbps Hard Drive for RS-Series
4XB0F28676	ThinkServer 2.5" 500GB 7.2K Enterprise SATA 6Gbps Hard Drive for RS-Series
4XB0F28677	ThinkServer 2.5" 1TB 7.2K Enterprise SATA 6Gbps Hard Drive for RS-Series
4XB0F28678	ThinkServer 2.5" 120GB SATA 6Gbps Solid State Drive for RS-Series
4XB0F28679	ThinkServer 2.5" 240GB SATA 6Gbps Solid State Drive for RS-Series
4XB0F28680	ThinkServer 2.5" 480GB SATA 6Gbps Solid State Drive for RS-Series
4XF0F28767	ThinkServer 2 Post Rail kit for RS-Series
4XF0F28772	ThinkServer 4 Post Rail kit for RS-Series
0C19499	4GB PC3-12800E 1600MHz DDR3 ECC-UDIMM
0C19500	8GB PC3-12800E 1600MHz DDR3 ECC-UDIMM
0A89464	ThinkServer RAID 500 Adapter
0A89407	ThinkServer RAID 500 Upgrade Key for Advanced RAID
0A89463	ThinkServer RAID 700 Adapter
67Y2647	ThinkServer RAID 700 Battery
4XB0F28645	ThinkServer 9280-8e 6G HBA
0C19506	Ethernet Server Adapter Card Dual Port - I350-T2
0C19507	Ethernet Server Adapter Card Quad Port - I350-T4
0C19511	PCI-E to 2 Serial port card

ThinkServer RD350 with 3.5" Disk Drive Bay Platform Specifications

Product Specifications Reference (PSREF)

Components	Specification
Form factor	1U rack
Processor	Up to two 105W Intel Xeon E5-2600 v3 family processors with 12 cores up to 1.8 GHz, 10 cores up to 2.6 GHz, 8 cores up to 2.6 GHz, 6 cores up to 2.4 GHz, 4 cores up to 3 GHz. Two QPI link up to 9.6 GT/s. Up to 2133MHz memory speed. Up to 30MB cache
Memory DIMMs	16 DIMM sockets. 4 channels per processor, 2 DIMMs per channel. RDIMM or LRDIMM (cannot be intermixed), DDR4, 2133MHz
Memory capacity	256GB (RDIMM, 16GB x 16)/512GB (LRDIMM, 32GB x 16), 2nd CPU is needed
Memory protection	ECC, memory mirroring, lockstep, and memory sparing
RAID support	RAID 0, 1, 10 with embedded RAID 110i , 6Gb/s SATA, optional key for RAID5. RAID 0, 1, 10 with RAID 500 , PCIe adapter, 6Gb/s SAS/SATA, optional key for RAID5. RAID 0, 1, 10, 5, 6 with RAID 710 , PCIe adapter, 6Gb/s SAS/SATA, 1GB memory, optional CacheVault flash cache with super capacitor, CacheCade Pro, or FastPath upgrade key
Disk drive bays	Up to 4 x 3.5" disk drive bays
SD module	Optional SD module, supports up to 2 optional SDHC flash cards
Internal storage	3.5" SATA (7.2K 6Gbs HDD) 1TB/2TB/3TB/4TB/
	3.5" SAS (7.2K 6Gbs HDD) 1TB/2TB/3TB/4TB/
	2.5" SAS SSD (12Gbs) 200GB/400GB/800GB
	2.5" SATA SSD (6Gbs) 120GB/240GB/300GB/480GB/600GB/800GB
	SDHC flash card 8GB/32GB
<i>Note: 1. SAS drive needs SAS adapter, 2. SDHC flash card needs SDHC flash memory module. 3. On 3.5" models, 2.5" drive comes with a 3.5" carrier.</i>	
Optical drive	Optional one UltraSlim optical drive bay, supports DVD-ROM or DVD±RW
Tape drive bays	No internal tape bay
Network interfaces	One dedicated management port, two Gigabit Ethernet ports (RJ-45). Supports optional discrete network adapters via PCIe slots
Security features	Power-on and administrator password. Optional Trusted Platform Module (TCG 1.2-compliant). Optional chassis intrusion switch
Systems management	Supports ThinkServer System Manager (TSM), optional TSM Premium. UEFI. Onboard Aspeed AST2400 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC). Control Panel LEDs shows the status of power, ID, network, system. Supports ThinkServer management software: Diagnostics, Deployment Manager, Energy Manager, System Manager, Partner Pack for VMware vCenter and Microsoft System Center Operations Manager, Power Planner
Power supply	Up to two redundant hot-swap 450 W ac or 550 W ac or 750 W ac power supplies. 550 W is 80 PLUS Platinum qualified, 750 W is 80 PLUS Platinum or Titanium qualified, 450 W is 80 PLUS Gold qualified. 750 W Titanium is 200V - 240V, others are 110V - 240V
Operating systems supported	Microsoft Windows Server 2012 R2, 2012, and 2008 R2, Windows Small Business Server 2011, Windows Server Storage 2012 R2 and 2012, Windows Multipoint Server 2012. Red Hat Enterprise Linux 7.0 and 6.5. SUSE Linux Enterprise Server 11 SP3. VMware vSphere (ESXi) 5.1 P5 and 5.5 U2
Rack kit	Optional slide or static rack kit on selected model
Base warranty	1 or 3-year limited onsite service with 9x5/NBD. Some parts are Customer Replaceable Units

Components	Specification	
Graphics	Onboard Aspeed AST2400 with 16MB memory, one DisplayPort on front, one VGA on rear. Maximum resolution: 1920x1200@60Hz	
Front ports	Two USB 2.0, one DisplayPort	
Rear ports	One VGA, two USB 3.0, one RJ-45 (dedicated mgmt), two ethernet, one serial (9-pin)	
Cooling	6 (5+1, dual processors) or 4 (3+1, single processor) fans, non-hot swap	
Hot-swap parts	Disk drives, power supplies	
Noise emissions	Operating: < 6.5 Bels, Idle: < 5.4 Bels (Maximum configuration)	
Environmental specification	Temperature - operating	50 °F to 95 °F (10 °C to 35 °C)
	Temperature - non operating (no package)	-10 °C to 60 °C
	Temperature - non operating (with package)	-40 °C to 70 °C
	Altitude - operating	(Unpressurized): 0-10000ft (0-3048m)
	Humidity - operating	8%-90%, non-condensing
	Humidity - storage (with package)	8%-90%, non-condensing
Weight	Minimum configuration: 13 kg (28.66 lb), maximum: 19.1 kg (42.11 lb)	
Dimensions	Height: 43 mm (1.7 in), width: 482 mm (19 in), depth: 781.5 mm (30.77 in)	



Expansion slots

Up to 2 PCIe 3.0 slots via two optional riser cards.

Slot 1 (riser card 1): PCIe 3.0 x16, half length, full height, CPU1

Slot 2 (riser card 2): PCIe 3.0 x16, low-profile, half length, CPU2, requires 2nd riser card and 2nd CPU

Core options for ThinkServer RD350 (partial)

4X70F28590	16GB 2R x4 PC4-17000R RDIMM DDR4-2133 4Gbit
4X70F28591	32GB 4R x4 PC4-17000LR LRDIMM DDR4-2133 4Gbit
4XF0G45865	SDHC Flash Memory Module
4X70F28593	32GB SDHC Flash Memory card
4XB0F28690	Lenovo ThinkServer RAID110i Raid 5 Upgrade
4XB0G45759	ThinkServer RAID 500 Upgrade Key for Advanced RAID
4XF0G45867	ThinkServer System Manager Premium
4X20F28576	750W Titanium Hot Swap Power Supply
4X90F92980	DisplayPort to VGA Dongle

ThinkServer RD350 with 3.5" Disk Drive Bay - TopSeller Models

Product Specifications Reference (PSREF)

Type-model	Processor	2nd CPU	Memory	RAID controller	Disk bays	Disk drives	SD module	Optical	Slots	Discrete ethernet	TPM	Chassis intrusion switch	System mgmt	Power	Preloaded OS	Rack kit	Base wty
Announced on December 2, 2014 - 70D6																	
70D60000EA	1xXeon E5-2609 v3 6C/ 1.9GHz/15MB/85W/1600MHz	4XG0F28847	1x4GB 2133MHz RDIMM	RAID110i +key	4x3.5" HS	Open	No	DVD±RW	1	No	TPM	Switch	TSM Premium	450Wx1 Gold	No	Slide	3-year
70D60001EA	1xXeon E5-2620 v3 6C/ 2.4GHz/15MB/85W/1866MHz	4XG0F28846	1x8GB 2133MHz RDIMM	RAID500	4x3.5" HS	Open	No	DVD±RW	1	No	TPM	Switch	TSM Premium	450Wx2 Gold	No	Slide	3-year
70D60002EA	1xXeon E5-2650 v3 10C/ 2.3GHz/25MB/105W/2133MHz	4XG0F28843	1x16GB 2133MHz RDIMM	RAID710 +CacheVault	4x3.5" HS	Open	No	DVD±RW	1	No	TPM	Switch	TSM Premium	450Wx2 Gold	No	Slide	3-year
70D60007EA	1xXeon E5-2603 v3 6C/ 1.6GHz/15MB/85W/1600MHz	4XG0F28848	1x8GB 2133MHz RDIMM	RAID110i	4x3.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D60008EA	1xXeon E5-2609 v3 6C/ 1.9GHz/15MB/85W/1600MHz	4XG0F28847	1x8GB 2133MHz RDIMM	RAID110i	4x3.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D60009EA	1xXeon E5-2620 v3 6C/ 2.4GHz/15MB/85W/1866MHz	4XG0F28846	1x8GB 2133MHz RDIMM	RAID110i	4x3.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D6000AEA	1xXeon E5-2630 v3 8C/ 2.4GHz/20MB/85W/1866MHz	4XG0F28845	1x8GB 2133MHz RDIMM	RAID110i	4x3.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D6000BEA	1xXeon E5-2640 v3 8C/ 2.6GHz/20MB/90W/1866MHz	4XG0F28844	1x8GB 2133MHz RDIMM	RAID110i	4x3.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D6000CEA	1xXeon E5-2650 v3 10C/ 2.3GHz/25MB/105W/2133MHz	4XG0F28843	1x8GB 2133MHz RDIMM	RAID110i	4x3.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D6000DEA	1xXeon E5-2660 v3 10C/ 2.6GHz/25MB/105W/2133MHz	4XG0F28842	1x8GB 2133MHz RDIMM	RAID110i	4x3.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D6000EEA	1xXeon E5-2603 v3 6C/ 1.6GHz/15MB/85W/1600MHz	4XG0F28848	1x8GB 2133MHz RDIMM	RAID500	4x3.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D6000FEA	1xXeon E5-2609 v3 6C/ 1.9GHz/15MB/85W/1600MHz	4XG0F28847	1x8GB 2133MHz RDIMM	RAID500	4x3.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D6000GEA	1xXeon E5-2620 v3 6C/ 2.4GHz/15MB/85W/1866MHz	4XG0F28846	1x8GB 2133MHz RDIMM	RAID500	4x3.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D6000HEA	1xXeon E5-2630 v3 8C/ 2.4GHz/20MB/85W/1866MHz	4XG0F28845	1x8GB 2133MHz RDIMM	RAID500	4x3.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D6000JEA	1xXeon E5-2640 v3 8C/ 2.6GHz/20MB/90W/1866MHz	4XG0F28844	1x8GB 2133MHz RDIMM	RAID500	4x3.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D6000KEA	1xXeon E5-2650 v3 10C/ 2.3GHz/25MB/105W/2133MHz	4XG0F28843	1x8GB 2133MHz RDIMM	RAID500	4x3.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D6000LEA	1xXeon E5-2660 v3 10C/ 2.6GHz/25MB/105W/2133MHz	4XG0F28842	1x8GB 2133MHz RDIMM	RAID500	4x3.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D6000MEA	1xXeon E5-2603 v3 6C/ 1.6GHz/15MB/85W/1600MHz	4XG0F28848	1x8GB 2133MHz RDIMM	RAID710 +CacheVault	4x3.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70D6000NEA	1xXeon E5-2609 v3 6C/ 1.9GHz/15MB/85W/1600MHz	4XG0F28847	1x8GB 2133MHz RDIMM	RAID710 +CacheVault	4x3.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70D6000PEA	1xXeon E5-2620 v3 6C/ 2.4GHz/15MB/85W/1866MHz	4XG0F28846	1x8GB 2133MHz RDIMM	RAID710 +CacheVault	4x3.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70D6000QEA	1xXeon E5-2603 v3 6C/ 1.6GHz/15MB/85W/1600MHz	4XG0F28848	1x16GB 2133MHz RDIMM	RAID710 +CacheVault	4x3.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70D6000REA	1xXeon E5-2609 v3 6C/ 1.9GHz/15MB/85W/1600MHz	4XG0F28847	1x16GB 2133MHz RDIMM	RAID710 +CacheVault	4x3.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70D6000SEA	1xXeon E5-2620 v3 6C/ 2.4GHz/15MB/85W/1866MHz	4XG0F28846	1x16GB 2133MHz RDIMM	RAID710 +CacheVault	4x3.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70D6000TEA	1xXeon E5-2640 v3 8C/ 2.6GHz/20MB/90W/1866MHz	4XG0F28844	1x8GB 2133MHz RDIMM	RAID710 +CacheVault	4x3.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70D6000UEA	2xXeon E5-2640 v3 8C/ 2.6GHz/20MB/90W/1866MHz	-	2x8GB 2133MHz RDIMM	RAID710 +CacheVault	4x3.5" HS	Open	No	DVD±RW	2	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70D6000VEA	1xXeon E5-2650 v3 10C/ 2.3GHz/25MB/105W/2133MHz	4XG0F28843	1x8GB 2133MHz RDIMM	RAID710 +CacheVault	4x3.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70D6000WEA	2xXeon E5-2650 v3 10C/ 2.3GHz/25MB/105W/2133MHz	-	2x8GB 2133MHz RDIMM	RAID710 +CacheVault	4x3.5" HS	Open	No	DVD±RW	2	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year

ThinkServer RD350 with 2.5" Disk Drive Bay Platform Specifications

Product Specifications Reference (PSREF)

Components	Specification
Form factor	1U rack
Processor	Up to two 105W Intel Xeon E5-2600 v3 family processors with 12 cores up to 1.8 GHz, 10 cores up to 2.6 GHz, 8 cores up to 2.6 GHz, 6 cores up to 2.4 GHz, 4 cores up to 3 GHz. Two QPI link up to 9.6 GT/s. Up to 2133MHz memory speed. Up to 30MB cache
Memory DIMMs	16 DIMM sockets. 4 channels per processor, 2 DIMMs per channel. RDIMM or LRDIMM (cannot be intermixed), DDR4, 2133MHz
Memory capacity	256GB (RDIMM, 16GB x 16)/512GB (LRDIMM, 32GB x 16), 2nd CPU is needed
Memory protection	ECC, memory mirroring, lockstep, and memory sparing
RAID support	RAID 0, 1, 10 with embedded RAID 110i , 6Gb/s SATA, optional key for RAID5. RAID 0, 1, 10 with RAID 500 , PCIe adapter, 6Gb/s SAS/SATA, optional key for RAID5/50. RAID 0, 1, 10, 5, 50, 6, 60 with RAID 710 , PCIe adapter, 6Gb/s SAS/SATA, 1GB memory, optional CacheVault flash cache with super capacitor, CacheCade Pro, or FastPath upgrade key
Disk drive bays	Up to 8 x 2.5" disk drive bays
SD module	Optional SD module, supports up to 2 optional SDHC flash cards
Internal storage	2.5" SATA (7.2K 6Gbs HDD) 500GB/1TB
	2.5" SAS (10K 6Gbs HDD) 300GB/600GB/900GB/1.2TB
	2.5" SAS (15K 6Gbs HDD) 146GB/300GB/450GB/600GB
	2.5" SAS SSD (12Gbs) 200GB/400GB/800GB
	2.5" SATA SSD (6Gbs) 120GB/240GB/300GB/480GB/600GB/800GB
	SDHC flash card 8GB/32GB
	<i>Note: 1. SAS drive needs SAS adapter. 2. SDHC flash card needs SDHC flash memory module.</i>
Optical drive	Optional one UltraSlim optical drive bay, supports DVD-ROM or DVD±RW
Tape drive bays	No internal tape bay
Network interfaces	One dedicated management port, two Gigabit Ethernet ports (RJ-45). Supports optional discrete network adapters via PCIe slots
Security features	Power-on and administrator password. Optional Trusted Platform Module (TCG 1.2-compliant). Optional chassis intrusion switch
Systems management	Supports ThinkServer System Manager (TSM), optional TSM Premium. UEFI. Onboard Aspeed AST2400 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC). Control Panel LEDs shows the status of power, ID, network, system. Supports ThinkServer management software: Diagnostics, Deployment Manager, Energy Manager, System Manager, Partner Pack for VMware vCenter and Microsoft System Center Operations Manager, Power Planner
Power supply	Up to two redundant hot-swap 450 W ac or 550 W ac or 750 W ac power supplies. 550 W is 80 PLUS Platinum qualified, 750 W is 80 PLUS Platinum or Titanium qualified, 450 W is 80 PLUS Gold qualified. 750 W Titanium is 200V - 240V, others are 110V - 240V
Operating systems supported	Microsoft Windows Server 2012 R2, 2012, and 2008 R2, Windows Small Business Server 2011, Windows Server Storage 2012 R2 and 2012, Windows Multipoint Server 2012. Red Hat Enterprise Linux 7.0 and 6.5. SUSE Linux Enterprise Server 11 SP3. VMware vSphere (ESXi) 5.1 P5 and 5.5 U2
Rack kit	Optional slide or static rack kit on selected model
Base warranty	1 or 3-year limited onsite service with 9x5/NBD. Some parts are Customer Replaceable Units

Components	Specification	
Graphics	Onboard Aspeed AST2400 with 16MB memory, one DisplayPort on front, one VGA on rear. Maximum resolution: 1920x1200@60Hz	
Front ports	Two USB 2.0, one DisplayPort	
Rear ports	One VGA, two USB 3.0, one RJ-45 (dedicated mgmt), two ethernet, one serial (9-pin)	
Cooling	6 (5+1, dual processors) or 4 (3+1, single processor) fans, non-hot swap	
Hot-swap parts	Disk drives, power supplies	
Noise emissions	Operating: < 6.5 Bels, Idle: < 5.4 Bels (Maximum configuration)	
Environmental specification	Temperature - operating	50 °F to 95 °F (10 °C to 35 °C)
	Temperature - non operating (no package)	-10 °C to 60 °C
	Temperature - non operating (with package)	-40 °C to 70 °C
	Altitude - operating	(Unpressurized): 0-10000ft (0-3048m)
	Humidity - operating	8%-90%, non-condensing
	Humidity - storage (with package)	8%-90%, non-condensing
Weight	Minimum configuration: 13 kg (28.66 lb), maximum: 19.1 kg (42.11 lb)	
Dimensions	Height: 43 mm (1.7 in), width: 482 mm (19 in), depth: 781.5 mm (30.77 in)	



Expansion slots

Up to 2 PCIe 3.0 slots via two optional riser cards.

Slot 1 (riser card 1): PCIe 3.0 x16, half length, full height, CPU1

Slot 2 (riser card 2): PCIe 3.0 x16, low-profile, half length, CPU2, requires 2nd riser card and 2nd CPU

Core options for ThinkServer RD350 (partial)

4X70F28590	16GB 2R x4 PC4-17000R RDIMM DDR4-2133 4Gbit
4X70F28591	32GB 4R x4 PC4-17000LR LRDIMM DDR4-2133 4Gbit
4XF0G45865	SDHC Flash Memory Module
4X70F28593	32GB SDHC Flash Memory card
4XB0F28690	Lenovo ThinkServer RAID110i Raid 5 Upgrade
4XB0G45759	ThinkServer RAID 500 Upgrade Key for Advanced RAID
4XF0G45867	ThinkServer System Manager Premium
4X20F28576	750W Titanium Hot Swap Power Supply
4X90F92980	DisplayPort to VGA Dongle

ThinkServer RD350 with 2.5" Disk Drive Bay - TopSeller Models

Product Specifications Reference (PSREF)


Type-model	Processor	2nd CPU	Memory	RAID controller	Disk bays	Disk drives	SD module	Optical	Slots	Discrete ethernet	TPM	Chassis intrusion switch	System mgmt	Power	Preloaded OS	Rack kit	Base wty
Announced on December 2, 2014 - 70D8																	
70D80000EA	1xXeon E5-2609 v3 6C/ 1.9GHz/15MB/85W/1600MHz	4XG0F28847	1x8GB 2133MHz RDIMM	RAID710 +CacheVault	8x2.5" HS	Open	No	DVD±RW	1	No	TPM	Switch	TSM Premium	550Wx1 Platinum	No	Slide	3-year
70D80001EA	1xXeon E5-2620 v3 6C/ 2.4GHz/15MB/85W/1866MHz	4XG0F28846	1x16GB 2133MHz RDIMM	RAID710 +CacheVault	8x2.5" HS	Open	No	DVD±RW	1	No	TPM	Switch	TSM Premium	550Wx1 Platinum	No	Slide	3-year
70D80003EA	1xXeon E5-2603 v3 6C/ 1.6GHz/15MB/85W/1600MHz	4XG0F28848	1x8GB 2133MHz RDIMM	RAID110i	8x2.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D80004EA	1xXeon E5-2609 v3 6C/ 1.9GHz/15MB/85W/1600MHz	4XG0F28847	1x8GB 2133MHz RDIMM	RAID110i	8x2.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D80005EA	1xXeon E5-2620 v3 6C/ 2.4GHz/15MB/85W/1866MHz	4XG0F28846	1x8GB 2133MHz RDIMM	RAID110i	8x2.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D80006EA	1xXeon E5-2630 v3 8C/ 2.4GHz/20MB/85W/1866MHz	4XG0F28845	1x8GB 2133MHz RDIMM	RAID110i	8x2.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D80007EA	1xXeon E5-2640 v3 8C/ 2.6GHz/20MB/90W/1866MHz	4XG0F28844	1x8GB 2133MHz RDIMM	RAID110i	8x2.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D80008EA	1xXeon E5-2650 v3 10C/ 2.3GHz/25MB/105W/2133MHz	4XG0F28843	1x8GB 2133MHz RDIMM	RAID110i	8x2.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D80009EA	1xXeon E5-2660 v3 10C/ 2.6GHz/25MB/105W/2133MHz	4XG0F28842	1x8GB 2133MHz RDIMM	RAID110i	8x2.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D8000AEA	1xXeon E5-2603 v3 6C/ 1.6GHz/15MB/85W/1600MHz	4XG0F28848	1x8GB 2133MHz RDIMM	RAID500	8x2.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D8000BEA	1xXeon E5-2609 v3 6C/ 1.9GHz/15MB/85W/1600MHz	4XG0F28847	1x8GB 2133MHz RDIMM	RAID500	8x2.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D8000CEA	1xXeon E5-2620 v3 6C/ 2.4GHz/15MB/85W/1866MHz	4XG0F28846	1x8GB 2133MHz RDIMM	RAID500	8x2.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D8000DEA	1xXeon E5-2630 v3 8C/ 2.4GHz/20MB/85W/1866MHz	4XG0F28845	1x8GB 2133MHz RDIMM	RAID500	8x2.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D8000EEA	1xXeon E5-2640 v3 8C/ 2.6GHz/20MB/90W/1866MHz	4XG0F28844	1x8GB 2133MHz RDIMM	RAID500	8x2.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D8000FEA	1xXeon E5-2650 v3 10C/ 2.3GHz/25MB/105W/2133MHz	4XG0F28843	1x8GB 2133MHz RDIMM	RAID500	8x2.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D8000GEA	1xXeon E5-2660 v3 10C/ 2.6GHz/25MB/105W/2133MHz	4XG0F28842	1x8GB 2133MHz RDIMM	RAID500	8x2.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70D8000HEA	1xXeon E5-2603 v3 6C/ 1.6GHz/15MB/85W/1600MHz	4XG0F28848	1x8GB 2133MHz RDIMM	RAID710 +CacheVault	8x2.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70D8000JEA	1xXeon E5-2609 v3 6C/ 1.9GHz/15MB/85W/1600MHz	4XG0F28847	1x8GB 2133MHz RDIMM	RAID710 +CacheVault	8x2.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70D8000KEA	1xXeon E5-2620 v3 6C/ 2.4GHz/15MB/85W/1866MHz	4XG0F28846	1x8GB 2133MHz RDIMM	RAID710 +CacheVault	8x2.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70D8000LEA	1xXeon E5-2603 v3 6C/ 1.6GHz/15MB/85W/1600MHz	4XG0F28848	1x16GB 2133MHz RDIMM	RAID710 +CacheVault	8x2.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70D8000MEA	1xXeon E5-2609 v3 6C/ 1.9GHz/15MB/85W/1600MHz	4XG0F28847	1x16GB 2133MHz RDIMM	RAID710 +CacheVault	8x2.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70D8000NEA	1xXeon E5-2620 v3 6C/ 2.4GHz/15MB/85W/1866MHz	4XG0F28846	1x16GB 2133MHz RDIMM	RAID710 +CacheVault	8x2.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70D8000PEA	1xXeon E5-2640 v3 8C/ 2.6GHz/20MB/90W/1866MHz	4XG0F28844	1x8GB 2133MHz RDIMM	RAID710 +CacheVault	8x2.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70D8000QEA	2xXeon E5-2640 v3 8C/ 2.6GHz/20MB/90W/1866MHz	-	2x8GB 2133MHz RDIMM	RAID710 +CacheVault	8x2.5" HS	Open	No	DVD±RW	2	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70D8000REA	1xXeon E5-2650 v3 10C/ 2.3GHz/25MB/105W/2133MHz	4XG0F28843	1x8GB 2133MHz RDIMM	RAID710 +CacheVault	8x2.5" HS	Open	No	DVD±RW	1	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70D8000SEA	2xXeon E5-2650 v3 10C/ 2.3GHz/25MB/105W/2133MHz	-	2x8GB 2133MHz RDIMM	RAID710 +CacheVault	8x2.5" HS	Open	No	DVD±RW	2	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year

ThinkServer RD450 with 3.5" Disk Drive Bay Platform Specifications

Product Specifications Reference (PSREF)

Components	Specification	
Form factor	2U rack	
Processor	Up to two 105W Intel Xeon E5-2600 v3 family processors with 12 cores up to 1.8 GHz, 10 cores up to 2.6 GHz, 8 cores up to 2.6 GHz, 6 cores up to 2.4 GHz, 4 cores up to 3 GHz. Two QPI link up to 9.6 GT/s. Up to 2133MHz memory speed. Up to 30MB cache	
Memory DIMMs	16 DIMM sockets. 4 channels per processor, 2 DIMMs per channel.	
Memory capacity	256GB (RDIMM, 16GB x 16)/512GB (LRDIMM, 32GB x 16), 2nd CPU is needed	
Memory protection	ECC, memory mirroring, lockstep, and memory sparing	
RAID support	RAID 0, 1, 10 with embedded RAID 110i , 6Gb/s SATA, optional key for RAID5. RAID 0, 1, 10 with RAID 500 , PCIe adapter, 6Gb/s SAS/SATA, optional key for RAID5/50. RAID 0, 1, 10, 5, 50, 6, 60 with RAID 710 , PCIe adapter, 6Gb/s SAS/SATA, 1GB memory, optional CacheVault flash cache with super capacitor, CacheCade Pro, or FastPath upgrade key	
Disk drive bays	Up to 8 x 3.5" disk drive bays	
SD module	Optional SD module, supports up to 2 optional SDHC flash cards	
Internal storage	3.5" SATA (7.2K 6Gbs HDD)	1TB/2TB/3TB/4TB/
	3.5" SAS (7.2K 6Gbs HDD)	1TB/2TB/3TB/4TB/
	2.5" SAS SSD (12Gbs)	200GB/400GB/800GB
	2.5" SATA SSD (6Gbs)	120GB/240GB/300GB/480GB/600GB/800GB
	PCIe 2.0 x8 SSD	1.6TB/3.2TB
	SDHC flash card	8GB/32GB
	<i>Note: 1. SAS drive needs SAS adapter. 2. SDHC flash card needs SDHC flash memory module. 3. On 3.5" models, 2.5" drive comes with a 3.5" carrier.</i>	
Optical drive	Optional one UltraSlim optical drive bay, supports DVD-ROM or DVD±RW	
Tape drive bays	No internal tape bay	
Network interfaces	One dedicated management port, two Gigabit Ethernet ports. Supports optional discrete network adapters via PCIe slots	
Security features	Power-on and administrator password. Optional Trusted Platform Module (TCG 1.2-compliant). Optional chassis intrusion switch	
Systems management	Supports ThinkServer System Manager (TSM), optional TSM Premium. UEFI. Onboard Aspeed AST2400 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC). Control Panel LEDs shows the status of power, ID, network, system. Supports ThinkServer management software: Diagnostics, Deployment Manager, Energy Manager, System Manager, Partner Pack for VMware vCenter and Microsoft System Center Operations Manager, Power Planner	
Power supply	Up to two redundant hot-swap 450 W ac or 550 W ac or 750 W ac or 1100 W ac power supplies. 550 W and 1100 W are 80 PLUS Platinum qualified, 750 W is 80 PLUS Platinum or Titanium qualified, 450 W is 80 PLUS Gold qualified. 750 W Titanium is 200V - 240V, others are 110V - 240V	
Operating systems supported	Microsoft Windows Server 2012 R2, 2012, and 2008 R2, Windows Small Business Server 2011, Windows Server Storage 2012 R2 and 2012, Windows Multipoint Server 2012. Red Hat Enterprise Linux 7.0 and 6.5. SUSE Linux Enterprise Server 11 SP3. VMware vSphere (ESXi) 5.1 P5 and 5.5 U2	
Rack kit	Optional slide or static rack kit on selected model	
Base warranty	1 or 3-year limited onsite service with 9x5/NBD. Some parts are Customer Replaceable Units	

Components	Specification	
Graphics	Onboard Aspeed AST2400 with 16MB memory, one DisplayPort on front, one VGA on rear. Maximum resolution: 1920x1200@60Hz	
Front ports	Two USB 2.0, one DisplayPort	
Rear ports	One VGA, two USB 3.0, one RJ-45 (dedicated mgmt), two ethernet, one serial (9-pin)	
Cooling	4 (3+1, dual processors) or 3 (2+1, single processor) fans, non-hot swap	
Hot-swap parts	Disk drives, power supplies	
Noise emissions	Operating: < 6.5 Bels, Idle: < 5.6 Bels (Maximum configuration)	
Environmental specification	Temperature - operating	50 °F to 95 °F (10 °C to 35 °C)
	Temperature - non operating (no package)	-10 °C to 60 °C
	Temperature - non operating (with package)	-40 °C to 70 °C
	Altitude - operating	(Unpressurized): 0-10000ft (0-3048m)
	Humidity - operating	8%-90%, non-condensing
	Humidity - storage (with package)	8%-90%, non-condensing
Weight	Minimum configuration: 16 kg (35.3 lb), maximum: 27 kg (59.52 lb)	
Dimensions	Height: 87 mm (3.4 in), width: 482 mm (19 in), depth: 764 mm (30 in)	

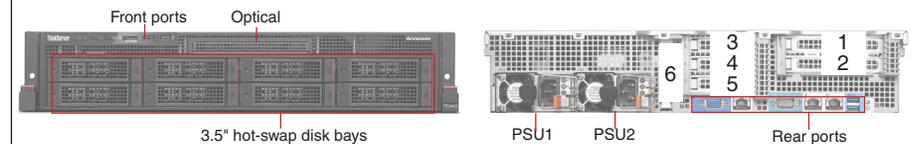

Expansion slots
Up to 6 PCIe 3.0 slots: one vertical onboard PCIe slot, up to 5 PCIe slots via two optional riser cards.
Slot 1 (riser card 1): PCIe 3.0 x8, half length, full height, CPU1
Slot 2 (riser card 1): PCIe 3.0 x8, half length, full height, CPU1
Slot 3 (riser card 2): PCIe 3.0 x8, low-profile, half length, CPU2, requires 2nd riser card and 2nd CPU
Slot 4 (riser card 2): PCIe 3.0 x8, low-profile, half length, CPU2, requires 2nd riser card and 2nd CPU
Slot 5 (riser card 2): PCIe 3.0 x8, low-profile, half length, CPU1, requires 2nd riser card and 2nd CPU
Slot 6 (onboard): PCIe 3.0 x16 (x8 elec), low-profile, half length, requires 2nd CPU
Note: Although slot 5 connects to CPU1, slot 5 is supported on model with two processors and two riser cards only.

Core options for ThinkServer RD450 (partial)
4X70F28590 16GB DDR4-2133MHz (2Rx4) RDIMM
4X70F28591 32GB DDR4-2133MHz (4Rx4) LRDIMM
4XB0G45719 3.5" 4TB 7.2K Enterprise SAS 6Gbps Hot Swap Hard Drive
4XB0G45735 3.5" 800GB Enterprise Performance SAS 12Gbps Hot Swap Solid State Drive
4XB0G45747 3.5" 800GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive
4XB0F28662 3.2TB ioMemory SX300 Performance PCIe 2.0 SSD by FusionIO
4XF0G45865 SDHC Flash Assembly Module
4X70F28593 32GB SD Card
4XB0G45760 RD350, RD450 RAID 710 PCIe Adapter
4XF0G45867 ThinkServer System Manager Premium
4X20F28576 750W Titanium Hot Swap Power Supply
4X90F92980 DisplayPort to VGA Dongle

ThinkServer RD450 with 3.5" Disk Drive Bay - TopSeller Models

Product Specifications Reference (PSREF)


Type-model	Processor	2nd CPU	Memory	RAID controller	Disk bays	Disk drives	SD module/ PCIe x8 SSD	Optical	Tape drive	Slots	Discrete ethernet	TPM	Chassis intrusion switch	System mgmt	Power	Preloaded OS	Rack kit	Base wty
Announced on December 2, 2014																		
70DC0000EA	1xXeon E5-2609 v3 6C/ 1.9GHz/15MB/85W/1600MHz	4XG0F28859	1x4GB 2133MHz RDIMM	RAID110i +key	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	TPM	Switch	TSM Premium	550Wx1 Platinum	No	Slide	3-year
70DC0001EA	1xXeon E5-2620 v3 6C/ 2.4GHz/15MB/85W/1866MHz	4XG0F28858	1x8GB 2133MHz RDIMM	RAID500 +key	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	TPM	Switch	TSM Premium	550Wx1 Platinum	No	Slide	3-year
70DC0006EA	1xXeon E5-2603 v3 6C/ 1.6GHz/15MB/85W/1600MHz	4XG0F28860	1x8GB 2133MHz RDIMM	RAID110i	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DC0007EA	1xXeon E5-2609 v3 6C/ 1.9GHz/15MB/85W/1600MHz	4XG0F28859	1x8GB 2133MHz RDIMM	RAID110i	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DC0008EA	1xXeon E5-2620 v3 6C/ 2.4GHz/15MB/85W/1866MHz	4XG0F28858	1x8GB 2133MHz RDIMM	RAID110i	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DC0009EA	1xXeon E5-2630 v3 8C/ 2.4GHz/20MB/85W/1866MHz	4XG0F28857	1x8GB 2133MHz RDIMM	RAID110i	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DC000AEA	1xXeon E5-2640 v3 8C/ 2.6GHz/20MB/90W/1866MHz	4XG0F28856	1x8GB 2133MHz RDIMM	RAID110i	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DC000BEA	1xXeon E5-2650 v3 10C/ 2.3GHz/25MB/105W/2133MHz	4XG0F28855	1x8GB 2133MHz RDIMM	RAID110i	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DC000CEA	1xXeon E5-2660 v3 10C/ 2.6GHz/25MB/105W/2133MHz	4XG0F28854	1x8GB 2133MHz RDIMM	RAID110i	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DC000DEA	1xXeon E5-2603 v3 6C/ 1.6GHz/15MB/85W/1600MHz	4XG0F28860	1x8GB 2133MHz RDIMM	RAID500	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DC000EEA	1xXeon E5-2609 v3 6C/ 1.9GHz/15MB/85W/1600MHz	4XG0F28859	1x8GB 2133MHz RDIMM	RAID500	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DC000FEA	1xXeon E5-2620 v3 6C/ 2.4GHz/15MB/85W/1866MHz	4XG0F28858	1x8GB 2133MHz RDIMM	RAID500	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DC000GEA	1xXeon E5-2630 v3 8C/ 2.4GHz/20MB/85W/1866MHz	4XG0F28857	1x8GB 2133MHz RDIMM	RAID500	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DC000HEA	1xXeon E5-2640 v3 8C/ 2.6GHz/20MB/90W/1866MHz	4XG0F28856	1x8GB 2133MHz RDIMM	RAID500	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DC000JEA	1xXeon E5-2650 v3 10C/ 2.3GHz/25MB/105W/2133MHz	4XG0F28855	1x8GB 2133MHz RDIMM	RAID500	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DC000KEA	1xXeon E5-2660 v3 10C/ 2.6GHz/25MB/105W/2133MHz	4XG0F28854	1x8GB 2133MHz RDIMM	RAID500	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DC000LEA	1xXeon E5-2603 v3 6C/ 1.6GHz/15MB/85W/1600MHz	4XG0F28860	1x8GB 2133MHz RDIMM	RAID710 +CacheVault	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DC000MEA	1xXeon E5-2609 v3 6C/ 1.9GHz/15MB/85W/1600MHz	4XG0F28859	1x8GB 2133MHz RDIMM	RAID710 +CacheVault	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DC000NEA	1xXeon E5-2620 v3 6C/ 2.4GHz/15MB/85W/1866MHz	4XG0F28858	1x8GB 2133MHz RDIMM	RAID710 +CacheVault	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DC000PEA	1xXeon E5-2630 v3 8C/ 2.4GHz/20MB/85W/1866MHz	4XG0F28857	1x8GB 2133MHz RDIMM	RAID710 +CacheVault	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DC000QEA	1xXeon E5-2640 v3 8C/ 2.6GHz/20MB/90W/1866MHz	4XG0F28856	1x8GB 2133MHz RDIMM	RAID710 +CacheVault	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DC000REA	1xXeon E5-2650 v3 10C/ 2.3GHz/25MB/105W/2133MHz	4XG0F28855	1x8GB 2133MHz RDIMM	RAID710 +CacheVault	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DC000SEA	1xXeon E5-2660 v3 10C/ 2.6GHz/25MB/105W/2133MHz	4XG0F28854	1x8GB 2133MHz RDIMM	RAID710 +CacheVault	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DC000TEA	1xXeon E5-2603 v3 6C/ 1.6GHz/15MB/85W/1600MHz	4XG0F28860	1x8GB 2133MHz RDIMM	RAID710 +CacheVault	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70DC000UEA	1xXeon E5-2609 v3 6C/ 1.9GHz/15MB/85W/1600MHz	4XG0F28859	1x8GB 2133MHz RDIMM	RAID710 +CacheVault	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70DC000VEA	1xXeon E5-2620 v3 6C/ 2.4GHz/15MB/85W/1866MHz	4XG0F28858	1x8GB 2133MHz RDIMM	RAID710 +CacheVault	8x3.5" HS	Open	No/No	DVD±RW	None	2	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70DC000WEA	2xXeon E5-2640 v3 8C/ 2.6GHz/20MB/90W/1866MHz	-	2x8GB 2133MHz RDIMM	RAID710 +CacheVault	8x3.5" HS	Open	No/No	DVD±RW	None	6	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70DC000XEA	2xXeon E5-2650 v3 10C/ 2.3GHz/25MB/105W/2133MHz	-	2x8GB 2133MHz RDIMM	RAID710 +CacheVault	8x3.5" HS	Open	No/No	DVD±RW	None	6	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year

ThinkServer RD450 with 2.5" Disk Drive Bay Platform Specifications

Product Specifications Reference (PSREF)

Components	Specification
Form factor	2U rack
Processor	Up to two 105W Intel Xeon E5-2600 v3 family processors with 12 cores up to 1.8 GHz, 10 cores up to 2.6 GHz, 8 cores up to 2.6 GHz, 6 cores up to 2.4 GHz, 4 cores up to 3 GHz. Two QPI link up to 9.6 GT/s. Up to 2133MHz memory speed. Up to 30MB cache
Memory DIMMs	16 DIMM sockets. 4 channels per processor, 2 DIMMs per channel. RDIMM or LRDIMM (cannot be intermixed), DDR4, 2133MHz
Memory capacity	256GB (RDIMM, 16GB x 16)/512GB (LRDIMM, 32GB x 16), 2nd CPU is needed
Memory protection	ECC, memory mirroring, lockstep, and memory sparing
AnyRAID support	Supports AnyRAID 110i/510i/720i/720ix for 8 x 2.5" model, 720ix for 16 or 24x 2.5" model. RAID 0, 1, 10 with AnyRAID 110i. 6Gb/s SATA, optional key for RAID 5. RAID 0, 1, 10 with AnyRAID 510i. 6Gb/s SAS/SATA, optional key for RAID 5/50. RAID 0, 1, 10, 5, 50, 6, 60 with AnyRAID 720i/720ix. 12Gb/s SAS/SATA. 720i needs cache for RAID 6/60 support. 720ix must have a cache. Optional cache for 720i/720ix: 1GB read-only memory. 1GB/2GB/4GB flash with super capacitor. Flash options include CacheVault, CacheCade Pro, and FastPath
Disk drive bays	Up to 8 x 2.5" (Bay 0-7) disk drive bays, or up to 16 x 2.5" (Bay 0-15) disk drive bays, or up to 24 x 2.5" (Bay 0-23) disk drive bays (see right)
SD module	Optional SD module, supports up to 2 optional SDHC flash cards
Internal storage	2.5" SATA (7.2K 6Gbs HDD) 500GB/1TB
	2.5" SAS (10K 6Gbs HDD) 300GB/600GB/900GB/1.2TB
	2.5" SAS (15K 6Gbs HDD) 146GB/300GB/450GB/600GB
	2.5" SAS SSD (12Gbs) 200GB/400GB/800GB
	2.5" SATA SSD (6Gbs) 120GB/240GB/300GB/480GB/600GB/800GB
	Tape drive 2.5TB
	PCIe 2.0 x8 SSD 1.6TB/3.2TB
	SDHC flash card 8GB/32GB
	<i>Note: 1. SAS drive needs SAS adapter. 2. SDHC flash card needs SDHC flash memory module.</i>
Optical drive	Optional one UltraSlim optical drive bay on 8 and 16 x 2.5" bays model, supports DVD-ROM or DVD±RW
Tape drive bays	Supports up to one LTO-6 internal SAS tape drive. 8 x 2.5" model only. AnyRAID 720ix is needed
Network interfaces	One dedicated management port, two Gigabit Ethernet ports. Supports optional discrete network adapters via PCIe slots
Security features	Power-on and administrator password. Optional Trusted Platform Module (TCG 1.2-compliant). Optional chassis intrusion switch
Systems management	Supports ThinkServer System Manager (TSM), optional TSM Premium. UEFI. Onboard Aspeed AST2400 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC). Control Panel LEDs shows the status of power, ID, network, system. Supports ThinkServer management software: Diagnostics, Deployment Manager, Energy Manager, System Manager, Partner Pack for VMware vCenter and Microsoft System Center Operations Manager, Power Planner
Power supply	Up to two redundant hot-swap 450 W ac or 550 W ac or 750 W ac or 1100 W ac power supplies. 550 W and 1100 W are 80 PLUS Platinum qualified, 750 W is 80 PLUS Platinum or Titanium qualified, 450 W is 80 PLUS Gold qualified. 750 W Titanium is 200V - 240V, others are 110V - 240V. 450 W is supported on 8 x 2.5" models only

Components	Specification	
Operating systems supported	Microsoft Windows Server 2012 R2, 2012, and 2008 R2, Windows Small Business Server 2011, Windows Server Storage 2012 R2 and 2012, Windows Multipoint Server 2012, Red Hat Enterprise Linux 7.0 and 6.5. SUSE Linux Enterprise Server 11 SP3. VMware vSphere (ESXi) 5.1 P5 and 5.5 U2	
Rack kit	Optional slide or static rack kit on selected model	
Base warranty	1 or 3-year limited onsite service with 9x5/NBD. Some parts are Customer Replaceable Units	
Graphics	Onboard Aspeed AST2400 with 16MB memory, one DisplayPort on front, one VGA on rear. Maximum resolution: 1920x1200@60Hz	
Front ports	Two USB 2.0, one DisplayPort	
Rear ports	One VGA, two USB 3.0, one RJ-45 (dedicated mgmt), two ethernet, one serial (9-pin)	
Cooling	4 (3+1, dual processors) or 3 (2+1, single processor) fans, non-hot swap	
Hot-swap parts	Disk drives, power supplies	
Noise emissions	Operating: < 6.5 Bels, Idle: < 5.6 Bels (Maximum configuration)	
Environmental specification	Temperature - operating	50 °F to 95 °F (10 °C to 35 °C)
	Temperature - non operating (no package)	-10 °C to 60 °C
	Temperature - non operating (with package)	-40 °C to 70 °C
	Altitude - operating	(Unpressurized): 0-10000ft (0-3048m)
	Humidity - operating	8%-90%, non-condensing
	Humidity - storage (with package)	8%-90%, non-condensing
Weight	Minimum configuration: 16 kg (35.3 lb), maximum: 27 kg (59.52 lb)	
Dimensions	Height: 87 mm (3.4 in), width: 482 mm (19 in), depth: 764 mm (30 in)	



Tape drive and optical are located in bay 16-23



PSU1 PSU2 Rear ports

Expansion slots

Up to 6 PCIe 3.0 slots: one vertical onboard PCIe slot, up to 5 PCIe slots via two optional riser cards.
 Slot 1 (riser card 1): PCIe 3.0 x8, half length, full height, CPU1
 Slot 2 (riser card 1): PCIe 3.0 x8, half length, full height, CPU1
 Slot 3 (riser card 2): PCIe 3.0 x8, low-profile, half length, CPU2, requires 2nd riser card and 2nd CPU
 Slot 4 (riser card 2): PCIe 3.0 x8, low-profile, half length, CPU2, requires 2nd riser card and 2nd CPU
 Slot 5 (riser card 2): PCIe 3.0 x8, low-profile, half length, CPU1, requires 2nd riser card and 2nd CPU
 Slot 6 (onboard): PCIe 3.0 x16 (x8 elec), low-profile, half length, requires 2nd CPU
Note: Although slot 5 connects to CPU1, slot 5 is supported on model with two processors and two riser cards only.

Core options for ThinkServer RD450 (partial)

4X70F28590 16GB DDR4-2133MHz (2Rx4) RDIMM
 4XB0F28662 3.2TB ioMemory SX300 Performance PCIe 2.0 SSD by FusionIO
 4XF0G45866 LTO-6 Linear Tape Drive Kit by Tandberg
 4XB0G45757 Lenovo ThinkServer RD450 Raid 720ix AnyRAID Adapter with Expander
 4XF0G45867 ThinkServer System Manager Premium
 4X20F28576 750W Titanium Hot Swap Power Supply
 4X90F92980 DisplayPort to VGA Dongle

ThinkServer RD450 with 2.5" Disk Drive Bay - TopSeller Models - I

Product Specifications Reference (PSREF)

Type-model	Processor	2nd CPU	Memory	AnyRAID	Disk bays	Disk drives	SD module/ PCIe x8 SSD	Optical	Tape drive	Slots	Discrete ethernet	TPM	Chassis intrusion switch	System mgmt	Power	Preloaded OS	Rack kit	Base wty
Announced on December 2, 2014 - 70DA																		
70DA0000EA	1xXeon E5-2609 v3 6C/ 1.9GHz/15MB/85W/1600MHz	4XG0F28859	1x8GB 2133MHz RDIMM	110i +key	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	TPM	Switch	TSM Premium	550Wx1 Platinum	No	Slide	3-year
70DA0002EA	1xXeon E5-2603 v3 6C/ 1.6GHz/15MB/85W/1600MHz	4XG0F28860	1x8GB 2133MHz RDIMM	110i	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DA0003EA	1xXeon E5-2609 v3 6C/ 1.9GHz/15MB/85W/1600MHz	4XG0F28859	1x8GB 2133MHz RDIMM	110i	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DA0004EA	1xXeon E5-2620 v3 6C/ 2.4GHz/15MB/85W/1866MHz	4XG0F28858	1x8GB 2133MHz RDIMM	110i	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DA0005EA	1xXeon E5-2630 v3 8C/ 2.4GHz/20MB/85W/1866MHz	4XG0F28857	1x8GB 2133MHz RDIMM	110i	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DA0006EA	1xXeon E5-2640 v3 8C/ 2.6GHz/20MB/90W/1866MHz	4XG0F28856	1x8GB 2133MHz RDIMM	110i	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DA0007EA	1xXeon E5-2650 v3 10C/ 2.3GHz/25MB/105W/2133MHz	4XG0F28855	1x8GB 2133MHz RDIMM	110i	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DA0008EA	1xXeon E5-2660 v3 10C/ 2.6GHz/25MB/105W/2133MHz	4XG0F28854	1x8GB 2133MHz RDIMM	110i	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DA0009EA	1xXeon E5-2603 v3 6C/ 1.6GHz/15MB/85W/1600MHz	4XG0F28860	1x8GB 2133MHz RDIMM	510i	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DA000AEA	1xXeon E5-2609 v3 6C/ 1.9GHz/15MB/85W/1600MHz	4XG0F28859	1x8GB 2133MHz RDIMM	510i	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DA000BEA	1xXeon E5-2620 v3 6C/ 2.4GHz/15MB/85W/1866MHz	4XG0F28858	1x8GB 2133MHz RDIMM	510i	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DA000CEA	1xXeon E5-2630 v3 8C/ 2.4GHz/20MB/85W/1866MHz	4XG0F28857	1x8GB 2133MHz RDIMM	510i	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DA000DEA	1xXeon E5-2640 v3 8C/ 2.6GHz/20MB/90W/1866MHz	4XG0F28856	1x8GB 2133MHz RDIMM	510i	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DA000EEA	1xXeon E5-2650 v3 10C/ 2.3GHz/25MB/105W/2133MHz	4XG0F28855	1x8GB 2133MHz RDIMM	510i	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DA000FEA	1xXeon E5-2660 v3 10C/ 2.6GHz/25MB/105W/2133MHz	4XG0F28854	1x8GB 2133MHz RDIMM	510i	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DA000GEA	1xXeon E5-2603 v3 6C/ 1.6GHz/15MB/85W/1600MHz	4XG0F28860	1x8GB 2133MHz RDIMM	720i +1GB Flash	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DA000HEA	1xXeon E5-2609 v3 6C/ 1.9GHz/15MB/85W/1600MHz	4XG0F28859	1x8GB 2133MHz RDIMM	720i +1GB Flash	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DA000JEA	1xXeon E5-2620 v3 6C/ 2.4GHz/15MB/85W/1866MHz	4XG0F28858	1x8GB 2133MHz RDIMM	720i +1GB Flash	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DA000KEA	1xXeon E5-2630 v3 8C/ 2.4GHz/20MB/85W/1866MHz	4XG0F28857	1x8GB 2133MHz RDIMM	720i +1GB Flash	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DA000LEA	1xXeon E5-2640 v3 8C/ 2.6GHz/20MB/90W/1866MHz	4XG0F28856	1x8GB 2133MHz RDIMM	720i +1GB Flash	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DA000MEA	1xXeon E5-2650 v3 10C/ 2.3GHz/25MB/105W/2133MHz	4XG0F28855	1x8GB 2133MHz RDIMM	720i +1GB Flash	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DA000NEA	1xXeon E5-2660 v3 10C/ 2.6GHz/25MB/105W/2133MHz	4XG0F28854	1x8GB 2133MHz RDIMM	720i +1GB Flash	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DA000PEA	1xXeon E5-2603 v3 6C/ 1.6GHz/15MB/85W/1600MHz	4XG0F28860	1x8GB 2133MHz RDIMM	720i +1GB Flash	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70DA000QEA	1xXeon E5-2609 v3 6C/ 1.9GHz/15MB/85W/1600MHz	4XG0F28859	1x8GB 2133MHz RDIMM	720i +1GB Flash	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70DA000REA	1xXeon E5-2620 v3 6C/ 2.4GHz/15MB/85W/1866MHz	4XG0F28858	1x8GB 2133MHz RDIMM	720i +1GB Flash	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70DA000SEA	2xXeon E5-2640 v3 8C/ 2.6GHz/20MB/90W/1866MHz	-	2x8GB 2133MHz RDIMM	720i +1GB Flash	8x2.5" HS	Open	No/No	DVD±RW	No	6	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70DA000TEA	2xXeon E5-2650 v3 10C/ 2.3GHz/25MB/105W/2133MHz	-	2x8GB 2133MHz RDIMM	720i +1GB Flash	8x2.5" HS	Open	No/No	DVD±RW	No	6	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70DA000UEA	1xXeon E5-2609 v3 6C/ 1.9GHz/15MB/85W/1600MHz	4XG0F28859	1x4GB 2133MHz RDIMM	110i +key	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	TPM	Switch	TSM Premium	550Wx2 Platinum	No	Slide	3-year

ThinkServer RD450 with 2.5" Disk Drive Bay - TopSeller Models - II


Product Specifications Reference (PSREF)

Type-model	Processor	2nd CPU	Memory	AnyRAID	Disk bays	Disk drives	SD module/ PCIe x8 SSD	Optical	Tape drive	Slots	Discrete ethernet	TPM	Chassis intrusion switch	System mgmt	Power	Preloaded OS	Rack kit	Base wty
70DA000VEA	1xXeon E5-2620 v3 6C/ 2.4GHz/15MB/85W/1866MHz	4XG0F28858	1x8GB 2133MHz RDIMM	510i +key	8x2.5" HS	Open	No/No	DVD±RW	No	2	No	TPM	Switch	TSM Premium	550Wx2 Platinum	No	Slide	3-year
70DA000WEA	2xXeon E5-2650 v3 10C/ 2.3GHz/25MB/105W/2133MHz	-	8x16GB 2133MHz RDIMM	720i +1GB RAM	8x2.5" HS	6x300GB 2.5" SAS6.0 10K HDD	No/No	DVD±RW	No	6	No	TPM	Switch	TSM Premium	550Wx2 Platinum	No	Slide	3-year
Announced on December 2, 2014 - 70DE																		
70DE0000EA	1xXeon E5-2650 v3 10C/ 2.3GHz/25MB/105W/2133MHz	4XG0F28855	1x16GB 2133MHz RDIMM	720ix +1GB Flash	24x2.5" HS	Open	No/No	None	None	2	No	TPM	Switch	TSM Premium	750Wx1 Platinum	No	Slide	3-year
70DE0002EA	1xXeon E5-2603 v3 6C/ 1.6GHz/15MB/85W/1600MHz	4XG0F28860	1x8GB 2133MHz RDIMM	720ix +1GB Flash	24x2.5" HS	Open	No/No	None	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DE0003EA	1xXeon E5-2609 v3 6C/ 1.9GHz/15MB/85W/1600MHz	4XG0F28859	1x8GB 2133MHz RDIMM	720ix +1GB Flash	24x2.5" HS	Open	No/No	None	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DE0004EA	1xXeon E5-2620 v3 6C/ 2.4GHz/15MB/85W/1866MHz	4XG0F28858	1x8GB 2133MHz RDIMM	720ix +1GB Flash	24x2.5" HS	Open	No/No	None	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DE0005EA	1xXeon E5-2630 v3 8C/ 2.4GHz/20MB/85W/1866MHz	4XG0F28857	1x8GB 2133MHz RDIMM	720ix +1GB Flash	24x2.5" HS	Open	No/No	None	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DE0006EA	1xXeon E5-2640 v3 8C/ 2.6GHz/20MB/90W/1866MHz	4XG0F28856	1x8GB 2133MHz RDIMM	720ix +1GB Flash	24x2.5" HS	Open	No/No	None	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DE0007EA	1xXeon E5-2650 v3 10C/ 2.3GHz/25MB/105W/2133MHz	4XG0F28855	1x8GB 2133MHz RDIMM	720ix +1GB Flash	24x2.5" HS	Open	No/No	None	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DE0008EA	1xXeon E5-2660 v3 10C/ 2.6GHz/25MB/105W/2133MHz	4XG0F28854	1x8GB 2133MHz RDIMM	720ix +1GB Flash	24x2.5" HS	Open	No/No	None	None	2	No	No	Switch	TSM	750Wx1 Platinum	No	Slide	1-year
70DE0009EA	2xXeon E5-2640 v3 8C/ 2.6GHz/20MB/90W/1866MHz	-	2x8GB 2133MHz RDIMM	720ix +1GB Flash	24x2.5" HS	Open	No/No	None	None	6	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
70DE000AEA	2xXeon E5-2650 v3 10C/ 2.3GHz/25MB/105W/2133MHz	-	2x8GB 2133MHz RDIMM	720ix +1GB Flash	24x2.5" HS	Open	No/No	None	None	6	No	No	Switch	TSM Premium	750Wx1 Platinum	No	Slide	1-year
Announced on December 2, 2014 - 70DE																		
70DV0000EA	1xXeon E5-2620 v3 6C/ 2.4GHz/15MB/85W/1866MHz	4XG0F28858	1x8GB 2133MHz RDIMM	720ix +1GB RAM	16x2.5" HS	Open	No/No	DVD±RW	None	2	No	TPM	Switch	TSM Premium	750Wx1 Platinum	No	Slide	3-year

ThinkServer RD340 Overview


Front view - ThinkServer RD340 supports the following disk bay configurations:

ThinkServer RD340 with 4 x 3.5" Disk Drive Bays

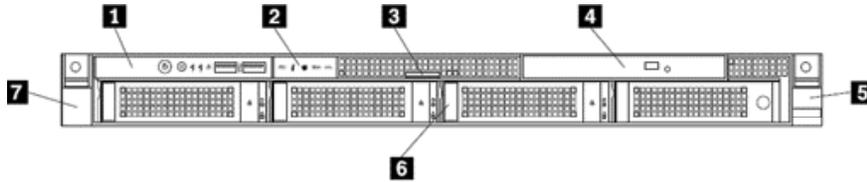


1. Front panel
 - Power Button with LED
 - ID button with LED
 - 2 Network interface status LEDs
 - System error LED
 - 2 USB 2.0
2. Intelligent Diagnostics Module (IDM basic only, optional)
3. Pull-out information card
4. Slim optical drive (optional)
5. Rack handle (right)
6. 4 x 3.5" hot-swap disk drive bays
7. Rack handle (left)

ThinkServer RD340 with 6 x 2.5" Disk Drive Bays

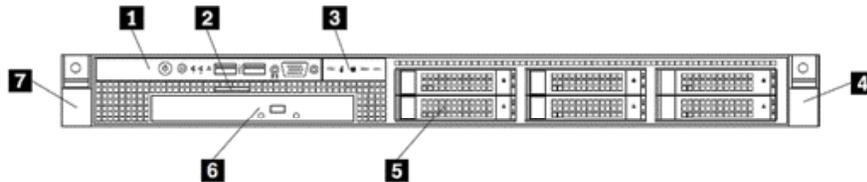


1. Front panel
 - Power Button with LED
 - ID button with LED
 - 2 Network interface status LEDs
 - System error LED
 - 2 USB 2.0
 - 1 VGA
2. Pull-out information card
3. Intelligent Diagnostics Module (IDM basic only, optional)
4. Rack handle (right)
5. 6 x 2.5" hot-swap disk drive bays
6. Slim optical drive (optional)
7. Rack handle (left)

ThinkServer RD340 with 8 x 2.5" Disk Drive Bays

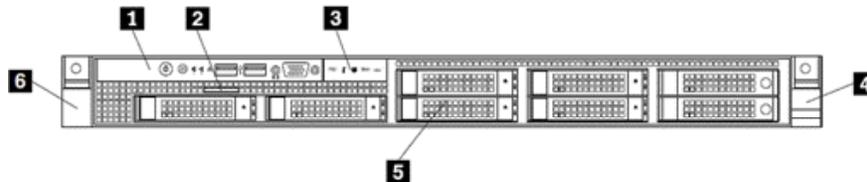


1. Front panel
 - Power Button with LED
 - ID button with LED
 - 2 Network interface status LEDs
 - System error LED
 - 2 USB 2.0
 - 1 VGA
2. Pull-out information card
3. Intelligent Diagnostics Module (IDM basic only, optional)
4. Rack handle (right)
5. 8 x 2.5" hot-swap disk drive bays
6. Rack handle (left)

Rear view

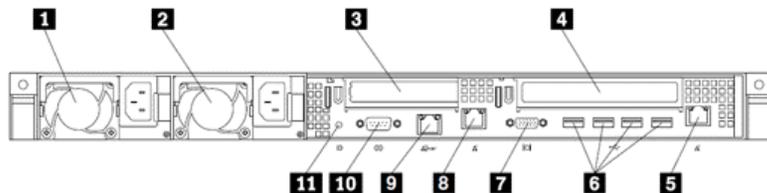

1. Hot-swap redundant power supply 2 (optional)
2. Hot-swap redundant power supply 1
3. Low profile PCI Express slot by riser card 2
4. PCI Express slot by riser card 1
5. Ethernet 2 (RJ-45)
6. Four USB 2.0
7. VGA DB-15 connector
8. Ethernet 1 (RJ-45)
9. Dedicate/share management connector (RJ-45)
10. Serial
11. ID LED

ThinkServer RD340 Platform Systems Specifications - I of II

Components	Specifications																									
Mechanical	<ul style="list-style-type: none"> • 1U rack with rail kit • 19" W x 28.9" D x 1.72" H (with rack handles) • 482.4mm W x 734mm D x 43.6mm H (with rack handles) • 17kg (37.5 lb) when fully configured 																									
Chipset	Intel C606 Chipset																									
Processors	Two LGA1356 sockets, supports up to two processors from Intel Xeon E5-2400 or Xeon E5-2400 v2 families, up to 8 cores (E5-2400 series)/10 cores (E5-2400 v2 series), one QPI links up to 8.0GT/s, up to 20MB (E5-2400 series)/25MB (E5-2400 v2 series) cache, integrated 3-channel DDR3 memory controller up to 1600MHz																									
Memory type	1600MHz, LV RDIMM*, DDR3, 3-channel per processor, 240-pin <small>* By default, the voltage of LV RDIMM is 1.5V and can be changed to 1.35V in BIOS setting</small>																									
Memory DIMMs	Twelve DIMM sockets, six DIMM sockets per processor																									
Memory protection	ECC, memory mirroring, memory sparing																									
Disk bays configurations	Supports one of the following configurations <ul style="list-style-type: none"> • 4 x 3.5" disk bays + 1 x slim optical bay • 6 x 2.5" disk bays + 1 x slim optical bay • 8 x 2.5" disk bays 																									
RAID support	<table border="1"> <thead> <tr> <th>RAID adapter</th> <th>RAID support</th> <th>Cache</th> <th>Transfer rates</th> <th>Optional upgrades</th> </tr> </thead> <tbody> <tr> <td>RAID 300 (onboard)</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5 support</td> </tr> <tr> <td>RAID 500 (LSI 9240-8i)</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5, 50 support</td> </tr> <tr> <td>RAID 700 (LSI 9260-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>512MB</td> <td>6Gb/s</td> <td>optional intelligent Battery Backup Unit (iBBU08)</td> </tr> <tr> <td>RAID 710 (LSI 9270CV-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>1GB</td> <td>6Gb/s</td> <td> <ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key </td> </tr> </tbody> </table>	RAID adapter	RAID support	Cache	Transfer rates	Optional upgrades	RAID 300 (onboard)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5 support	RAID 500 (LSI 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support	RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)	RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key
	RAID adapter	RAID support	Cache	Transfer rates	Optional upgrades																					
	RAID 300 (onboard)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5 support																					
	RAID 500 (LSI 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support																					
RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)																						
RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key 																						
Optical drive (optional)	4 x 3.5"/6 x 2.5" models: one slim optical bay, supports one optional slim optical 8 x 2.5" models: none optical bay, optional external USB optical is needed																									
Onboard network	Two Gigabit Ethernet ports by Intel i350, one Gigabit Ethernet port by Intel 82574L, dedicate/share management																									
Front ports	One analog VGA DB-15 connector (for 6 x 2.5"/8 x 2.5" models), two USB 2.0																									
Rear ports	Four USB 2.0, one serial (9-pin), two ethernet (RJ-45), one RJ-45 (dedicate/share mgmt), one analog VGA DB-15 connector																									
Expansion Slots	 <p>Two PCI-Express slots via two riser cards, riser card 1 for slot 1, riser card 2 for slot 2 Slot 1: half-length, full-height, PCI Express 3.0 x16 Slot 2: Low Profile, PCI Express 3.0 x8 (x4 elec)</p>																									
Graphics	Onboard Aspeed AST2300 graphics/management processor, one VGA DB-15 on front, one VGA DB-15 on rear; <i>Maximum resolution: 1920x1200@60Hz</i>																									
Intelligent Diagnostics Module (optional)	Supports optional Intelligent Diagnostics Module (IDM) basic, IDM basic LED lights indicate failing component category																									
Systems management (iKVM is optional)	<ul style="list-style-type: none"> • Onboard Aspeed AST2300 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC); optional ThinkServer Management Module Premium for iKVM functions • Front control panel LEDs shows the status of power, ID, network, system • Lenovo SmartGrid Manager • ThinkServer EasyStartup/EasyManage/EasyUpdate 																									
Cooling fans	6 fans, non-hot swap, 5 + 1 redundant																									
Cable mgmt (opt)	Optional cable management arm on selected models																									

ThinkServer RD340 Platform Systems Specifications - II of II

Components	Specifications			
Power supply	One or two 550 watts standard, two maximum, rear access, hot-swap, 80 PLUS Gold qualified, redundant with two power supplies			
Hot-swap parts	Disk drives, power supplies, and cooling fans			
Security features	Power-on password/administrator password/Trusted Platform Module (TCG 1.2-compliant)			
Safety, environment, and certifications	Environmental certifications	<ul style="list-style-type: none"> • Energy Star Server 2.0 qualified • RoHS-compliant 		
	EMC	FCC Class A, CSA, CE		
	240VA	Supports		
	Temperature - operating	50 °F to 95 °F (10 °C to 35 °C)		
	Temperature - non operating (no package)	-10 °C to 60 °C		
	Temperature - non operating (with package)	-40 °C to 70 °C		
	Altitude - operating	Supported Altitude (unpressurized): 0-10000ft (0-3048m)		
	Humidity - operating	8%~80%, non-condensing		
	Humidity - non operating (no package)	8%~80%, non-condensing		
	Humidity - non operating (with package)	8%~90%, non-condensing		
	Acoustic noise (idle/working mode)	System Configuration		
		Category	Entry level	High-end
		CPU	1	2
		Memory	4GB x 1	4GB x 12
Optical Drive		Slim optical	Slim optical	
Drive Bays		4 x 3.5"	6 x 2.5"	
RAID		RAID500	RAID500	
HDD		2 x 500GB 3.5" SATA	6 x 300GB 2.5" SAS	
PSU		550Wx1	550Wx2	
Sound Pressure (operating)		45.28 dB(A)	44.74 dB(A)	
Sound Pressure (idle)	45.28 dB(A)	44.95 dB(A)		

ThinkServer RD340 Optional Configurations - Processor and Memory

Rack kit	Included in models									
Processor	The following processor options are available:									
	Processors Specifications*								Part Number	
Processor Number	# of Cores	# of Threads	Clock Speed	Max Turbo Frequency	Cache	QPI Speed	Max TDP	Memory Speed		
Intel Xeon E5-2400 v2 Series										
Xeon E5-2440 v2	8	16	1.9 GHz	2.4 GHz	20MB	7.2 GT/s	95W	DDR3-1600	0C19539	
Xeon E5-2450 v2	8	16	2.5 GHz	3.3 GHz	20MB	8 GT/s	95W	DDR3-1600	0C19538	
Xeon E5-2450L v2	10	20	1.7 GHz	2.1 GHz	25MB	7.2 GT/s	60W	DDR3-1600	0C19544	
Xeon E5-2470 v2	10	20	2.4 GHz	3.2 GHz	25MB	8 GT/s	95W	DDR3-1600	0C19537	
Xeon E5-2407 v2	4	4	2.4 GHz	2.4 GHz	10MB	6.4 GT/s	80W	DDR3-1333	0C19542	
Xeon E5-2420 v2	6	12	2.2 GHz	2.7 GHz	15MB	7.2 GT/s	80W	DDR3-1600	0C19541	
Xeon E5-2430 v2	6	12	2.5 GHz	3 GHz	15MB	7.2 GT/s	80W	DDR3-1600	0C19540	
Xeon E5-2430L v2	6	12	2.4 GHz	2.8 GHz	15MB	7.2 GT/s	60W	DDR3-1600	0C19545	
Xeon E5-2403 v2	4	4	1.8 GHz	1.8 GHz	10MB	6.4 GT/s	80W	DDR3-1333	0C19543	
Intel Xeon E5-2400 Series										
Xeon E5-2450L	8	16	1.8 GHz	2.3 GHz	20MB	8 GT/s	70 W	DDR3-1600	0A89450	
Xeon E5-2450	8	16	2.1 GHz	2.9 GHz	20MB	8 GT/s	95 W	DDR3-1600	0A89444	
Xeon E5-2440	6	12	2.4 GHz	2.9 GHz	15MB	7.2 GT/s	95 W	DDR3-1333	0A89445	
Xeon E5-2430L	6	12	2 GHz	2.5 GHz	15MB	7.2 GT/s	60 W	DDR3-1333	0A89451	
Xeon E5-2407	4	4	2.2 GHz		10MB	6.4 GT/s	80 W	DDR3-1066	0A89448	
Xeon E5-2403	4	4	1.8 GHz		10MB	6.4 GT/s	80 W	DDR3-1066	0A89449	
Xeon E5-2430	6	12	2.2 GHz	2.7 GHz	15MB	7.2 GT/s	95 W	DDR3-1333	0A89446	
Xeon E5-2420	6	12	1.9 GHz	2.4 GHz	15MB	7.2 GT/s	95 W	DDR3-1333	0A89447	
Xeon E5-2470	8	16	2.3 GHz	3.1 GHz	20MB	8 GT/s	95 W	DDR3-1600	0A89443	
<p>Notes:</p> <p>All processors specifications is provided by Intel and may be changed at any time without notice.</p> <p>The information herein is provided "as-is".</p> <p>Intel may update this information in non-scheduled. For latest information, please see http://ark.intel.com/</p>										
Memory options	Memory options							Part Number		
	ThinkServer 4GB DDR3L-1600MHz (1RX8) RDIMM							0C19533		
	ThinkServer 8GB DDR3L-1600MHz (2RX8) RDIMM							0C19534		
	ThinkServer 16GB DDR3L-1600MHz (2RX4) RDIMM							0C19535		

ThinkServer RD340 Optional Configurations - Storage and RAID

Disk drive options for 3.5" disk bay models (8 x 3.5"/12 x 3.5")	Hot-swap disk drive options for 3.5" bay		Part Number
	3.5" SATA Hard Drive		
	ThinkServer 3.5" 500GB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive		0A89473
	ThinkServer 3.5" 1TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive		0A89474
	ThinkServer 3.5" 2TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive		0A89475
	ThinkServer 3.5" 3TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive		0A89477
	ThinkServer 3.5" 4TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive		0C19520
	3.5" SAS Hard Drive		
	ThinkServer 3.5" 1TB 7.2K SAS 6Gbps Hot Swap Hard Drive		0C19530
	ThinkServer 3.5" 2TB 7.2K SAS 6Gbps Hot Swap Hard Drive		0C19531
	ThinkServer 3.5" 3TB 7.2K SAS 6Gbps Hot Swap Hard Drive		0C19532
	ThinkServer 3.5" 300GB 15K SAS 6Gbps Hot Swap Hard Drive		67Y2616
	ThinkServer 3.5" 600GB 15K SAS 6Gbps Hot Swap Hard Drive		4XB0F28644
	2.5" SSD for 3.5" disk bay		
	ThinkServer 2.5" 100GB MLC SATA Solid State Drive to 3.5" Kit		0C19571
	ThinkServer 2.5" 200GB MLC SATA Solid State Drive to 3.5" Kit		0C19572
	ThinkServer 2.5" 400GB MLC SATA Solid State Drive to 3.5" Kit		0C19573
Disk drive options for 2.5" disk bay models (8 x 2.5"/16 x 2.5")	Hot-swap disk drive options for 2.5" bay		Part Number
	2.5" SATA Hard Drive		
	ThinkServer 2.5" 500GB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive		0C19495
	ThinkServer 2.5" 1TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive		0C19496
	2.5" SAS Hard Drive		
	ThinkServer 2.5" 300GB 10K SAS 6Gbps Hot Swap Hard Drive		67Y2619
	ThinkServer 2.5" 600GB 10K SAS 6Gbps Hot Swap Hard Drive		67Y2621
	ThinkServer 2.5" 900GB 10K SAS 6Gbps Hot Swap Hard Drive		0A89409
	ThinkServer 2.5" 300GB 15K SAS 6Gbps Hot Swap Hard Drive		0C19494
	2.5" SSD		
	ThinkServer 2.5" 100GB MLC SATA Solid State Drive		0A89420
	ThinkServer 2.5" 200GB MLC SATA Solid State Drive		0A89418
ThinkServer 2.5" 400GB MLC SATA Solid State Drive		0A89419	
RAID options	RAID controller and RAID upgrade options		Part Number
	ThinkServer RAID 300 Upgrade Key for Advanced RAID		0A89422
	ThinkServer RAID 500 Adapter II		0A89464
	ThinkServer RAID 500 Upgrade Key for Advanced RAID		0A89407
	ThinkServer RAID 700 Adapter II		0A89463
	ThinkServer RAID 700 Battery		67Y2647
	ThinkServer RAID 710 Adapter		0C19489
	ThinkServer RAID Super Capacitor Module		0C19490
	ThinkServer RAID FastPath Software Key		0C19491
	ThinkServer RAID CacheCade Pro 2.0 Software Key		0C19492

ThinkServer RD340 Optional Configurations - Network, System Management, Power Supply

Network and HBA options	Network and HBA options		Part Number
	ThinkServer 1Gbps Ethernet I350-T2 Server Adapter by Intel		0C19506
	ThinkServer 1Gbps Ethernet I350-T4 Server Adapter by Intel		0C19507
	Lenovo 10Gbps Ethernet X540-T2 Server Adapter by Intel		0C19497
	Lenovo 10Gbps Ethernet X520-DA2 Server Adapter by Intel		0C19486
	Lenovo 10Gbps Ethernet Fiber Module by Intel		0C19488
	Lenovo 10Gbps Ethernet X520-SR2 Server Adapter by Intel		0C19487
	ThinkServer QLE8242-CU-CK Dual Port CNA by QLogic		0C19483
	ThinkServer LPe1250 Single Port 8Gb Fibre Channel HBA by Emulex		0C19476
	ThinkServer LPe12002 Dual Port 8Gb Fibre Channel HBA by Emulex		0C19478
	ThinkServer QLE2562 Dual Port 8Gb Fibre Channel HBA by QLogic		0C19482
Security options	Trusted Platform Module options		Part Number
	ThinkServer Trusted Platform Module		0A89428
Systems management options	System Management option for iKVM		Part Number
	ThinkServer Management Module Premium		67Y2624
	Cable Management option		Part Number
	ThinkServer Cable management Arm		0A89476
Power supply options	Power supply option		Part Number
	ThinkServer 550W Gold Hot Swap Redundant Power Supply		4X20E54689

ThinkServer RD340 Operating System and Virtualization Supportability Matrix

List of operationg system and virtualization software supported on ThinkServer RD340

Operating System/Virtualization	Certified	Support ROK	Supports EasyStartup	Preloaded
Windows Server 2008 x86 Edition				
Windows Server 2008 Standard Edition (x86)			•	
Windows Server 2008 Enterprise Edition (x86)			•	
Windows Server 2008 Datacenter Edition (x86)			•	
Windows Server 2008 x64 Edition				
Windows Server 2008 Standard Edition (x64) (including Hyper-V)	•		•	
Windows Server 2008 Enterprise Edition (x64) (including Hyper-V)	•		•	
Windows Server 2008 Datacenter Edition (x64) (including Hyper-V)	•		•	
Windows Server 2008 R2 (x64) with SP1				
Windows Server 2008 Standard Edition R2 with SP1 (including Hyper-V)	•	•	•	
Windows Server 2008 Enterprise Edition R2 with SP1 (including Hyper-V)	•	•	•	
Windows Server 2008 Datacenter Edition R2 with SP1 (including Hyper-V)	•	•	•	
Windows Small Business Server 2011				
Windows Small Business Server 2011 Essentials	•		•	
Windows Small Business Server 2011 Standard	•	•	•	
Windows Small Business Server Premium Add-On (including Hyper-V)	•	•	•	
Windows Server 2012				
Windows Server 2012 Standard (including Hyper-V)	•	•	•	•
Windows Server 2012 Datacenter (including Hyper-V)	•	•	•	•
Windows Server 2012 Essentials	•	•	•	•
Windows Server 2012 Hyper-V	•		•	
Windows Server 2012 R2				
Windows Server 2012 R2 Standard (including Hyper-V)	•	•	•	•
Windows Server 2012 R2 Datacenter (including Hyper-V)	•	•	•	•
Windows Server 2012 R2 Essentials	•	•	•	•
Windows Server 2012 R2 Hyper-V	•		•	
SUSE LINUX Enterprise Server x86				
SUSE LINUX Enterprise Server 10 sp4			•	
SUSE LINUX Enterprise Server 11 sp2	•		•	
SUSE LINUX Enterprise Server 11 sp3	•		•	
SUSE LINUX Enterprise Server x64				
SUSE LINUX Enterprise Server 10 sp4			•	
SUSE LINUX Enterprise Server 11 sp2	•		•	
RedHat Enterprise Linux Server (RHEL) x86				
RHEL 5.9	•		•	
RHEL 5.10	•		•	
RHEL 6.4	•		•	
RHEL 6.5	•		•	
RedHat Enterprise Linux Server x64				
RHEL 5.9	•		•	
RHEL 5.10	•		•	
RHEL 6.4	•		•	
RHEL 6.5	•		•	
Vmware x64				
Vmware ESXi 5.1 U1	•		•	•
Vmware ESXi 5.5	•	•	•	•
Microsoft Hyper V				
Microsoft Hyper-V server 2008	•		•	
Microsoft Hyper-v server 2008 R2 SP1	•		•	
Citrix				
Citrix XenServer 6.1	•		•	
Citrix XenServer 6.0.2	•		•	

Note:

- For more information on ThinkServer operating system and virtualization software, please visit ThinkServer Software page: <http://shop.lenovo.com/us/en/servers/thinkserver/server-software.html>
- For ThinkServer operating system and virtualization software options, please visit ThinkServer OS and virtualization Options document: http://www.lenovo.com/images/products/server/pdfs/datasheets/ThinkServer_OS_&Virtualization_Options_Datasheet.pdf

Type-model ¹	Intel Xeon Processor	2nd CPU	Memory	Disk Bays	RAID controller	Storage	Slim optical	Discrete ethernet	Intelligent Diagnostics	Remote mgmt	Cable mgmt	PSU qty	TPM module	Preloaded OS	Base warranty (-year, on-site)
70AB000Axx	Xeon E5-2403 v2 4C/1.8GHz/10MB/1333MHz	No	4GBx1 1600MHz LVRDIMM	4x3.5" HS	RAID300	Open	DVD±RW	No	No	IPMI	No	1	No	No	3
70AB000Kxx	Xeon E5-2420 v2 6C/2.2GHz/15MB/1600MHz	No	8GBx1 1600MHz LVRDIMM	4x3.5" HS	RAID300	Open	DVD±RW	No	No	IPMI	No	1	No	No	3
70AB000Sxx	Xeon E5-2430 v2 6C/2.5GHz/15MB/1600MHz	No	8GBx1 1600MHz LVRDIMM	4x3.5" HS	RAID500	Open	DVD±RW	No	No	IPMI	No	1	No	No	3
70AB001Rxx	Xeon E5-2407 v2 4C/2.4GHz/10MB/1333MHz	No	8GBx1 1600MHz LVRDIMM	4x3.5" HS	RAID300	Open	DVD±RW	No	No	IPMI	No	1	No	No	3

1. Model in italics is Global model 2. By default, the voltage of LV RDIMM is 1.5V and can be changed to 1.35V in BIOS setting

- For detailed platform specifications, please see [ThinkServer RD340 Platform Specifications sheets](#)
- For optional configurations of ThinkServer RD340, please see [ThinkServer RD340 Optional Configurations sheets](#)

Mechanical	<ul style="list-style-type: none"> • 1U rack with rail kit • 19" W x 28.9" D x 1.72" H (with rack handles) • 482.4mm W x 734mm D x 43.6mm H (with rack handles) • 17kg (37.5 lb) when fully configured 	Cable mgmt (opt)	Optional cable management arm on selected models																								
Chipset	Intel C606 Chipset, two LGA1356 sockets for processors	Power supply	One or two 550 watts standard, two maximum, rear access, hot-swap, 80 PLUS Gold qualified, redundant with two power supplies																								
Memory DIMMs	Twelve DIMM sockets, six DIMM sockets per processor	Security features	Power-on password/administrator password, Trusted Platform Module (TCG 1.2-compliant)																								
Memory protection	ECC, memory mirroring, memory sparing	Environmental certifications	<ul style="list-style-type: none"> • Energy Star Server 2.0 qualified • RoHS-compliant 																								
RAID support	<table border="1"> <thead> <tr> <th>RAID adapter</th> <th>RAID support</th> <th>Cache</th> <th>Transfer rates</th> <th>Optional upgrades</th> </tr> </thead> <tbody> <tr> <td>RAID 300 (onboard)</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5 support</td> </tr> <tr> <td>RAID 500 (LSI 9240-8i)</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5, 50 support</td> </tr> <tr> <td>RAID 700 (LSI 9260-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>512MB</td> <td>6Gb/s</td> <td>optional intelligent Battery Backup Unit (iBBU08)</td> </tr> <tr> <td>RAID 710 (LSI 9270CV-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>1GB</td> <td>6Gb/s</td> <td> <ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key </td> </tr> </tbody> </table>	RAID adapter	RAID support	Cache	Transfer rates	Optional upgrades	RAID 300 (onboard)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5 support	RAID 500 (LSI 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support	RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)	RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key 	<p>Top</p> <p>Front: Supports the following disk bay configurations: 4 x 3.5" 6 x 2.5" 8 x 2.5" </p> <p>Rear</p>
RAID adapter	RAID support	Cache	Transfer rates	Optional upgrades																							
RAID 300 (onboard)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5 support																							
RAID 500 (LSI 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support																							
RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)																							
RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key 																							
Optical drive (optional)	4 x 3.5"/6 x 2.5" : one slim optical bay, supports one optional slim optical 8 x 2.5": none optical bay, optional external USB optical is needed	<p>* Slim optical bay is not available on 8 x 2.5" models</p> <p>Expansion Slots: Riser card 1 for slot 1, riser card 2 for slot 2 Slot 1: half-length, full-height, PCIe 3.0 x16 Slot 2: Low Profile, PCIe 3.0 x8 (x4 elec)</p> <p>Front/rear Ports: Front: 1 VGA (for 6 x 2.5"/8 x 2.5" models), 2 USB 2.0 Rear: 4 USB 2.0, 1 serial (9-pin), 2 ethernet (RJ-45), 1 RJ-45 (dedicate/share mgmt), 1 VGA</p>																									
Onboard network	Two Gigabit Ethernet ports by Intel i350, one Gigabit Ethernet port by Intel 82574L, dedicate/share management																										
Discrete network (optional)	Supports the following Intel Server Adapter options on selected models: 1Gbps: 350-T2/I350-T4 10Gbps: X520-SR2/X520-DA2/X540-T2/Fiber Module for X520-DA2																										
Intelligent Diagnostics Module (optional)	Supports optional Intelligent Diagnostics Module (IDM) basic, IDM basic LED lights indicate failing component category																										
Systems management (iKVM is optional)	<ul style="list-style-type: none"> • Onboard Aspeed AST2300 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC); optional ThinkServer Management Module Premium for iKVM functions • Control Panel LEDs shows the status of power, ID, network, system • Lenovo SmartGrid Manager • ThinkServer EasyStartup/EasyManage/EasyUpdate 																										
Cooling fans	6 fans, non-hot swap, 5 + 1 redundant																										

See footnotes for more detailed information
Model(s) announced January 21, 2014

Type-model ¹	Intel Xeon Processor	2nd CPU	Memory	Disk Bays	RAID controller	Storage	Slim optical	Discrete ethernet	Intelligent Diagnostics	Remote mgmt	Cable mgmt	PSU qty	TPM module	Preloaded OS	Base warranty (-year, on-site)
70AC0005xx	Xeon E5-2407 v2 4C/2.4GHz/10MB/1333MHz	No	4GBx1 1600MHz LVRDIMM	6x2.5" HS	RAID300	Open	DVD±RW	No	No	IPMI	No	1	No	No	3
70AC000Cxx	Xeon E5-2420 v2 6C/2.2GHz/15MB/1600MHz	No	8GBx1 1600MHz LVRDIMM	6x2.5" HS	RAID500	Open	DVD±RW	No	No	IPMI	No	1	No	No	3
70AC000Dxx	Xeon E5-2420 v2 6C/2.2GHz/15MB/1600MHz	No	8GBx1 1600MHz LVRDIMM	6x2.5" HS	RAID500 +upgrade	Open	DVD±RW	No	No	IPMI	No	1	No	No	3

1. Model in italics is Global model 2. By default, the voltage of LV RDIMM is 1.5V and can be changed to 1.35V in BIOS setting

- For detailed platform specifications, please see [ThinkServer RD340 Platform Specifications sheets](#)
- For optional configurations of ThinkServer RD340, please see [ThinkServer RD340 Optional Configurations sheets](#)

Mechanical	<ul style="list-style-type: none"> • 1U rack with rail kit • 19" W x 28.9" D x 1.72" H (with rack handles) • 482.4mm W x 734mm D x 43.6mm H (with rack handles) • 17kg (37.5 lb) when fully configured 	Cable mgmt (opt)	Optional cable management arm on selected models																								
Chipset	Intel C606 Chipset, two LGA1356 sockets for processors	Power supply	One or two 550 watts standard, two maximum, rear access, hot-swap, 80 PLUS Gold qualified, redundant with two power supplies																								
Memory DIMMs	Twelve DIMM sockets, six DIMM sockets per processor	Security features	Power-on password/administrator password, Trusted Platform Module (TCG 1.2-compliant)																								
Memory protection	ECC, memory mirroring, memory sparing	Environmental certifications	<ul style="list-style-type: none"> • Energy Star Server 2.0 qualified • RoHS-compliant 																								
RAID support	<table border="1"> <thead> <tr> <th>RAID adapter</th> <th>RAID support</th> <th>Cache</th> <th>Transfer rates</th> <th>Optional upgrades</th> </tr> </thead> <tbody> <tr> <td>RAID 300 (onboard)</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5 support</td> </tr> <tr> <td>RAID 500 (LSI 9240-8i)</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5, 50 support</td> </tr> <tr> <td>RAID 700 (LSI 9260-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>512MB</td> <td>6Gb/s</td> <td>optional intelligent Battery Backup Unit (iBBU08)</td> </tr> <tr> <td>RAID 710 (LSI 9270CV-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>1GB</td> <td>6Gb/s</td> <td> <ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key </td> </tr> </tbody> </table>	RAID adapter	RAID support	Cache	Transfer rates	Optional upgrades	RAID 300 (onboard)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5 support	RAID 500 (LSI 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support	RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)	RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key 	<p>Top</p> <p>Front: Supports the following disk bay configurations: 4 x 3.5" 6 x 2.5" 8 x 2.5" Rear </p> <p>* Slim optical bay is not available on 8 x 2.5" models</p> <p>Expansion Slots: Riser card 1 for slot 1, riser card 2 for slot 2 Slot 1: half-length, full-height, PCIe 3.0 x16 Slot 2: Low Profile, PCIe 3.0 x8 (x4 elec)</p> <p>Front/rear Ports: Front: 1 VGA (for 6 x 2.5"/8 x 2.5" models), 2 USB 2.0 Rear: 4 USB 2.0, 1 serial (9-pin), 2 ethernet (RJ-45), 1 RJ-45 (dedicate/share mgmt), 1 VGA</p>
RAID adapter	RAID support	Cache	Transfer rates	Optional upgrades																							
RAID 300 (onboard)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5 support																							
RAID 500 (LSI 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support																							
RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)																							
RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key 																							
Optical drive (optional)	4 x 3.5"/6 x 2.5" : one slim optical bay, supports one optional slim optical 8 x 2.5": none optical bay, optional external USB optical is needed																										
Onboard network	Two Gigabit Ethernet ports by Intel i350, one Gigabit Ethernet port by Intel 82574L, dedicate/share management																										
Discrete network (optional)	Supports the following Intel Server Adapter options on selected models: 1Gbps: 350-T2/I350-T4 10Gbps: X520-SR2/X520-DA2/X540-T2/Fiber Module for X520-DA2																										
Intelligent Diagnostics Module (optional)	Supports optional Intelligent Diagnostics Module (IDM) basic, IDM basic LED lights indicate failing component category																										
Systems management (iKVM is optional)	<ul style="list-style-type: none"> • Onboard Aspeed AST2300 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC); optional ThinkServer Management Module Premium for iKVM functions • Control Panel LEDs shows the status of power, ID, network, system • Lenovo SmartGrid Manager • ThinkServer EasyStartup/EasyManage/EasyUpdate 																										
Cooling fans	6 fans, non-hot swap, 5 + 1 redundant																										

See footnotes for more detailed information
Model(s) announced January 21, 2014

Type-model ¹	Intel Xeon Processor	2nd CPU	Memory	Disk Bays	RAID controller	Storage	Slim optical	Discrete ethernet	Intelligent Diagnostics	Remote mgmt	Cable mgmt	PSU qty	TPM module	Preloaded OS	Base warranty (-year, on-site)
70AD0007xx	Xeon E5-2420 v2 6C/2.2GHz/15MB/1600MHz	No	4GBx1 1600MHz LVRDIMM	8x2.5" HS	RAID300	Open	N/A	No	No	IPMI	No	1	No	No	3
70AD000Qxx	Xeon E5-2450 v2 8C/2.5GHz/20MB/1600MHz	No	8GBx1 1600MHz LVRDIMM	8x2.5" HS	RAID500 +upgrade	Open	N/A	No	No	IPMI	No	1	No	No	3

1. Model in italics is Global model 2. By default, the voltage of LV RDIMM is 1.5V and can be changed to 1.35V in BIOS setting

- For detailed platform specifications, please see [ThinkServer RD340 Platform Specifications sheets](#)
- For optional configurations of ThinkServer RD340, please see [ThinkServer RD340 Optional Configurations sheets](#)


Mechanical	<ul style="list-style-type: none"> • 1U rack with rail kit • 19" W x 28.9" D x 1.72" H (with rack handles) • 482.4mm W x 734mm D x 43.6mm H (with rack handles) • 17kg (37.5 lb) when fully configured 	Cable mgmt (opt)	Optional cable management arm on selected models																								
Chipset	Intel C606 Chipset, two LGA1356 sockets for processors	Power supply	One or two 550 watts standard, two maximum, rear access, hot-swap, 80 PLUS Gold qualified, redundant with two power supplies																								
Memory DIMMs	Twelve DIMM sockets, six DIMM sockets per processor	Security features	Power-on password/administrator password, Trusted Platform Module (TCG 1.2-compliant)																								
Memory protection	ECC, memory mirroring, memory sparing	Environmental certifications	<ul style="list-style-type: none"> • Energy Star Server 2.0 qualified • RoHS-compliant 																								
RAID support	<table border="1"> <thead> <tr> <th>RAID adapter</th> <th>RAID support</th> <th>Cache</th> <th>Transfer rates</th> <th>Optional upgrades</th> </tr> </thead> <tbody> <tr> <td>RAID 300 (onboard)</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5 support</td> </tr> <tr> <td>RAID 500 (LSI 9240-8i)</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5, 50 support</td> </tr> <tr> <td>RAID 700 (LSI 9260-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>512MB</td> <td>6Gb/s</td> <td>optional intelligent Battery Backup Unit (iBBU08)</td> </tr> <tr> <td>RAID 710 (LSI 9270CV-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>1GB</td> <td>6Gb/s</td> <td> <ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key </td> </tr> </tbody> </table>	RAID adapter	RAID support	Cache	Transfer rates	Optional upgrades	RAID 300 (onboard)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5 support	RAID 500 (LSI 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support	RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)	RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key 	<p>Top</p> <p>Front: Supports the following disk bay configurations: 4 x 3.5" 6 x 2.5" 8 x 2.5" </p> <p>Rear</p>
RAID adapter	RAID support	Cache	Transfer rates	Optional upgrades																							
RAID 300 (onboard)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5 support																							
RAID 500 (LSI 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support																							
RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)																							
RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key 																							
Optical drive (optional)	4 x 3.5"/6 x 2.5" : one slim optical bay, supports one optional slim optical 8 x 2.5": none optical bay, optional external USB optical is needed	* Slim optical bay is not available on 8 x 2.5" models																									
Onboard network	Two Gigabit Ethernet ports by Intel i350, one Gigabit Ethernet port by Intel 82574L, dedicate/share management	Expansion Slots:	Riser card 1 for slot 1, riser card 2 for slot 2 Slot 1: half-length, full-height, PCIe 3.0 x16 Slot 2: Low Profile, PCIe 3.0 x8 (x4 elec)																								
Discrete network (optional)	Supports the following Intel Server Adapter options on selected models: 1Gbps: 350-T2/I350-T4 10Gbps: X520-SR2/X520-DA2/X540-T2/Fiber Module for X520-DA2	Front/rear Ports:																									
Intelligent Diagnostics Module (optional)	Supports optional Intelligent Diagnostics Module (IDM) basic, IDM basic LED lights indicate failing component category	Front: 1 VGA (for 6 x 2.5"/8 x 2.5" models), 2 USB 2.0 Rear: 4 USB 2.0, 1 serial (9-pin), 2 ethernet (RJ-45), 1 RJ-45 (dedicate/share mgmt), 1 VGA																									
Systems management (iKVM is optional)	<ul style="list-style-type: none"> • Onboard Aspeed AST2300 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC); optional ThinkServer Management Module Premium for iKVM functions • Control Panel LEDs shows the status of power, ID, network, system • Lenovo SmartGrid Manager • ThinkServer EasyStartup/EasyManage/EasyUpdate 																										
Cooling fans	6 fans, non-hot swap, 5 + 1 redundant																										

See footnotes for more detailed information
Model(s) announced January 21, 2014

ThinkServer RD440 Overview


Front view - ThinkServer RD440 supports the following disk bay configurations:

ThinkServer RD440 with 8 x 3.5" Disk Drive Bays

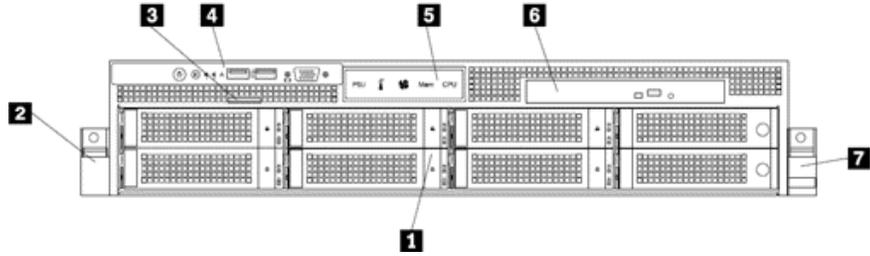


1. 8 x 3.5" hot-swap disk drive bays
2. Rack handle (left)
3. Pull-out information card
4. Front panel
 - Power Button with LED
 - ID button with LED
 - 2 Network interface status LEDs
 - System error LED
 - 2 USB 2.0
 - 1 VGA
5. Intelligent Diagnostics Module (optional)
6. Slim optical drive (optional)
7. Rack handle (right)

ThinkServer RD440 with 12 x 3.5" Disk Drive Bays

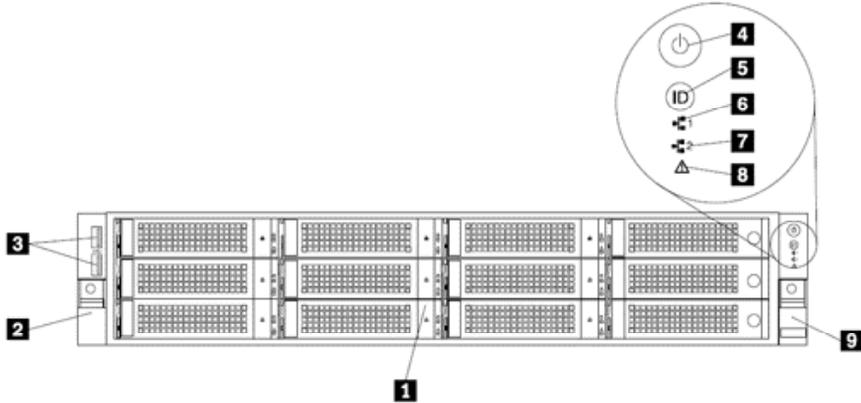


1. 12 x 3.5" hot-swap disk drive bays
2. Rack handle (left)
3. 2 USB 2.0
4. Power Button with LED
5. ID button with LED
6. Network interface status LED 1
7. Network interface status LED 2
8. System error LED
9. Rack handle (right)

ThinkServer RD440 with 2.5" Disk Drive Bays

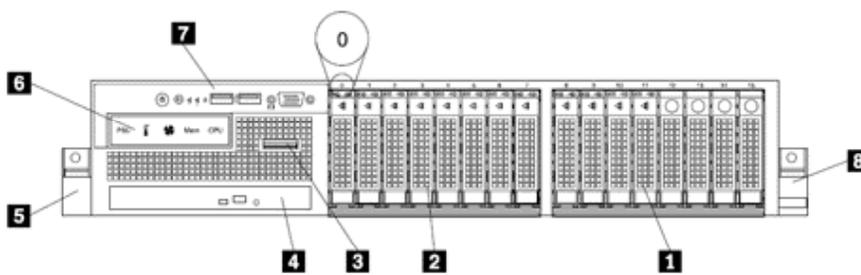


1. 8 x hot-swap disk drive bays (for 16x2.5" hard drive bays model)
2. 8 x Hot-swap disk drive bays
3. Pull-out information card
4. Slim optical drive (optional)
5. Rack handle (left)
6. Intelligent Diagnostics Module (basic or premium, optional)
7. Front panel
 - Power Button with LED
 - ID button with LED
 - 2 Network interface status LEDs
 - System error LED
 - 2 USB 2.0
 - 1 VGA
8. Rack handle (right)

Rear view

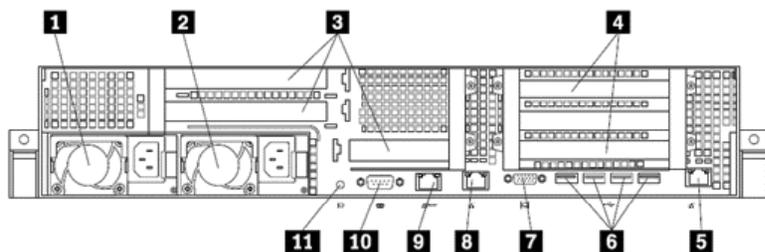

1. Hot-swap redundant power supply 2 (optional)
2. Hot-swap redundant power supply 1
3. Three PCI Express slots by riser card 2
4. Two PCI Express slots by riser card 1
5. Ethernet 2 (RJ-45)
6. Four USB 2.0
7. VGA DB-15 connector
8. Ethernet 1 (RJ-45)
9. Dedicate/share management connector (RJ-45)
10. Serial
11. ID LED

ThinkServer RD440 Platform Systems Specifications - I of II

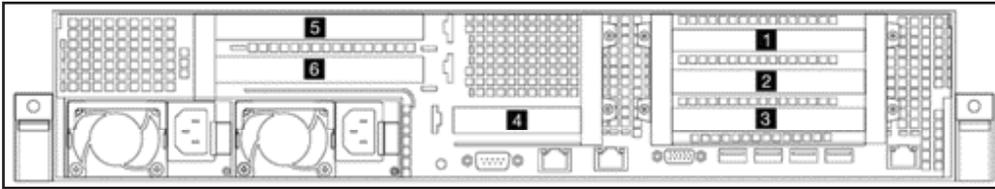Components	Specifications																									
Mechanical	<ul style="list-style-type: none"> • 2U rack with rail kit • 19" W x 28.9" D x 3.45" H (with rack handles) • 482.4mm W x 734mm D x 87.6mm H (with rack handles) • 28 kg (61.73 lb) when fully configured 																									
Chipset	Intel C606 Chipset																									
Processors	Two LGA1356 sockets, supports up to two processors from Intel Xeon E5-2400 or Xeon E5-2400 v2 families, up to 8 cores (E5-2400 series)/10 cores (E5-2400 v2 series), one QPI links up to 8.0GT/s, up to 20MB (E5-2400 series)/25MB (E5-2400 v2 series) cache, integrated 3-channel DDR3 memory controller up to 1600MHz																									
Memory type	1600MHz, LV RDIMM*, DDR3, 3-channel per processor, 240-pin * By default, the voltage of LV RDIMM is 1.5V and can be changed to 1.35V in BIOS setting																									
Memory DIMMs	Twelve DIMM sockets, six DIMM sockets per processor																									
Memory capacity	Up to 192GB DDR3 LV RDIMM (16GB x 12)																									
Memory protection	ECC, memory mirroring, memory sparing																									
Disk bays configurations	Supports one of the following configurations: <ul style="list-style-type: none"> • 8 x 3.5" disk bays + 1 x slim optical bay • 12 x 3.5" disk bays • 8 x 2.5" disk bays + 1 x slim optical bay • 16 x 2.5" disk bays + 1 x slim optical bay 																									
RAID support	<table border="1"> <thead> <tr> <th>RAID adapter</th> <th>RAID support</th> <th>Cache</th> <th>Transfer rates</th> <th>Optional upgrades</th> </tr> </thead> <tbody> <tr> <td>RAID 300** (onboard)</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5 support</td> </tr> <tr> <td>RAID 500 (LSI 9240-8i)</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5, 50 support</td> </tr> <tr> <td>RAID 700 (LSI 9260-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>512MB</td> <td>6Gb/s</td> <td>optional intelligent Battery Backup Unit (iBBU08)</td> </tr> <tr> <td>RAID 710 (LSI 9270CV-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>1GB</td> <td>6Gb/s</td> <td> <ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key </td> </tr> </tbody> </table> <p>** RAID 300 is supported on 8 x 3.5" and 8 x 2.5" models only</p>	RAID adapter	RAID support	Cache	Transfer rates	Optional upgrades	RAID 300** (onboard)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5 support	RAID 500 (LSI 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support	RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)	RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key
RAID adapter	RAID support	Cache	Transfer rates	Optional upgrades																						
RAID 300** (onboard)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5 support																						
RAID 500 (LSI 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support																						
RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)																						
RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key 																						
Optical drive (optional)	8 x 3.5"/8 x 2.5"/16 x 2.5" models: one slim optical bay, supports one optional slim optical 12 x 3.5" models: none optical bay, optional external USB optical is needed																									
Onboard network	Two Gigabit Ethernet ports by Intel i350, one Gigabit Ethernet port by Intel 82574L, dedicate/share management																									
Front ports	One analog VGA DB-15 connector (for 8 x 3.5", 8 x 2.5", and 16 x 2.5" models), two USB 2.0																									
Rear ports	Four USB 2.0, one serial (9-pin), two ethernet (RJ-45), one RJ-45 (dedicate/share mgmt), one analog VGA DB-15 connector																									
Expansion Slots	 <p>Up to six PCI-Express slots via two riser cards, riser card 1 for slot 1-3, riser card 2 for slot 4-6 Slot 1: half-length, full-height, PCIe 3.0 x16 (x8 elec) Slot 2: half-length, full-height, PCIe 3.0 x8 Slot 3: half-length, full-height, PCIe 2.0 x8 (x4) Slot 4: Low Profile, PCIe 3.0 x8 (x4 elec) Slot 5-6 are available on dual processors models: Slot 5: half-length, full-height, PCIe 3.0 x16 (x8 elec) Slot 6: half-length, full-height, PCIe 3.0 x8</p>																									
Graphics	Onboard Aspeed AST2300 graphics/management processor, one VGA DB-15 on front, one VGA DB-15 on rear; Maximum resolution: 1920x1200@60Hz																									

ThinkServer RD440 Platform Systems Specifications - II of II

Components	Specifications			
Intelligent Diagnostics Module (optional)	Supports optional Intelligent Diagnostics Module (IDM) or IDM Premium on selected 8 x 3.5"/8 x 2.5"/16 x 2.5" models, IDM LED lights indicate failing component category, IDM Premium LED lights indicate individual failing part			
Systems management (iKVM is optional)	<ul style="list-style-type: none"> Onboard Aspeed AST2300 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC); optional ThinkServer Management Module Premium for iKVM functions Front control panel LEDs shows the status of power, ID, network, system Lenovo SmartGrid Manager ThinkServer EasyStartup/EasyManage/EasyUpdate 			
Security features	Power-on password/administrator password/Trusted Platform Module (TCG 1.2-compliant)			
Cooling fans	5 fans, hot-swap, 4 + 1 redundant			
Cable mgmt (opt)	Optional cable management arm on selected models			
Power supply	One or two 800 watts standard, two maximum, rear access, hot-swap, 80 PLUS Gold qualified, redundant with two power supplies			
Hot-swap parts	Disk drives, power supplies, and cooling fans			
Safety, environment, and certifications	Environmental certifications	<ul style="list-style-type: none"> Energy Star Server 2.0 qualified RoHS-compliant 		
	EMC	FCC Class A, CSA, CE		
	240VA	Supports		
	Temperature - operating	50 °F to 95 °F (10 °C to 35 °C)		
	Temperature - non operating (no package)	-10 °C to 60 °C		
	Temperature - non operating (with package)	-40 °C to 70 °C		
	Altitude - operating	Supported Altitude (unpressurized): 0-10000ft (0-3048m)		
	Humidity - operating	8%~80%, non-condensing		
	Humidity - non operating (no package)	8%~80%, non-condensing		
	Humidity - non operating (with package)	8%~90%, non-condensing		
	Acoustic noise (idle/working mode)	System Configuration		
		Category	Entry level	High-end
		CPU	1	2
		Memory	4GB x 1	4GB x 12
		Optical Drive	Slim optical	None
Drive Bays		8 x 3.5"	12 x 3.5"	
RAID		RAID500	RAID500	
HDD		2 x 500GB 3.5" SATA	12 x 2TB 3.5" SAS	
PSU		800Wx1	800Wx2	
Sound Pressure (operating)		44.98 dB(A)	44.2 dB(A)	
Sound Pressure (idle)	44.5 dB(A)	44.7 dB(A)		

ThinkServer RD440 Optional Configurations - Processor and Memory

Rack kit	Included in models																																																																																																																																																																																																																																																									
Processor	The following processor options are available:																																																																																																																																																																																																																																																									
	<table border="1"> <thead> <tr> <th rowspan="2">Processor Number</th> <th colspan="9">Processors Specifications*</th> <th rowspan="2">Part Number</th> </tr> <tr> <th># of Cores</th> <th># of Threads</th> <th>Clock Speed</th> <th>Max Turbo Frequency</th> <th>Cache</th> <th>QPI Speed</th> <th>Max TDP</th> <th>Memory Speed</th> <th></th> </tr> </thead> <tbody> <tr> <td colspan="11">Intel Xeon E5-2400 v2 Series</td> </tr> <tr> <td>Xeon E5-2440 v2</td> <td>8</td> <td>16</td> <td>1.9 GHz</td> <td>2.4 GHz</td> <td>20MB</td> <td>7.2 GT/s</td> <td>95W</td> <td>DDR3-1600</td> <td></td> <td>0C19539</td> </tr> <tr> <td>Xeon E5-2450 v2</td> <td>8</td> <td>16</td> <td>2.5 GHz</td> <td>3.3 GHz</td> <td>20MB</td> <td>8 GT/s</td> <td>95W</td> <td>DDR3-1600</td> <td></td> <td>0C19538</td> </tr> <tr> <td>Xeon E5-2450L v2</td> <td>10</td> <td>20</td> <td>1.7 GHz</td> <td>2.1 GHz</td> <td>25MB</td> <td>7.2 GT/s</td> <td>60W</td> <td>DDR3-1600</td> <td></td> <td>0C19544</td> </tr> <tr> <td>Xeon E5-2470 v2</td> <td>10</td> <td>20</td> <td>2.4 GHz</td> <td>3.2 GHz</td> <td>25MB</td> <td>8 GT/s</td> <td>95W</td> <td>DDR3-1600</td> <td></td> <td>0C19537</td> </tr> <tr> <td>Xeon E5-2407 v2</td> <td>4</td> <td>4</td> <td>2.4 GHz</td> <td>2.4 GHz</td> <td>10MB</td> <td>6.4 GT/s</td> <td>80W</td> <td>DDR3-1333</td> <td></td> <td>0C19542</td> </tr> <tr> <td>Xeon E5-2420 v2</td> <td>6</td> <td>12</td> <td>2.2 GHz</td> <td>2.7 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>80W</td> <td>DDR3-1600</td> <td></td> <td>0C19541</td> </tr> <tr> <td>Xeon E5-2430 v2</td> <td>6</td> <td>12</td> <td>2.5 GHz</td> <td>3 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>80W</td> <td>DDR3-1600</td> <td></td> <td>0C19540</td> </tr> <tr> <td>Xeon E5-2430L v2</td> <td>6</td> <td>12</td> <td>2.4 GHz</td> <td>2.8 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>60W</td> <td>DDR3-1600</td> <td></td> <td>0C19545</td> </tr> <tr> <td>Xeon E5-2403 v2</td> <td>4</td> <td>4</td> <td>1.8 GHz</td> <td>1.8 GHz</td> <td>10MB</td> <td>6.4 GT/s</td> <td>80W</td> <td>DDR3-1333</td> <td></td> <td>0C19543</td> </tr> <tr> <td colspan="11">Intel Xeon E5-2400 Series</td> </tr> <tr> <td>Xeon E5-2450L</td> <td>8</td> <td>16</td> <td>1.8 GHz</td> <td>2.3 GHz</td> <td>20MB</td> <td>8 GT/s</td> <td>70 W</td> <td>DDR3-1600</td> <td></td> <td>0A89450</td> </tr> <tr> <td>Xeon E5-2450</td> <td>8</td> <td>16</td> <td>2.1 GHz</td> <td>2.9 GHz</td> <td>20MB</td> <td>8 GT/s</td> <td>95 W</td> <td>DDR3-1600</td> <td></td> <td>0A89444</td> </tr> <tr> <td>Xeon E5-2440</td> <td>6</td> <td>12</td> <td>2.4 GHz</td> <td>2.9 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>95 W</td> <td>DDR3-1333</td> <td></td> <td>0A89445</td> </tr> <tr> <td>Xeon E5-2430L</td> <td>6</td> <td>12</td> <td>2 GHz</td> <td>2.5 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>60 W</td> <td>DDR3-1333</td> <td></td> <td>0A89451</td> </tr> <tr> <td>Xeon E5-2407</td> <td>4</td> <td>4</td> <td>2.2 GHz</td> <td></td> <td>10MB</td> <td>6.4 GT/s</td> <td>80 W</td> <td>DDR3-1066</td> <td></td> <td>0A89448</td> </tr> <tr> <td>Xeon E5-2403</td> <td>4</td> <td>4</td> <td>1.8 GHz</td> <td></td> <td>10MB</td> <td>6.4 GT/s</td> <td>80 W</td> <td>DDR3-1066</td> <td></td> <td>0A89449</td> </tr> <tr> <td>Xeon E5-2430</td> <td>6</td> <td>12</td> <td>2.2 GHz</td> <td>2.7 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>95 W</td> <td>DDR3-1333</td> <td></td> <td>0A89446</td> </tr> <tr> <td>Xeon E5-2420</td> <td>6</td> <td>12</td> <td>1.9 GHz</td> <td>2.4 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>95 W</td> <td>DDR3-1333</td> <td></td> <td>0A89447</td> </tr> <tr> <td>Xeon E5-2470</td> <td>8</td> <td>16</td> <td>2.3 GHz</td> <td>3.1 GHz</td> <td>20MB</td> <td>8 GT/s</td> <td>95 W</td> <td>DDR3-1600</td> <td></td> <td>0A89443</td> </tr> </tbody> </table>										Processor Number	Processors Specifications*									Part Number	# of Cores	# of Threads	Clock Speed	Max Turbo Frequency	Cache	QPI Speed	Max TDP	Memory Speed		Intel Xeon E5-2400 v2 Series											Xeon E5-2440 v2	8	16	1.9 GHz	2.4 GHz	20MB	7.2 GT/s	95W	DDR3-1600		0C19539	Xeon E5-2450 v2	8	16	2.5 GHz	3.3 GHz	20MB	8 GT/s	95W	DDR3-1600		0C19538	Xeon E5-2450L v2	10	20	1.7 GHz	2.1 GHz	25MB	7.2 GT/s	60W	DDR3-1600		0C19544	Xeon E5-2470 v2	10	20	2.4 GHz	3.2 GHz	25MB	8 GT/s	95W	DDR3-1600		0C19537	Xeon E5-2407 v2	4	4	2.4 GHz	2.4 GHz	10MB	6.4 GT/s	80W	DDR3-1333		0C19542	Xeon E5-2420 v2	6	12	2.2 GHz	2.7 GHz	15MB	7.2 GT/s	80W	DDR3-1600		0C19541	Xeon E5-2430 v2	6	12	2.5 GHz	3 GHz	15MB	7.2 GT/s	80W	DDR3-1600		0C19540	Xeon E5-2430L v2	6	12	2.4 GHz	2.8 GHz	15MB	7.2 GT/s	60W	DDR3-1600		0C19545	Xeon E5-2403 v2	4	4	1.8 GHz	1.8 GHz	10MB	6.4 GT/s	80W	DDR3-1333		0C19543	Intel Xeon E5-2400 Series											Xeon E5-2450L	8	16	1.8 GHz	2.3 GHz	20MB	8 GT/s	70 W	DDR3-1600		0A89450	Xeon E5-2450	8	16	2.1 GHz	2.9 GHz	20MB	8 GT/s	95 W	DDR3-1600		0A89444	Xeon E5-2440	6	12	2.4 GHz	2.9 GHz	15MB	7.2 GT/s	95 W	DDR3-1333		0A89445	Xeon E5-2430L	6	12	2 GHz	2.5 GHz	15MB	7.2 GT/s	60 W	DDR3-1333		0A89451	Xeon E5-2407	4	4	2.2 GHz		10MB	6.4 GT/s	80 W	DDR3-1066		0A89448	Xeon E5-2403	4	4	1.8 GHz		10MB	6.4 GT/s	80 W	DDR3-1066		0A89449	Xeon E5-2430	6	12	2.2 GHz	2.7 GHz	15MB	7.2 GT/s	95 W	DDR3-1333		0A89446	Xeon E5-2420	6	12	1.9 GHz	2.4 GHz	15MB	7.2 GT/s	95 W	DDR3-1333		0A89447	Xeon E5-2470	8	16	2.3 GHz	3.1 GHz	20MB	8 GT/s	95 W	DDR3-1600		0A89443
	Processor Number	Processors Specifications*										Part Number																																																																																																																																																																																																																																														
		# of Cores	# of Threads	Clock Speed	Max Turbo Frequency	Cache	QPI Speed	Max TDP	Memory Speed																																																																																																																																																																																																																																																	
	Intel Xeon E5-2400 v2 Series																																																																																																																																																																																																																																																									
	Xeon E5-2440 v2	8	16	1.9 GHz	2.4 GHz	20MB	7.2 GT/s	95W	DDR3-1600		0C19539																																																																																																																																																																																																																																															
	Xeon E5-2450 v2	8	16	2.5 GHz	3.3 GHz	20MB	8 GT/s	95W	DDR3-1600		0C19538																																																																																																																																																																																																																																															
	Xeon E5-2450L v2	10	20	1.7 GHz	2.1 GHz	25MB	7.2 GT/s	60W	DDR3-1600		0C19544																																																																																																																																																																																																																																															
	Xeon E5-2470 v2	10	20	2.4 GHz	3.2 GHz	25MB	8 GT/s	95W	DDR3-1600		0C19537																																																																																																																																																																																																																																															
	Xeon E5-2407 v2	4	4	2.4 GHz	2.4 GHz	10MB	6.4 GT/s	80W	DDR3-1333		0C19542																																																																																																																																																																																																																																															
	Xeon E5-2420 v2	6	12	2.2 GHz	2.7 GHz	15MB	7.2 GT/s	80W	DDR3-1600		0C19541																																																																																																																																																																																																																																															
	Xeon E5-2430 v2	6	12	2.5 GHz	3 GHz	15MB	7.2 GT/s	80W	DDR3-1600		0C19540																																																																																																																																																																																																																																															
	Xeon E5-2430L v2	6	12	2.4 GHz	2.8 GHz	15MB	7.2 GT/s	60W	DDR3-1600		0C19545																																																																																																																																																																																																																																															
	Xeon E5-2403 v2	4	4	1.8 GHz	1.8 GHz	10MB	6.4 GT/s	80W	DDR3-1333		0C19543																																																																																																																																																																																																																																															
	Intel Xeon E5-2400 Series																																																																																																																																																																																																																																																									
	Xeon E5-2450L	8	16	1.8 GHz	2.3 GHz	20MB	8 GT/s	70 W	DDR3-1600		0A89450																																																																																																																																																																																																																																															
	Xeon E5-2450	8	16	2.1 GHz	2.9 GHz	20MB	8 GT/s	95 W	DDR3-1600		0A89444																																																																																																																																																																																																																																															
	Xeon E5-2440	6	12	2.4 GHz	2.9 GHz	15MB	7.2 GT/s	95 W	DDR3-1333		0A89445																																																																																																																																																																																																																																															
	Xeon E5-2430L	6	12	2 GHz	2.5 GHz	15MB	7.2 GT/s	60 W	DDR3-1333		0A89451																																																																																																																																																																																																																																															
	Xeon E5-2407	4	4	2.2 GHz		10MB	6.4 GT/s	80 W	DDR3-1066		0A89448																																																																																																																																																																																																																																															
	Xeon E5-2403	4	4	1.8 GHz		10MB	6.4 GT/s	80 W	DDR3-1066		0A89449																																																																																																																																																																																																																																															
	Xeon E5-2430	6	12	2.2 GHz	2.7 GHz	15MB	7.2 GT/s	95 W	DDR3-1333		0A89446																																																																																																																																																																																																																																															
	Xeon E5-2420	6	12	1.9 GHz	2.4 GHz	15MB	7.2 GT/s	95 W	DDR3-1333		0A89447																																																																																																																																																																																																																																															
Xeon E5-2470	8	16	2.3 GHz	3.1 GHz	20MB	8 GT/s	95 W	DDR3-1600		0A89443																																																																																																																																																																																																																																																
<p>Notes: All processors specifications is provided by Intel and may be changed at any time without notice. The information herein is provided "as-is". Intel may update this information in non-scheduled. For latest information, please see http://ark.intel.com/</p>																																																																																																																																																																																																																																																										
Memory options	Memory options									Part Number																																																																																																																																																																																																																																																
	ThinkServer 4GB DDR3L-1600MHz (1RX8) RDIMM									0C19533																																																																																																																																																																																																																																																
	ThinkServer 8GB DDR3L-1600MHz (2RX8) RDIMM									0C19534																																																																																																																																																																																																																																																
	ThinkServer 16GB DDR3L-1600MHz (2RX4) RDIMM									0C19535																																																																																																																																																																																																																																																

ThinkServer RD440 Optional Configurations - Storage and RAID

Disk drive options for 3.5" disk bay models (8 x 3.5"/12 x 3.5")	Hot-swap disk drive options for 3.5" bay		Part Number	
	3.5" SATA Hard Drive			
	ThinkServer 3.5" 500GB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive		0A89473	
	ThinkServer 3.5" 1TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive		0A89474	
	ThinkServer 3.5" 2TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive		0A89475	
	ThinkServer 3.5" 3TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive		0A89477	
	ThinkServer 3.5" 4TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive		0C19520	
	3.5" SAS Hard Drive			
	ThinkServer 3.5" 1TB 7.2K SAS 6Gbps Hot Swap Hard Drive		0C19530	
	ThinkServer 3.5" 2TB 7.2K SAS 6Gbps Hot Swap Hard Drive		0C19531	
	ThinkServer 3.5" 3TB 7.2K SAS 6Gbps Hot Swap Hard Drive		0C19532	
	ThinkServer 3.5" 300GB 15K SAS 6Gbps Hot Swap Hard Drive		67Y2616	
	ThinkServer 3.5" 600GB 15K SAS 6Gbps Hot Swap Hard Drive		4XB0F28644	
	2.5" SSD for 3.5" disk bay			
	ThinkServer 2.5" 100GB MLC SATA Solid State Drive to 3.5" Kit		0C19571	
	ThinkServer 2.5" 200GB MLC SATA Solid State Drive to 3.5" Kit		0C19572	
	ThinkServer 2.5" 400GB MLC SATA Solid State Drive to 3.5" Kit		0C19573	
Disk drive options for 2.5" disk bay models (8 x 2.5"/16 x 2.5")	Hot-swap disk drive options for 2.5" bay		Part Number	
	2.5" SATA Hard Drive			
	ThinkServer 2.5" 500GB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive		0C19495	
	ThinkServer 2.5" 1TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive		0C19496	
	2.5" SAS Hard Drive			
	ThinkServer 2.5" 300GB 10K SAS 6Gbps Hot Swap Hard Drive		67Y2619	
	ThinkServer 2.5" 600GB 10K SAS 6Gbps Hot Swap Hard Drive		67Y2621	
	ThinkServer 2.5" 900GB 10K SAS 6Gbps Hot Swap Hard Drive		0A89409	
	ThinkServer 2.5" 300GB 15K SAS 6Gbps Hot Swap Hard Drive		0C19494	
	2.5" SSD			
	ThinkServer 2.5" 100GB MLC SATA Solid State Drive		0A89420	
ThinkServer 2.5" 200GB MLC SATA Solid State Drive		0A89418		
ThinkServer 2.5" 400GB MLC SATA Solid State Drive		0A89419		
RAID options	RAID controller and RAID upgrade options		Part Number	
	ThinkServer RAID 300 Upgrade Key for Advanced RAID		0A89422	
	ThinkServer RAID 500 Adapter II		0A89464	
	ThinkServer RAID 500 Upgrade Key for Advanced RAID		0A89407	
	ThinkServer RAID 700 Adapter II		0A89463	
	ThinkServer RAID 700 Battery		67Y2647	
	ThinkServer RAID 710 Adapter		0C19489	
	ThinkServer RAID Super Capacitor Module		0C19490	
	ThinkServer RAID FastPath Software Key		0C19491	
	ThinkServer RAID CacheCade Pro 2.0 Software Key		0C19492	

ThinkServer RD440 Optional Configurations - Network, System Management, Power Supply

Network and HBA options	Network and HBA options	Part Number
	ThinkServer 1Gbps Ethernet I350-T2 Server Adapter by Intel	0C19506
	ThinkServer 1Gbps Ethernet I350-T4 Server Adapter by Intel	0C19507
	Lenovo 10Gbps Ethernet X540-T2 Server Adapter by Intel	0C19497
	Lenovo 10Gbps Ethernet X520-DA2 Server Adapter by Intel	0C19486
	Lenovo 10Gbps Ethernet Fiber Module by Intel	0C19488
	Lenovo 10Gbps Ethernet X520-SR2 Server Adapter by Intel	0C19487
	ThinkServer QLE8242-CU-CK Dual Port CNA by QLogic	0C19483
	ThinkServer LPe1250 Single Port 8Gb Fibre Channel HBA by Emulex	0C19476
	ThinkServer LPe12002 Dual Port 8Gb Fibre Channel HBA by Emulex	0C19478
ThinkServer QLE2562 Dual Port 8Gb Fibre Channel HBA by QLogic	0C19482	
Security options	Trusted Platform Module options	Part Number
	ThinkServer Trusted Platform Module	0A89428
Systems management options	System Management option for iKVM	Part Number
	ThinkServer Management Module Premium	67Y2624
	Cable Management option	Part Number
	ThinkServer Cable management Arm	0A89476
Power supply options	Power supply option	Part Number
	ThinkServer 800W Gold Hot Swap Redundant Power Supply for Rack	4X20E54690

ThinkServer RD440 Operating System and Virtualization Supportability Matrix

List of operating system and virtualization software supported on ThinkServer RD440

Operating System/Virtualization	Certified	Support ROK	Supports EasyStartup	Preloaded
Windows Server 2008 x86 Edition				
Windows Server 2008 Standard Edition (x86)			•	
Windows Server 2008 Enterprise Edition (x86)			•	
Windows Server 2008 Datacenter Edition (x86)			•	
Windows Server 2008 x64 Edition				
Windows Server 2008 Standard Edition (x64) (including Hyper-V)	•		•	
Windows Server 2008 Enterprise Edition (x64) (including Hyper-V)	•		•	
Windows Server 2008 Datacenter Edition (x64) (including Hyper-V)	•		•	
Windows Server 2008 R2 (x64) with SP1				
Windows Server 2008 Standard Edition R2 with SP1 (including Hyper-V)	•	•	•	
Windows Server 2008 Enterprise Edition R2 with SP1 (including Hyper-V)	•	•	•	
Windows Server 2008 Datacenter Edition R2 with SP1 (including Hyper-V)	•	•	•	
Windows Small Business Server 2011				
Windows Small Business Server 2011 Essentials	•		•	
Windows Small Business Server 2011 Standard	•	•	•	
Windows Small Business Server Premium Add-On (including Hyper-V)	•	•	•	
Windows Server 2012				
Windows Server 2012 Standard (including Hyper-V)	•	•	•	•
Windows Server 2012 Datacenter (including Hyper-V)	•	•	•	•
Windows Server 2012 Essentials	•	•	•	•
Windows Server 2012 Hyper-V	•		•	
Windows Server 2012 R2				
Windows Server 2012 R2 Standard (including Hyper-V)	•	•	•	•
Windows Server 2012 R2 Datacenter (including Hyper-V)	•	•	•	•
Windows Server 2012 R2 Essentials	•	•	•	•
Windows Server 2012 R2 Hyper-V	•		•	
SUSE LINUX Enterprise Server x86				
SUSE LINUX Enterprise Server 10 SP4			•	
SUSE LINUX Enterprise Server 11 SP2	•		•	
SUSE LINUX Enterprise Server 11 SP3	•		•	
SUSE LINUX Enterprise Server x64				
SUSE LINUX Enterprise Server 10 SP4			•	
SUSE LINUX Enterprise Server 11 SP2	•		•	
RedHat Enterprise Linux Server (RHEL) x86				
RHEL 5.9	•		•	
RHEL 5.10	•		•	
RHEL 6.4	•		•	
RHEL 6.5	•		•	
RedHat Enterprise Linux Server x64				
RHEL 5.9	•		•	
RHEL 5.10	•		•	
RHEL 6.4	•		•	
RHEL 6.5	•		•	
VMware x64				
VMware ESXi 5.1 U1	•		•	•
VMware ESXi 5.5	•	•	•	•
Microsoft Hyper V				
Microsoft Hyper-V server 2008	•		•	
Microsoft Hyper-v server 2008 R2 SP1	•		•	
Citrix				
Citrix XenServer 6.1	•		•	
Citrix XenServer 6.0.2	•		•	

Note:

- For more information on ThinkServer operating system and virtualization software, please visit ThinkServer Software page: <http://shop.lenovo.com/us/en/servers/thinkserver/server-software.html>
- For ThinkServer operating system and virtualization software options, please visit ThinkServer OS and virtualization Options document: http://www.lenovo.com/images/products/server/pdfs/datasheets/ThinkServer_OS_&Virtualization_Options_Datasheet.pdf

Type-model ¹	Intel Xeon Processor	2nd CPU	Memory	Disk Bays	RAID controller	Storage	Slim optical	Discrete ethernet	Intelligent Diagnostics	Remote mgmt	Cable mgmt	PSU qty	TPM module	Preloaded OS	Base warranty (-year, on-site)
70AH0000++	Xeon E5-2403 v2 4C/1.8GHz/10MB/1333MHz	No	4GBx1 1600MHz LVRDIMM	8X3.5" HS	RAID300	Open	DVD±RW	No	IDM	IPMI	No	1	TPM	No	3
70AH0006++	Xeon E5-2403 v2 4C/1.8GHz/10MB/1333MHz	No	4GBx1 1600MHz LVRDIMM	8X3.5" HS	RAID300	Open	DVD±RW	No	IDM	IPMI	No	1	No	No	3
70AH000F++	Xeon E5-2420 v2 6C/2.2GHz/15MB/1600MHz	No	8GBx1 1600MHz LVRDIMM	8X3.5" HS	RAID300	Open	DVD±RW	No	IDM	IPMI	No	1	No	No	3
70AH001M++	Xeon E5-2407 v2 4C/2.4GHz/10MB/1333MHz	No	8GBx1 1600MHz LVRDIMM	8X3.5" HS	RAID300	Open	DVD±RW	No	IDM	IPMI	No	1	No	No	3
70AH001N++	Xeon E5-2420 v2 6C/2.2GHz/15MB/1600MHz	No	8GBx1 1600MHz LVRDIMM	8X3.5" HS	RAID700	Open	DVD±RW	No	IDM Premium	iKVM	No	1	No	No	3

1. Model in italics is Global model 2. By default, the voltage of LV RDIMM is 1.5V and can be changed to 1.35V in BIOS setting

- For detailed platform specifications, please see [ThinkServer RD440 Platform Specifications sheets](#)
- For optional configurations of ThinkServer RD340, please see [ThinkServer RD440 Optional Configurations sheets](#)

Mechanical	<ul style="list-style-type: none"> • 2U rack with rail kit • 19" W x 28.9" D x 3.45" H (with rack handles) • 482.4mm W x 734mm D x 87.6mm H (with rack handles) • 26.5 kg (58.42 lb) when fully configured 	Cable mgmt (opt)	Optional cable management arm on selected models																								
Chipset	Intel C606 Chipset, two LGA1356 sockets for processors	Power supply	One or two 800 watts standard, two maximum, rear access, hot-swap, 80 PLUS Gold qualified, redundant with two power supplies																								
Memory DIMMs	Twelve DIMM sockets, six DIMM sockets per processor	Security features (TPM is optional)	Power-on password/administrator password, Trusted Platform Module (TCG 1.2-compliant) on selected models																								
Memory protection	ECC, memory mirroring, memory sparing	Environmental certifications	<ul style="list-style-type: none"> • Energy Star Server 2.0 qualified • RoHS-compliant 																								
RAID support	<table border="1"> <thead> <tr> <th>RAID adapter</th> <th>RAID support</th> <th>Cache</th> <th>Transfer rates</th> <th>Optional upgrades</th> </tr> </thead> <tbody> <tr> <td>RAID 300* (onboard)</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5 support</td> </tr> <tr> <td>RAID 500 (LSI 9240-8i)</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5, 50 support</td> </tr> <tr> <td>RAID 700 (LSI 9260-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>512MB</td> <td>6Gb/s</td> <td>optional intelligent Battery Backup Unit (iBBU08)</td> </tr> <tr> <td>RAID 710 (LSI 9270CV-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>1GB</td> <td>6Gb/s</td> <td> <ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key </td> </tr> </tbody> </table> <p><i>**RAID 300 is supported on 8 x 3.5" and 8 x 2.5" models only</i></p>	RAID adapter	RAID support	Cache	Transfer rates	Optional upgrades	RAID 300* (onboard)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5 support	RAID 500 (LSI 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support	RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)	RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key 	<p>Top</p> <p>Front: Supports the following disk bay configurations: 8 x 3.5" 12 x 3.5" 8 x 2.5"/16 x 2.5" (Bay 9-16 are available on 16 x 2.5" models) Rear </p> <p>Expansion Slots: Up to six PCI-Express slots via two riser cards, riser card 1 for slot 1-3, riser card 2 for slot 4-6: Slot 1: half-length, full-height, PCIe 3.0 x16 (x8 elec) Slot 2: half-length, full-height, PCIe 3.0 x8 Slot 3: half-length, full-height, PCIe 2.0 x8 (x4) Slot 4: Low Profile, PCIe 3.0 x8 (x4 elec) <i>Slot 5-6 are available on dual processors models:</i> Slot 5: half-length, full-height, PCIe 3.0 x16 (x8 elec) Slot 6: half-length, full-height, PCIe 3.0 x8</p> <p>Front/rear Ports: Front: 1 VGA (for 6 x 2.5"/8 x 2.5" models), 2 USB 2.0 Rear: 4 USB 2.0, 1 serial (9-pin), 2 ethernet (RJ-45), 1 RJ-45 (dedicate/share mgmt), 1 VGA</p>
RAID adapter	RAID support	Cache	Transfer rates	Optional upgrades																							
RAID 300* (onboard)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5 support																							
RAID 500 (LSI 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support																							
RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)																							
RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key 																							
Optical drive (optional)	8 x 3.5"/8 x 2.5"/16 x 2.5": one slim optical bay, supports one slim optical none optical bay, external USB optical is needed	* Slim optical bay is not available on 12 x 3.5" models																									
Onboard network	Two Gigabit Ethernet ports by Intel i350, one Gigabit Ethernet port by Intel 82574L, dedicate/share management																										
Discrete network (optional)	Supports the following Intel Server Adapter options on selected models: 1Gbps: 350-T2/I350-T4 10Gbps: X520-SR2/X520-DA2/X540-T2/Fiber Module for X520-DA2																										
Intelligent Diagnostics Module (optional)	Supports optional Intelligent Diagnostics Module (IDM) or IDM Premium on selected 8 x 3.5"/8 x 2.5"/16 x 2.5" models, IDM LED lights indicate failing component category, IDM Premium LED lights indicate individual failing part																										
Systems management (iKVM is optional)	<ul style="list-style-type: none"> • Onboard Aspeed AST2300 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC); optional ThinkServer Management Module Premium for iKVM functions • Control Panel LEDs shows the status of power, ID, network, system • Lenovo SmartGrid Manager • ThinkServer EasyStartup/EasyManage/EasyUpdate 																										
Cooling fans	5 fans, hot swap, 4 + 1 redundant																										

See footnotes for more detailed information
 Model(s) announced January 21, 2014

Type-model ¹	Intel Xeon Processor	2nd CPU	Memory	Disk Bays	RAID controller	Storage	Slim optical	Discrete ethernet	Intelligent Diagnostics	Remote mgmt	Cable mgmt	PSU qty	TPM module	Preloaded OS	Base warranty (-year, on-site)
70AJ0013xx	Xeon E5-2420 v2 6C/2.2GHz/15MB/1600MHz	No	8GBx1 1600MHz LVRDIMM	12X3.5" HS	RAID700 +Battery	Open	N/A	No	N/A	IPMI	No	1	No	No	3

1. Model in italics is Global model 2. By default, the voltage of LV RDIMM is 1.5V and can be changed to 1.35V in BIOS setting

- For detailed platform specifications, please see [ThinkServer RD440 Platform Specifications sheets](#)
- For optional configurations of ThinkServer RD340, please see [ThinkServer RD440 Optional Configurations sheets](#)

Mechanical	<ul style="list-style-type: none"> • 2U rack with rail kit • 19" W x 28.9" D x 3.45" H (with rack handles) • 482.4mm W x 734mm D x 87.6mm H (with rack handles) • 26.5 kg (58.42 lb) when fully configured 	Cable mgmt (opt)	Optional cable management arm on selected models																								
Chipset	Intel C606 Chipset, two LGA1356 sockets for processors	Power supply	One or two 800 watts standard, two maximum, rear access, hot-swap, 80 PLUS Gold qualified, redundant with two power supplies																								
Memory DIMMs	Twelve DIMM sockets, six DIMM sockets per processor	Security features (TPM is optional)	Power-on password/administrator password, Trusted Platform Module (TCG 1.2-compliant) on selected models																								
Memory protection	ECC, memory mirroring, memory sparing	Environmental certifications	<ul style="list-style-type: none"> • Energy Star Server 2.0 qualified • RoHS-compliant 																								
RAID support	<table border="1"> <thead> <tr> <th>RAID adapter</th> <th>RAID support</th> <th>Cache</th> <th>Transfer rates</th> <th>Optional upgrades</th> </tr> </thead> <tbody> <tr> <td>RAID 300* (onboard)</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5 support</td> </tr> <tr> <td>RAID 500 (LSI 9240-8i)</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5, 50 support</td> </tr> <tr> <td>RAID 700 (LSI 9260-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>512MB</td> <td>6Gb/s</td> <td>optional intelligent Battery Backup Unit (iBBU08)</td> </tr> <tr> <td>RAID 710 (LSI 9270CV-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>1GB</td> <td>6Gb/s</td> <td> <ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key </td> </tr> </tbody> </table> <p><i>**RAID 300 is supported on 8 x 3.5" and 8 x 2.5" models only</i></p>	RAID adapter	RAID support	Cache	Transfer rates	Optional upgrades	RAID 300* (onboard)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5 support	RAID 500 (LSI 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support	RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)	RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key 	<p>Top</p> <p>Front: Supports the following disk bay configurations: 8 x 3.5" 12 x 3.5" 8 x 2.5"/16 x 2.5" (Bay 9-16 are available on 16 x 2.5" models)</p> <p>Rear</p> <p>Expansion Slots: Up to six PCI-Express slots via two riser cards, riser card 1 for slot 1-3, riser card 2 for slot 4-6: Slot 1: half-length, full-height, PCIe 3.0 x16 (x8 elec) Slot 2: half-length, full-height, PCIe 3.0 x8 Slot 3: half-length, full-height, PCIe 2.0 x8 (x4) Slot 4: Low Profile, PCIe 3.0 x8 (x4 elec) <i>Slot 5-6 are available on dual processors models:</i> Slot 5: half-length, full-height, PCIe 3.0 x16 (x8 elec) Slot 6: half-length, full-height, PCIe 3.0 x8</p> <p>Front/rear Ports: Front: 1 VGA (for 6 x 2.5"/8 x 2.5" models), 2 USB 2.0 Rear: 4 USB 2.0, 1 serial (9-pin), 2 ethernet (RJ-45), 1 RJ-45 (dedicate/share mgmt), 1 VGA</p>
RAID adapter	RAID support	Cache	Transfer rates	Optional upgrades																							
RAID 300* (onboard)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5 support																							
RAID 500 (LSI 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support																							
RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)																							
RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key 																							
Optical drive (optional)	8 x 3.5"/8 x 2.5"/16 x 2.5": one slim optical bay, supports one slim optical 12 x 3.5": none optical bay, external USB optical is needed	disks and optical* area																									
Onboard network	Two Gigabit Ethernet ports by Intel i350, one Gigabit Ethernet port by Intel 82574L, dedicate/share management																										
Discrete network (optional)	Supports the following Intel Server Adapter options on selected models: 1Gbps: 350-T2/I350-T4 10Gbps: X520-SR2/X520-DA2/X540-T2/Fiber Module for X520-DA2																										
Intelligent Diagnostics Module (optional)	Supports optional Intelligent Diagnostics Module (IDM) or IDM Premium on selected 8 x 3.5"/8 x 2.5"/16 x 2.5" models, IDM LED lights indicate failing component category, IDM Premium LED lights indicate individual failing part																										
Systems management (iKVM is optional)	<ul style="list-style-type: none"> • Onboard Aspeed AST2300 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC); optional ThinkServer Management Module Premium for iKVM functions • Control Panel LEDs shows the status of power, ID, network, system • Lenovo SmartGrid Manager • ThinkServer EasyStartup/EasyManage/EasyUpdate 																										
Cooling fans	5 fans, hot swap, 4 + 1 redundant																										

See footnotes for more detailed information
 Model(s) announced January 21, 2014

Type-model ¹	Intel Xeon Processor	2nd CPU	Memory	Disk Bays	RAID controller	Storage	Slim optical	Discrete ethernet	Intelligent Diagnostics	Remote mgmt	Cable mgmt	PSU qty	TPM module	Preloaded OS	Base warranty (-year, on-site)
70B3000Pxx	Xeon E5-2450 v2 8C/2.5GHz/20MB/1600MHz	No	8GBx1 1600MHz LVRDIMM	16X2.5" HS	RAID710 +CacheVault	Open	DVD±RW	No	IDM	IPMI	No	1	No	No	3

1. Model in italics is Global model 2. By default, the voltage of LV RDIMM is 1.5V and can be changed to 1.35V in BIOS setting

- For detailed platform specifications, please see [ThinkServer RD440 Platform Specifications sheets](#)
- For optional configurations of ThinkServer RD340, please see [ThinkServer RD440 Optional Configurations sheets](#)

Mechanical	<ul style="list-style-type: none"> • 2U rack with rail kit • 19" W x 28.9" D x 3.45" H (with rack handles) • 482.4mm W x 734mm D x 87.6mm H (with rack handles) • 26.5 kg (58.42 lb) when fully configured 	Cable mgmt (opt)	Optional cable management arm on selected models																								
Chipset	Intel C606 Chipset, two LGA1356 sockets for processors	Power supply	One or two 800 watts standard, two maximum, rear access, hot-swap, 80 PLUS Gold qualified, redundant with two power supplies																								
Memory DIMMs	Twelve DIMM sockets, six DIMM sockets per processor	Security features (TPM is optional)	Power-on password/administrator password, Trusted Platform Module (TCG 1.2-compliant) on selected models																								
Memory protection	ECC, memory mirroring, memory sparing	Environmental certifications	<ul style="list-style-type: none"> • Energy Star Server 2.0 qualified • RoHS-compliant 																								
RAID support	<table border="1"> <thead> <tr> <th>RAID adapter</th> <th>RAID support</th> <th>Cache</th> <th>Transfer rates</th> <th>Optional upgrades</th> </tr> </thead> <tbody> <tr> <td>RAID 300* (onboard)</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5 support</td> </tr> <tr> <td>RAID 500 (LSI 9240-8i)</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5, 50 support</td> </tr> <tr> <td>RAID 700 (LSI 9260-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>512MB</td> <td>6Gb/s</td> <td>optional intelligent Battery Backup Unit (iBBU08)</td> </tr> <tr> <td>RAID 710 (LSI 9270CV-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>1GB</td> <td>6Gb/s</td> <td> <ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key </td> </tr> </tbody> </table> <p><i>**RAID 300 is supported on 8 x 3.5" and 8 x 2.5" models only</i></p>	RAID adapter	RAID support	Cache	Transfer rates	Optional upgrades	RAID 300* (onboard)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5 support	RAID 500 (LSI 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support	RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)	RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key 	<p>Top</p> <p>Front: Supports the following disk bay configurations: 8 x 3.5" 12 x 3.5" 8 x 2.5"/16 x 2.5" (Bay 9-16 are available on 16 x 2.5" models) Rear </p> <p>Expansion Slots: Up to six PCI-Express slots via two riser cards, riser card 1 for slot 1-3, riser card 2 for slot 4-6: Slot 1: half-length, full-height, PCIe 3.0 x16 (x8 elec) Slot 2: half-length, full-height, PCIe 3.0 x8 Slot 3: half-length, full-height, PCIe 2.0 x8 (x4) Slot 4: Low Profile, PCIe 3.0 x8 (x4 elec) <i>Slot 5-6 are available on dual processors models:</i> Slot 5: half-length, full-height, PCIe 3.0 x16 (x8 elec) Slot 6: half-length, full-height, PCIe 3.0 x8</p> <p>Front/rear Ports: Front: 1 VGA (for 6 x 2.5"/8 x 2.5" models), 2 USB 2.0 Rear: 4 USB 2.0, 1 serial (9-pin), 2 ethernet (RJ-45), 1 RJ-45 (dedicate/share mgmt), 1 VGA</p>
RAID adapter	RAID support	Cache	Transfer rates	Optional upgrades																							
RAID 300* (onboard)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5 support																							
RAID 500 (LSI 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support																							
RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)																							
RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade Pro 2.0 • optional FastPath key 																							
Optical drive (optional)	8 x 3.5"/8 x 2.5"/16 x 2.5": one slim optical bay, supports one slim optical 12 x 3.5": none optical bay, external USB optical is needed	* Slim optical bay is not available on 12 x 3.5" models																									
Onboard network	Two Gigabit Ethernet ports by Intel i350, one Gigabit Ethernet port by Intel 82574L, dedicate/share management																										
Discrete network (optional)	Supports the following Intel Server Adapter options on selected models: 1Gbps: 350-T2/I350-T4 10Gbps: X520-SR2/X520-DA2/X540-T2/Fiber Module for X520-DA2																										
Intelligent Diagnostics Module (optional)	Supports optional Intelligent Diagnostics Module (IDM) or IDM Premium on selected 8 x 3.5"/8 x 2.5"/16 x 2.5" models, IDM LED lights indicate failing component category, IDM Premium LED lights indicate individual failing part																										
Systems management (iKVM is optional)	<ul style="list-style-type: none"> • Onboard Aspeed AST2300 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC); optional ThinkServer Management Module Premium for iKVM functions • Control Panel LEDs shows the status of power, ID, network, system • Lenovo SmartGrid Manager • ThinkServer EasyStartup/EasyManage/EasyUpdate 																										
Cooling fans	5 fans, hot swap, 4 + 1 redundant																										


See footnotes for more detailed information
 Model(s) announced January 21, 2014

ThinkServer RD550 with 3.5" Disk Bay Platform Specifications

Product Specifications Reference (PSREF)

Components	Specification	
Form factor	1U rack	
Processor	Up to two 145W Intel Xeon E5-2600 v3 family processors with 18 cores up to 2.3GHz, 16 cores up to 2.3GHz, 14 cores up to 2.6GHz, 12 cores up to 2.6GHz, 10 cores up to 2.6GHz, 8 cores up to 3.2GHz, 6 cores up to 3.4GHz, 4 cores up to 3.5GHz. Two QPI link up to 9.6 GT/s. Up to 2133MHz memory speed. Up to 45MB cache	
Chipset	Intel C612 Platform Controller Hub (PCH)	
Memory DIMMs	24 DIMM sockets (12 DIMMs per processor), 8-channel capable (4-channel per processor). RDIMM and LRDIMM (cannot be intermixed), DDR4, up to 2133MHz	
Memory capacity	384GB (RDIMM, 16GB x 24)/768GB (LRDIMM, 32GB x 24)	
Memory protection	ECC, memory mirroring, lockstep, and memory sparing	
AnyRAID support	Supports AnyRAID 110i, 510i, and 720i. RAID 0, 1, 10 with AnyRAID 110i. 6Gb/s SATA, optional key for RAID 5. RAID 0, 1, 10 with AnyRAID 510i. 6Gb/s SAS/SATA, optional key for RAID 5/50. RAID 0, 1, 10, 5, 6 with AnyRAID 720i. 12Gb/s SAS/SATA. 720i needs cache for RAID 6 support. Optional cache for 720i: 1GB read-only memory. 1GB/2GB/4GB flash with super capacitor. Flash options include CacheVault, CacheCade Pro, and FastPath. Also supports AnyRAID 110i on no front bay model. RAID 0 or 1	
Disk drive bays	Up to 4 x 3.5" hot-swap disk drive bays. Up to 2 x 2.5" rear hot-swap disk drive bays. Rear bay supports SATA drives only	
M.2 SSD module	Optional M.2 module, supports up to 2 optional M.2 SSD drives.	
SD module	Optional SD module, supports up to 2 optional SDHC flash cards	
Internal storage	HDD	
	3.5" SATA 7.2K 6Gbs	1TB/2TB/3TB/4TB/5TB/6TB
	3.5" SAS 7.2K 6Gbs	1TB/2TB/3TB/4TB
	3.5" SAS 7.2K 12Gbs	6TB
	2.5" SATA 7.2K 6Gbs	500GB/1TB
	2.5" SAS 12Gbs	200GB/400GB/800GB
	SSD	
3.5" SATA 6Gbs	120GB/240GB/300GB/480GB/600GB/800GB	
M.2 SSD	80GB/120GB	
SD		
SDHC flash card	8GB/32GB	
<i>Note: Rear disk drive and M.2 SSD can not be supported simultaneously, only one can be selected per system.</i>		
Optical drive	Optional one Ultralim optical drive, DVD-ROM or DVD±RW	
Tape drive bays	None	
Network interfaces	One dedicated management port. One AnyFabric slots for customized LOM. Optional discrete network adapters via PCIe slots	
Security features	Power-on and administrator password. Optional Trusted Platform Module (TCG 1.2-compliant). Optional chassis intrusion switch	
Systems management	Supports ThinkServer System Manager (TSM), optional TSM Premium. UEFI. Onboard Aspeed AST2400 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC). Control Panel LEDs shows the status of power, ID, network, system. Supports ThinkServer management software: Diagnostics, Deployment Manager, Energy Manager, System Manager, Partner Pack for VMware vCenter and Microsoft System Center Operations Manager, Power Planner	
Operating systems supported	Microsoft Windows Server 2012 R2, 2012, and 2008 R2, Windows Small Business Server 2011, Red Hat Enterprise Linux 6.5, SUSE Linux Enterprise Server 11, VMware vSphere (ESXi) 5.5 U2	
Base warranty	3-year limited onsite service with 9x5/NBD. Some parts are Customer Replaceable Units	

Components	Specification	
Power supply	Up to two redundant hot-swap 550 W ac, 750 W ac, or 1100 W ac power supplies. 550 W and 1100 W are 80 PLUS Platinum qualified. 750 W is 80 PLUS Platinum or Titanium qualified. 750 W Titanium is 200V - 240V, others are 110V - 240V.	
Graphics	Onboard Aspeed AST2400 with 16MB memory, one DisplayPort on front, one DisplayPort on rear. Maximum resolution: 1920x1200@60Hz	
Front ports	One DisplayPort, two USB 2.0	
Rear ports	One DisplayPort, two USB 3.0, one RJ-45 (dedicate mgmt), one serial (9-pin)	
Cooling	8 (7+1, dual processors) or 6 (5+1, single processor), hot-swap	
Hot-swap parts	Disk drives, power supplies, and fans	
Noise emissions	Operating: < 6.5 Bels, Idle: < 6 Bels (Maximum configuration)	
Environmental specification	Temperature - operating	41 °F to 113 °F (5 °C to 45 °C)
	Temperature - non operating (no package)	-10 °C to 60 °C
	Temperature - non operating (with package)	-40 °C to 60 °C
	Altitude - operating	(Unpressurized): 0-10000ft (0-3048m)
	Humidity - operating	8%-90%, non-condensing
Humidity - storage (with package)	8%-90%, non-condensing	
<i>Note: 45 °C continuous operation configuration limitation: no 145W CPU/no 135W 4, 6, or 8 cores CPU/no GPU card/redundant PSU/no FLFH card/no PCIe SSD adapter/no 1100W PSU.</i>		
Weight	Minimum configuration: 13.5 kg (29.76 lb), maximum: 21 kg (46.3 lb)	
Dimensions	Height: 43 mm (1.7 in), width: 482 mm (19 in), depth: 780 mm (30.7 in)	

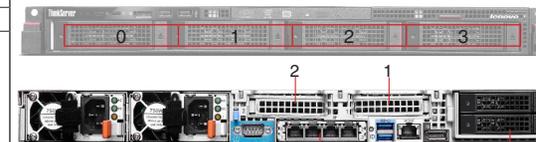

AnyFabric slot 1 (Network adapter is optional) Optional 2 x 2.5" rear bays

Expansion slots

Up to two half-length PCIe 3.0 x16 slots, depending on the riser cards and processors installed:
 Slot 1 (riser card 1): PCIe 3.0 x 16, low-profile, half length
 Slot 2 (riser card 2): PCIe 3.0 x 16, low-profile, half length, requires 2nd riser card and 2nd CPU

Core Options for ThinkServer RD550 (partial)

4X70F28590	ThinkServer 16GB DDR4-2133MHz (2Rx4) RDIMM
4X70F28591	ThinkServer 32GB DDR4-2133MHz (4Rx4)RDIMM
4XB0F28712	ThinkServer 3.5" 1TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive
4XB0G45719	ThinkServer Gen 5 3.5" 4TB 7.2K Enterprise SAS 6Gbps Hot Swap Hard Drive
4XB0G45743	ThinkServer 3.5" 240GB Value Read-Optimized SATA 6Gbps Hot Swap SSD
4XB0F28714	ThinkServer Gen 5 3.5" 3TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive
4XB0G45715	ThinkServer Gen 5 3.5" 4TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive
4XF0G45878	Lenovo ThinkServer 1U x16 PCIe Riser 2 Kit
4X20F28576	ThinkServer Gen 5 750W Titanium Hot Swap Power Supply
4XF0G45867	ThinkServer System Manager Premium (TSM Premium)
4X90F92980	ThinkServer DisplayPort to VGA Dongle

For a list of all supported options, Please see [ThinkServer RD550 Options](#) sheet.

ThinkServer RD550 with 3.5" Disk Bay - TopSeller - 70CV

Type-model	Processor	2nd CPU	Memory	AnyRAID	Disk Bays	Disk drives	M.2/SD module	Slots	Optical	AnyFabric	TPM	Chassis intrusion switch	System mgmt	Preloaded OS	Power	Ann Date (mm/yy)
70CV0005EA	1xE5-2603 v3 6C/1.6GHz/15MB/85W/1600MHz	4XG0F28804	1x8GB 2133MHz RDIMM	720i	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV0006EA	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	4XG0F28803	1x8GB 2133MHz RDIMM	720i	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV0007EA	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	4XG0F28802	1x8GB 2133MHz RDIMM	720i	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV0008EA	1xE5-2630L v3 8C/1.8GHz/20MB/55W/1866MHz	4XG0F28806	1x8GB 2133MHz RDIMM	720i	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV0009EA	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	4XG0F28801	1x8GB 2133MHz RDIMM	720i	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV000AEA	1xE5-2637 v3 4C/3.5GHz/15MB/135W/2133MHz	4XG0F28831	1x8GB 2133MHz RDIMM	720i	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV000BEA	1xE5-2640 v3 8C/2.6GHz/20MB/90W/1866MHz	4XG0F28800	1x8GB 2133MHz RDIMM	720i	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV000CEA	1xE5-2643 v3 6C/3.4GHz/20MB/135W/2133MHz	4XG0F28830	1x8GB 2133MHz RDIMM	720i	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV000DEA	1xE5-2650L v3 12C/1.8GHz/30MB/65W/2133MHz	4XG0F28805	1x8GB 2133MHz RDIMM	720i	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV000EEA	1xE5-2650 v3 10C/2.3GHz/25MB/105W/2133MHz	4XG0F28799	1x8GB 2133MHz RDIMM	720i	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV000FEA	1xE5-2660 v3 10C/2.6GHz/25MB/105W/2133MHz	4XG0F28798	1x8GB 2133MHz RDIMM	720i	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV000GEA	1xE5-2667 v3 8C/3.2GHz/20MB/135W/2133MHz	4XG0F28829	1x8GB 2133MHz RDIMM	720i	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV000HEA	1xE5-2670 v3 12C/2.3GHz/30MB/120W/2133MHz	4XG0F28797	1x8GB 2133MHz RDIMM	720i	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV000JEA	1xE5-2680 v3 12C/2.5GHz/30MB/120W/2133MHz	4XG0F28796	1x8GB 2133MHz RDIMM	720i	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV000KEA	1xE5-2683 v3 14C/2GHz/35MB/120W/2133MHz	4XG0F28795	1x8GB 2133MHz RDIMM	720i	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV000LEA	1xE5-2685 v3 12C/2.6GHz/30MB/120W/2133MHz	4XG0F28833	1x8GB 2133MHz RDIMM	720i	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV000MEA	1xE5-2690 v3 12C/2.6GHz/30MB/135W/2133MHz	4XG0F28794	1x8GB 2133MHz RDIMM	720i	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV000NEA	1xE5-2695 v3 14C/2.3GHz/35MB/120W/2133MHz	4XG0F28793	1x8GB 2133MHz RDIMM	720i	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV000PEA	1xE5-2697 v3 14C/2.6GHz/35MB/145W/2133MHz	4XG0F28792	1x8GB 2133MHz RDIMM	720i	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV000QEA	1xE5-2698 v3 16C/2.3GHz/40MB/135W/2133MHz	4XG0F28791	1x8GB 2133MHz RDIMM	720i	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV000REA	1xE5-2699 v3 18C/2.3GHz/45MB/145W/2133MHz	4XG0F28790	1x8GB 2133MHz RDIMM	720i	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV000SEA	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	4XG0F28803	1x8GB 2133MHz RDIMM	510i+Key	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV000TEA	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	4XG0F28802	1x8GB 2133MHz RDIMM	510i+Key	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV000UEA	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	4XG0F28801	1x8GB 2133MHz RDIMM	510i+Key	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV000VEA	1xE5-2640 v3 8C/2.6GHz/20MB/90W/1866MHz	4XG0F28800	1x8GB 2133MHz RDIMM	510i+Key	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CV000WEA	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	4XG0F28803	1x8GB 2133MHz RDIMM	510i	4x3.5" HS	Open	No	1	DVD±RW	GbEx4 RJ-45	TPM	No	TSM	No	750Wx1 Platinum	09/14


For a list of all supported options, Please see [ThinkServer RD550 Options](#) sheet.

ThinkServer RD550 with 2.5" Disk Bay Platform Specifications

Product Specifications Reference (PSREF)

Components	Specification	
Form factor	1U rack	
Processor	Up to two 145W Intel Xeon E5-2600 v3 family processors with 18 cores up to 2.3GHz, 16 cores up to 2.3GHz, 14 cores up to 2.6GHz, 12 cores up to 2.6GHz, 10 cores up to 2.6GHz, 8 cores up to 3.2GHz, 6 cores up to 3.4GHz, 4 cores up to 3.5GHz. Two QPI link up to 9.6 GT/s. Up to 2133MHz memory speed. Up to 45MB cache	
Chipset	Intel C612 Platform Controller Hub (PCH)	
Memory DIMMs	24 DIMM sockets (12 DIMMs per processor), 8-channel capable (4-channel per processor). RDIMM and LRDIMM (cannot be intermixed), DDR4, up to 2133MHz	
Memory capacity	384GB (RDIMM, 16GB x 24)/768GB (LRDIMM, 32GB x 24)	
Memory protection	ECC, memory mirroring, lockstep, and memory sparing	
AnyRAID support	Supports AnyRAID 110i, 510i, and 720i on 8 x 2.5" model, 720ix on 12 x 2.5" model. RAID 0, 1, 10 with AnyRAID 510i, 6Gb/s SAS/SATA, optional key for RAID 5/50. RAID 0, 1, 10, 5, 50, 6, 60 with AnyRAID 720i/720ix. 12Gb/s SAS/SATA. 720i needs cache for RAID 6/60 support. 720ix must have a cache. Optional cache for 720i/720ix: 1GB read-only memory. 1GB/2GB/4GB flash with super capacitor. Flash options include CacheVault, CacheCade Pro, and FastPath.	
Disk drive bays	Up to 8 (0-7) or 12 (0-11) 2.5" hot-swap disk drive bays	
M.2 SSD module	Optional M.2 module, supports up to 2 optional M.2 SSD drives. Available on 12 x 2.5" and 720ix model only	
SD module	Optional SD module, supports up to 2 optional SDHC flash cards	
Internal storage	HDD	2.5" SATA 7.2K 6Gbs - HS 500GB/1TB 2.5" SAS 10K 6Gbs - HS 300GB/600GB/900GB/1.2TB 2.5" SAS 15K 6Gbs - HS 300GB/450GB/600GB
	SSD	2.5" SAS 12Gbs - HS 200GB/400GB/800GB 2.5" SATA 6Gbs - HS 120GB/240GB/300GB/480GB/600GB/800GB
		M.2 SSD 80GB/120GB
	SD	SDHC flash card 8GB/32GB
	Optical drive	None
Tape drive bays	None	
Network interfaces	One dedicated management port. Two AnyFabric slots for customized LOM. Optional discrete network adapters via PCIe slots	
Security features	Power-on and administrator password. Optional Trusted Platform Module (TCG 1.2-compliant). Optional chassis intrusion switch	
Systems management	Supports ThinkServer System Manager (TSM), optional TSM Premium. UEFI. Onboard Aspeed AST2400 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC). Control Panel LEDs shows the status of power, ID, network, system. Supports ThinkServer management software: Diagnostics, Deployment Manager, Energy Manager, System Manager, Partner Pack for VMware vCenter and Microsoft System Center Operations Manager, Power Planner	
Operating systems supported	Microsoft Windows Server 2012 R2, 2012, and 2008 R2, Windows Small Business Server 2011, Red Hat Enterprise Linux 6.5, SUSE Linux Enterprise Server 11, VMware vSphere (ESXi) 5.5 U2	
Base warranty	3-year limited onsite service with 9x5/NBD. Some parts are Customer Replaceable Units	

Components	Specification
Power supply	Up to two redundant hot-swap 750 W ac or 1100 W ac power supplies. 1100 W is 80 PLUS Platinum qualified, 750 W is 80 PLUS Platinum or Titanium qualified. 750 W Titanium is 200V - 240V, 1100 W is 110V - 240V.
Graphics	Onboard Aspeed AST2400 with 16MB memory, one DisplayPort on rear. Maximum resolution: 1920x1200@60Hz
Front ports	None
Rear ports	One DisplayPort, two USB 3.0, one RJ-45 (dedicate mgmt), one serial (9-pin)
Cooling	8 (7+1, dual processors) or 6 (5+1, single processor), hot-swap
Hot-swap parts	Disk drives, power supplies, and fans
Noise emissions	Operating: < 6.5 Bels, Idle: < 6 Bels (Maximum configuration)
Environmental specification	Temperature - operating 41 °F to 113 °F (5 °C to 45 °C)
	Temperature - non operating (no package) -10 °C to 60 °C Temperature - non operating (with package) -40 °C to 60 °C Altitude - operating (Unpressurized): 0-10000ft (0-3048m) Humidity - operating 8%-90%, non-condensing Humidity - storage (with package) 8%-90%, non-condensing
<i>Note: 45 °C continuous operation configuration limitation: no 145W CPU/no 135W 4, 6, or 8 cores CPU/no GPU card/redundant PSU/no FLFH card/no PCIe SSD adapter/no 1100W PSU.</i>	
Weight	Minimum configuration: 13.5 kg (29.76 lb), maximum: 21 kg (46.3 lb)
Dimensions	Height: 43 mm (1.7 in), width: 482 mm (19 in), depth: 780 mm (30.7 in)

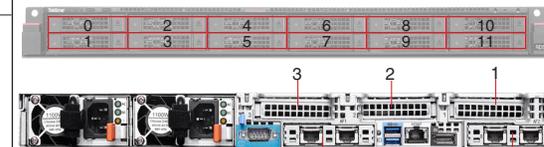

AnyFabric slot 1 (Network adapter is optional) AnyFabric slot 2 (Network adapter is optional)

Expansion slots

Up to three low-profile and half-length PCIe 3.0 x16 slots, depending on the riser cards and processors installed:

Slot 1 (riser card 1): PCIe 3.0 x 16 (x8 wired), low-profile, half length

Slot 2 (riser card 1): PCIe 3.0 x 16 (x8 wired), low-profile, half length

Slot 3 (riser card 2): PCIe 3.0 x 16, low-profile, half length, requires 2nd riser card and 2nd CPU

Core Options for ThinkServer RD550 (partial)

4X70F28590 ThinkServer 16GB DDR4-2133MHz (2Rx4) RDIMM

4X70F28591 ThinkServer 32GB DDR4-2133MHz (4Rx4)RDIMM

4XF0G45880 Lenovo ThinkServer 1U x8/x8 PCIe Riser Kit

4X20F28576 ThinkServer Gen 5 750W Titanium Hot Swap Power Supply

4XF0G45867 ThinkServer System Manager Premium (TSM Premium)

4X90F92980 ThinkServer DisplayPort to VGA Dongle

For a list of all supported options, Please see [ThinkServer RD550 Options](#) sheet.

ThinkServer RD550 with 2.5" Disk Bay - TopSeller - 70CX - I

Type-model	Processor	2nd CPU	Memory	AnyRAID	Disk Bays	Disk drives	M.2/SD module	Slots	Optical	AnyFabric	TPM	Chassis intrusion switch	System mgmt	Preloaded OS	Power	Ann Date (mm/yy)
70CX000BEA	1xE5-2603 v3 6C/1.6GHz/15MB/85W/1600MHz	4XG0F28804	1x8GB 2133MHz RDIMM	720ix+1GB RAM	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX000CEA	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	4XG0F28803	1x8GB 2133MHz RDIMM	720ix+1GB RAM	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX000DEA	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	4XG0F28802	1x8GB 2133MHz RDIMM	720ix+1GB RAM	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX000EEA	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	4XG0F28801	1x8GB 2133MHz RDIMM	720ix+1GB RAM	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX000FEA	1xE5-2630L v3 8C/1.8GHz/20MB/55W/1866MHz	4XG0F28806	1x8GB 2133MHz RDIMM	720ix+1GB RAM	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX000GEA	1xE5-2640 v3 8C/2.6GHz/20MB/90W/1866MHz	4XG0F28800	1x8GB 2133MHz RDIMM	720ix+1GB RAM	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX000HEA	1xE5-2650 v3 10C/2.3GHz/25MB/105W/2133MHz	4XG0F28799	1x8GB 2133MHz RDIMM	720ix+1GB RAM	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX000JEA	1xE5-2660 v3 10C/2.6GHz/25MB/105W/2133MHz	4XG0F28798	1x8GB 2133MHz RDIMM	720ix+1GB RAM	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX000KEA	1xE5-2667 v3 8C/3.2GHz/20MB/135W/2133MHz	4XG0F28829	1x8GB 2133MHz RDIMM	720ix+1GB RAM	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX000LEA	1xE5-2670 v3 12C/2.3GHz/30MB/120W/2133MHz	4XG0F28797	1x8GB 2133MHz RDIMM	720ix+1GB RAM	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX000MEA	1xE5-2680 v3 12C/2.5GHz/30MB/120W/2133MHz	4XG0F28796	1x8GB 2133MHz RDIMM	720ix+1GB RAM	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX000NEA	1xE5-2683 v3 14C/2GHz/35MB/120W/2133MHz	4XG0F28795	1x8GB 2133MHz RDIMM	720ix+1GB RAM	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX000PEA	1xE5-2685 v3 8C/2.6GHz/30MB/120W/2133MHz	4XG0F28833	1x8GB 2133MHz RDIMM	720ix+1GB RAM	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX000QEA	1xE5-2690 v3 12C/2.6GHz/30MB/135W/2133MHz	4XG0F28794	1x8GB 2133MHz RDIMM	720ix+1GB RAM	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX000REA	1xE5-2695 v3 14C/2.3GHz/35MB/120W/2133MHz	4XG0F28793	1x8GB 2133MHz RDIMM	720ix+1GB RAM	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX000SEA	1xE5-2697 v3 14C/2.6GHz/35MB/145W/2133MHz	4XG0F28792	1x8GB 2133MHz RDIMM	720ix+1GB RAM	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX000TEA	1xE5-2698 v3 16C/2.3GHz/40MB/135W/2133MHz	4XG0F28791	1x8GB 2133MHz RDIMM	720ix+1GB RAM	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX000UEA	1xE5-2699 v3 18C/2.3GHz/45MB/145W/2133MHz	4XG0F28790	1x8GB 2133MHz RDIMM	720ix+1GB RAM	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX000VEA	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	4XG0F28801	2x8GB 2133MHz RDIMM	720ix+1GB Flash	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX000WEA	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	4XG0F28801	4x8GB 2133MHz RDIMM	720ix+1GB Flash	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX000XEA	1xE5-2640 v3 8C/2.6GHz/20MB/90W/1866MHz	4XG0F28800	4x8GB 2133MHz RDIMM	720ix+1GB Flash	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX000YEA	2xE5-2650 v3 10C/2.3GHz/25MB/105W/2133MHz	-	4x16GB 2133MHz RDIMM	720ix+2GB Flash	12x2.5" HS	Open	No	3	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx2 Platinum	09/14
70CX0010EA	2xE5-2690 v3 12C/2.6GHz/30MB/135W/2133MHz	-	4x16GB 2133MHz RDIMM	720ix+2GB Flash	12x2.5" HS	Open	No	3	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx2 Platinum	09/14
70CX0011EA	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	4XG0F28802	1x8GB 2133MHz RDIMM	720ix+1GB Flash	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx2 Platinum	09/14
70CX0012EA	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	4XG0F28802	2x8GB 2133MHz RDIMM	720ix+1GB Flash	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX0013EA	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	4XG0F28802	1x8GB 2133MHz RDIMM	510i+Key	8x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX0014EA	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	4XG0F28802	1x8GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14
70CX0015EA	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	4XG0F28801	1x8GB 2133MHz RDIMM	720ix+1GB Flash	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx2 Platinum	09/14
70CX0016EA	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	4XG0F28803	1x8GB 2133MHz RDIMM	510i+Key	8x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	09/14

For a list of all supported options, Please see [ThinkServer RD550 Options](#) sheet.

ThinkServer RD550 with 2.5" Disk Bay - TopSeller - 70CX - II

Type-model	Processor	2nd CPU	Memory	AnyRAID	Disk Bays	Disk drives	M.2/SD module	Slots	Optical	AnyFabric	TPM	Chassis intrusion switch	System mgmt	Preloaded OS	Power	Ann Date (mm/yy)
70CX0017EA	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	4XG0F28803	1x8GB 2133MHz RDIMM	720ix+1GB RAM	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	No	TSM	No	750Wx1 Platinum	09/14
70CX0018EA	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	4XG0F28803	1x16GB 2133MHz RDIMM	720ix+1GB RAM	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	No	TSM	No	750Wx1 Platinum	09/14
70CX0019EA	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	4XG0F28803	1x16GB 2133MHz RDIMM	720ix+1GB RAM	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	TPM	No	TSM Premium	No	750Wx2 Platinum	09/14
70CX001AEA	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	4XG0F28803	1x32GB PC4 LRDIMM	720ix+2GB Flash	12x2.5" HS	Open	No	2	None	GbEx4 RJ-45	TPM	No	TSM Premium	No	750Wx2 Platinum	09/14
70CX002BEA	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	4XG0F28803	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	12/14
70CX002CEA	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	4XG0F28802	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	12/14
70CX002DEA	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	4XG0F28801	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	12/14
70CX002EEA	1xE5-2640 v3 8C/2.6GHz/20MB/90W/1866MHz	4XG0F28800	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	12/14
70CX002FEA	1xE5-2650 v3 10C/2.3GHz/25MB/105W/2133MHz	4XG0F28799	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	12/14
70CX002GEA	1xE5-2660 v3 10C/2.6GHz/25MB/105W/2133MHz	4XG0F28798	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	12/14
70CX002HEA	1xE5-2670 v3 12C/2.3GHz/30MB/120W/2133MHz	4XG0F28797	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	12/14
70CX002JEA	1xE5-2690 v3 12C/2.6GHz/30MB/135W/2133MHz	4XG0F28794	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	12/14
70CX002KEA	1xE5-2697 v3 14C/2.6GHz/35MB/145W/2133MHz	4XG0F28792	1x8GB 2133MHz RDIMM	720i+1GB Flash	8x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	12/14
70CX002LEA	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	4XG0F28801	1x16GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	2	None	GbEx4 RJ-45	No	Switch	TSM	No	750Wx1 Platinum	11/14

For a list of all supported options, Please see [ThinkServer RD550 Options](#) sheet.

ThinkServer RD550 Options

Partial list of accessories supported on ThinkServer RD550

Processors	
4XG0F28790	Lenovo ThinkServer RD550 Intel Xeon E5-2699 v3 (18C, 145W, 2.3GHz) Processor Option Kit
4XG0F28791	Lenovo ThinkServer RD550 Intel Xeon E5-2698 v3 (16C, 135W, 2.3GHz) Processor Option Kit
4XG0F28792	Lenovo ThinkServer RD550 Intel Xeon E5-2697 v3 (14C, 145W, 2.6GHz) Processor Option Kit
4XG0F28793	Lenovo ThinkServer RD550 Intel Xeon E5-2695 v3 (14C, 120W, 2.3GHz) Processor Option Kit
4XG0F28794	Lenovo ThinkServer RD550 Intel Xeon E5-2690 v3 (12C, 135W, 2.6GHz) Processor Option Kit
4XG0F28795	Lenovo ThinkServer RD550 Intel Xeon E5-2683 v3 (14C, 120W, 2.0GHz) Processor Option Kit
4XG0F28796	Lenovo ThinkServer RD550 Intel Xeon E5-2680 v3 (12C, 120W, 2.5GHz) Processor Option Kit
4XG0F28797	Lenovo ThinkServer RD550 Intel Xeon E5-2670 v3 (12C, 120W, 2.3GHz) Processor Option Kit
4XG0F28798	Lenovo ThinkServer RD550 Intel Xeon E5-2660 v3 (10C, 105W, 2.6GHz) Processor Option Kit
4XG0F28799	Lenovo ThinkServer RD550 Intel Xeon E5-2650 v3 (10C, 105W, 2.3GHz) Processor Option Kit
4XG0F28800	Lenovo ThinkServer RD550 Intel Xeon E5-2640 v3 (8C, 90W, 2.6GHz) Processor Option Kit
4XG0F28801	Lenovo ThinkServer RD550 Intel Xeon E5-2630 v3 (8C, 85W, 2.4GHz) Processor Option Kit
4XG0F28802	Lenovo ThinkServer RD550 Intel Xeon E5-2620 v3 (6C, 85W, 2.4GHz) Processor Option Kit
4XG0F28803	Lenovo ThinkServer RD550 Intel Xeon E5-2609 v3 (6C, 85W, 1.9GHz) Processor Option Kit
4XG0F28804	Lenovo ThinkServer RD550 Intel Xeon E5-2603 v3 (6C, 85W, 1.6GHz) Processor Option Kit
4XG0F28805	Lenovo ThinkServer RD550 Intel Xeon E5-2650L v3 (12C, 65W, 1.8GHz) Processor Option Kit
4XG0F28806	Lenovo ThinkServer RD550 Intel Xeon E5-2630L v3 (8C, 55W, 1.8GHz) Processor Option Kit
4XG0F28829	Lenovo ThinkServer RD550 Intel Xeon E5-2667 v3 (8C, 135W, 3.2GHz) Processor Option Kit
4XG0F28830	Lenovo ThinkServer RD550 Intel Xeon E5-2643 v3 (6C, 135W, 3.4GHz) Processor Option Kit
4XG0F28831	Lenovo ThinkServer RD550 Intel Xeon E5-2637 v3 (4C, 135W, 3.5GHz) Processor Option Kit
4XG0F28832	Lenovo ThinkServer RD550 Intel Xeon E5-2623 v3 (4C, 105W, 3.0GHz) Processor Option Kit
4XG0F28833	Lenovo ThinkServer RD550 Intel Xeon E5-2685 v3 (12C, 120W, 2.6GHz) Processor Option Kit
Memory	
4X70F28588	ThinkServer 4GB DDR4-2133MHz (1Rx8) RDIMM
4X70F28589	ThinkServer 8GB DDR4-2133MHz (1Rx4) RDIMM
4X70F28590	ThinkServer 16GB DDR4-2133MHz (2Rx4) RDIMM
4X70F28591	ThinkServer 32GB DDR4-2133MHz (4Rx4) LRDIMM
Drives - 3.5"	
3.5" Hot Swap SATA Hard Drives	
4XB0F28712	ThinkServer Gen 5 3.5" 1TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive
4XB0F28713	ThinkServer Gen 5 3.5" 2TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive
4XB0F28714	ThinkServer Gen 5 3.5" 3TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive
4XB0G45715	ThinkServer Gen 5 3.5" 4TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive
3.5" Hot Swap 7.2K SAS Hard Drives	
4XB0G45716	ThinkServer Gen 5 3.5" 1TB 7.2K Enterprise SAS 6Gbps Hot Swap Hard Drive
4XB0G45717	ThinkServer Gen 5 3.5" 2TB 7.2K Enterprise SAS 6Gbps Hot Swap Hard Drive
4XB0G45718	ThinkServer Gen 5 3.5" 3TB 7.2K Enterprise SAS 6Gbps Hot Swap Hard Drive
4XB0G45719	ThinkServer Gen 5 3.5" 4TB 7.2K Enterprise SAS 6Gbps Hot Swap Hard Drive
3.5" Hot Swap SATA Solid State Drives	
4XB0G45720	ThinkServer Gen 5 3.5" 120GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive
4XB0G45721	ThinkServer Gen 5 3.5" 240GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive
4XB0G45722	ThinkServer Gen 5 3.5" 300GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive
4XB0G45723	ThinkServer Gen 5 3.5" 480GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive
4XB0G45724	ThinkServer Gen 5 3.5" 600GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive
4XB0G45725	ThinkServer Gen 5 3.5" 800GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive
3.5" Hot Swap SAS Solid State Drives	
4XB0G45726	ThinkServer Gen 5 3.5" 200GB Enterprise Performance SAS 12Gbps Hot Swap Solid State Drive
4XB0G45727	ThinkServer Gen 5 3.5" 400GB Enterprise Performance SAS 12Gbps Hot Swap Solid State Drive
4XB0G45728	ThinkServer Gen 5 3.5" 800GB Enterprise Performance SAS 12Gbps Hot Swap Solid State Drive
Drives - 2.5"	
2.5" Hot Swap SATA Hard Drives	
4XB0G45729	ThinkServer Gen 5 2.5" 500GB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive
4XB0G45730	ThinkServer Gen 5 2.5" 1TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive
2.5" Hot Swap 10K SAS Hard Drives	
4XB0G45731	ThinkServer Gen 5 2.5" 300GB 10K Enterprise SAS 6Gbps Hot Swap Hard Drive
4XB0G45732	ThinkServer Gen 5 2.5" 600GB 10K Enterprise SAS 6Gbps Hot Swap Hard Drive
4XB0G45733	ThinkServer Gen 5 2.5" 900GB 10K Enterprise SAS 6Gbps Hot Swap Hard Drive
4XB0G45734	ThinkServer Gen 5 2.5" 1.2TB 10K Enterprise SAS 6Gbps Hot Swap Hard Drive
2.5" Hot Swap 15K SAS Hard Drives	
4XB0G45735	ThinkServer Gen 5 2.5" 146GB 15K Enterprise SAS 6Gbps Hot Swap Hard Drive
4XB0G45736	ThinkServer Gen 5 2.5" 300GB 15K Enterprise SAS 6Gbps Hot Swap Hard Drive
4XB0G45737	ThinkServer Gen 5 2.5" 450GB 15K Enterprise SAS 6Gbps Hot Swap Hard Drive
4XB0G45738	ThinkServer Gen 5 2.5" 600GB 15K Enterprise SAS 6Gbps Hot Swap Hard Drive
2.5" Hot Swap SATA Solid State Drives	
4XB0G45739	ThinkServer Gen 5 2.5" 120GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive
4XB0G45740	ThinkServer Gen 5 2.5" 240GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive
4XB0G45741	ThinkServer Gen 5 2.5" 300GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive
4XB0G45742	ThinkServer Gen 5 2.5" 480GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive
4XB0G45743	ThinkServer Gen 5 2.5" 600GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive
4XB0G45744	ThinkServer Gen 5 2.5" 800GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive

PCIe Solid State Drives	
4XB0F28661	ThinkServer 1.6TB ioMemory SX300 Performance PCIe 2.0 Solid State Drive by FusionIO
4XB0F28662	ThinkServer 3.2TB ioMemory SX300 Performance PCIe 2.0 Solid State Drive by FusionIO
AnyRAID	
4XB0F28690	ThinkServer RAID 110i RAID 5 Upgrade
4XB0F28691	ThinkServer RAID 510i AnyRAID Adapter
4XB0F28692	ThinkServer RAID 510i RAID 5 Upgrade
4XB0F28693	ThinkServer RAID 720i AnyRAID Adapter
4XB0F28694	ThinkServer RAID 720ix AnyRAID Adapter with Expander
4XB0F28695	ThinkServer RAID 720i 1GB Modular DRAM Upgrade
4XB0F28696	ThinkServer RAID 720i 1GB Modular Flash and Supercapacitor Upgrade
4XB0F28697	ThinkServer RAID 720i 2GB Modular Flash and Supercapacitor Upgrade
4XB0F28698	ThinkServer RAID 720i 4GB Modular Flash and Supercapacitor Upgrade
Connectivity & Host Bus Adapters	
PCIe Ethernet Adapters - 1Gbps	
4XC0F28730	ThinkServer I350-T2 PCIe 1Gb 2 Port Base-T Ethernet Adapter by Intel
4XC0F28731	ThinkServer I350-T4 PCIe 1Gb 4 Port Base-T Ethernet Adapter by Intel
PCIe Converged Network Adapters - 10Gbps	
4XC0F28732	ThinkServer X540-T2 PCIe 10Gb 2 Port Base-T Ethernet Adapter by Intel
4XC0F28733	ThinkServer X520-SR2 PCIe 10Gb 2 Port SFP+ Ethernet Adapter by Intel
4XC0F28734	ThinkServer X520-DA2 PCIe 10Gb 2 Port SFP+ Ethernet Adapter by Intel
4XC0F28735	ThinkServer 10Gb SR Optical Module by Intel
4XC0F28736	ThinkServer OCe14102-UX-L PCIe 10Gb 2 Port SFP+ Converged Network Adapter by Emulex
4XC0F28737	ThinkServer 10Gb SR Optical Module by Emulex
PCIe Converged Network Adapters - 40Gbps	
4XC0F28738	ThinkServer OCe14401-UX-L PCIe 40Gb 1 Port QSFP+ Converged Network Adapter by Emulex
4XC0F28739	ThinkServer 40Gb SR Optical Module by Emulex
PCIe Fibre Channel Adapters	
4XB0F28704	ThinkServer LPe16002B-M8-L PCIe 8Gb 2 Port Fibre Channel Adapter by Emulex
4XB0F28705	ThinkServer LPe16002B-M6-L PCIe 16Gb 2 Port Fibre Channel Adapter by Emulex
4XC0F28745	ThinkServer QLE2672 PCIe 16Gb 2 Port Fibre Channel Adapter by Qlogic
SAS Controllers & Upgrades	
4XB0F28699	ThinkServer 9286CV-8e PCIe 6Gb 8 Port External SAS RAID Adapter by LSI
4XB0F28700	ThinkServer CacheVault Data Protection Upgrade
4XB0F28701	ThinkServer RAID FastPath Key
4XB0F28702	ThinkServer RAID CacheCade Pro 2.0 Key
Backup Options	
4XF0G45866	ThinkServer LTO-6 Linear Tape Drive Kit by Tandberg
4XB0F28689	ThinkServer 2.5TB SAS 6Gbps LTO-6 Tape
Redundant Power Supply	
4X20F28579	Lenovo ThinkServer Gen 5 550W Platinum Hot Swap Power Supply
4X20F28575	Lenovo ThinkServer Gen 5 750W Platinum Hot Swap Power Supply
4X20F28576	Lenovo ThinkServer Gen 5 750W Titanium Hot Swap Power Supply
4X20F28577	Lenovo ThinkServer Gen 5 1100W Platinum Hot Swap Power Supply
System Options	
4XF0G45871	Lenovo ThinkServer Gen 5 1U 4-Post Slide Rail Kit
4XF0G45872	Lenovo ThinkServer Gen 5 1U Cable Management Arm
4XF0G45873	Lenovo ThinkServer 1U x16 PCIe Riser 2 Kit
4XF0G45874	Lenovo ThinkServer 1U x16 PCIe Riser 1 Kit
4XF0G45880	Lenovo ThinkServer 1U x8/x8 PCIe Riser Kit
4XF0G45885	Lenovo ThinkServer Gen 5 1U 3.5" 4-Drive Backplane Kit
4XF0G45877	Lenovo ThinkServer Gen 5 4-Post Static Rail Kit
4XF0G45878	Lenovo ThinkServer Gen 5 2.5" 2-Drive Rear Backplane Kit
4X90F92980	Lenovo ThinkServer Gen 5 DisplayPort to VGA Dongle
4XF0G45876	Lenovo ThinkServer Gen 5 Cable Management Bar
4X90F92964	ThinkServer C13-C14 WW 250V 10A 1.8m Jumper Cord
4XA0E97775	ThinkPad UltraSlim USB DVD Burner
Microsoft Windows Server ROK	
4XI0E51561	Windows Server 2012 R2 Standard ROK (2 CPU/2VMs)
4XI0E51562	Windows Server 2012 R2 Datacenter ROK (2 CPU)
4XI0E51563	Windows Server 2012 R2 Essentials ROK (1-2 CPU)

ThinkServer RD650 Overview

ThinkServer RD650 - Front and rear view

ThinkServer RD650 with 3.5" Disk Bay - Front view



ThinkServer RD650 with 2.5" + 3.5" Disk Bay - Front view



ThinkServer RD650 with 2.5" Disk Bay - Front view



ThinkServer RD650 - Rear view (All chassis types share one rear view)



Note: Some modules are optional depending on models.

ThinkServer RD650 supporting list for front disk drive bays, rear disk drive bays, ultralim optical bays, tape drive bays, M.2 SSD drives

Chassis Type	Front Disk Bays Supported	Ultralim Optical Bay Supported	When this AnyRAID is selected, the type of internal storage can be supported			
			AnyRAID 110i (SATA)	AnyRAID 510i (SATA/SAS)	AnyRAID 720i (SATA/SAS)	AnyRAID 720ix (SATA/SAS)
ThinkServer RD650 with 3.5" Disk Bay	6 x 3.5"	-	Front bay	Front bay	Front bay	-
	12 x 3.5"	-	-	-	-	Front bay + rear bay/M.2 SSD
ThinkServer RD650 with 2.5" + 3.5" Disk Bay	6 x 2.5" + 9 x 3.5"	-	-	-	-	Front bay + rear bay/M.2 SSD
ThinkServer RD650 with 2.5" Disk Bay	8 x 2.5"	Optional	-	Front bay	Front bay	Front bay + rear bay/M.2 SSD/Tape
	16 x 2.5"	Optional	-	-	-	Front bay + rear bay/M.2 SSD
	24 x 2.5"	-	-	-	-	Front bay + rear bay/M.2 SSD
	No front bay	-	M.2 SSD	-	-	-

For a list of all supported options, Please see [ThinkServer RD650 Options](#) sheet.

Note:


1. "-" shows the configuration is not available.
2. Tape drive, rear disk drive, and M.2 SSD can not be supported simultaneously, only one device can be selected per system.
3. Rear disk bay supports SATA only.

ThinkServer RD650 with 3.5" Disk Bay Platform Specifications

Product Specifications Reference (PSREF)

Components	Specification	
Form factor	2U rack	
Processor	Up to two 145W Intel Xeon E5-2600 v3 family processors with 18 cores up to 2.3GHz, 16 cores up to 2.3GHz, 14 cores up to 2.6GHz, 12 cores up to 2.6GHz, 10 cores up to 2.6GHz, 8 cores up to 3.2GHz, 6 cores up to 3.4GHz, 4 cores up to 3.5GHz. Two QPI link up to 9.6 GT/s. Up to 2133MHz memory speed. Up to 45MB cache	
Chipset	Intel C612 Platform Controller Hub (PCH)	
Memory DIMMs	24 DIMM sockets (12 DIMMs per processor), 8-channel capable (4-channel per processor). RDIMM and LRDIMM (cannot be intermixed), DDR4, up to 2133MHz	
Memory capacity	384GB (RDIMM, 16GB x 24)/768GB (LRDIMM, 32GB x 24)	
Memory protection	ECC, memory mirroring, lockstep, and memory sparing	
AnyRAID support	Supports AnyRAID 110i, 510i, and 720i for 6 x 3.5" model, 720ix for 12 x 3.5" model. RAID 0, 1, 10 with AnyRAID 110i. 6Gb/s SATA, optional key for RAID 5. RAID 0, 1, 10 with AnyRAID 510i. 6Gb/s SAS/SATA, optional key for RAID 5/50. RAID 0, 1, 10, 5, 50, 6, 60 with AnyRAID 720i/720ix. 12Gb/s SAS/SATA. 720i needs cache for RAID 6/60 support. 720ix must have a cache. Optional cache for 720i/720ix: 1GB read-only memory. 1GB/2GB/4GB flash with super capacitor. Flash options include CacheVault, CacheCade Pro, and FastPath	
Disk drive bays	Up to 6 (0-5) or 12 (0-11) 3.5" hot-swap disk drive bays. Up to 2 x 2.5" rear hot-swap disk drive bays on 12 x 3.5" models. Rear bay supports SATA drives only	
M.2 SSD module	Optional M.2 module, supports up to 2 optional M.2 SSD drives. Available on 12 x 3.5" and 720ix models only	
SD module	Optional SD module, supports up to 2 optional SDHC flash cards	
Internal storage	HDD	3.5" SATA 7.2K 6Gbs 1TB/2TB/3TB/4TB/5TB/6TB 3.5" SAS 7.2K 6Gbs 1TB/2TB/3TB/4TB/ 3.5" SAS 7.2K 12Gbs 6TB 2.5" SATA 7.2K 6Gbs 500GB/1TB
	SSD	2.5" SAS 12Gbs 200GB/400GB/800GB 3.5" SATA 6Gbs 120GB/240GB/300GB/480GB/600GB/800GB PCIe 2.0 x8 SSD adapter 1.6TB/3.2TB
		M.2 SSD 80GB/120GB
		SD SDHC flash card 8GB/32GB
	<i>Note: SAS drive needs 510i/720i/720ix.</i>	
	Optical drive	None
Tape drive bays	None	
Network interfaces	One dedicated management port, one AnyFabric slot for customized LOM. Discrete network options is also available via PCIe slots	
Security features	Power-on and administrator password. Optional Trusted Platform Module (TCG 1.2-compliant). Optional chassis intrusion switch	
Systems management	Supports ThinkServer System Manager (TSM), optional TSM Premium. UEFI. Onboard Aspeed AST2400 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC). Control Panel LEDs shows the status of power, ID, network, system. Supports ThinkServer management software: Diagnostics, Deployment Manager, Energy Manager, System Manager, Partner Pack for VMware vCenter and Microsoft System Center Operations Manager, Power Planner	
Operating systems supported	Microsoft Windows Server 2012 R2, 2012, and 2008 R2, Windows Small Business Server 2011, Red Hat Enterprise Linux 6.5, SUSE Linux Enterprise Server 11, VMware vSphere (ESXi) 5.5 U2	
Base warranty	3-year limited onsite service with 9x5/NBD. Some parts are Customer Replaceable Units	

Components	Specification
Power supply	Up to two redundant hot-swap 550 W ac, 750 W ac, 1100 W ac, or 1600 W ac power supplies. 550 W, 1100 W, and 1600 W are 80 PLUS Platinum qualified, 750 W is 80 PLUS Platinum or Titanium qualified. 750 W Titanium is 200V - 240V, others are 110V - 240V. 1600 W will automatically operate in 1100W if the system line input is 100-127V. Up to 135W CPU on 550 W and 12 x 3.5" model
Graphics	Onboard Aspeed AST2400 with 16MB memory, one DisplayPort on rear. Maximum resolution: 1920x1200@60Hz
Front ports	None
Rear ports	One DisplayPort, two USB 3.0, one RJ-45 (dedicate mgmt), one serial (9-pin)
Cooling	Six (5+1, dual processors) or four (3+1, single processor), hot-swap
Hot-swap parts	Disk drives, power supplies, and fans
Noise emissions	Operating: < 6.5 Bels, Idle: < 6 Bels (Maximum configuration)
Environmental specification	Temperature - operating 41 °F to 113 °F (5 °C to 45 °C) Temperature - non operating (no package) -10 °C to 60 °C Temperature - non operating (with package) -40 °C to 60 °C Altitude - operating (Unpressurized): 0-10000ft (0-3048m) Humidity - operating 8%-90%, non-condensing Humidity - storage (with package) 8%-90%, non-condensing
	<i>Note: 45 °C continuous operation configuration limitation: no 135W or 145W CPU/no GPU card/ redundant PSU/no FLFH card/no PCIe SSD adapter.</i>
Weight	Minimum configuration: 16 kg (35.3 lb), maximum: 32 kg (70.5 lb)
Dimensions	Height: 87 mm (3.4 in), width: 482 mm (19 in), depth: 764 mm (30 in)

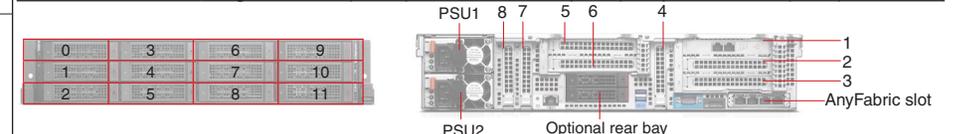

Expansion slots

Up to eight half-length PCIe 3.0 x 16 slots depending on the riser cards installed:

- Slot 1 (riser card 1): PCIe 3.0 x 16, half length, full height
- Slot 2 (riser card 1): PCIe 3.0 x 16, half length, full height
- Slot 3 (riser card 1): PCIe 3.0 x 16, half length, full height
- Slot 4 (onboard): PCIe 3.0 x 16, low-profile, half length, requires 2nd CPU
- Slot 5 (riser card 2): PCIe 3.0 x 16, half length, full height, requires 2nd riser card and 2nd CPU
- Slot 6 (riser card 2): PCIe 3.0 x 16, half length, full height, requires 2nd riser card and 2nd CPU
- Slot 7 (onboard): PCIe 3.0 x 16, low-profile, half length, requires 2nd CPU
- Slot 8 (onboard): PCIe 3.0 x 16, low-profile, half length, requires 2nd CPU

Note: Slot 1-8 are x8 wired. Full height and full length PCIe x16 slots is optional on 2.5" models only.

Core Options for ThinkServer RD650 (partial)

- 4X70F28589 ThinkServer 8GB DDR4-2133MHz (1Rx4) RDIMM
- 4XF0G45881 ThinkServer 2U x8/x8/x8 PCIe Riser Kit
- 4X20F28577 Lenovo ThinkServer Gen 5 1100W Platinum Hot Swap Power Supply
- 4XF0G45867 ThinkServer System Manager Premium (TSM Premium)
- 4X90F92980 ThinkServer DisplayPort to VGA Dongle

For a list of all supported options, Please see [ThinkServer RD650 Options](#) sheet.

ThinkServer RD650 with 3.5" Disk Bay - TopSeller - 70D0

Type-model	Processor	2nd CPU	Memory	AnyRAID	Disk bays	Disk drives	M.2/SD module	PCIe x8 SSD adpr	Slots (HL/ FHFL)	Optical	Tape drive	AnyFabric	TPM	Chassis intrusion switch	System mgmt	Preloaded OS	Base wty	Power
Announced September 2014																		
70D00005EA	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	4XG0F28820	1x16GB 2133MHz RDIMM	720ix +1GB Flash	12x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	TPM	No	TSM Premium	No	3-year	750Wx1 Platinum
70D00006EA	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	4XG0F28820	1x8GB 2133MHz RDIMM	720ix +1GB Flash	12x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	TPM	No	TSM	No	3-year	750Wx1 Platinum
70D0001CEA	1xE5-2603 v3 6C/1.6GHz/15MB/85W/1600MHz	4XG0F28821	1x8GB 2133MHz RDIMM	720ix +1GB RAM	12x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D0001DEA	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	4XG0F28820	1x8GB 2133MHz RDIMM	720ix +1GB RAM	12x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D0001EEA	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	4XG0F28819	1x8GB 2133MHz RDIMM	720ix +1GB RAM	12x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D0001FEA	1xE5-2630L v3 8C/1.8GHz/20MB/55W/1866MHz	4XG0F28823	1x8GB 2133MHz RDIMM	720ix +1GB RAM	12x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D0001GEA	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	4XG0F28818	1x8GB 2133MHz RDIMM	720ix +1GB RAM	12x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D0001HEA	1xE5-2637 v3 4C/3.5GHz/15MB/135W/2133MHz	4XG0F28836	1x8GB 2133MHz RDIMM	720ix +1GB RAM	12x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D0001JEA	1xE5-2640 v3 8C/2.6GHz/20MB/90W/1866MHz	4XG0F28817	1x8GB 2133MHz RDIMM	720ix +1GB RAM	12x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D0001KEA	1xE5-2643 v3 6C/3.4GHz/20MB/135W/2133MHz	4XG0F28835	1x8GB 2133MHz RDIMM	720ix +1GB RAM	12x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D0001LEA	1xE5-2650L v3 12C/1.8GHz/30MB/65W/2133MHz	4XG0F28822	1x8GB 2133MHz RDIMM	720ix +1GB RAM	12x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D0001MEA	1xE5-2650 v3 10C/2.3GHz/25MB/105W/2133MHz	4XG0F28816	1x8GB 2133MHz RDIMM	720ix +1GB RAM	12x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D0001NEA	1xE5-2660 v3 10C/2.6GHz/25MB/105W/2133MHz	4XG0F28815	1x8GB 2133MHz RDIMM	720ix +1GB RAM	12x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D0001PEA	1xE5-2667 v3 8C/3.2GHz/20MB/135W/2133MHz	4XG0F28834	1x8GB 2133MHz RDIMM	720ix +1GB RAM	12x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D0001QEA	1xE5-2670 v3 12C/2.3GHz/30MB/120W/2133MHz	4XG0F28814	1x8GB 2133MHz RDIMM	720ix +1GB RAM	12x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D0001REA	1xE5-2680 v3 12C/2.5GHz/30MB/120W/2133MHz	4XG0F28813	1x8GB 2133MHz RDIMM	720ix +1GB RAM	12x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D0001SEA	1xE5-2683 v3 14C/2GHz/35MB/120W/2133MHz	4XG0F28812	1x8GB 2133MHz RDIMM	720ix +1GB RAM	12x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D0001TEA	1xE5-2690 v3 12C/2.6GHz/30MB/135W/2133MHz	4XG0F28811	1x8GB 2133MHz RDIMM	720ix +1GB RAM	12x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D0001UEA	1xE5-2695 v3 14C/2.3GHz/35MB/120W/2133MHz	4XG0F28810	1x8GB 2133MHz RDIMM	720ix +1GB RAM	12x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D0001VEA	1xE5-2697 v3 14C/2.6GHz/35MB/145W/2133MHz	4XG0F28809	1x8GB 2133MHz RDIMM	720ix +1GB RAM	12x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D0001WEA	1xE5-2698 v3 16C/2.3GHz/40MB/135W/2133MHz	4XG0F28808	1x8GB 2133MHz RDIMM	720ix +1GB RAM	12x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D0001XEA	1xE5-2699 v3 18C/2.3GHz/45MB/145W/2133MHz	4XG0F28807	1x8GB 2133MHz RDIMM	720ix +1GB RAM	12x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D0001YEA	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	4XG0F28819	1x8GB 2133MHz RDIMM	720ix +1GB Flash	12x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D00020EA	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	4XG0F28820	1x8GB 2133MHz RDIMM	110i +key	6x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D00021EA	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	4XG0F28819	1x8GB 2133MHz RDIMM	110i +key	6x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D00022EA	1xE5-2640 v3 8C/2.6GHz/20MB/90W/1866MHz	4XG0F28817	1x8GB 2133MHz RDIMM	110i +key	6x3.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum


For a list of all supported options, Please see [ThinkServer RD650 Options](#) sheet.

ThinkServer RD650 with 2.5" + 3.5" Disk Bay Platform Specifications

Product Specifications Reference (PSREF)

Components	Specification		
Form factor	2U rack		
Processor	Up to two 145W Intel Xeon E5-2600 v3 family processors with 18 cores up to 2.3GHz, 16 cores up to 2.3GHz, 14 cores up to 2.6GHz, 12 cores up to 2.6GHz, 10 cores up to 2.6GHz, 8 cores up to 3.2GHz, 6 cores up to 3.4GHz, 4 cores up to 3.5GHz. Two QPI link up to 9.6 GT/s. Up to 2133MHz memory speed. Up to 45MB cache		
Chipset	Intel C612 Platform Controller Hub (PCH)		
Memory DIMMs	24 DIMM sockets (12 DIMMs per processor), 8-channel capable (4-channel per processor). RDIMM and LRDIMM (cannot be intermixed), DDR4, up to 2133MHz		
Memory capacity	384GB (RDIMM, 16GB x 24)/768GB (LRDIMM, 32GB x 24)		
Memory protection	ECC, memory mirroring, lockstep, and memory sparing		
AnyRAID support	RAID 0, 1, 10, 5, 50, 6, 60 with AnyRAID 720ix, 12Gb/s SAS/SATA. Cache is needed. Optional cache: 1GB read-only memory. 1GB/2GB/4GB flash with super capacitor. Flash options include CacheVault, CacheCade Pro, and FastPath		
Disk drive bays	Up to 6 x 2.5" (0-5) and 12 (6-14) 3.5" hot-swap disk drive bays. Up to 2 x 2.5" rear hot-swap disk drive bays. Rear bay supports SATA drives only		
M.2 SSD	Optional M.2 module, supports up to 2 optional M.2 SSD drives		
SD module	Optional SD module, supports up to 2 optional SDHC flash cards		
Internal storage	HDD	3.5" SATA 7.2K 6Gbs	1TB/2TB/3TB/4TB/5TB/6TB
		3.5" SAS 7.2K 6Gbs	1TB/2TB/3TB/4TB/
		3.5" SAS 7.2K 12Gbs	6TB
		2.5" SATA 7.2K 6Gbs	500GB/1TB
		2.5" SAS 10K 6Gbs	300GB/600GB/900GB/1.2TB
	SSD	2.5" SAS 15K 6Gbs	300GB/450GB/600GB
		2.5" SAS 12Gbs*	200GB/400GB/800GB
		2.5" SATA 6Gbs*	120GB/240GB/300GB/480GB/600GB/800GB
		PCIe 2.0 x8 SSD adapter	1.6TB/3.2TB
		M.2 SSD	80GB/120GB
SD	SDHC flash card	8GB/32GB	
Optical drive	None		
Tape drive bays	None		
Network interfaces	One dedicated management port, one AnyFabric slot for customized LOM. Discrete network options is also available via PCIe slots		
Security features	Power-on and administrator password. Optional Trusted Platform Module (TCG 1.2-compliant). Optional chassis intrusion switch		
Systems management	Supports ThinkServer System Manager (TSM), optional TSM Premium. UEFI. Onboard Aspeed AST2400 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC). Control Panel LEDs shows the status of power, ID, network, system. Supports ThinkServer management software: Diagnostics, Deployment Manager, Energy Manager, System Manager, Partner Pack for VMware vCenter and Microsoft System Center Operations Manager, Power Planner		
Operating systems supported	Microsoft Windows Server 2012 R2, 2012, and 2008 R2, Windows Small Business Server 2011, Red Hat Enterprise Linux 6.5, SUSE Linux Enterprise Server 11, VMware vSphere (ESXi) 5.5 U2		
Base warranty	3-year limited onsite service with 9x5/NBD. Some parts are Customer Replaceable Units		

Components	Specification	
Power supply	Up to two redundant hot-swap 750 W ac or 1100 W ac or 1600 W ac power supplies. 550 W, 1100 W, and 1600 W are 80 PLUS Platinum qualified, 750 W is 80 PLUS Platinum or Titanium qualified. 750 W Titanium is 200V - 240V, others are 110V - 240V. 1600 W will automatically operate in 1100W if the system line input is 100-127V.	
Graphics	Onboard Aspeed AST2400 with 16MB memory, one DisplayPort on rear. Maximum resolution: 1920x1200@60Hz	
Front ports	None	
Rear ports	One DisplayPort, two USB 3.0, one RJ-45 (dedicate mgmt), one serial (9-pin)	
Cooling	Six (5+1, dual processors) or four (3+1, single processor), hot-swap	
Hot-swap parts	Disk drives, power supplies, and fans	
Noise emissions	Operating: < 6.5 Bels, Idle: < 6 Bels (Maximum configuration)	
Environmental specification	Temperature - operating	41 °F to 113 °F (5 °C to 45 °C)
	Temperature - non operating (no package)	-10 °C to 60 °C
	Temperature - non operating (with package)	-40 °C to 60 °C
	Altitude - operating	(Unpressurized): 0-10000ft (0-3048m)
Humidity - operating	8%-90%, non-condensing	
Humidity - storage (with package)	8%-90%, non-condensing	
Note: 45 °C continuous operation configuration limitation: no 135W or 145W CPU/no GPU card/ redundant PSU/no FLFH card/no PCIe SSD adapter.		
Weight	Minimum configuration: 16 kg (35.3 lb), maximum: 32 kg (70.5 lb)	
Dimensions	Height: 87 mm (3.4 in), width: 482 mm (19 in), depth: 764 mm (30 in)	

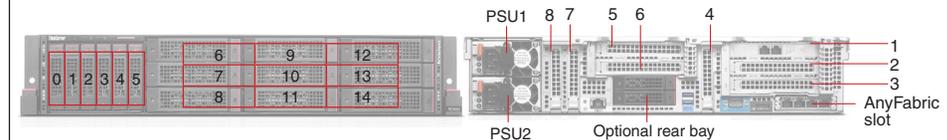

Expansion slots

Up to eight half-length PCIe 3.0 x 16 slots depending on the riser cards installed:

- Slot 1 (riser card 1): PCIe 3.0 x 16, half length, full height
- Slot 2 (riser card 1): PCIe 3.0 x 16, half length, full height
- Slot 3 (riser card 1): PCIe 3.0 x 16, half length, full height
- Slot 4 (onboard): PCIe 3.0 x 16, low-profile, half length, requires 2nd CPU
- Slot 5 (riser card 2): PCIe 3.0 x 16, half length, full height, requires 2nd riser card and 2nd CPU
- Slot 6 (riser card 2): PCIe 3.0 x 16, half length, full height, requires 2nd riser card and 2nd CPU
- Slot 7 (onboard): PCIe 3.0 x 16, low-profile, half length, requires 2nd CPU
- Slot 8 (onboard): PCIe 3.0 x 16, low-profile, half length, requires 2nd CPU

Note: Slot 1-8 are x8 wired. Full height and full length PCIe x16 slots is optional on 2.5" models only.

Core Options for ThinkServer RD650 (partial)

- 4X70F28589 ThinkServer 8GB DDR4-2133MHz (1Rx4) RDIMM
- 4XF0G45881 ThinkServer 2U x8/x8/x8 PCIe Riser Kit
- 4X20F28577 Lenovo ThinkServer Gen 5 1100W Platinum Hot Swap Power Supply
- 4XF0G45867 ThinkServer System Manager Premium (TSM Premium)
- 4X90F92980 ThinkServer DisplayPort to VGA Dongle

For a list of all supported options, Please see [ThinkServer RD650 Options](#) sheet.

ThinkServer RD650 with 2.5" + 3.5" Disk Bay - TopSeller - 70D4

Type-model	Processor	2nd CPU	Memory	AnyRAID	Disk bays	Disk drives	M.2/SD module	PCIe x8 SSD adpr	Slots (HL/FH/L)	Optical	Tape drive	AnyFabric	TPM	Chassis intrusion switch	System mgmt	Preloaded OS	Base wty	Power
Announced September 2014																		
70D40014EA	1xE5-2603 v3 6C/1.6GHz/15MB/85W/1600MHz	4XG0F28821	1x8GB 2133MHz RDIMM	720ix+1GB RAM	6+9 HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D40015EA	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	4XG0F28820	1x8GB 2133MHz RDIMM	720ix+1GB RAM	6+9 HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D40016EA	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	4XG0F28819	1x8GB 2133MHz RDIMM	720ix+1GB RAM	6+9 HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D40017EA	1xE5-2630L v3 8C/1.8GHz/20MB/55W/1866MHz	4XG0F28823	1x8GB 2133MHz RDIMM	720ix+1GB RAM	6+9 HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D40018EA	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	4XG0F28818	1x8GB 2133MHz RDIMM	720ix+1GB RAM	6+9 HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D40019EA	1xE5-2637 v3 4C/3.5GHz/15MB/135W/2133MHz	4XG0F28836	1x8GB 2133MHz RDIMM	720ix+1GB RAM	6+9 HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D4001AEA	1xE5-2640 v3 8C/2.6GHz/20MB/90W/1866MHz	4XG0F28817	1x8GB 2133MHz RDIMM	720ix+1GB RAM	6+9 HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D4001BEA	1xE5-2643 v3 6C/3.4GHz/20MB/135W/2133MHz	4XG0F28835	1x8GB 2133MHz RDIMM	720ix+1GB RAM	6+9 HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D4001CEA	1xE5-2650L v3 12C/1.8GHz/30MB/65W/2133MHz	4XG0F28822	1x8GB 2133MHz RDIMM	720ix+1GB RAM	6+9 HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D4001DEA	1xE5-2650 v3 10C/2.3GHz/25MB/105W/2133MHz	4XG0F28816	1x8GB 2133MHz RDIMM	720ix+1GB RAM	6+9 HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D4001EEA	1xE5-2660 v3 10C/2.6GHz/25MB/105W/2133MHz	4XG0F28815	1x8GB 2133MHz RDIMM	720ix+1GB RAM	6+9 HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D4001FEA	1xE5-2667 v3 8C/3.2GHz/20MB/135W/2133MHz	4XG0F28834	1x8GB 2133MHz RDIMM	720ix+1GB RAM	6+9 HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D4001GEA	1xE5-2670 v3 12C/2.3GHz/30MB/120W/2133MHz	4XG0F28814	1x8GB 2133MHz RDIMM	720ix+1GB RAM	6+9 HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D4001HEA	1xE5-2680 v3 12C/2.5GHz/30MB/120W/2133MHz	4XG0F28813	1x8GB 2133MHz RDIMM	720ix+1GB RAM	6+9 HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D4001JEA	1xE5-2683 v3 14C/2GHz/35MB/120W/2133MHz	4XG0F28812	1x8GB 2133MHz RDIMM	720ix+1GB RAM	6+9 HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D4001KEA	1xE5-2685 v3 12C/2.6GHz/30MB/120W/2133MHz	4XG0F28838	1x8GB 2133MHz RDIMM	720ix+1GB RAM	6+9 HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D4001LEA	1xE5-2690 v3 12C/2.6GHz/30MB/135W/2133MHz	4XG0F28811	1x8GB 2133MHz RDIMM	720ix+1GB RAM	6+9 HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D4001MEA	1xE5-2695 v3 14C/2.3GHz/35MB/120W/2133MHz	4XG0F28810	1x8GB 2133MHz RDIMM	720ix+1GB RAM	6+9 HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D4001NEA	1xE5-2697 v3 14C/2.6GHz/35MB/145W/2133MHz	4XG0F28809	1x8GB 2133MHz RDIMM	720ix+1GB RAM	6+9 HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D4001PEA	1xE5-2698 v3 16C/2.3GHz/40MB/135W/2133MHz	4XG0F28808	1x8GB 2133MHz RDIMM	720ix+1GB RAM	6+9 HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D4001QEA	1xE5-2699 v3 18C/2.3GHz/45MB/145W/2133MHz	4XG0F28807	1x8GB 2133MHz RDIMM	720ix+1GB RAM	6+9 HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum


For a list of all supported options, Please see [ThinkServer RD650 Options](#) sheet.

ThinkServer RD650 with 2.5" Disk Bay Platform Specifications

Product Specifications Reference (PSREF)

Components	Specification	
Form factor	2U rack	
Processor	Up to two 145W Intel Xeon E5-2600 v3 family processors with 18 cores up to 2.3GHz, 16 cores up to 2.3GHz, 14 cores up to 2.6GHz, 12 cores up to 2.6GHz, 10 cores up to 2.6GHz, 8 cores up to 3.2GHz, 6 cores up to 3.4GHz, 4 cores up to 3.5GHz. Two QPI link up to 9.6 GT/s. Up to 2133MHz memory speed. Up to 45MB cache	
Chipset	Intel C612 Platform Controller Hub (PCH)	
Memory DIMMs	24 DIMM sockets (12 DIMMs per processor), 8-channel capable (4-channel per processor). RDIMM and LRDIMM (cannot be intermixed), DDR4, up to 2133MHz	
Memory capacity	384GB (RDIMM, 16GB x 24)/768GB (LRDIMM, 32GB x 24)	
Memory protection	ECC, memory mirroring, lockstep, and memory sparing	
AnyRAID support	Supports AnyRAID 510i and 720i on 8 x 2.5" model, 720ix on 8/16/24 x 2.5" model. RAID 0, 1, 10 with AnyRAID 510i, 6Gb/s SAS/SATA, optional key for RAID 5/50. RAID 0, 1, 10, 5, 50, 6, 60 with AnyRAID 720i/720ix. 12Gb/s SAS/SATA. 720i needs cache for RAID 6/60 support. 720ix must have a cache. Optional cache for 720i/720ix: 1GB read-only memory. 1GB/2GB/4GB flash with super capacitor. Flash options include CacheVault, CacheCade Pro, and FastPath. Also supports AnyRAID 110i on no front bay model, RAID 0 or 1	
Disk drive bays	Up to 8 (0-7), 16 (0-15) or 24 (0-23) 2.5" hot-swap disk drive bays. Up to 2 x 2.5" rear disk drive bays on 720ix models, hot-swap. Rear bay supports SATA drives only	
M.2 SSD	Optional M.2 module, supports up to 2 optional M.2 SSD drives, no front bay model with 110i or 8/16/24 x 2.5" model with 720ix only	
SD module	Optional SD module, supports up to 2 optional SDHC flash cards	
Internal storage	HDD	2.5" SATA 7.2K 6Gbs - HS 500GB/1TB 2.5" SAS 10K 6Gbs - HS 300GB/600GB/900GB/1.2TB 2.5" SAS 15K 6Gbs - HS 300GB/450GB/600GB
	SSD	2.5" SAS 12Gbs - HS 200GB/400GB/800GB 2.5" SATA 6Gbs - HS 120GB/240GB/300GB/480GB/600GB/800GB PCIe 2.0 x8 SSD adapter 1.6TB/3.2TB
		M.2 SSD 80GB/120GB
		SD SDHC flash card 8GB/32GB
	Tape LTO-6 SAS 6Gbs 2.5TB	
	<i>Note: Tape drive, rear disk drive, and M.2 SSD can not be supported simultaneously, only one device can be selected per system.</i>	
	Optical drive	Optional one Ultralim optical drive on 8/16 x 2.5" model, DVD-ROM or DVD±RW
Tape drive bays	Supports up to one LTO-6 internal SAS tape drive on 8 x 2.5" and 720ix model.	
Network interfaces	One dedicated management port, one AnyFabric slot for customized LOM. Discrete network options is also available via PCIe slots	
Security features	Power-on and administrator password. Optional Trusted Platform Module (TCG 1.2-compliant). Optional chassis intrusion switch	
Systems management	Supports ThinkServer System Manager (TSM), optional TSM Premium. UEFI. Onboard Aspeed AST2400 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC). Control Panel LEDs shows the status of power, ID, network, system. Supports ThinkServer management software: Diagnostics, Deployment Manager, Energy Manager, System Manager, Partner Pack for VMware vCenter and Microsoft System Center Operations Manager, Power Planner	
Operating systems supported	Microsoft Windows Server 2012 R2, 2012, and 2008 R2, Windows Small Business Server 2011, Red Hat Enterprise Linux 6.5, SUSE Linux Enterprise Server 11, VMware vSphere (ESXi) 5.5 U2	
Base warranty	3-year limited onsite service with 9x5/NBD. Some parts are Customer Replaceable Units	

Components	Specification	
Power supply	Up to two redundant hot-swap 550 W ac, 750 W ac, 1100 W ac, or 1600 W ac power supplies. 550 W, 1100 W, and 1600 W are 80 PLUS Platinum qualified, 750 W is 80 PLUS Platinum or Titanium qualified. 750 W Titanium is 200V - 240V, others are 110V - 240V. 1600 W will automatically operate in 1100W if the system line input is 100-127V. Up to 105W CPU with 24 DIMMs or 135W CPU with 16 DIMMs on 550 W and 16 x 2.5" model. 550 W is not supported on 24 x 2.5" model	
Graphics	Onboard Aspeed AST2400 with 16MB memory, one DisplayPort on front, one DisplayPort on rear. Maximum resolution: 1920x1200@60Hz	
Front ports	Two USB 2.0, one DisplayPort	
Rear ports	One DisplayPort, two USB 3.0, one RJ-45 (dedicate mgmt), one serial (9-pin)	
Cooling	Six (5+1, dual processors) or four (3+1, single processor), hot-swap	
Hot-swap parts	Disk drives, power supplies, and fans	
Noise emissions	Operating: < 6.5 Bels, Idle: < 6 Bels (Maximum configuration)	
Environmental specification	Temperature - operating	41 °F to 113 °F (5 °C to 45 °C)
	Temperature - non operating (no package)	-10 °C to 60 °C
	Temperature - non operating (with package)	-40 °C to 60 °C
	Altitude - operating	(Unpressurized): 0-10000ft (0-3048m)
Humidity - operating	8%-90%, non-condensing	
Humidity - storage (with package)	8%-90%, non-condensing	
<i>Note: 45 °C continuous operation configuration limitation: no 135W or 145W CPU/no GPU card/redundant PSU/no FLFH card/no PCIe SSD adapter.</i>		
Weight	Minimum configuration: 16 kg (35.3 lb), maximum: 32 kg (70.5 lb)	
Dimensions	Height: 87 mm (3.4 in), width: 482 mm (19 in), depth: 764 mm (30 in)	

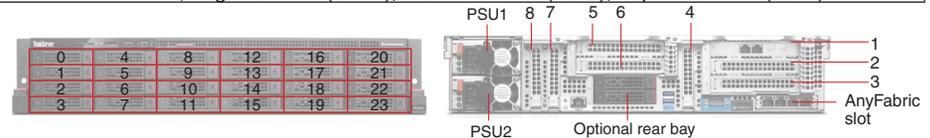

Expansion slots

Up to eight half-length PCIe 3.0 slots, or up to six PCIe 3.0 slots with two full size PCIe 3.0 x16 slots, depending on the riser cards and processors installed:

- Slot 1 (riser card 1): PCIe 3.0 x 16, half length, full height
 - Slot 2 (riser card 1): PCIe 3.0 x 16, half length, full height
 - Slot 3 (riser card 1): PCIe 3.0 x 16, half length, full height
 - Slot 4 (onboard): PCIe 3.0 x 16, low-profile, half length, requires 2nd CPU
 - Slot 5 (riser card 2): PCIe 3.0 x 16, half length, full height, requires 2nd riser card and 2nd CPU
 - Slot 6 (riser card 2): PCIe 3.0 x 16, half length, full height, requires 2nd riser card and 2nd CPU
 - Slot 7 (onboard): PCIe 3.0 x 16, low-profile, half length, requires 2nd CPU
 - Slot 8 (onboard): PCIe 3.0 x 16, low-profile, half length, requires 2nd CPU
- Slots 1 and 2 can be replaced with one PCIe 3.0 x16 slot, double wide, full length, full height, Slots 5 and 6 can be replaced with one PCIe 3.0 x16 slot, double wide, full length, full height.

Note: 1. Slot 1-8 are x8 wired. 2. One full size PCIe 3.0 x16 slot model needs 1100 W or 1600 W PSU, two full size PCIe 3.0 x16 slots model needs 1600 W PSU. 3. Full size PCIe x16 slot is not available when tape drive is used.

Core Options for ThinkServer RD650 (partial)

- 4X70F28589 ThinkServer 8GB DDR4-2133MHz (1Rx4) RDIMM
- 4X20F28577 Lenovo ThinkServer Gen 5 1100W Platinum Hot Swap Power Supply
- 4XF0G45867 ThinkServer System Manager Premium (TSM Premium)
- 4X90F92980 ThinkServer DisplayPort to VGA Dongle

For a list of all supported options, Please see [ThinkServer RD650 Options](#) sheet.

ThinkServer RD650 with 2.5" Disk Bay - TopSeller - 70DR

Type-model	Processor	2nd CPU	Memory	AnyRAID	Disk bays	Disk drives	M.2/SD module	PCIe x8 SSD adpr	Slots (HL/FHFL)	Optical	Tape drive	AnyFabric	TPM	Chassis intrusion switch	System mgmt	Preloaded OS	Base wty	Power	
Announced September 2014																			
70DR001PEA	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	4XG0F28819	1x8GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	No	3/0	DVD±RW	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR001QEA	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	4XG0F28819	1x8GB 2133MHz RDIMM	720i +1GB RAM	8x2.5" HS	Open	No	No	3/0	DVD±RW	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR001REA	1xE5-2640 v3 8C/2.6GHz/20MB/90W/1866MHz	4XG0F28817	1x8GB 2133MHz RDIMM	720i +1GB RAM	8x2.5" HS	Open	No	No	3/0	DVD±RW	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR001SEA	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	4XG0F28818	1x8GB 2133MHz RDIMM	720i +1GB RAM	8x2.5" HS	Open	No	No	3/0	DVD±RW	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR001TEA	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	4XG0F28819	2x8GB 2133MHz RDIMM	720i +1GB Flash	8x2.5" HS	Open	No	No	3/0	DVD±RW	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR001UEA	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	4XG0F28818	2x8GB 2133MHz RDIMM	720i +1GB Flash	8x2.5" HS	Open	No	No	3/0	DVD±RW	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR001VEA	1xE5-2640 v3 8C/2.6GHz/20MB/90W/1866MHz	4XG0F28817	2x8GB 2133MHz RDIMM	720i +1GB Flash	8x2.5" HS	Open	No	No	3/0	DVD±RW	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR001WEA	1xE5-2683 v3 14C/2GHz/35MB/120W/2133MHz	4XG0F28812	1x8GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	No	3/0	No	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR001XEA	1xE5-2630L v3 8C/1.8GHz/20MB/55W/1866MHz	4XG0F28823	1x8GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	No	3/0	No	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR001YEA	1xE5-2699 v3 18C/2.3GHz/45MB/145W/2133MHz	4XG0F28807	1x8GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	No	3/0	No	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR0020EA	1xE5-2697 v3 14C/2.6GHz/35MB/145W/2133MHz	4XG0F28809	1x8GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	No	3/0	No	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR0021EA	1xE5-2685 v3 12C/2.6GHz/30MB/120W/2133MHz	4XG0F28838	1x8GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	No	3/0	No	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR0022EA	1xE5-2660 v3 10C/2.6GHz/25MB/105W/2133MHz	4XG0F28815	1x8GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	No	3/0	No	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR0023EA	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	4XG0F28818	1x8GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	No	3/0	No	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR0024EA	1xE5-2603 v3 6C/1.6GHz/15MB/85W/1600MHz	4XG0F28821	1x8GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	No	3/0	No	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR0025EA	1xE5-2698 v3 16C/2.3GHz/40MB/135W/2133MHz	4XG0F28808	1x8GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	No	3/0	No	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR0026EA	1xE5-2670 v3 12C/2.3GHz/30MB/120W/2133MHz	4XG0F28814	1x8GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	No	3/0	No	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR0027EA	1xE5-2643 v3 6C/3.4GHz/20MB/135W/2133MHz	4XG0F28835	1x8GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	No	3/0	No	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR0028EA	1xE5-2667 v3 8C/3.2GHz/20MB/135W/2133MHz	4XG0F28834	1x8GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	No	3/0	No	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR0029EA	1xE5-2637 v3 4C/3.5GHz/15MB/135W/2133MHz	4XG0F28836	1x8GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	No	3/0	No	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR002AEA	1xE5-2690 v3 12C/2.6GHz/30MB/135W/2133MHz	4XG0F28811	1x8GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	No	3/0	No	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR002BEA	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	4XG0F28820	1x8GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	No	3/0	No	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR002CEA	1xE5-2650L v3 12C/1.8GHz/30MB/65W/2133MHz	4XG0F28822	1x8GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	No	3/0	No	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR002DEA	1xE5-2680 v3 12C/2.5GHz/30MB/120W/2133MHz	4XG0F28813	1x8GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	No	3/0	No	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR002EEA	1xE5-2640 v3 8C/2.6GHz/20MB/90W/1866MHz	4XG0F28817	1x8GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	No	3/0	No	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR002FEA	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	4XG0F28819	1x8GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	No	3/0	No	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR002GEA	1xE5-2695 v3 14C/2.3GHz/35MB/120W/2133MHz	4XG0F28810	1x8GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	No	3/0	No	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
70DR002HEA	1xE5-2650 v3 10C/2.3GHz/25MB/105W/2133MHz	4XG0F28816	1x8GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	No	3/0	No	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	
Announced November 2014																			
70DR002QEA	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	4XG0F28818	1x16GB 2133MHz RDIMM	720i	8x2.5" HS	Open	No	No	3/0	DVD±RW	No	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum	

For a list of all supported options, Please see [ThinkServer RD650 Options](#) sheet.

© Copyright Lenovo 2015. All rights reserved.

ThinkServer RD650 with 2.5" Disk Bay - TopSeller - 70DR

ThinkServer RD650 with 2.5" Disk Bay - TopSeller - 70D2

Type-model	Processor	2nd CPU	Memory	AnyRAID	Disk bays	Disk drives	M.2/SD module	PCIe x8 SSD adpr	Slots (HL/ FHFL)	Optical	Tape drive	AnyFabric	TPM	Chassis intrusion switch	System mgmt	Preloaded OS	Base wty	Power
Announced September 2014																		
70D20007EA	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	4XG0F28820	1x32GB 2133MHz LRDIMM	720ix+1GB Flash	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	TPM	No	TSM Premium	No	3-year	750Wx1 Platinum
70D20008EA	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	4XG0F28820	1x8GB 2133MHz RDIMM	720ix+2GB Flash	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	TPM	No	TSM Premium	No	3-year	750Wx2 Platinum
70D20009EA	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	4XG0F28820	1x16GB 2133MHz RDIMM	720ix+2GB Flash	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	TPM	No	TSM Premium	No	3-year	750Wx2 Platinum
70D2001DEA	1xE5-2603 v3 6C/1.6GHz/15MB/85W/1600MHz	4XG0F28821	1x8GB 2133MHz RDIMM	720ix+1GB RAM	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D2001EEA	1xE5-2609 v3 6C/1.9GHz/15MB/85W/1600MHz	4XG0F28820	1x8GB 2133MHz RDIMM	720ix+1GB RAM	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D2001FEA	1xE5-2620 v3 6C/2.4GHz/15MB/85W/1866MHz	4XG0F28819	1x8GB 2133MHz RDIMM	720ix+1GB RAM	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D2001GEA	1xE5-2630L v3 8C/1.8GHz/20MB/55W/1866MHz	4XG0F28823	1x8GB 2133MHz RDIMM	720ix+1GB RAM	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D2001HEA	1xE5-2630 v3 8C/2.4GHz/20MB/85W/1866MHz	4XG0F28818	1x8GB 2133MHz RDIMM	720ix+1GB RAM	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D2001JEA	1xE5-2637 v3 4C/3.5GHz/15MB/135W/2133MHz	4XG0F28836	1x8GB 2133MHz RDIMM	720ix+1GB RAM	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D2001KEA	1xE5-2640 v3 8C/2.6GHz/20MB/90W/1866MHz	4XG0F28817	1x8GB 2133MHz RDIMM	720ix+1GB RAM	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D2001LEA	1xE5-2643 v3 6C/3.4GHz/20MB/135W/2133MHz	4XG0F28835	1x8GB 2133MHz RDIMM	720ix+1GB RAM	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D2001MEA	1xE5-2650L v3 12C/1.8GHz/30MB/65W/2133MHz	4XG0F28822	1x8GB 2133MHz RDIMM	720ix+1GB RAM	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D2001NEA	1xE5-2650 v3 10C/2.3GHz/25MB/105W/2133MHz	4XG0F28816	1x8GB 2133MHz RDIMM	720ix+1GB RAM	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D2001PEA	1xE5-2660 v3 10C/2.6GHz/25MB/105W/2133MHz	4XG0F28815	1x8GB 2133MHz RDIMM	720ix+1GB RAM	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D2001QEA	1xE5-2667 v3 8C/3.2GHz/20MB/135W/2133MHz	4XG0F28834	1x8GB 2133MHz RDIMM	720ix+1GB RAM	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D2001REA	1xE5-2670 v3 12C/2.3GHz/30MB/120W/2133MHz	4XG0F28814	1x8GB 2133MHz RDIMM	720ix+1GB RAM	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D2001SEA	1xE5-2680 v3 12C/2.5GHz/30MB/120W/2133MHz	4XG0F28813	1x8GB 2133MHz RDIMM	720ix+1GB RAM	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D2001TEA	1xE5-2683 v3 14C/2GHz/35MB/120W/2133MHz	4XG0F28812	1x8GB 2133MHz RDIMM	720ix+1GB RAM	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D2001UEA	1xE5-2685 v3 12C/2.6GHz/30MB/120W/2133MHz	4XG0F28838	1x8GB 2133MHz RDIMM	720ix+1GB RAM	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D2001VEA	1xE5-2690 v3 12C/2.6GHz/30MB/135W/2133MHz	4XG0F28811	1x8GB 2133MHz RDIMM	720ix+1GB RAM	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D2001WEA	1xE5-2695 v3 14C/2.3GHz/35MB/120W/2133MHz	4XG0F28810	1x8GB 2133MHz RDIMM	720ix+1GB RAM	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D2001XEA	1xE5-2697 v3 14C/2.6GHz/35MB/145W/2133MHz	4XG0F28809	1x8GB 2133MHz RDIMM	720ix+1GB RAM	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D2001YEA	1xE5-2698 v3 16C/2.3GHz/40MB/135W/2133MHz	4XG0F28808	1x8GB 2133MHz RDIMM	720ix+1GB RAM	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D20020EA	1xE5-2699 v3 18C/2.3GHz/45MB/145W/2133MHz	4XG0F28807	1x8GB 2133MHz RDIMM	720ix+1GB RAM	24x2.5" HS	Open	No	No	3/0	None	None	GbEx4 RJ45	No	Switch	TSM	No	3-year	750Wx1 Platinum
70D20021EA	2xE5-2650 v3 10C/2.3GHz/25MB/105W/2133MHz	-	4x8GB 2133MHz RDIMM	720ix+2GB Flash	24x2.5" HS	Open	No	No	8/0	None	None	10GbEx2 SFP+	No	Switch	TSM	No	3-year	750Wx2 Platinum
70D20022EA	2xE5-2690 v3 12C/2.6GHz/30MB/135W/2133MHz	-	4x8GB 2133MHz RDIMM	720ix+2GB Flash	24x2.5" HS	Open	No	No	8/0	None	None	10GbEx2 SFP+	No	Switch	TSM	No	3-year	750Wx2 Platinum
70D20023EA	2xE5-2667 v3 8C/3.2GHz/20MB/135W/2133MHz	-	4x8GB 2133MHz RDIMM	720ix+2GB Flash	24x2.5" HS	Open	No	No	8/0	None	None	10GbEx2 SFP+	No	Switch	TSM	No	3-year	750Wx2 Platinum

For a list of all supported options, Please see [ThinkServer RD650 Options](#) sheet.

ThinkServer RD650 Options

Partial list of accessories supported on ThinkServer RD650

Processors	
4XG0F28807	ThinkServer RD650 Intel Xeon E5-2699 v3 (18C, 145W, 2.3GHz) Processor Option Kit
4XG0F28808	ThinkServer RD650 Intel Xeon E5-2698 v3 (16C, 135W, 2.3GHz) Processor Option Kit
4XG0F28809	ThinkServer RD650 Intel Xeon E5-2697 v3 (14C, 145W, 2.6GHz) Processor Option Kit
4XG0F28810	ThinkServer RD650 Intel Xeon E5-2695 v3 (14C, 120W, 2.3GHz) Processor Option Kit
4XG0F28811	ThinkServer RD650 Intel Xeon E5-2690 v3 (12C, 135W, 2.6GHz) Processor Option Kit
4XG0F28812	ThinkServer RD650 Intel Xeon E5-2683 v3 (14C, 120W, 2.0GHz) Processor Option Kit
4XG0F28813	ThinkServer RD650 Intel Xeon E5-2680 v3 (12C, 120W, 2.5GHz) Processor Option Kit
4XG0F28814	ThinkServer RD650 Intel Xeon E5-2670 v3 (12C, 120W, 2.3GHz) Processor Option Kit
4XG0F28815	ThinkServer RD650 Intel Xeon E5-2660 v3 (10C, 105W, 2.6GHz) Processor Option Kit
4XG0F28816	ThinkServer RD650 Intel Xeon E5-2650 v3 (10C, 105W, 2.3GHz) Processor Option Kit
4XG0F28817	ThinkServer RD650 Intel Xeon E5-2640 v3 (8C, 90W, 2.6GHz) Processor Option Kit
4XG0F28818	ThinkServer RD650 Intel Xeon E5-2630 v3 (8C, 85W, 2.4GHz) Processor Option Kit
4XG0F28819	ThinkServer RD650 Intel Xeon E5-2620 v3 (6C, 85W, 2.4GHz) Processor Option Kit
4XG0F28820	ThinkServer RD650 Intel Xeon E5-2609 v3 (6C, 85W, 1.9GHz) Processor Option Kit
4XG0F28821	ThinkServer RD650 Intel Xeon E5-2603 v3 (6C, 85W, 1.6GHz) Processor Option Kit
4XG0F28822	ThinkServer RD650 Intel Xeon E5-2650L v3 (12C, 65W, 1.8GHz) Processor Option Kit
4XG0F28823	ThinkServer RD650 Intel Xeon E5-2630L v3 (8C, 55W, 1.8GHz) Processor Option Kit
4XG0F28834	ThinkServer RD650 Intel Xeon E5-2667 v3 (8C, 135W, 3.2GHz) Processor Option Kit
4XG0F28835	ThinkServer RD650 Intel Xeon E5-2643 v3 (6C, 135W, 3.4GHz) Processor Option Kit
4XG0F28836	ThinkServer RD650 Intel Xeon E5-2637 v3 (4C, 135W, 3.5GHz) Processor Option Kit
4XG0F28837	ThinkServer RD650 Intel Xeon E5-2623 v3 (4C, 105W, 3.0GHz) Processor Option Kit
4XG0F28838	ThinkServer RD650 Intel Xeon E5-2685 v3 (12C, 120W, 2.6GHz) Processor Option Kit
Memory	
4X70F28588	ThinkServer 4GB DDR4-2133MHz (1Rx8) RDIMM
4X70F28589	ThinkServer 8GB DDR4-2133MHz (1Rx4) RDIMM
4X70F28590	ThinkServer 16GB DDR4-2133MHz (2Rx4) RDIMM
4X70F28591	ThinkServer 32GB DDR4-2133MHz (4Rx4) LRDIMM
Drives - 3.5"	
3.5" Hot Swap SATA Hard Drives	
4XB0F28712	ThinkServer Gen 5 3.5" 1TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive
4XB0F28713	ThinkServer Gen 5 3.5" 2TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive
4XB0F28714	ThinkServer Gen 5 3.5" 3TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive
4XB0G45715	ThinkServer Gen 5 3.5" 4TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive
3.5" Hot Swap 7.2K SAS Hard Drives	
4XB0G45716	ThinkServer Gen 5 3.5" 1TB 7.2K Enterprise SAS 6Gbps Hot Swap Hard Drive
4XB0G45717	ThinkServer Gen 5 3.5" 2TB 7.2K Enterprise SAS 6Gbps Hot Swap Hard Drive
4XB0G45718	ThinkServer Gen 5 3.5" 3TB 7.2K Enterprise SAS 6Gbps Hot Swap Hard Drive
4XB0G45719	ThinkServer Gen 5 3.5" 4TB 7.2K Enterprise SAS 6Gbps Hot Swap Hard Drive
3.5" Hot Swap SATA Solid State Drives	
4XB0G45720	ThinkServer Gen 5 3.5" 120GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive
4XB0G45721	ThinkServer Gen 5 3.5" 240GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive
4XB0G45722	ThinkServer Gen 5 3.5" 300GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive
4XB0G45723	ThinkServer Gen 5 3.5" 480GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive
4XB0G45724	ThinkServer Gen 5 3.5" 600GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive
4XB0G45725	ThinkServer Gen 5 3.5" 800GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive
3.5" Hot Swap SAS Solid State Drives	
4XB0G45726	ThinkServer Gen 5 3.5" 200GB Enterprise Performance SAS 12Gbps Hot Swap Solid State Drive
4XB0G45727	ThinkServer Gen 5 3.5" 400GB Enterprise Performance SAS 12Gbps Hot Swap Solid State Drive
4XB0G45728	ThinkServer Gen 5 3.5" 800GB Enterprise Performance SAS 12Gbps Hot Swap Solid State Drive
Drives - 2.5"	
2.5" Hot Swap SATA Hard Drives	
4XB0G45729	ThinkServer Gen 5 2.5" 500GB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive
4XB0G45730	ThinkServer Gen 5 2.5" 1TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive
2.5" Hot Swap 10K SAS Hard Drives	
4XB0G45731	ThinkServer Gen 5 2.5" 300GB 10K Enterprise SAS 6Gbps Hot Swap Hard Drive
4XB0G45732	ThinkServer Gen 5 2.5" 600GB 10K Enterprise SAS 6Gbps Hot Swap Hard Drive
4XB0G45733	ThinkServer Gen 5 2.5" 900GB 10K Enterprise SAS 6Gbps Hot Swap Hard Drive
4XB0G45734	ThinkServer Gen 5 2.5" 1.2TB 10K Enterprise SAS 6Gbps Hot Swap Hard Drive
2.5" Hot Swap 15K SAS Hard Drives	
4XB0G45735	ThinkServer Gen 5 2.5" 146GB 15K Enterprise SAS 6Gbps Hot Swap Hard Drive
4XB0G45736	ThinkServer Gen 5 2.5" 300GB 15K Enterprise SAS 6Gbps Hot Swap Hard Drive
4XB0G45737	ThinkServer Gen 5 2.5" 450GB 15K Enterprise SAS 6Gbps Hot Swap Hard Drive
4XB0G45738	ThinkServer Gen 5 2.5" 600GB 15K Enterprise SAS 6Gbps Hot Swap Hard Drive
2.5" Hot Swap SATA Solid State Drives	
4XB0G45739	ThinkServer Gen 5 2.5" 120GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive
4XB0G45740	ThinkServer Gen 5 2.5" 240GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive
4XB0G45741	ThinkServer Gen 5 2.5" 300GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive
4XB0G45742	ThinkServer Gen 5 2.5" 480GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive
4XB0G45743	ThinkServer Gen 5 2.5" 600GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive
4XB0G45744	ThinkServer Gen 5 2.5" 800GB Value Read-Optimized SATA 6Gbps Hot Swap Solid State Drive

PCIe Solid State Drives	
4XB0F28661	ThinkServer 1.6TB ioMemory SX300 Performance PCIe 2.0 Solid State Drive by FusionIO
4XB0F28662	ThinkServer 3.2TB ioMemory SX300 Performance PCIe 2.0 Solid State Drive by FusionIO
AnyRAID	
4XB0F28690	ThinkServer RAID 110i RAID 5 Upgrade
4XB0F28691	ThinkServer RAID 510i AnyRAID Adapter
4XB0F28692	ThinkServer RAID 510i RAID 5 Upgrade
4XB0F28693	ThinkServer RAID 720i AnyRAID Adapter
4XB0F28694	ThinkServer RAID 720ix AnyRAID Adapter with Expander
4XB0F28695	ThinkServer RAID 720i 1GB Modular DRAM Upgrade
4XB0F28696	ThinkServer RAID 720i 1GB Modular Flash and Supercapacitor Upgrade
4XB0F28697	ThinkServer RAID 720i 2GB Modular Flash and Supercapacitor Upgrade
4XB0F28698	ThinkServer RAID 720i 4GB Modular Flash and Supercapacitor Upgrade
Connectivity & Host Bus Adapters	
PCIe Ethernet Adapters - 1Gbps	
4XC0F28730	ThinkServer I350-T2 PCIe 1Gb 2 Port Base-T Ethernet Adapter by Intel
4XC0F28731	ThinkServer I350-T4 PCIe 1Gb 4 Port Base-T Ethernet Adapter by Intel
PCIe Converged Network Adapters - 10Gbps	
4XC0F28732	ThinkServer X540-T2 PCIe 10Gb 2 Port Base-T Ethernet Adapter by Intel
4XC0F28733	ThinkServer X520-SR2 PCIe 10Gb 2 Port SFP+ Ethernet Adapter by Intel
4XC0F28734	ThinkServer X520-DA2 PCIe 10Gb 2 Port SFP+ Ethernet Adapter by Intel
4XC0F28735	ThinkServer 10Gb SR Optical Module by Intel
4XC0F28736	ThinkServer OCe14102-UX-L PCIe 10Gb 2 Port SFP+ Converged Network Adapter by Emulex
4XC0F28737	ThinkServer 10Gb SR Optical Module by Emulex
PCIe Converged Network Adapters - 40Gbps	
4XC0F28738	ThinkServer OCe14401-UX-L PCIe 40Gb 1 Port QSFP+ Converged Network Adapter by Emulex
4XC0F28739	ThinkServer 40Gb SR Optical Module by Emulex
PCIe Fibre Channel Adapters	
4XB0F28704	ThinkServer LPe16002B-M8-L PCIe 8Gb 2 Port Fibre Channel Adapter by Emulex
4XB0F28705	ThinkServer LPe16002B-M6-L PCIe 16Gb 2 Port Fibre Channel Adapter by Emulex
4XC0F28745	ThinkServer QLE2672 PCIe 16Gb 2 Port Fibre Channel Adapter by Qlogic
SAS Controllers & Upgrades	
4XB0F28699	ThinkServer 9286CV-8e PCIe 6Gb 8 Port External SAS RAID Adapter by LSI
4XB0F28700	ThinkServer CacheVault Data Protection Upgrade
4XB0F28701	ThinkServer RAID FastPath Key
4XB0F28702	ThinkServer RAID CacheCade Pro 2.0 Key
Backup Options	
4XF0G45866	ThinkServer LTO-6 Linear Tape Drive Kit by Tandberg
4XB0F28689	ThinkServer 2.5TB SAS 6Gbps LTO-6 Tape
Redundant Power Supply	
4X20F28575	ThinkServer Gen 5 750W Platinum Hot Swap Power Supply
4X20F28576	ThinkServer Gen 5 750W Titanium Hot Swap Power Supply
4X20F28577	ThinkServer Gen 5 1100W Platinum Hot Swap Power Supply
4X20F28578	ThinkServer Gen 5 1600W Platinum Hot Swap Power Supply
System Options	
4XF0G45872	ThinkServer Gen 5 2U 4-Post Slide Rail Kit
4XF0G45873	ThinkServer Gen 5 2U Cable Management Arm
4XF0G45874	ThinkServer 2U x8/x8/x8 PCIe Riser Kit
4XF0G45875	ThinkServer Gen 5 2U 2.5" 8-Drive Backplane Kit
4XF0G45876	ThinkServer Gen 5 2U 2.5" 16-Drive Backplane Kit
4XF0G45877	ThinkServer Gen 5 4-Post Static Rail Kit
4XF0G45878	ThinkServer Gen 5 2.5" 2-Drive Rear Backplane Kit
4X90F92980	ThinkServer Gen 5 DisplayPort to VGA Dongle
4XF0G45876	ThinkServer Gen 5 Cable Management Bar
4X90F92964	ThinkServer C13-C14 WW 250V 10A 1.8m Jumper Cord
4XA0E97775	ThinkPad Ultralim USB DVD Burner
Microsoft Windows Server ROK	
4XI0E51561	Windows Server 2012 R2 Standard ROK (2 CPU/2VMs)
4XI0E51562	Windows Server 2012 R2 Datacenter ROK (2 CPU)
4XI0E51563	Windows Server 2012 R2 Essentials ROK (1-2 CPU)


ThinkServer RD540 Overview - Front and Rear



ThinkServer RD540 with 4x3.5" Disk Drive Bays



ThinkServer RD540 with 8x2.5" Disk Drive Bays

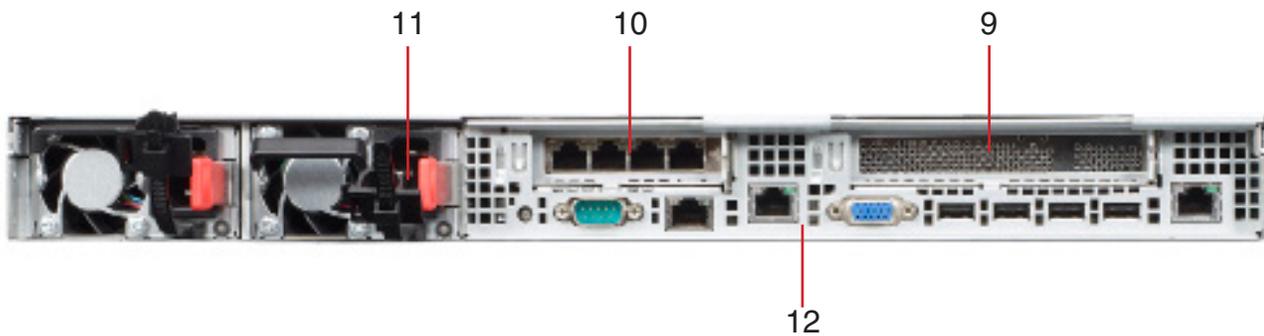

Front View


1. Hot-swap disk drive bays
2. Power Button with LED
3. ID button with LED
4. 2 Network interface status LEDs
5. 2 USB 2.0
6. Intelligent Diagnostics Module (optional)
7. Optical (optional, for 3.5" disk drive bay model)
8. VGA (for 2.5" disk drive bay model)

Rear View

9. PCI Express slots 1*
10. PCI Express slots 2*
11. Hot-swap power supplies
12. Rear ports:
 - 4 USB 2.0
 - 1 serial
 - 2 ethernet
 - 1 RJ-45 (dedicate/share mgmt)
 - 1 VGA


*Adapters are optional

ThinkServer RD540 Overview - Internal

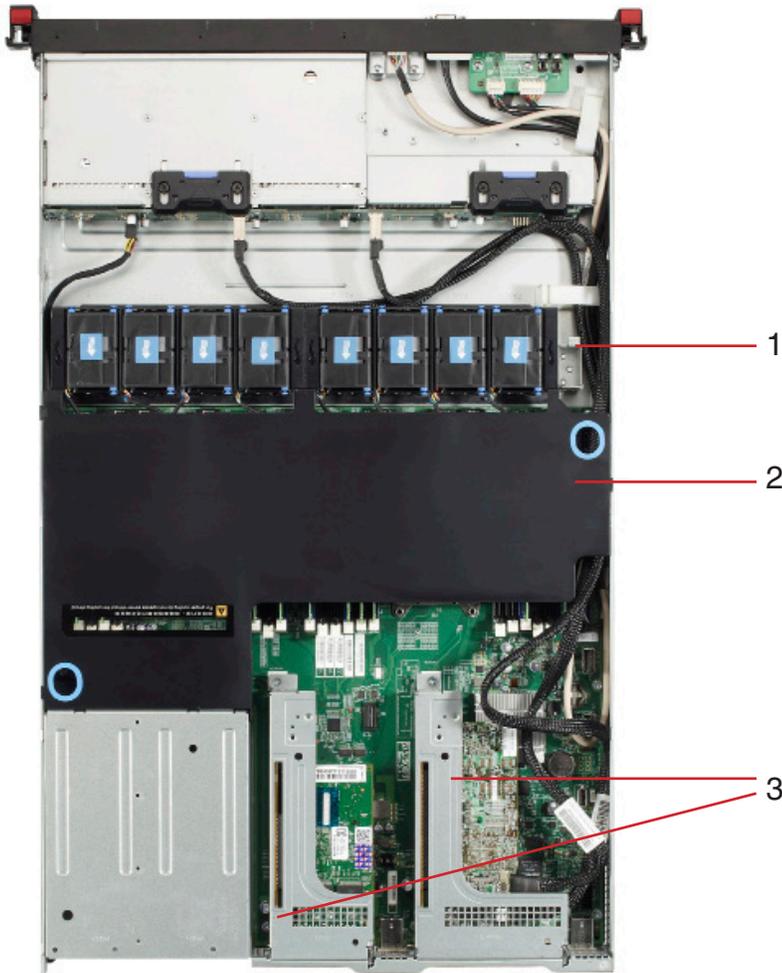

Internal View

1. Non-hot swap cooling fans
2. Processors and memory DIMM sockets (under cooling shroud, see below)
3. PCI Express slots (*Adapters are optional)

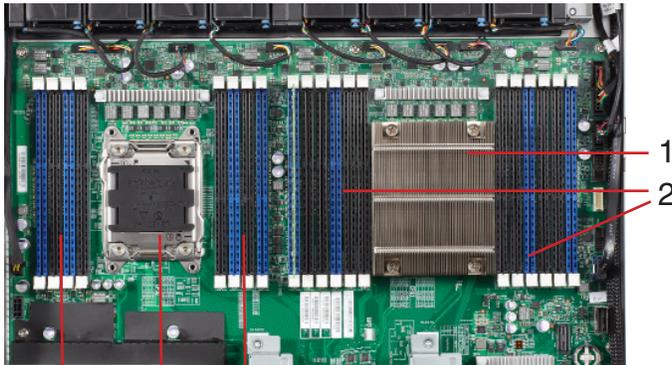


Processors and Memory DIMM Sockets (under cooling shroud)

1. CPU 1
2. 12 Memory DIMM sockets for CPU 1
3. CPU 2 (optional)
4. 8 Memory DIMM sockets for CPU 2 (for dual processors model)

4 3 4

ThinkServer RD540 Platform Specifications

Components	Specifications																											
Chipset	Intel C602J Chipset																											
Mechanical	<ul style="list-style-type: none"> • 1U rack • 19"W x 28.9"D x 1.72"H (with rack handles) • 482.4mm W x 734mm D x 43.6mm H (with rack handles) • 17kg (37.5 lb) when fully configured 																											
Front ports	Two USB 2.0, one analog VGA DB-15 connector (for 8x2.5" disk bays models)																											
Rear ports	Four USB 2.0, one serial (9-pin), two ethernet (RJ-45), one RJ-45 (dedicate/share mgmt), one analog VGA DB-15 connector																											
Expansion Slots	 <p>Two PCI-Express slots via two riser cards, riser card 1 for slot 1, riser card 2 for slot 2 Slot 1: half-length, full-height, PCI Express 3.0 x16 Slot 2: Low Profile, PCI Express 3.0 x8</p>																											
Graphics	Onboard Aspeed AST2300 graphics/management processor, one VGA DB-15 on front (for 8x2.5" disk bays models), one VGA DB-15 on rear; <i>Maximum resolution: 1920x1200@60Hz</i>																											
Hot-swap parts	Disk drives, power supplies																											
Safety, environment, and certifications	Environmental certifications	<ul style="list-style-type: none"> • Energy Star Server 2.0 qualified • RoHS-compliant 																										
	EMC	FCC Class A, CSA CE																										
	240VA	Supports																										
	Temperature - operating	50 °F to 95 °F (10 °C to 35 °C)																										
	Temperature - non operating (no package)	-10 °C to 60 °C																										
	Temperature - non operating (with package)	-40 °C to 70 °C																										
	Altitude - operating	Supported Altitude (unpressurized): 0-10000ft (0-3048m)																										
	Humidity - operating	8%~80%, non-condensing																										
	Humidity - non operating (no package)	8%~80%, non-condensing																										
	Humidity - non operating (with package)	8%~90%, non-condensing																										
Acoustic noise (idle/working mode)	<table border="1"> <thead> <tr> <th>Category</th> <th>Normal Configuration</th> <th>High Performance Configuration</th> </tr> </thead> <tbody> <tr> <td>CPU</td> <td>1</td> <td>2</td> </tr> <tr> <td>HDD</td> <td>2x 900GB 2.5" SAS 6Gb/s</td> <td>8x 900GB 2.5" SAS 6Gb/s</td> </tr> <tr> <td>Memory</td> <td>1x 8GB 1600MHz LVRDIMM</td> <td>20x 8GB 1600MHz LVRDIMM</td> </tr> <tr> <td>PCIe adapters</td> <td>I350</td> <td>I350</td> </tr> <tr> <td>PSU</td> <td>1x 800W</td> <td>2x 800W</td> </tr> <tr> <td>RAID</td> <td>RAID 700 adapter</td> <td>RAID 700 adapter</td> </tr> <tr> <td>Sound Pressure (operating)</td> <td>38.6 dB(A)</td> <td>38.7 dB(A)</td> </tr> <tr> <td>Sound Pressure (idle)</td> <td>39.0 dB(A)</td> <td>40.0 dB(A)</td> </tr> </tbody> </table>	Category	Normal Configuration	High Performance Configuration	CPU	1	2	HDD	2x 900GB 2.5" SAS 6Gb/s	8x 900GB 2.5" SAS 6Gb/s	Memory	1x 8GB 1600MHz LVRDIMM	20x 8GB 1600MHz LVRDIMM	PCIe adapters	I350	I350	PSU	1x 800W	2x 800W	RAID	RAID 700 adapter	RAID 700 adapter	Sound Pressure (operating)	38.6 dB(A)	38.7 dB(A)	Sound Pressure (idle)	39.0 dB(A)	40.0 dB(A)
Category	Normal Configuration	High Performance Configuration																										
CPU	1	2																										
HDD	2x 900GB 2.5" SAS 6Gb/s	8x 900GB 2.5" SAS 6Gb/s																										
Memory	1x 8GB 1600MHz LVRDIMM	20x 8GB 1600MHz LVRDIMM																										
PCIe adapters	I350	I350																										
PSU	1x 800W	2x 800W																										
RAID	RAID 700 adapter	RAID 700 adapter																										
Sound Pressure (operating)	38.6 dB(A)	38.7 dB(A)																										
Sound Pressure (idle)	39.0 dB(A)	40.0 dB(A)																										

Type-model ¹	Intel Xeon Processor(s)	1600MHz LV RDIMM memory	Disk Bays	RAID controller	Storage	Slim optical	Intelligent Diagnostics	Remote mgmt	Discrete ethernet	Cable mgmt	PSU	Windows Server 2012 Preloaded	Base on-site warranty (-year)
70AU000G++	1xE5-2609 v2 4C/2.5GHz/ 10MB/1333MHz	4GBx1	8x2.5"	RAID500	Open	No	No	IPMI	No	No	800Wx1	No	3
70AU000H++	1xE5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	4GBx4	8x2.5"	RAID710 +CacheVault	Open	No	No	IPMI	No	No	800Wx1	No	3
70AU000J++	1xE5-2630 v2 6C/2.6GHz/ 15MB/1600MHz	4GBx4	8x2.5"	RAID710 +CacheVault	Open	No	No	IPMI	No	No	800Wx1	No	3
70AU000K++	1xE5-2640 v2 8C/2GHz/ 20MB/1600MHz	4GBx4	8x2.5"	RAID710 +CacheVault	Open	No	No	IPMI	No	No	800Wx1	No	3
70AU000L++	1xE5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	8GBx1	8x2.5"	RAID500	Open	No	No	IPMI	No	No	800Wx1	No	3
70AU000M++	1xE5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	8GBx2	8x2.5"	RAID500	Open	No	No	IPMI	No	No	800Wx1	No	3

1. Model in *italics* is Global 2. 8 x 2.5" disk bays models do not support optical bay, external USB optical is needed

- For detailed platform specifications, please see [ThinkServer RD540 Platform Specifications sheets](#)
- For optional configurations of ThinkServer RD540, please see [ThinkServer RD540 Optional Configurations sheets](#)

Chipset	Intel C602J Chipset, two LGA2011 sockets for processors	<h3>2U Rack top</h3>																					
Memory type	1600MHz, RDIMM and LV RDIMM, DDR3, 4-channel per processor, 240-pin																						
Memory DIMMs	Twenty DIMM sockets (12 sockets for CPU 1, 8 sockets for CPU 2)																						
Memory protection	ECC, memory mirroring, memory sparing																						
Disk drive bays	Supports 4 x 3.5" or 8 x 2.5" disk drive bays																						
RAID support	<table border="1"> <thead> <tr> <th>RAID adapter*</th> <th>RAID support</th> <th>Cache</th> <th>Transfer rates</th> <th>Optional upgrades</th> </tr> </thead> <tbody> <tr> <td>RAID 500 (LSI® 9240-8i)</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5, 50 support</td> </tr> <tr> <td>RAID 700 (LSI 9260-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>512MB</td> <td>6Gb/s</td> <td>optional intelligent Battery Backup Unit (iBBU08)</td> </tr> <tr> <td>RAID 710 (LSI 9270CV-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>1GB</td> <td>6Gb/s</td> <td> <ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key </td> </tr> </tbody> </table>		RAID adapter*	RAID support	Cache	Transfer rates	Optional upgrades	RAID 500 (LSI® 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support	RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)	RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key 	<h3>Front - 3.5" bay</h3> <h3>Front - 2.5" bay</h3> <h3>Rear</h3>
	RAID adapter*		RAID support	Cache	Transfer rates	Optional upgrades																	
	RAID 500 (LSI® 9240-8i)		0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support																	
	RAID 700 (LSI 9260-8i)		0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)																	
RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60		1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key 																		
* All RAID adapters supports SAS and SATA drives																							
** RAID 50 and 60 are supported on 8x2.5" disk bays models																							
Optical (optional)	4x3.5" bay models: one DVD±RW or DVD ROM, slim, SATA interface 8x2.5" bay models: no optical bay, use optional external USB optical																						
Onboard network	Three onboard Gigabit Ethernet ports (RJ-45): Two Gigabit Ethernet ports by Intel i350; one Gigabit Ethernet port by Intel 82574L, dedicate/share management																						
Discrete network (optional)	<ul style="list-style-type: none"> • Intel Ethernet Server Adapter I350-T2 • Intel Ethernet Server Adapter I350-T4 • Intel 10Gbps Ethernet X520-SR2 Server adapter • Intel 10Gbps Ethernet X520-DA2 Server adapter • Intel 10Gbps Ethernet Fiber Module for X520-DA2 adapter • Intel 10Gbps Ethernet X540-T2 Server adapter 																						
Intelligent Diagnostics Module (IDM, opt)	Supports IDM on selected models, IDM LED lights indicate failing component category,																						
Security features	Power-on password/administrator password, Trusted Platform Module (TCG 1.2-compliant)																						
Systems management (Optional iKVM)	<ul style="list-style-type: none"> • Onboard Aspeed AST2300 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC); optional ThinkServer Management Module Premium for iKVM functions • Control Panel LEDs shows the status of power, ID, network, system • Lenovo SmartGrid Manager • ThinkServer EasyStartup/EasyManage/EasyUpdate 																						
Cable mgmt (opt)	Optional cable management arm on selected models																						
Power supply	One or two 800 watts standard, two maximum, rear access, hot-swap, 80 PLUS® Gold qualified, redundant with two power supplies																						
Environmental certifications	<ul style="list-style-type: none"> • Energy Star Server 2.0 qualified • RoHS-compliant More environmental information and requirements, see ThinkServer RD540 Platform Specifications																						
<h3>Front and Rear Ports</h3> Front: 2 USB 2.0 1 VGA (for 8x2.5" disk bays models) Rear: 4 USB 2.0 1 serial (9-pin) 2 ethernet (RJ-45) 1 RJ-45 (dedicate/share mgmt) 1 VGA																							
<h3>Expansion Slots</h3> Slot 1: half-length, full-height, PCI Express 3.0 x16 Slot 2: Low Profile, PCI Express 3.0 x8																							
<h3>Mechanical</h3> <ul style="list-style-type: none"> • 1U rack • 19"W x 28.9"D x 1.72"H (with rack handles) • 482.4mm W x 734mm D x 43.6mm H (with rack handles) • 17kg (37.5 lb) when fully configured 																							

Type-model ¹	Intel Xeon Processor(s)	1600MHz LV RDIMM memory	Disk Bays	RAID controller	Storage	Slim optical	Intelligent Diagnostics	Remote mgmt	Discrete ethernet	Cable mgmt	PSU	Windows Server 2012 Preloaded	Base on-site warranty (-year)
70AU000N++	1xE5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	4GBx2	8x2.5"	RAID710 +CacheVault	Open	No	No	IPMI	No	No	800Wx2	No	3
70AU000P++	1xE5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	4GBx1	8x2.5"	RAID700 +Battery	Open	No	No	IPMI	No	No	800Wx1	No	3
70AU000Q++	1xE5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	4GBx1	8x2.5"	RAID500	Open	No	No	IPMI	No	No	800Wx1	No	3
70AU000R++	1xE5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	4GBx2	8x2.5"	RAID710 +CacheVault	Open	No	No	IPMI	No	No	800Wx1	No	3

1. Model in italics is Global 2. 8 x 2.5" disk bays models do not support optical bay, external USB optical is needed




- For detailed platform specifications, please see [ThinkServer RD540 Platform Specifications sheets](#)
- For optional configurations of ThinkServer RD540, please see [ThinkServer RD540 Optional Configurations sheets](#)

Chipset	Intel C602J Chipset, two LGA2011 sockets for processors	<p>2U Rack top</p>																					
Memory type	1600MHz, RDIMM and LV RDIMM, DDR3, 4-channel per processor, 240-pin																						
Memory DIMMs	Twenty DIMM sockets (12 sockets for CPU 1, 8 sockets for CPU 2)																						
Memory protection	ECC, memory mirroring, memory sparing																						
Disk drive bays	Supports 4 x 3.5" or 8 x 2.5" disk drive bays																						
RAID support	<table border="1"> <thead> <tr> <th>RAID adapter*</th> <th>RAID support</th> <th>Cache</th> <th>Transfer rates</th> <th>Optional upgrades</th> </tr> </thead> <tbody> <tr> <td>RAID 500 (LSI® 9240-8i)</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5, 50 support</td> </tr> <tr> <td>RAID 700 (LSI 9260-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>512MB</td> <td>6Gb/s</td> <td>optional intelligent Battery Backup Unit (iBBU08)</td> </tr> <tr> <td>RAID 710 (LSI 9270CV-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>1GB</td> <td>6Gb/s</td> <td> <ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key </td> </tr> </tbody> </table>		RAID adapter*	RAID support	Cache	Transfer rates	Optional upgrades	RAID 500 (LSI® 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support	RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)	RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key 	
	RAID adapter*		RAID support	Cache	Transfer rates	Optional upgrades																	
	RAID 500 (LSI® 9240-8i)		0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support																	
	RAID 700 (LSI 9260-8i)		0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)																	
RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60		1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key 																		
	* All RAID adapters supports SAS and SATA drives																						
	** RAID 50 and 60 are supported on 8x2.5" disk bays models																						
Optical (optional)	4x3.5" bay models: one DVD±RW or DVD ROM, slim, SATA interface 8x2.5" bay models: no optical bay, use optional external USB optical	<p>Front - 3.5" bay</p>																					
Onboard network	Three onboard Gigabit Ethernet ports (RJ-45): Two Gigabit Ethernet ports by Intel i350; one Gigabit Ethernet port by Intel 82574L, dedicate/share management	<p>Front - 2.5" bay</p>																					
Discrete network (optional)	<ul style="list-style-type: none"> • Intel Ethernet Server Adapter I350-T2 • Intel Ethernet Server Adapter I350-T4 • Intel 10Gbps Ethernet X520-SR2 Server adapter • Intel 10Gbps Ethernet X520-DA2 Server adapter • Intel 10Gbps Ethernet Fiber Module for X520-DA2 adapter • Intel 10Gbps Ethernet X540-T2 Server adapter 	<p>Rear</p>																					
Intelligent Diagnostics Module (IDM, opt)	Supports IDM on selected models, IDM LED lights indicate failing component category,	<p>Front and Rear Ports</p> <p>Front: 2 USB 2.0 1 VGA (for 8x2.5" disk bays models)</p> <p>Rear: 4 USB 2.0 1 serial (9-pin) 2 ethernet (RJ-45) 1 RJ-45 (dedicate/share mgmt) 1 VGA</p> <p>Expansion Slots</p> <p>Slot 1: half-length, full-height, PCI Express 3.0 x16 Slot 2: Low Profile, PCI Express 3.0 x8</p> <p>Mechanical</p> <ul style="list-style-type: none"> • 1U rack • 19"W x 28.9"D x 1.72"H (with rack handles) • 482.4mm W x 734mm D x 43.6mm H (with rack handles) • 17kg (37.5 lb) when fully configured 																					
Security features	Power-on password/administrator password, Trusted Platform Module (TCG 1.2-compliant)																						
Systems management (Optional iKVM)	<ul style="list-style-type: none"> • Onboard Aspeed AST2300 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC); optional ThinkServer Management Module Premium for iKVM functions • Control Panel LEDs shows the status of power, ID, network, system • Lenovo SmartGrid Manager • ThinkServer EasyStartup/EasyManage/EasyUpdate 																						
Cable mgmt (opt)	Optional cable management arm on selected models																						
Power supply	One or two 800 watts standard, two maximum, rear access, hot-swap, 80 PLUS® Gold qualified, redundant with two power supplies																						
Environmental certifications	<ul style="list-style-type: none"> • Energy Star Server 2.0 qualified • RoHS-compliant <p>More environmental information and requirements, see ThinkServer RD540 Platform Specifications</p>																						

Type-model ¹	Intel Xeon Processor(s)	1600MHz LV RDIMM memory	Disk Bays	RAID controller	Storage	Slim optical	Intelligent Diagnostics	Remote mgmt	Discrete ethernet	Cable mgmt	PSU	Windows Server 2012 Preloaded	Base on-site warranty (-year)
70AU0013++	1xXeon E5-2620 v2 6C/2.1GHz/15MB/1600MHz	4GBx4	8x2.5"	RAID710+CacheVault	Open	No	No	IPMI	No	No	800Wx1	No	3
70AU0014++	1xXeon E5-2620 v2 6C/2.1GHz/15MB/1600MHz	8GBx2	8x2.5"	RAID500	Open	No	No	IPMI	No	No	800Wx1	No	3
70AU0015++	1xXeon E5-2620 v2 6C/2.1GHz/15MB/1600MHz	4GBx2	8x2.5"	RAID710+CacheVault	Open	No	No	IPMI	No	No	800Wx1	No	3
70AU0016++	1xXeon E5-2630 v2 6C/2.6GHz/15MB/1600MHz	4GBx4	8x2.5"	RAID710+CacheVault	Open	No	No	IPMI	No	No	800Wx1	No	3
70AU0017++	1xXeon E5-2620 v2 6C/2.1GHz/15MB/1600MHz	4GBx2	8x2.5"	RAID710+CacheVault	Open	No	No	IPMI	No	No	800Wx2	No	3
70AU0018++	1xXeon E5-2640 v2 8C/2GHz/20MB/1600MHz	4GBx4	8x2.5"	RAID710+CacheVault	Open	No	No	IPMI	No	No	800Wx1	No	3

1. Model in *italics* is Global 2. 8 x 2.5" disk bays models do not support optical bay, external USB optical is needed

- For detailed platform specifications, please see [ThinkServer RD540 Platform Specifications sheets](#)
- For optional configurations of ThinkServer RD540, please see [ThinkServer RD540 Optional Configurations sheets](#)

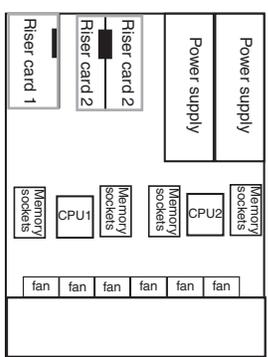Chipset	Intel C602J Chipset, two LGA2011 sockets for processors																					
Memory type	1600MHz, RDIMM and LV RDIMM, DDR3, 4-channel per processor, 240-pin																					
Memory DIMMs	Twenty DIMM sockets (12 sockets for CPU 1, 8 sockets for CPU 2)																					
Memory protection	ECC, memory mirroring, memory sparing																					
Disk drive bays	Supports 4 x 3.5" or 8 x 2.5" disk drive bays																					
RAID support	<table border="1"> <thead> <tr> <th>RAID adapter*</th> <th>RAID support</th> <th>Cache</th> <th>Transfer rates</th> <th>Optional upgrades</th> </tr> </thead> <tbody> <tr> <td>RAID 500 (LSI® 9240-8i)</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5, 50 support</td> </tr> <tr> <td>RAID 700 (LSI 9260-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>512MB</td> <td>6Gb/s</td> <td>optional intelligent Battery Backup Unit (iBBU08)</td> </tr> <tr> <td>RAID 710 (LSI 9270CV-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>1GB</td> <td>6Gb/s</td> <td> <ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key </td> </tr> </tbody> </table>		RAID adapter*	RAID support	Cache	Transfer rates	Optional upgrades	RAID 500 (LSI® 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support	RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)	RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key
	RAID adapter*		RAID support	Cache	Transfer rates	Optional upgrades																
	RAID 500 (LSI® 9240-8i)		0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support																
	RAID 700 (LSI 9260-8i)		0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)																
RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60		1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key 																	
	* All RAID adapters supports SAS and SATA drives																					
	** RAID 50 and 60 are supported on 8x2.5" disk bays models																					
Optical (optional)	4x3.5" bay models: one DVD±RW or DVD ROM, slim, SATA interface 8x2.5" bay models: no optical bay, use optional external USB optical																					
Onboard network	Three onboard Gigabit Ethernet ports (RJ-45): Two Gigabit Ethernet ports by Intel i350; one Gigabit Ethernet port by Intel 82574L, dedicate/share management																					
Discrete network (optional)	<ul style="list-style-type: none"> • Intel Ethernet Server Adapter I350-T2 • Intel Ethernet Server Adapter I350-T4 • Intel 10Gbps Ethernet X520-SR2 Server adapter • Intel 10Gbps Ethernet X520-DA2 Server adapter • Intel 10Gbps Ethernet Fiber Module for X520-DA2 adapter • Intel 10Gbps Ethernet X540-T2 Server adapter 																					
Intelligent Diagnostics Module (IDM, opt)	Supports IDM on selected models, IDM LED lights indicate failing component category,																					
Security features	Power-on password/administrator password, Trusted Platform Module (TCG 1.2-compliant)																					
Systems management (Optional iKVM)	<ul style="list-style-type: none"> • Onboard Aspeed AST2300 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC); optional ThinkServer Management Module Premium for iKVM functions • Control Panel LEDs shows the status of power, ID, network, system • Lenovo SmartGrid Manager • ThinkServer EasyStartup/EasyManage/EasyUpdate 																					
Cable mgmt (opt)	Optional cable management arm on selected models																					
Power supply	One or two 800 watts standard, two maximum, rear access, hot-swap, 80 PLUS® Gold qualified, redundant with two power supplies																					
Environmental certifications	<ul style="list-style-type: none"> • Energy Star Server 2.0 qualified • RoHS-compliant More environmental information and requirements, see ThinkServer RD540 Platform Specifications																					
		Front - 3.5" bay 																				
		Front - 2.5" bay 																				
		Rear 																				
		Front and Rear Ports Front: 2 USB 2.0 1 VGA (for 8x2.5" disk bays models) Rear: 4 USB 2.0 1 serial (9-pin) 2 ethernet (RJ-45) 1 RJ-45 (dedicate/share mgmt) 1 VGA																				
		Expansion Slots Slot 1: half-length, full-height, PCI Express 3.0 x16 Slot 2: Low Profile, PCI Express 3.0 x8																				
		Mechanical <ul style="list-style-type: none"> • 1U rack • 19"W x 28.9"D x 1.72"H (with rack handles) • 482.4mm W x 734mm D x 43.6mm H (with rack handles) • 17kg (37.5 lb) when fully configured 																				

Type-model ¹	Intel Xeon Processor(s)	1600MHz LV RDIMM memory	Disk Bays	RAID controller	Storage	Slim optical	Intelligent Diagnostics	Remote mgmt	Discrete ethernet	Cable mgmt	PSU	Windows Server 2012 Preloaded	Base on-site warranty (-year)
70AU0019++	1xXeon E5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	4GBx1	8x2.5"	RAID700+Battery	Open	No	No	IPMI	No	No	800Wx1	No	3
70AU001A++	1xXeon E5-2609 v2 4C/2.5GHz/ 10MB/1333MHz	4GBx1	8x2.5"	RAID500	Open	No	No	IPMI	No	No	800Wx1	No	3
70AU001B++	1xXeon E5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	8GBx1	8x2.5"	RAID500	Open	No	No	IPMI	No	No	800Wx1	No	3
70AU001C++	1xXeon E5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	8GBx1	8x2.5"	RAID500	Open	No	No	iKVM	No	No	800Wx1	No	3
70AU001D++	1xXeon E5-2630 v2 6C/2.6GHz/ 15MB/1600MHz	8GBx1	8x2.5"	RAID700+Battery	Open	No	No	iKVM	No	No	800Wx2	No	3
70AU001E++	1xXeon E5-2660 v2 10C/2.2GHz/ 25MB/1866MHz	16Gx1	8x2.5"	RAID700+Battery	Open	No	No	iKVM	No	No	800Wx2	No	3

1. Model in italics is Global 2. 8 x 2.5" disk bays models do not support optical bay, external USB optical is needed

- For detailed platform specifications, please see [ThinkServer RD540 Platform Specifications sheets](#)
- For optional configurations of ThinkServer RD540, please see [ThinkServer RD540 Optional Configurations sheets](#)

Chipset	Intel C602J Chipset, two LGA2011 sockets for processors																					
Memory type	1600MHz, RDIMM and LV RDIMM, DDR3, 4-channel per processor, 240-pin																					
Memory DIMMs	Twenty DIMM sockets (12 sockets for CPU 1, 8 sockets for CPU 2)																					
Memory protection	ECC, memory mirroring, memory sparing																					
Disk drive bays	Supports 4 x 3.5" or 8 x 2.5" disk drive bays																					
RAID support	<table border="1"> <thead> <tr> <th>RAID adapter*</th> <th>RAID support</th> <th>Cache</th> <th>Transfer rates</th> <th>Optional upgrades</th> </tr> </thead> <tbody> <tr> <td>RAID 500 (LSI® 9240-8i)</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5, 50 support</td> </tr> <tr> <td>RAID 700 (LSI 9260-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>512MB</td> <td>6Gb/s</td> <td>optional intelligent Battery Backup Unit (iBBU08)</td> </tr> <tr> <td>RAID 710 (LSI 9270CV-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>1GB</td> <td>6Gb/s</td> <td> <ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key </td> </tr> </tbody> </table>		RAID adapter*	RAID support	Cache	Transfer rates	Optional upgrades	RAID 500 (LSI® 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support	RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)	RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key
	RAID adapter*		RAID support	Cache	Transfer rates	Optional upgrades																
	RAID 500 (LSI® 9240-8i)		0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support																
	RAID 700 (LSI 9260-8i)		0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)																
RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60		1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key 																	
	* All RAID adapters supports SAS and SATA drives																					
	** RAID 50 and 60 are supported on 8x2.5" disk bays models																					
Optical (optional)	4x3.5" bay models: one DVD±RW or DVD ROM, slim, SATA interface 8x2.5" bay models: no optical bay, use optional external USB optical																					
Onboard network	Three onboard Gigabit Ethernet ports (RJ-45): Two Gigabit Ethernet ports by Intel i350; one Gigabit Ethernet port by Intel 82574L, dedicate/share management																					
Discrete network (optional)	<ul style="list-style-type: none"> • Intel Ethernet Server Adapter I350-T2 • Intel Ethernet Server Adapter I350-T4 • Intel 10Gbps Ethernet X520-SR2 Server adapter • Intel 10Gbps Ethernet X520-DA2 Server adapter • Intel 10Gbps Ethernet Fiber Module for X520-DA2 adapter • Intel 10Gbps Ethernet X540-T2 Server adapter 																					
Intelligent Diagnostics Module (IDM, opt)	Supports IDM on selected models, IDM LED lights indicate failing component category,																					
Security features	Power-on password/administrator password, Trusted Platform Module (TCG 1.2-compliant)																					
Systems management (Optional iKVM)	<ul style="list-style-type: none"> • Onboard Aspeed AST2300 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC); optional ThinkServer Management Module Premium for iKVM functions • Control Panel LEDs shows the status of power, ID, network, system • Lenovo SmartGrid Manager • ThinkServer EasyStartup/EasyManage/EasyUpdate 																					
Cable mgmt (opt)	Optional cable management arm on selected models																					
Power supply	One or two 800 watts standard, two maximum, rear access, hot-swap, 80 PLUS® Gold qualified, redundant with two power supplies																					
Environmental certifications	<ul style="list-style-type: none"> • Energy Star Server 2.0 qualified • RoHS-compliant More environmental information and requirements, see ThinkServer RD540 Platform Specifications																					
		Front - 3.5" bay 																				
		Front - 2.5" bay 																				
		Rear 																				
		Front and Rear Ports Front: 2 USB 2.0 1 VGA (for 8x2.5" disk bays models) Rear: 4 USB 2.0 1 serial (9-pin) 2 ethernet (RJ-45) 1 RJ-45 (dedicate/share mgmt) 1 VGA																				
		Expansion Slots Slot 1: half-length, full-height, PCI Express 3.0 x16 Slot 2: Low Profile, PCI Express 3.0 x8																				
		Mechanical <ul style="list-style-type: none"> • 1U rack • 19"W x 28.9"D x 1.72"H (with rack handles) • 482.4mm W x 734mm D x 43.6mm H (with rack handles) • 17kg (37.5 lb) when fully configured 																				

Type-model ¹	Intel Xeon Processor(s)	1600MHz LV RDIMM memory	Disk Bays	RAID controller	Storage	Slim optical	Intelligent Diagnostics	Remote mgmt	Discrete ethernet	Cable mgmt	PSU	Windows Server 2012 Preloaded	Base on-site warranty (-year)
70AU000G++	1xXeon E5-2609 v2 4C/2.5GHz/ 10MB/1333MHz	4GBx1	8x2.5"	RAID500	Open	No	No	IPMI	No	No	800Wx1	No	3
70AU000H++	1xXeon E5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	4GBx4	8x2.5"	RAID710+CacheVault	Open	No	No	IPMI	No	No	800Wx1	No	3
70AU000J++	1xXeon E5-2630 v2 6C/2.6GHz/ 15MB/1600MHz	4GBx4	8x2.5"	RAID710+CacheVault	Open	No	No	IPMI	No	No	800Wx1	No	3
70AU000K++	1xXeon E5-2640 v2 8C/2GHz/ 20MB/1600MHz	4GBx4	8x2.5"	RAID710+CacheVault	Open	No	No	IPMI	No	No	800Wx1	No	3
70AU000L++	1xXeon E5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	8GBx1	8x2.5"	RAID500	Open	No	No	IPMI	No	No	800Wx1	No	3
70AU000M++	1xXeon E5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	8GBx2	8x2.5"	RAID500	Open	No	No	IPMI	No	No	800Wx1	No	3
70AU000N++	1xXeon E5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	4GBx2	8x2.5"	RAID710+CacheVault	Open	No	No	IPMI	No	No	800Wx2	No	3

1. Model in italics is Global 2. 8 x 2.5" disk bays models do not support optical bay, external USB optical is needed

- For detailed platform specifications, please see [ThinkServer RD540 Platform Specifications sheets](#)
- For optional configurations of ThinkServer RD540, please see [ThinkServer RD540 Optional Configurations sheets](#)

Chipset	Intel C602J Chipset, two LGA2011 sockets for processors																					
Memory type	1600MHz, RDIMM and LV RDIMM, DDR3, 4-channel per processor, 240-pin																					
Memory DIMMs	Twenty DIMM sockets (12 sockets for CPU 1, 8 sockets for CPU 2)																					
Memory protection	ECC, memory mirroring, memory sparing																					
Disk drive bays	Supports 4 x 3.5" or 8 x 2.5" disk drive bays																					
RAID support	<table border="1"> <thead> <tr> <th>RAID adapter*</th> <th>RAID support</th> <th>Cache</th> <th>Transfer rates</th> <th>Optional upgrades</th> </tr> </thead> <tbody> <tr> <td>RAID 500 (LSI® 9240-8i)</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5, 50 support</td> </tr> <tr> <td>RAID 700 (LSI 9260-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>512MB</td> <td>6Gb/s</td> <td>optional Intelligent Battery Backup Unit (iBBU08)</td> </tr> <tr> <td>RAID 710 (LSI 9270CV-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>1GB</td> <td>6Gb/s</td> <td> <ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key </td> </tr> </tbody> </table>		RAID adapter*	RAID support	Cache	Transfer rates	Optional upgrades	RAID 500 (LSI® 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support	RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional Intelligent Battery Backup Unit (iBBU08)	RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key
	RAID adapter*		RAID support	Cache	Transfer rates	Optional upgrades																
	RAID 500 (LSI® 9240-8i)		0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support																
	RAID 700 (LSI 9260-8i)		0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional Intelligent Battery Backup Unit (iBBU08)																
RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60		1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key 																	
	* All RAID adapters supports SAS and SATA drives																					
	** RAID 50 and 60 are supported on 8x2.5" disk bays models																					
Optical (optional)	4x3.5" bay models: one DVD±RW or DVD ROM, slim, SATA interface 8x2.5" bay models: no optical bay, use optional external USB optical																					
Onboard network	Three onboard Gigabit Ethernet ports (RJ-45): Two Gigabit Ethernet ports by Intel i350; one Gigabit Ethernet port by Intel 82574L, dedicate/share management																					
Discrete network (optional)	<ul style="list-style-type: none"> • Intel Ethernet Server Adapter I350-T2 • Intel Ethernet Server Adapter I350-T4 • Intel 10Gbps Ethernet X520-SR2 Server adapter • Intel 10Gbps Ethernet X520-DA2 Server adapter • Intel 10Gbps Ethernet Fiber Module for X520-DA2 adapter • Intel 10Gbps Ethernet X540-T2 Server adapter 																					
Intelligent Diagnostics Module (IDM, opt)	Supports IDM on selected models, IDM LED lights indicate failing component category,																					
Security features	Power-on password/administrator password, Trusted Platform Module (TCG 1.2-compliant)																					
Systems management (Optional iKVM)	<ul style="list-style-type: none"> • Onboard Aspeed AST2300 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC); optional ThinkServer Management Module Premium for iKVM functions • Control Panel LEDs shows the status of power, ID, network, system • Lenovo SmartGrid Manager • ThinkServer EasyStartup/EasyManage/EasyUpdate 																					
Cable mgmt (opt)	Optional cable management arm on selected models																					
Power supply	One or two 800 watts standard, two maximum, rear access, hot-swap, 80 PLUS® Gold qualified, redundant with two power supplies																					
Environmental certifications	<ul style="list-style-type: none"> • Energy Star Server 2.0 qualified • RoHS-compliant More environmental information and requirements, see ThinkServer RD540 Platform Specifications																					
		Front - 3.5" bay 																				
		Front - 2.5" bay 																				
		Rear 																				
		Front and Rear Ports Front: 2 USB 2.0 1 VGA (for 8x2.5" disk bays models) Rear: 4 USB 2.0 1 serial (9-pin) 2 ethernet (RJ-45) 1 RJ-45 (dedicate/share mgmt) 1 VGA																				
		Expansion Slots Slot 1: half-length, full-height, PCI Express 3.0 x16 Slot 2: Low Profile, PCI Express 3.0 x8																				
		Mechanical <ul style="list-style-type: none"> • 1U rack • 19"W x 28.9"D x 1.72"H (with rack handles) • 482.4mm W x 734mm D x 43.6mm H (with rack handles) • 17kg (37.5 lb) when fully configured 																				

See footnotes for important warranty information
Model(s) announced December 3, 2013

Type-model ¹	Intel Xeon Processor(s)	1600MHz LV RDIMM memory	Disk Bays	RAID controller	Storage	Slim optical	Intelligent Diagnostics	Remote mgmt	Discrete ethernet	Cable mgmt	PSU	Windows Server 2012 Preloaded	Base on-site warranty (-year)
70AU000P++	1xXeon E5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	4GBx1	8x2.5"	RAID700+Battery	Open	No	No	IPMI	No	No	800Wx1	No	3
70AU000Q++	1xXeon E5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	4GBx1	8x2.5"	RAID500	Open	No	No	IPMI	No	No	800Wx1	No	3
70AU000R++	1xXeon E5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	4GBx2	8x2.5"	RAID710+CacheVault	Open	No	No	IPMI	No	No	800Wx1	No	3
70AU0010++	1xXeon E5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	8GBx1	8x2.5"	RAID500	Open	No	No	iKVM	No	No	800Wx1	No	3
70AU0011++	1xXeon E5-2630 v2 6C/2.6GHz/ 15MB/1600MHz	8GBx1	8x2.5"	RAID700+Battery	Open	No	No	iKVM	No	No	800Wx2	No	3
70AU0012++	1xXeon E5-2660 v2 10C/2.2GHz/ 25MB/1866MHz	16Gx1	8x2.5"	RAID700+Battery	Open	No	No	iKVM	No	No	800Wx2	No	3

1. Model in italics is Global 2. 8 x 2.5" disk bays models do not support optical bay, external USB optical is needed

- For detailed platform specifications, please see [ThinkServer RD540 Platform Specifications sheets](#)
- For optional configurations of ThinkServer RD540, please see [ThinkServer RD540 Optional Configurations sheets](#)

Chipset	Intel C602J Chipset, two LGA2011 sockets for processors																					
Memory type	1600MHz, RDIMM and LV RDIMM, DDR3, 4-channel per processor, 240-pin																					
Memory DIMMs	Twenty DIMM sockets (12 sockets for CPU 1, 8 sockets for CPU 2)																					
Memory protection	ECC, memory mirroring, memory sparing																					
Disk drive bays	Supports 4 x 3.5" or 8 x 2.5" disk drive bays																					
RAID support	<table border="1"> <thead> <tr> <th>RAID adapter*</th> <th>RAID support</th> <th>Cache</th> <th>Transfer rates</th> <th>Optional upgrades</th> </tr> </thead> <tbody> <tr> <td>RAID 500 (LSI® 9240-8i)</td> <td>0, 1, 10</td> <td></td> <td>6Gb/s</td> <td>optional upgrade key, add RAID 5, 50 support</td> </tr> <tr> <td>RAID 700 (LSI 9260-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>512MB</td> <td>6Gb/s</td> <td>optional intelligent Battery Backup Unit (iBBU08)</td> </tr> <tr> <td>RAID 710 (LSI 9270CV-8i)</td> <td>0, 1, 10, 5, 50, 6, 60</td> <td>1GB</td> <td>6Gb/s</td> <td> <ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key </td> </tr> </tbody> </table>		RAID adapter*	RAID support	Cache	Transfer rates	Optional upgrades	RAID 500 (LSI® 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support	RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)	RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key
	RAID adapter*		RAID support	Cache	Transfer rates	Optional upgrades																
	RAID 500 (LSI® 9240-8i)		0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support																
	RAID 700 (LSI 9260-8i)		0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)																
RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60		1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key 																	
	* All RAID adapters supports SAS and SATA drives																					
	** RAID 50 and 60 are supported on 8x2.5" disk bays models																					
Optical (optional)	4x3.5" bay models: one DVD±RW or DVD ROM, slim, SATA interface 8x2.5" bay models: no optical bay, use optional external USB optical																					
Onboard network	Three onboard Gigabit Ethernet ports (RJ-45): Two Gigabit Ethernet ports by Intel i350; one Gigabit Ethernet port by Intel 82574L, dedicate/share management																					
Discrete network (optional)	<ul style="list-style-type: none"> • Intel Ethernet Server Adapter I350-T2 • Intel Ethernet Server Adapter I350-T4 • Intel 10Gbps Ethernet X520-SR2 Server adapter • Intel 10Gbps Ethernet X520-DA2 Server adapter • Intel 10Gbps Ethernet Fiber Module for X520-DA2 adapter • Intel 10Gbps Ethernet X540-T2 Server adapter 																					
Intelligent Diagnostics Module (IDM, opt)	Supports IDM on selected models, IDM LED lights indicate failing component category,																					
Security features	Power-on password/administrator password, Trusted Platform Module (TCG 1.2-compliant)																					
Systems management (Optional iKVM)	<ul style="list-style-type: none"> • Onboard Aspeed AST2300 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC); optional ThinkServer Management Module Premium for iKVM functions • Control Panel LEDs shows the status of power, ID, network, system • Lenovo SmartGrid Manager • ThinkServer EasyStartup/EasyManage/EasyUpdate 																					
Cable mgmt (opt)	Optional cable management arm on selected models																					
Power supply	One or two 800 watts standard, two maximum, rear access, hot-swap, 80 PLUS® Gold qualified, redundant with two power supplies																					
Environmental certifications	<ul style="list-style-type: none"> • Energy Star Server 2.0 qualified • RoHS-compliant More environmental information and requirements, see ThinkServer RD540 Platform Specifications																					
		2U Rack top Front - 3.5" bay Front - 2.5" bay Rear Front and Rear Ports Front: 2 USB 2.0 1 VGA (for 8x2.5" disk bays models) Rear: 4 USB 2.0 1 serial (9-pin) 2 ethernet (RJ-45) 1 RJ-45 (dedicate/share mgmt) 1 VGA Expansion Slots Slot 1: half-length, full-height, PCI Express 3.0 x16 Slot 2: Low Profile, PCI Express 3.0 x8 Mechanical <ul style="list-style-type: none"> • 1U rack • 19"W x 28.9"D x 1.72"H (with rack handles) • 482.4mm W x 734mm D x 43.6mm H (with rack handles) • 17kg (37.5 lb) when fully configured 																				

ThinkServer RD540 Optional Configurations - Processor and Memory

Rack kit	Included in models																																																																																																																																																																																																																																																																																																																																								
Processor	<p>Two LGA2011 sockets, supports up to two processors from Intel Xeon E5-2600 or Xeon E5-2600 v2 families, up to 8 cores (E5-2600 series)/12 cores (E5-2600 v2 series), two QPI links up to 8.0GT/s each, up to 20MB (E5-2600 series)/30MB (E5-2600 v2 series) cache, integrated 4-channel DDR3 memory controller up to 1600MHz (E5-2600 series)/1866MHz (E5-2600 v2 series).</p> <p>The following processor options are available:</p> <table border="1"> <thead> <tr> <th rowspan="2">Processor Number</th> <th colspan="8">Processors Specifications*</th> <th rowspan="2">Part Number</th> </tr> <tr> <th># of Cores</th> <th># of Threads</th> <th>Clock Speed</th> <th>Max Turbo Frequency</th> <th>Cache</th> <th>QPI Speed</th> <th>Max TDP</th> <th>Memory Speed</th> </tr> </thead> <tbody> <tr> <td colspan="10">Intel Xeon E5-2600 Series</td> </tr> <tr> <td>Xeon E5-2680</td> <td>8</td> <td>16</td> <td>2.7 GHz</td> <td>3.5 GHz</td> <td>20MB</td> <td>8 GT/s</td> <td>130 W</td> <td>DDR3-1600</td> <td>0A89430</td> </tr> <tr> <td>Xeon E5-2670</td> <td>8</td> <td>16</td> <td>2.6 GHz</td> <td>3.3 GHz</td> <td>20MB</td> <td>8 GT/s</td> <td>115 W</td> <td>DDR3-1600</td> <td>0A89431</td> </tr> <tr> <td>Xeon E5-2667</td> <td>6</td> <td>12</td> <td>2.9 GHz</td> <td>3.5 GHz</td> <td>15MB</td> <td>8 GT/s</td> <td>130 W</td> <td>DDR3-1600</td> <td>0A89435</td> </tr> <tr> <td>Xeon E5-2665</td> <td>8</td> <td>16</td> <td>2.4 GHz</td> <td>3.1 GHz</td> <td>20MB</td> <td>8 GT/s</td> <td>115 W</td> <td>DDR3-1600</td> <td>0A89432</td> </tr> <tr> <td>Xeon E5-2660</td> <td>8</td> <td>16</td> <td>2.2 GHz</td> <td>3 GHz</td> <td>20MB</td> <td>8 GT/s</td> <td>95 W</td> <td>DDR3-1600</td> <td>0A89462</td> </tr> <tr> <td>Xeon E5-2650L</td> <td>8</td> <td>16</td> <td>1.8 GHz</td> <td>2.3 GHz</td> <td>20MB</td> <td>8 GT/s</td> <td>70 W</td> <td>DDR3-1600</td> <td>0A89434</td> </tr> <tr> <td>Xeon E5-2650</td> <td>8</td> <td>16</td> <td>2 GHz</td> <td>2.8 GHz</td> <td>20MB</td> <td>8 GT/s</td> <td>95 W</td> <td>DDR3-1600</td> <td>0A89433</td> </tr> <tr> <td>Xeon E5-2643</td> <td>4</td> <td>8</td> <td>3.3 GHz</td> <td>3.5 GHz</td> <td>10MB</td> <td>8 GT/s</td> <td>130 W</td> <td>DDR3-1600</td> <td>0A89440</td> </tr> <tr> <td>Xeon E5-2640</td> <td>6</td> <td>12</td> <td>2.5 GHz</td> <td>3 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>95 W</td> <td>DDR3-1333</td> <td>0A89436</td> </tr> <tr> <td>Xeon E5-2630L</td> <td>6</td> <td>12</td> <td>2 GHz</td> <td>2.5 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>60 W</td> <td>DDR3-1333</td> <td>0A89439</td> </tr> <tr> <td>Xeon E5-2630</td> <td>6</td> <td>12</td> <td>2.3 GHz</td> <td>2.8 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>95 W</td> <td>DDR3-1333</td> <td>0A89437</td> </tr> <tr> <td>Xeon E5-2620</td> <td>6</td> <td>12</td> <td>2 GHz</td> <td>2.5 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>95 W</td> <td>DDR3-1333</td> <td>0A89438</td> </tr> <tr> <td>Xeon E5-2609</td> <td>4</td> <td>4</td> <td>2.4 GHz</td> <td></td> <td>10MB</td> <td>6.4 GT/s</td> <td>80 W</td> <td>DDR3-1066</td> <td>0A89441</td> </tr> <tr> <td>Xeon E5-2603</td> <td>4</td> <td>4</td> <td>1.8 GHz</td> <td></td> <td>10MB</td> <td>6.4 GT/s</td> <td>80 W</td> <td>DDR3-1066</td> <td>0A89442</td> </tr> <tr> <td colspan="10">Intel Xeon E5-2600 v2 Series</td> </tr> <tr> <td>Xeon E5-2697 v2</td> <td>12</td> <td>24</td> <td>2.7 GHz</td> <td>3.5 GHz</td> <td>30MB</td> <td>8 GT/s</td> <td>130 W</td> <td>DDR3-1866</td> <td>0C19546</td> </tr> <tr> <td>Xeon E5-2695 v2</td> <td>12</td> <td>24</td> <td>2.4 GHz</td> <td>3.2 GHz</td> <td>30MB</td> <td>8 GT/s</td> <td>115 W</td> <td>DDR3-1866</td> <td>0C19547</td> </tr> <tr> <td>Xeon E5-2690 v2</td> <td>10</td> <td>20</td> <td>3 GHz</td> <td>3.6 GHz</td> <td>25MB</td> <td>8 GT/s</td> <td>130 W</td> <td>DDR3-1866</td> <td>0C19548</td> </tr> <tr> <td>Xeon E5-2680 v2</td> <td>10</td> <td>20</td> <td>2.8 GHz</td> <td>3.6 GHz</td> <td>25MB</td> <td>8 GT/s</td> <td>115 W</td> <td>DDR3-1866</td> <td>0C19549</td> </tr> <tr> <td>Xeon E5-2670 v2</td> <td>10</td> <td>20</td> <td>2.5 GHz</td> <td>3.3 GHz</td> <td>25MB</td> <td>8 GT/s</td> <td>115 W</td> <td>DDR3-1866</td> <td>0C19550</td> </tr> <tr> <td>Xeon E5-2667 v2</td> <td>8</td> <td>16</td> <td>3.3 GHz</td> <td>4 GHz</td> <td>25MB</td> <td>8 GT/s</td> <td>130 W</td> <td>DDR3-1866</td> <td>0C19553</td> </tr> <tr> <td>Xeon E5-2660 v2</td> <td>10</td> <td>20</td> <td>2.2 GHz</td> <td>3 GHz</td> <td>25MB</td> <td>8 GT/s</td> <td>95 W</td> <td>DDR3-1866</td> <td>0C19551</td> </tr> <tr> <td>Xeon E5-2650 v2</td> <td>8</td> <td>16</td> <td>2.6 GHz</td> <td>3.4 GHz</td> <td>20MB</td> <td>8 GT/s</td> <td>95 W</td> <td>DDR3-1866</td> <td>0C19552</td> </tr> <tr> <td>Xeon E5-2650L v2</td> <td>10</td> <td>20</td> <td>1.7 GHz</td> <td>2.1 GHz</td> <td>25MB</td> <td>7.2 GT/s</td> <td>70 W</td> <td>DDR3-1600</td> <td>0C19554</td> </tr> <tr> <td>Xeon E5-2640 v2</td> <td>8</td> <td>16</td> <td>2 GHz</td> <td>2.5 GHz</td> <td>20MB</td> <td>7.2 GT/s</td> <td>95 W</td> <td>DDR3-1600</td> <td>0C19555</td> </tr> <tr> <td>Xeon E5-2630 v2</td> <td>6</td> <td>12</td> <td>2.6 GHz</td> <td>3.1 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>80 W</td> <td>DDR3-1600</td> <td>0C19558</td> </tr> <tr> <td>Xeon E5-2630L v2</td> <td>6</td> <td>12</td> <td>2.4 GHz</td> <td>2.8 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>60 W</td> <td>DDR3-1600</td> <td>0C19556</td> </tr> <tr> <td>Xeon E5-2620 v2</td> <td>6</td> <td>12</td> <td>2.1 GHz</td> <td>2.6 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>80 W</td> <td>DDR3-1600</td> <td>0C19557</td> </tr> <tr> <td>Xeon E5-2609 v2</td> <td>4</td> <td>4</td> <td>2.5 GHz</td> <td></td> <td>10MB</td> <td>6.4 GT/s</td> <td>80 W</td> <td>DDR3-1333</td> <td>0C19559</td> </tr> <tr> <td>Xeon E5-2603 v2</td> <td>4</td> <td>4</td> <td>1.8 GHz</td> <td></td> <td>10MB</td> <td>6.4 GT/s</td> <td>80 W</td> <td>DDR3-1333</td> <td>0C19560</td> </tr> </tbody> </table> <p><i>Notes:</i> All processors specifications is provided by Intel and may be changed at any time without notice. The information herein is provided "as-is". Intel may update this information in non-scheduled. For latest information, please see http://ark.intel.com/</p>	Processor Number	Processors Specifications*								Part Number	# of Cores	# of Threads	Clock Speed	Max Turbo Frequency	Cache	QPI Speed	Max TDP	Memory Speed	Intel Xeon E5-2600 Series										Xeon E5-2680	8	16	2.7 GHz	3.5 GHz	20MB	8 GT/s	130 W	DDR3-1600	0A89430	Xeon E5-2670	8	16	2.6 GHz	3.3 GHz	20MB	8 GT/s	115 W	DDR3-1600	0A89431	Xeon E5-2667	6	12	2.9 GHz	3.5 GHz	15MB	8 GT/s	130 W	DDR3-1600	0A89435	Xeon E5-2665	8	16	2.4 GHz	3.1 GHz	20MB	8 GT/s	115 W	DDR3-1600	0A89432	Xeon E5-2660	8	16	2.2 GHz	3 GHz	20MB	8 GT/s	95 W	DDR3-1600	0A89462	Xeon E5-2650L	8	16	1.8 GHz	2.3 GHz	20MB	8 GT/s	70 W	DDR3-1600	0A89434	Xeon E5-2650	8	16	2 GHz	2.8 GHz	20MB	8 GT/s	95 W	DDR3-1600	0A89433	Xeon E5-2643	4	8	3.3 GHz	3.5 GHz	10MB	8 GT/s	130 W	DDR3-1600	0A89440	Xeon E5-2640	6	12	2.5 GHz	3 GHz	15MB	7.2 GT/s	95 W	DDR3-1333	0A89436	Xeon E5-2630L	6	12	2 GHz	2.5 GHz	15MB	7.2 GT/s	60 W	DDR3-1333	0A89439	Xeon E5-2630	6	12	2.3 GHz	2.8 GHz	15MB	7.2 GT/s	95 W	DDR3-1333	0A89437	Xeon E5-2620	6	12	2 GHz	2.5 GHz	15MB	7.2 GT/s	95 W	DDR3-1333	0A89438	Xeon E5-2609	4	4	2.4 GHz		10MB	6.4 GT/s	80 W	DDR3-1066	0A89441	Xeon E5-2603	4	4	1.8 GHz		10MB	6.4 GT/s	80 W	DDR3-1066	0A89442	Intel Xeon E5-2600 v2 Series										Xeon E5-2697 v2	12	24	2.7 GHz	3.5 GHz	30MB	8 GT/s	130 W	DDR3-1866	0C19546	Xeon E5-2695 v2	12	24	2.4 GHz	3.2 GHz	30MB	8 GT/s	115 W	DDR3-1866	0C19547	Xeon E5-2690 v2	10	20	3 GHz	3.6 GHz	25MB	8 GT/s	130 W	DDR3-1866	0C19548	Xeon E5-2680 v2	10	20	2.8 GHz	3.6 GHz	25MB	8 GT/s	115 W	DDR3-1866	0C19549	Xeon E5-2670 v2	10	20	2.5 GHz	3.3 GHz	25MB	8 GT/s	115 W	DDR3-1866	0C19550	Xeon E5-2667 v2	8	16	3.3 GHz	4 GHz	25MB	8 GT/s	130 W	DDR3-1866	0C19553	Xeon E5-2660 v2	10	20	2.2 GHz	3 GHz	25MB	8 GT/s	95 W	DDR3-1866	0C19551	Xeon E5-2650 v2	8	16	2.6 GHz	3.4 GHz	20MB	8 GT/s	95 W	DDR3-1866	0C19552	Xeon E5-2650L v2	10	20	1.7 GHz	2.1 GHz	25MB	7.2 GT/s	70 W	DDR3-1600	0C19554	Xeon E5-2640 v2	8	16	2 GHz	2.5 GHz	20MB	7.2 GT/s	95 W	DDR3-1600	0C19555	Xeon E5-2630 v2	6	12	2.6 GHz	3.1 GHz	15MB	7.2 GT/s	80 W	DDR3-1600	0C19558	Xeon E5-2630L v2	6	12	2.4 GHz	2.8 GHz	15MB	7.2 GT/s	60 W	DDR3-1600	0C19556	Xeon E5-2620 v2	6	12	2.1 GHz	2.6 GHz	15MB	7.2 GT/s	80 W	DDR3-1600	0C19557	Xeon E5-2609 v2	4	4	2.5 GHz		10MB	6.4 GT/s	80 W	DDR3-1333	0C19559	Xeon E5-2603 v2	4	4	1.8 GHz		10MB	6.4 GT/s	80 W	DDR3-1333	0C19560
Processor Number	Processors Specifications*								Part Number																																																																																																																																																																																																																																																																																																																																
	# of Cores	# of Threads	Clock Speed	Max Turbo Frequency	Cache	QPI Speed	Max TDP	Memory Speed																																																																																																																																																																																																																																																																																																																																	
Intel Xeon E5-2600 Series																																																																																																																																																																																																																																																																																																																																									
Xeon E5-2680	8	16	2.7 GHz	3.5 GHz	20MB	8 GT/s	130 W	DDR3-1600	0A89430																																																																																																																																																																																																																																																																																																																																
Xeon E5-2670	8	16	2.6 GHz	3.3 GHz	20MB	8 GT/s	115 W	DDR3-1600	0A89431																																																																																																																																																																																																																																																																																																																																
Xeon E5-2667	6	12	2.9 GHz	3.5 GHz	15MB	8 GT/s	130 W	DDR3-1600	0A89435																																																																																																																																																																																																																																																																																																																																
Xeon E5-2665	8	16	2.4 GHz	3.1 GHz	20MB	8 GT/s	115 W	DDR3-1600	0A89432																																																																																																																																																																																																																																																																																																																																
Xeon E5-2660	8	16	2.2 GHz	3 GHz	20MB	8 GT/s	95 W	DDR3-1600	0A89462																																																																																																																																																																																																																																																																																																																																
Xeon E5-2650L	8	16	1.8 GHz	2.3 GHz	20MB	8 GT/s	70 W	DDR3-1600	0A89434																																																																																																																																																																																																																																																																																																																																
Xeon E5-2650	8	16	2 GHz	2.8 GHz	20MB	8 GT/s	95 W	DDR3-1600	0A89433																																																																																																																																																																																																																																																																																																																																
Xeon E5-2643	4	8	3.3 GHz	3.5 GHz	10MB	8 GT/s	130 W	DDR3-1600	0A89440																																																																																																																																																																																																																																																																																																																																
Xeon E5-2640	6	12	2.5 GHz	3 GHz	15MB	7.2 GT/s	95 W	DDR3-1333	0A89436																																																																																																																																																																																																																																																																																																																																
Xeon E5-2630L	6	12	2 GHz	2.5 GHz	15MB	7.2 GT/s	60 W	DDR3-1333	0A89439																																																																																																																																																																																																																																																																																																																																
Xeon E5-2630	6	12	2.3 GHz	2.8 GHz	15MB	7.2 GT/s	95 W	DDR3-1333	0A89437																																																																																																																																																																																																																																																																																																																																
Xeon E5-2620	6	12	2 GHz	2.5 GHz	15MB	7.2 GT/s	95 W	DDR3-1333	0A89438																																																																																																																																																																																																																																																																																																																																
Xeon E5-2609	4	4	2.4 GHz		10MB	6.4 GT/s	80 W	DDR3-1066	0A89441																																																																																																																																																																																																																																																																																																																																
Xeon E5-2603	4	4	1.8 GHz		10MB	6.4 GT/s	80 W	DDR3-1066	0A89442																																																																																																																																																																																																																																																																																																																																
Intel Xeon E5-2600 v2 Series																																																																																																																																																																																																																																																																																																																																									
Xeon E5-2697 v2	12	24	2.7 GHz	3.5 GHz	30MB	8 GT/s	130 W	DDR3-1866	0C19546																																																																																																																																																																																																																																																																																																																																
Xeon E5-2695 v2	12	24	2.4 GHz	3.2 GHz	30MB	8 GT/s	115 W	DDR3-1866	0C19547																																																																																																																																																																																																																																																																																																																																
Xeon E5-2690 v2	10	20	3 GHz	3.6 GHz	25MB	8 GT/s	130 W	DDR3-1866	0C19548																																																																																																																																																																																																																																																																																																																																
Xeon E5-2680 v2	10	20	2.8 GHz	3.6 GHz	25MB	8 GT/s	115 W	DDR3-1866	0C19549																																																																																																																																																																																																																																																																																																																																
Xeon E5-2670 v2	10	20	2.5 GHz	3.3 GHz	25MB	8 GT/s	115 W	DDR3-1866	0C19550																																																																																																																																																																																																																																																																																																																																
Xeon E5-2667 v2	8	16	3.3 GHz	4 GHz	25MB	8 GT/s	130 W	DDR3-1866	0C19553																																																																																																																																																																																																																																																																																																																																
Xeon E5-2660 v2	10	20	2.2 GHz	3 GHz	25MB	8 GT/s	95 W	DDR3-1866	0C19551																																																																																																																																																																																																																																																																																																																																
Xeon E5-2650 v2	8	16	2.6 GHz	3.4 GHz	20MB	8 GT/s	95 W	DDR3-1866	0C19552																																																																																																																																																																																																																																																																																																																																
Xeon E5-2650L v2	10	20	1.7 GHz	2.1 GHz	25MB	7.2 GT/s	70 W	DDR3-1600	0C19554																																																																																																																																																																																																																																																																																																																																
Xeon E5-2640 v2	8	16	2 GHz	2.5 GHz	20MB	7.2 GT/s	95 W	DDR3-1600	0C19555																																																																																																																																																																																																																																																																																																																																
Xeon E5-2630 v2	6	12	2.6 GHz	3.1 GHz	15MB	7.2 GT/s	80 W	DDR3-1600	0C19558																																																																																																																																																																																																																																																																																																																																
Xeon E5-2630L v2	6	12	2.4 GHz	2.8 GHz	15MB	7.2 GT/s	60 W	DDR3-1600	0C19556																																																																																																																																																																																																																																																																																																																																
Xeon E5-2620 v2	6	12	2.1 GHz	2.6 GHz	15MB	7.2 GT/s	80 W	DDR3-1600	0C19557																																																																																																																																																																																																																																																																																																																																
Xeon E5-2609 v2	4	4	2.5 GHz		10MB	6.4 GT/s	80 W	DDR3-1333	0C19559																																																																																																																																																																																																																																																																																																																																
Xeon E5-2603 v2	4	4	1.8 GHz		10MB	6.4 GT/s	80 W	DDR3-1333	0C19560																																																																																																																																																																																																																																																																																																																																
Memory type	1600MHz, RDIMM and LV RDIMM, DDR3, 4-channel per processor, 240-pin																																																																																																																																																																																																																																																																																																																																								
Memory DIMM sockets	twenty DIMM sockets (12 sockets for CPU 1, 8 sockets for CPU 2)																																																																																																																																																																																																																																																																																																																																								
Memory capacity	Up to 320GB (16GBx20)																																																																																																																																																																																																																																																																																																																																								
Memory protection	ECC, memory mirroring, memory sparing																																																																																																																																																																																																																																																																																																																																								
Memory options	<table border="1"> <thead> <tr> <th>Memory options</th> <th>Part Number</th> </tr> </thead> <tbody> <tr> <td>ThinkServer 4GB DDR3L-1600MHz (1RX8) RDIMM</td> <td>0C19533</td> </tr> <tr> <td>ThinkServer 8GB DDR3L-1600MHz (2RX8) RDIMM</td> <td>0C19534</td> </tr> <tr> <td>ThinkServer 16GB DDR3L-1600MHz (2RX4) RDIMM</td> <td>0C19535</td> </tr> </tbody> </table> <p><i>Notes:</i> • Actual memory operating speed depends on processor memory controller speed, installed memory speed, and quantity of memory DIMMs • By default, the voltage of LV RDIMM is 1.5V and can be changed to 1.35V in BIOS setting • When using Intel Xeon E5-2600 series processors, LV RIMM is needed to run at 1.5V to support all 20 memory DIMM sockets. If LV RIMM runs at 1.35V, only 16 memory DIMM sockets are functional (8 of 12 for CPU 1, 8 for CPU 2)</p>	Memory options	Part Number	ThinkServer 4GB DDR3L-1600MHz (1RX8) RDIMM	0C19533	ThinkServer 8GB DDR3L-1600MHz (2RX8) RDIMM	0C19534	ThinkServer 16GB DDR3L-1600MHz (2RX4) RDIMM	0C19535																																																																																																																																																																																																																																																																																																																																
Memory options	Part Number																																																																																																																																																																																																																																																																																																																																								
ThinkServer 4GB DDR3L-1600MHz (1RX8) RDIMM	0C19533																																																																																																																																																																																																																																																																																																																																								
ThinkServer 8GB DDR3L-1600MHz (2RX8) RDIMM	0C19534																																																																																																																																																																																																																																																																																																																																								
ThinkServer 16GB DDR3L-1600MHz (2RX4) RDIMM	0C19535																																																																																																																																																																																																																																																																																																																																								

ThinkServer RD540 Optional Configurations - Storage and RAID

Disk drive bays	Supports one of the following configurations: <ul style="list-style-type: none"> • 8 x 3.5" SAS/SATA disk drive bays • 8 x 2.5" SAS/SATA disk drive bays • 16 x 2.5" SAS/SATA disk drive bays 						
Disk drive options	Disk drive options						Part Number
	Hot-swap Disk drive for 3.5" bay						
	3.5" SATA Hard Drive						
	ThinkServer 3.5" 500GB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive						0A89473
	ThinkServer 3.5" 1TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive						0A89474
	ThinkServer 3.5" 2TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive						0A89475
	ThinkServer 3.5" 3TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive						0A89477
	ThinkServer 3.5" 4TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive						0C19520
	3.5" SAS Hard Drive						
	ThinkServer 3.5" 1TB 7.2K SAS 6Gbps Hot Swap Hard Drive						0C19530
	ThinkServer 3.5" 2TB 7.2K SAS 6Gbps Hot Swap Hard Drive						0C19531
	ThinkServer 3.5" 3TB 7.2K SAS 6Gbps Hot Swap Hard Drive						0C19532
	ThinkServer 3.5" 300GB 15K SAS 6Gbps Hot Swap Hard Drive						67Y2616
	ThinkServer 3.5" 600GB 15K SAS 6Gbps Hot Swap Hard Drive						67Y2618
	2.5" SSD for 3.5" disk bay						
	ThinkServer 2.5" 100GB MLC SATA Solid State Drive to 3.5" Kit						0C19571
	ThinkServer 2.5" 200GB MLC SATA Solid State Drive to 3.5" Kit						0C19572
	ThinkServer 2.5" 400GB MLC SATA Solid State Drive to 3.5" Kit						0C19573
	Hot-swap Disk drive for 2.5" bay						
	2.5" SATA Hard Drive						
	ThinkServer 2.5" 500GB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive						0C19495
	ThinkServer 2.5" 1TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive						0C19496
	2.5" SAS Hard Drive						
	ThinkServer 2.5" 300GB 10K SAS 6Gbps Hot Swap Hard Drive						67Y2619
	ThinkServer 2.5" 600GB 10K SAS 6Gbps Hot Swap Hard Drive						67Y2621
	ThinkServer 2.5" 900GB 10K SAS 6Gbps Hot Swap Hard Drive						0A89409
	ThinkServer 2.5" 300GB 15K SAS 6Gbps Hot Swap Hard Drive						0C19494
	2.5" SSD						
ThinkServer 2.5" 100GB MLC SATA Solid State Drive						0A89420	
ThinkServer 2.5" 200GB MLC SATA Solid State Drive						0A89418	
ThinkServer 2.5" 400GB MLC SATA Solid State Drive						0A89419	
RAID support	RAID adapter	RAID support	Device Support	Cache	Host bus type	Data transfer rates (per port)	Optional upgrades
	ThinkServer RAID 500 (LSI® SAS 9240-8i)	0, 1, 10	SAS/SATA		PCI Express	6Gb/s	optional upgrade key, add RAID 5, 50 support
	ThinkServer RAID 700 (LSI SAS 9260-8i)	0, 1, 10, 5, 50, 6, 60	SAS/SATA	512MB	PCI Express	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)
	ThinkServer RAID 710 (LSI SAS 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	SAS/SATA	1GB	PCI Express	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath
RAID options	RAID controller and RAID upgrade options						Part Number
	ThinkServer RAID 500 Adapter II						0A89464
	ThinkServer RAID 500 Upgrade Key for Advanced RAID						0A89407
	ThinkServer RAID 700 Adapter II						0A89463
	ThinkServer RAID 700 Battery						67Y2647
	ThinkServer RAID 710 Adapter						0C19489
	ThinkServer RAID 710 Super Capacitor Module (CacheVault)						0C19490
	ThinkServer RAID 710 FastPath Software Key						0C19491
ThinkServer RAID 710 CacheCade Pro 2.0 Software Key						0C19492	


ThinkServer RD540 Optional Configurations - Network, System Management, Power Supply

Network options	Network and HBA options	Part Number
	ThinkServer 1 Gbps Ethernet I350-T2 Server Adapter by Intel	0C19506
	ThinkServer 1 Gbps Ethernet I350-T4 Server Adapter by Intel	0C19507
	Lenovo 10Gbps Ethernet X540-T2 Server Adapter by Intel	0C19497
	Lenovo 10Gbps Ethernet X520-DA2 Server Adapter by Intel	0C19486
	Lenovo 10Gbps Ethernet Fiber Module by Intel	0C19488
	Lenovo 10Gbps Ethernet X520-SR2 Server Adapter by Intel	0C19487
	ThinkServer QLE8242-CU-CK Dual Port CNA by QLogic	0C19483
	HBA	
	ThinkServer LPe1250 Single Port 8Gb Fibre Channel HBA by Emulex	0C19476
ThinkServer LPe12002 Dual Port 8Gb Fibre Channel HBA by Emulex	0C19478	
Security options	Trusted Platform Module options	Part Number
	ThinkServer Trusted Platform Module	0A89428
Systems management options for iKVM	System Management options	Part Number
	ThinkServer Management Module Premium	67Y2624
Power supply options	Power supply options	Part Number
	ThinkServer 800W Gold Hot Swap Redundant Power Supply for Rack	4X20E54690


ThinkServer RD640 Overview - Front and Rear



ThinkServer RD640 with 8x2.5"/16x2.5" Disk Drive Bays

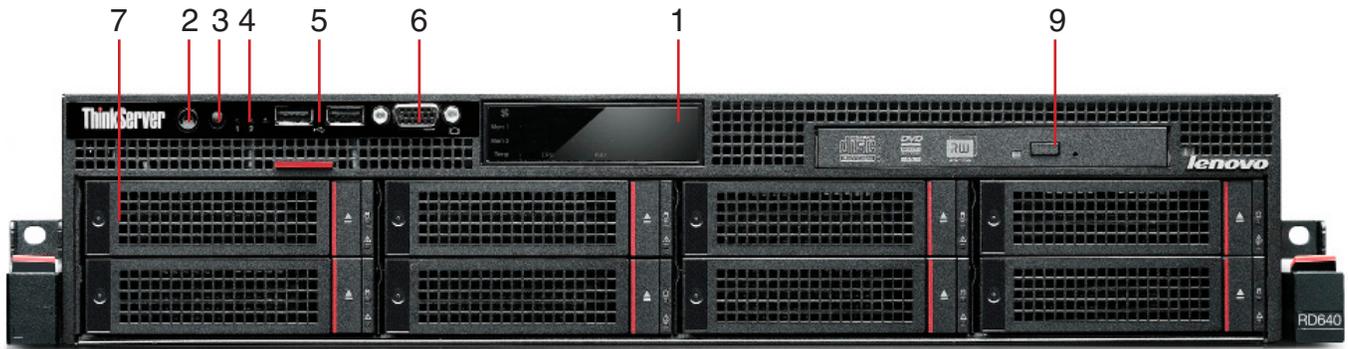

ThinkServer RD640 with 8x3.5" Disk Drive Bays

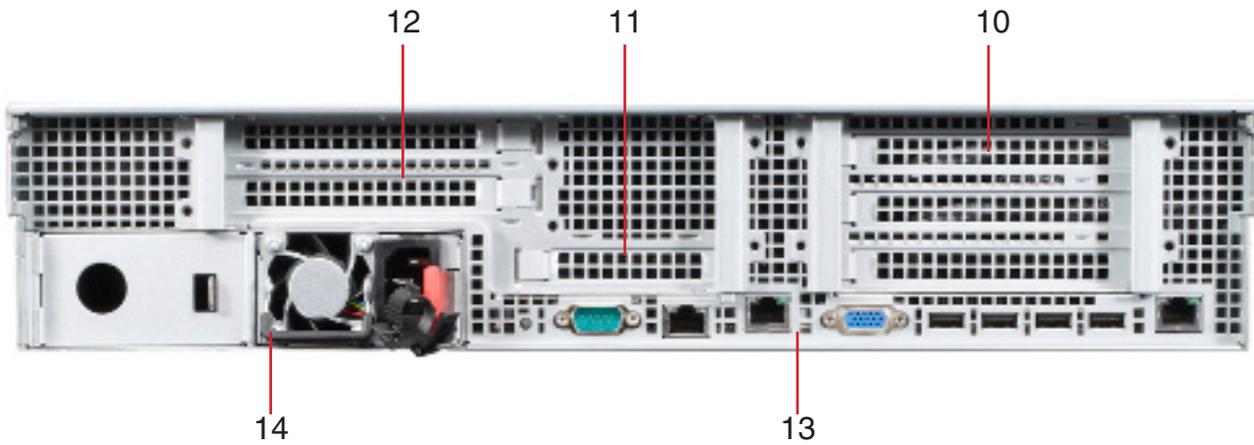

Front View

Rear View


1. Intelligent Diagnostics Premium Module (optional)
2. Power Button with LED
3. ID button with LED
4. 2 Network interface status LEDs
5. 2 USB 2.0
6. 1 VGA
7. Hot-swap disk drive bays
8. Hot-swap disk drive bays for 16x2.5" hard drive bays model
9. Optical (optional)

10. PCI Express slots 1-3
11. PCI Express slots 4
12. PCI Express slots 5-6 (for dual processors model)
13. Rear ports:
 - 4 USB 2.0
 - 1 serial
 - 2 ethernet
 - 1 RJ-45 (dedicate/share mgmt)
 - 1 VGA
14. Hot-swap power supplies

ThinkServer RD640 Overview - Internal


Internal View

1. Hot-swap cooling fans
2. Processors and memory DIMM sockets (under cooling shroud, see below)
3. PCI Express slots

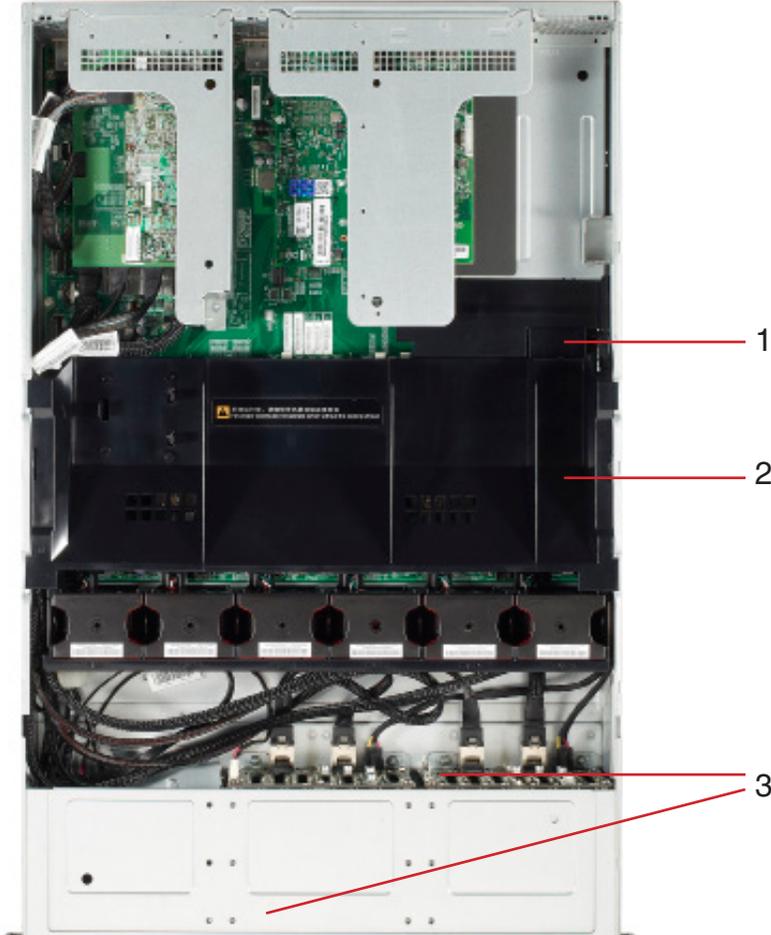


Processors and Memory DIMM Sockets (under cooling shroud)

1. CPU 1
2. 12 Memory DIMM sockets for CPU 1
3. CPU 2 (optional)
4. 8 Memory DIMM sockets for CPU 2 (for dual processors model)

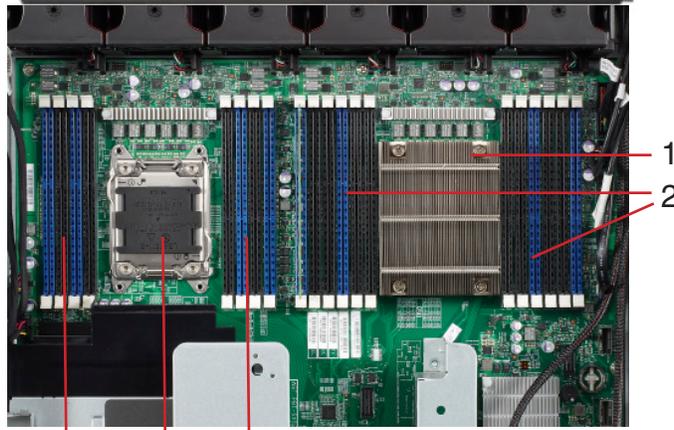

4 3 4

ThinkServer RD640 Platform Specifications

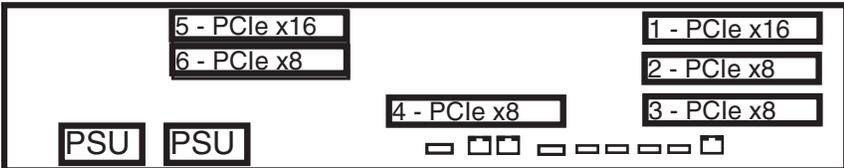Components	Specifications																											
Chipset	Intel C602J Chipset																											
Mechanical	<ul style="list-style-type: none"> • 2U rack with rail kit • 19"W x 28.9"D x 3.45"H (with rack handles) • 482.4mm W x 734mm D x 87.6mm H (with rack handles) • 26.5 kg (58.42 lb) when fully configured 																											
Front ports	Two USB 2.0, one analog VGA DB-15 connector																											
Rear ports	Four USB 2.0, one serial (9-pin), two ethernet (RJ-45), one RJ-45 (dedicate/share mgmt), one analog VGA DB-15 connector																											
Expansion Slots	 <p>Up to six PCI-Express slots via two riser cards, riser card 1 for slot 1-3, riser card 2 for slot 4-6 Slot 1: half-length, full-height, PCI Express 3.0 x16 (x8 elec) Slot 2: half-length, full-height, PCI Express 3.0 x8 Slot 3: half-length, full-height, PCI Express 3.0 x8 Slot 4: Low Profile, PCI Express 3.0 x8 <i>Slot 5-6 are available on dual processors models:</i> Slot 5: half-length, full-height, PCI Express 3.0 x16 (x8 elec) Slot 6: half-length, full-height, PCI Express 3.0 x8</p>																											
Graphics	Onboard Aspeed AST2300 graphics/management processor, one VGA DB-15 on front, one VGA DB-15 on rear; <i>Maximum resolution: 1920x1200@60Hz</i>																											
Hot-swap parts	Disk drives, power supplies, and cooling fans																											
Safety, environment, and certifications	Environmental certifications	<ul style="list-style-type: none"> • Energy Star Server 1.1 qualified • RoHS-compliant 																										
	EMC	FCC Class A, CSA CE																										
	240VA	Supports																										
	Temperature - operating	50 °F to 95 °F (10 °C to 35 °C)																										
	Temperature - non operating (no package)	-10 °C to 60 °C																										
	Temperature - non operating (with package)	-40 °C to 70 °C																										
	Altitude - operating	Supported Altitude (unpressurized): 0-10000ft (0-3048m)																										
	Humidity - operating	8%~80%, non-condensing																										
	Humidity - non operating (no package)	8%~80%, non-condensing																										
	Humidity - non operating (with package)	8%~90%, non-condensing																										
Acoustic noise (idle/working mode)	<table border="1"> <thead> <tr> <th>Category</th> <th>Normal Configuration</th> <th>Best Configuration</th> </tr> </thead> <tbody> <tr> <td>CPU</td> <td>1</td> <td>2</td> </tr> <tr> <td>HDD</td> <td>2x 900GB 2.5" SAS 6Gb/s</td> <td>16x 900GB 2.5" SAS 6Gb/s</td> </tr> <tr> <td>Memory</td> <td>1x 8GB 1600MHz LVRDIMM</td> <td>20x 8GB 1600MHz LVRDIMM</td> </tr> <tr> <td>PCIe adapters</td> <td>I350 X520-DA2 Emulex LPe16002</td> <td>I350 X520-DA2 Emulex LPe16002</td> </tr> <tr> <td>PSU</td> <td>1x 800W</td> <td>2x 800W</td> </tr> <tr> <td>RAID</td> <td>RAID 700 adapter</td> <td>RAID 700 adapter</td> </tr> <tr> <td>Sound Pressure (operating)</td> <td>44.1 dB(A)</td> <td>42.91 dB(A)</td> </tr> <tr> <td>Sound Pressure (idle)</td> <td>44.4 dB(A)</td> <td>43.8 dB(A)</td> </tr> </tbody> </table>	Category	Normal Configuration	Best Configuration	CPU	1	2	HDD	2x 900GB 2.5" SAS 6Gb/s	16x 900GB 2.5" SAS 6Gb/s	Memory	1x 8GB 1600MHz LVRDIMM	20x 8GB 1600MHz LVRDIMM	PCIe adapters	I350 X520-DA2 Emulex LPe16002	I350 X520-DA2 Emulex LPe16002	PSU	1x 800W	2x 800W	RAID	RAID 700 adapter	RAID 700 adapter	Sound Pressure (operating)	44.1 dB(A)	42.91 dB(A)	Sound Pressure (idle)	44.4 dB(A)	43.8 dB(A)
Category	Normal Configuration	Best Configuration																										
CPU	1	2																										
HDD	2x 900GB 2.5" SAS 6Gb/s	16x 900GB 2.5" SAS 6Gb/s																										
Memory	1x 8GB 1600MHz LVRDIMM	20x 8GB 1600MHz LVRDIMM																										
PCIe adapters	I350 X520-DA2 Emulex LPe16002	I350 X520-DA2 Emulex LPe16002																										
PSU	1x 800W	2x 800W																										
RAID	RAID 700 adapter	RAID 700 adapter																										
Sound Pressure (operating)	44.1 dB(A)	42.91 dB(A)																										
Sound Pressure (idle)	44.4 dB(A)	43.8 dB(A)																										

Type-model ¹	Intel Xeon Processor(s)	1600MHz LV RDIMM memory	Disk Bays	RAID controller	Storage	Slim optical	Intelligent Diagnostics	Remote mgmt	Discrete ethernet	Cable mgmt	PSU	Windows Server 2012 Preloaded	Base on-site warranty (-year)
70B00007++	1xE5-2609 v2 4C/2.5GHz/ 10MB/1333MHz	4GBx1	16x2.5"	RAID710	Open	DVD±RW	IDM	IPMI	No	No	800Wx1	No	3
70B00008++	1xE5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	4GBx4	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM	IPMI	No	No	800Wx1	No	3
70B00009++	1xE5-2630 v2 6C/2.6GHz/ 15MB/1600MHz	4GBx4	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM	IPMI	No	No	800Wx1	No	3
70B0000A++	1xE5-2640 v2 8C/2GHz/ 20MB/1600MHz	4GBx4	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM	IPMI	No	No	800Wx1	No	3
70B0000B++	1xE5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	8GBx1	16x2.5"	RAID700	Open	DVD±RW	IDM	IPMI	No	No	800Wx1	No	3
70B0000C++	1xE5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	4GBx2	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM	IPMI	No	No	800Wx2	No	3
70B0000D++	1xE5-2640 v2 8C/2GHz/ 20MB/1600MHz	4GBx2	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM	IPMI	No	No	800Wx1	No	3
70B0000E++	1xE5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	8GBx1	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM	IPMI	No	No	800Wx1	No	3

1. Model in italics is Global model




- For detailed platform specifications, please see [ThinkServer RD640 Platform Specifications sheets](#)
- For optional configurations of ThinkServer RD640, please see [ThinkServer RD640 Optional Configurations sheets](#)

Chipset	Intel C602J Chipset, two LGA2011 sockets for processors					<p>2U Rack top</p>
Memory type	1600MHz, LV RDIMM, DDR3, 4-channel per processor, 240-pin					
Memory DIMMs	Twenty DIMM sockets (12 sockets for CPU 1, 8 sockets for CPU 2)					
Memory protection	ECC, memory mirroring, memory sparing					
Disk drive bays	Supports 8 x 3.5", or 8 x 2.5", or 16 x 2.5" disk drive bays					
RAID support	RAID adapter*	RAID support	Cache	Transfer rates	Optional upgrades	
	RAID 500 (LSI® 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support	
	RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)	
	RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key 	
	* All RAID adapters supports SAS and SATA drives					
Optical (optional)	One DVD±RW or DVD ROM, slim, SATA interface					
Onboard network	Three onboard Gigabit Ethernet ports (RJ-45): Two Gigabit Ethernet ports by Intel i350; one Gigabit Ethernet port by Intel 82574L, dedicate/share management					
Discrete network (optional)	<ul style="list-style-type: none"> • Intel Ethernet Server Adapter I350-T2 • Intel Ethernet Server Adapter I350-T4 • Intel 10Gbps Ethernet X520-SR2 Server adapter • Intel 10Gbps Ethernet X520-DA2 Server adapter • Intel 10Gbps Ethernet Fiber Module for X520-DA2 adapter • Intel 10Gbps Ethernet X540-T2 Server adapter 					
Intelligent Diagnostics Module (IDM, opt)	Supports IDM or IDM Premium on selected models, IDM LED lights indicate failing component category, IDM Premium LED lights indicate individual failing part					
Security features	Power-on password/administrator password, Trusted Platform Module (TCG 1.2-compliant)					
Systems management (Optional iKVM)	<ul style="list-style-type: none"> • Onboard Aspeed AST2300 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC); optional ThinkServer Management Module Premium for iKVM functions • Control Panel LEDs shows the status of power, ID, network, system • Lenovo SmartGrid Manager • ThinkServer EasyStartup/EasyManage/EasyUpdate 					
Cable mgmt (opt)	Optional cable management arm on selected models					
Power supply	One or two 800 watts standard, two maximum, rear access, hot-swap, 80 PLUS® Gold qualified, redundant with two power supplies					
Environmental certifications	<ul style="list-style-type: none"> • Energy Star Server 2.0 qualified • RoHS-compliant More environmental information and requirements, please see ThinkServer RD640 Platform Specifications					
	<p>Front - 3.5" bay</p>					
	<p>Front - 2.5" bay (Bay 9-16 comes with 16x2.5" models)</p>					
	<p>Rear</p>					
	<p>Front and Rear Ports</p> Front: 2 USB 2.0, 1 VGA Rear: 4 USB 2.0, 1 serial (9-pin), 2 ethernet (RJ-45), 1 RJ-45 (dedicate/share mgmt), 1 VGA					
	<p>Expansion Slots</p> Slot 1: half-length, full-height, PCIe 3.0 x16 (x8 elec) Slot 2: half-length, full-height, PCIe 3.0 x8 Slot 3: half-length, full-height, PCIe 3.0 x8 Slot 4: Low Profile, PCIe 3.0 x8 Slot 5-6 are available on dual processors models: Slot 5: half-length, full-height, PCIe 3.0 x16 (x8 elec) Slot 6: half-length, full-height, PCIe 3.0 x8					
	<p>Mechanical</p> <ul style="list-style-type: none"> • 2U rack with rail kit • 19"W x 28.9"D x 3.45"H (with rack handles) • 482.4mm W x 734mm D x 87.6mm H (with rack handles) • 26.5 kg (58.42 lb) when fully configured 					

Type-model ¹	Intel Xeon Processor(s)	1600MHz LV RDIMM memory	Disk Bays	RAID controller	Storage	Slim optical	Intelligent Diagnostics	Remote mgmt	Discrete ethernet	Cable mgmt	PSU	Windows Server 2012 Preloaded	Base on-site warranty (-year)
70B0000V++	1xXeon E5-2630 v2 6C/2.6GHz/ 15MB/1600MHz	4GBx4	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM	IPMI	No	No	800Wx1	No	3
70B0000W++	1xXeon E5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	8GBx1	16x2.5"	RAID700	Open	DVD±RW	IDM	IPMI	No	No	800Wx1	No	3
70B0000X++	1xXeon E5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	8GBx1	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM	IPMI	No	No	800Wx1	No	3
70B0000Y++	1xXeon E5-2640 v2 8C/2GHz/ 20MB/1600MHz	4GBx4	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM	IPMI	No	No	800Wx1	No	3
70B00010++	1xXeon E5-2609 v2 4C/2.5GHz/ 10MB/1333MHz	4GBx1	16x2.5"	RAID710	Open	DVD±RW	IDM	IPMI	No	No	800Wx1	No	3
70B00011++	1xXeon E5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	4GBx2	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM	IPMI	No	No	800Wx2	No	3
70B00012++	1xXeon E5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	4GBx4	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM	IPMI	No	No	800Wx1	No	3
70B00013++	1xXeon E5-2640 v2 8C/2GHz/ 20MB/1600MHz	4GBx2	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM	IPMI	No	No	800Wx1	No	3

1. Model in italics is Global model

- For detailed platform specifications, please see [ThinkServer RD640 Platform Specifications sheets](#)
- For optional configurations of ThinkServer RD640, please see [ThinkServer RD640 Optional Configurations sheets](#)

Chipset	Intel C602J Chipset, two LGA2011 sockets for processors					2U Rack top 
Memory type	1600MHz, LV RDIMM, DDR3, 4-channel per processor, 240-pin					
Memory DIMMs	Twenty DIMM sockets (12 sockets for CPU 1, 8 sockets for CPU 2)					
Memory protection	ECC, memory mirroring, memory sparing					
Disk drive bays	Supports 8 x 3.5", or 8 x 2.5", or 16 x 2.5" disk drive bays					
RAID support	RAID adapter*	RAID support	Cache	Transfer rates	Optional upgrades	
	RAID 500 (LSI® 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support	
	RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)	
	RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key 	
	* All RAID adapters supports SAS and SATA drives					
Optical (optional)	One DVD±RW or DVD ROM, slim, SATA interface					
Onboard network	Three onboard Gigabit Ethernet ports (RJ-45): Two Gigabit Ethernet ports by Intel i350; one Gigabit Ethernet port by Intel 82574L, dedicate/share management					
Discrete network (optional)	<ul style="list-style-type: none"> • Intel Ethernet Server Adapter I350-T2 • Intel Ethernet Server Adapter I350-T4 • Intel 10Gbps Ethernet X520-SR2 Server adapter • Intel 10Gbps Ethernet X520-DA2 Server adapter • Intel 10Gbps Ethernet Fiber Module for X520-DA2 adapter • Intel 10Gbps Ethernet X540-T2 Server adapter 					
Intelligent Diagnostics Module (IDM, opt)	Supports IDM or IDM Premium on selected models, IDM LED lights indicate failing component category, IDM Premium LED lights indicate individual failing part					
Security features	Power-on password/administrator password, Trusted Platform Module (TCG 1.2-compliant)					
Systems management (Optional iKVM)	<ul style="list-style-type: none"> • Onboard Aspeed AST2300 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC); optional ThinkServer Management Module Premium for iKVM functions • Control Panel LEDs shows the status of power, ID, network, system • Lenovo SmartGrid Manager • ThinkServer EasyStartup/EasyManage/EasyUpdate 					
Cable mgmt (opt)	Optional cable management arm on selected models					
Power supply	One or two 800 watts standard, two maximum, rear access, hot-swap, 80 PLUS® Gold qualified, redundant with two power supplies					
Environmental certifications	<ul style="list-style-type: none"> • Energy Star Server 2.0 qualified • RoHS-compliant More environmental information and requirements, please see ThinkServer RD640 Platform Specifications					
	Front - 3.5" bay 					
	Front - 2.5" bay (Bay 9-16 comes with 16x2.5" models) 					
	Rear 					
	Front and Rear Ports Front: 2 USB 2.0, 1 VGA Rear: 4 USB 2.0, 1 serial (9-pin), 2 ethernet (RJ-45), 1 RJ-45 (dedicate/share mgmt), 1 VGA					
	Expansion Slots Slot 1: half-length, full-height, PCIe 3.0 x16 (x8 elec) Slot 2: half-length, full-height, PCIe 3.0 x8 Slot 3: half-length, full-height, PCIe 3.0 x8 Slot 4: Low Profile, PCIe 3.0 x8 Slot 5-6 are available on dual processors models: Slot 5: half-length, full-height, PCIe 3.0 x16 (x8 elec) Slot 6: half-length, full-height, PCIe 3.0 x8					
	Mechanical <ul style="list-style-type: none"> • 2U rack with rail kit • 19"W x 28.9"D x 3.45"H (with rack handles) • 482.4mm W x 734mm D x 87.6mm H (with rack handles) • 26.5 kg (58.42 lb) when fully configured 					

Type-model ¹	Intel Xeon Processor(s)	1600MHz LV RDIMM memory	Disk Bays	RAID controller	Storage	Slim optical	Intelligent Diagnostics	Remote mgmt	Discrete ethernet	Cable mgmt	PSU	Windows Server 2012 Preloaded	Base on-site warranty (-year)
70B0000M++	1xXeon E5-2630 v2 6C/2.6GHz/ 15MB/1600MHz	4GBx4	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM	IPMI	No	No	800Wx1	No	3
70B0000N++	1xXeon E5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	8GBx1	16x2.5"	RAID700	Open	DVD±RW	IDM	IPMI	No	No	800Wx1	No	3
70B0000P++	1xXeon E5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	8GBx1	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM	IPMI	No	No	800Wx1	No	3
70B0000Q++	1xXeon E5-2640 v2 8C/2GHz/ 20MB/1600MHz	4GBx4	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM	IPMI	No	No	800Wx1	No	3
70B0000R++	1xXeon E5-2609 v2 4C/2.5GHz/ 10MB/1333MHz	4GBx1	16x2.5"	RAID710	Open	DVD±RW	IDM	IPMI	No	No	800Wx1	No	3
70B0000S++	1xXeon E5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	4GBx2	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM	IPMI	No	No	800Wx2	No	3
70B0000T++	1xXeon E5-2620 v2 6C/2.1GHz/ 15MB/1600MHz	4GBx4	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM	IPMI	No	No	800Wx1	No	3
70B0000U++	1xXeon E5-2640 v2 8C/2GHz/ 20MB/1600MHz	4GBx2	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM	IPMI	No	No	800Wx1	No	3

1. Model in italics is Global model

- For detailed platform specifications, please see [ThinkServer RD640 Platform Specifications sheets](#)
- For optional configurations of ThinkServer RD640, please see [ThinkServer RD640 Optional Configurations sheets](#)

Chipset	Intel C602J Chipset, two LGA2011 sockets for processors					<p>2U Rack top</p>
Memory type	1600MHz, LV RDIMM, DDR3, 4-channel per processor, 240-pin					
Memory DIMMs	Twenty DIMM sockets (12 sockets for CPU 1, 8 sockets for CPU 2)					
Memory protection	ECC, memory mirroring, memory sparing					
Disk drive bays	Supports 8 x 3.5", or 8 x 2.5", or 16 x 2.5" disk drive bays					
RAID support	RAID adapter*	RAID support	Cache	Transfer rates	Optional upgrades	
	RAID 500 (LSI® 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support	
	RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)	
	RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key 	
	* All RAID adapters supports SAS and SATA drives					
Optical (optional)	One DVD±RW or DVD ROM, slim, SATA interface					
Onboard network	Three onboard Gigabit Ethernet ports (RJ-45): Two Gigabit Ethernet ports by Intel i350; one Gigabit Ethernet port by Intel 82574L, dedicate/share management					
Discrete network (optional)	<ul style="list-style-type: none"> • Intel Ethernet Server Adapter I350-T2 • Intel Ethernet Server Adapter I350-T4 • Intel 10Gbps Ethernet X520-SR2 Server adapter • Intel 10Gbps Ethernet X520-DA2 Server adapter • Intel 10Gbps Ethernet Fiber Module for X520-DA2 adapter • Intel 10Gbps Ethernet X540-T2 Server adapter 					
Intelligent Diagnostics Module (IDM, opt)	Supports IDM or IDM Premium on selected models, IDM LED lights indicate failing component category, IDM Premium LED lights indicate individual failing part					
Security features	Power-on password/administrator password, Trusted Platform Module (TCG 1.2-compliant)					
Systems management (Optional iKVM)	<ul style="list-style-type: none"> • Onboard Aspeed AST2300 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC); optional ThinkServer Management Module Premium for iKVM functions • Control Panel LEDs shows the status of power, ID, network, system • Lenovo SmartGrid Manager • ThinkServer EasyStartup/EasyManage/EasyUpdate 					
Cable mgmt (opt)	Optional cable management arm on selected models					
Power supply	One or two 800 watts standard, two maximum, rear access, hot-swap, 80 PLUS® Gold qualified, redundant with two power supplies					
Environmental certifications	<ul style="list-style-type: none"> • Energy Star Server 2.0 qualified • RoHS-compliant More environmental information and requirements, please see ThinkServer RD640 Platform Specifications					
	<p>Front and Rear Ports</p> <p>Front: 2 USB 2.0, 1 VGA Rear: 4 USB 2.0, 1 serial (9-pin), 2 ethernet (RJ-45), 1 RJ-45 (dedicate/share mgmt), 1 VGA</p>					
	<p>Expansion Slots</p> <p>Slot 1: half-length, full-height, PCIe 3.0 x16 (x8 elec) Slot 2: half-length, full-height, PCIe 3.0 x8 Slot 3: half-length, full-height, PCIe 3.0 x8 Slot 4: Low Profile, PCIe 3.0 x8 Slot 5-6 are available on dual processors models: Slot 5: half-length, full-height, PCIe 3.0 x16 (x8 elec) Slot 6: half-length, full-height, PCIe 3.0 x8</p>					
	<p>Mechanical</p> <ul style="list-style-type: none"> • 2U rack with rail kit • 19"W x 28.9"D x 3.45"H (with rack handles) • 482.4mm W x 734mm D x 87.6mm H (with rack handles) • 26.5 kg (58.42 lb) when fully configured 					

Type-model ¹	Intel Xeon Processor(s)	1600MHz LV RDIMM memory	Disk Bays	RAID controller	Storage	Slim optical	Intelligent Diagnostics	Remote mgmt	Discrete ethernet	Cable mgmt	PSU	Windows Server 2012 Preloaded	Base on-site warranty (-year)
70AW0002++	2xE5-2650 v2 8C/2.6GHz/ 20MB/1866MHz	8GBx4	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM Premium	IPMI	350T2	No	800Wx2	No	3
70AW0003++	2xE5-2660 v2 10C/2.2GHz/ 25MB/1866MHz	8GBx4	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM Premium	IPMI	X520DA2	No	800Wx2	No	3
70AW0004++	2xE5-2690 v2 10C/3GHz/ 25MB/1866MHz	8GBx4	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM Premium	IPMI	X520DA2	No	800Wx2	No	3

1. Model in italics is Global model




- For detailed platform specifications, please see [ThinkServer RD640 Platform Specifications sheets](#)
- For optional configurations of ThinkServer RD640, please see [ThinkServer RD640 Optional Configurations sheets](#)

Chipset	Intel C602J Chipset, two LGA2011 sockets for processors					<p>2U Rack top</p>
Memory type	1600MHz, LV RDIMM, DDR3, 4-channel per processor, 240-pin					
Memory DIMMs	Twenty DIMM sockets (12 sockets for CPU 1, 8 sockets for CPU 2)					
Memory protection	ECC, memory mirroring, memory sparing					
Disk drive bays	Supports 8 x 3.5", or 8 x 2.5", or 16 x 2.5" disk drive bays					
RAID support	RAID adapter*	RAID support	Cache	Transfer rates	Optional upgrades	
	RAID 500 (LSI® 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support	
	RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)	
	RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key 	
	* All RAID adapters supports SAS and SATA drives					
Optical (optional)	One DVD±RW or DVD ROM, slim, SATA interface					
Onboard network	Three onboard Gigabit Ethernet ports (RJ-45): Two Gigabit Ethernet ports by Intel i350; one Gigabit Ethernet port by Intel 82574L, dedicate/share management					
Discrete network (optional)	<ul style="list-style-type: none"> • Intel Ethernet Server Adapter I350-T2 • Intel Ethernet Server Adapter I350-T4 • Intel 10Gbps Ethernet X520-SR2 Server adapter • Intel 10Gbps Ethernet X520-DA2 Server adapter • Intel 10Gbps Ethernet Fiber Module for X520-DA2 adapter • Intel 10Gbps Ethernet X540-T2 Server adapter 					
Intelligent Diagnostics Module (IDM, opt)	Supports IDM or IDM Premium on selected models, IDM LED lights indicate failing component category, IDM Premium LED lights indicate individual failing part					
Security features	Power-on password/administrator password, Trusted Platform Module (TCG 1.2-compliant)					
Systems management (Optional iKVM)	<ul style="list-style-type: none"> • Onboard Aspeed AST2300 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC); optional ThinkServer Management Module Premium for iKVM functions • Control Panel LEDs shows the status of power, ID, network, system • Lenovo SmartGrid Manager • ThinkServer EasyStartup/EasyManage/EasyUpdate 					
Cable mgmt (opt)	Optional cable management arm on selected models					
Power supply	One or two 800 watts standard, two maximum, rear access, hot-swap, 80 PLUS® Gold qualified, redundant with two power supplies					
Environmental certifications	<ul style="list-style-type: none"> • Energy Star Server 2.0 qualified • RoHS-compliant More environmental information and requirements, please see ThinkServer RD640 Platform Specifications					
	<p>Front - 3.5" bay</p> <p>Front - 2.5" bay (Bay 9-16 comes with 16x2.5" models)</p> <p>Rear</p> <p>Front and Rear Ports</p> Front: 2 USB 2.0, 1 VGA Rear: 4 USB 2.0, 1 serial (9-pin), 2 ethernet (RJ-45), 1 RJ-45 (dedicate/share mgmt), 1 VGA					
	<p>Expansion Slots</p> Slot 1: half-length, full-height, PCIe 3.0 x16 (x8 elec) Slot 2: half-length, full-height, PCIe 3.0 x8 Slot 3: half-length, full-height, PCIe 3.0 x8 Slot 4: Low Profile, PCIe 3.0 x8 Slot 5-6 are available on dual processors models: Slot 5: half-length, full-height, PCIe 3.0 x16 (x8 elec) Slot 6: half-length, full-height, PCIe 3.0 x8					
	<p>Mechanical</p> <ul style="list-style-type: none"> • 2U rack with rail kit • 19"W x 28.9"D x 3.45"H (with rack handles) • 482.4mm W x 734mm D x 87.6mm H (with rack handles) • 26.5 kg (58.42 lb) when fully configured 					

Type-model ¹	Intel Xeon Processor(s)	1600MHz LV RDIMM memory	Disk Bays	RAID controller	Storage	Slim optical	Intelligent Diagnostics	Remote mgmt	Discrete ethernet	Cable mgmt	PSU	Windows Server 2012 Preloaded	Base on-site warranty (-year)
70AW000C++	2xXeon E5-2650 v2 8C/2.6GHz/ 20MB/1866MHz	8GBx4	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM Premium	IPMI	350-T2	No	800Wx2	No	3
70AW000D++	2xXeon E5-2660 v2 10C/2.2GHz/ 25MB/1866MHz	8GBx4	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM Premium	IPMI	X520DA2	No	800Wx2	No	3

1. Model in italics is Global model




- For detailed platform specifications, please see [ThinkServer RD640 Platform Specifications sheets](#)
- For optional configurations of ThinkServer RD640, please see [ThinkServer RD640 Optional Configurations sheets](#)

Chipset	Intel C602J Chipset, two LGA2011 sockets for processors					2U Rack top 
Memory type	1600MHz, LV RDIMM, DDR3, 4-channel per processor, 240-pin					
Memory DIMMs	Twenty DIMM sockets (12 sockets for CPU 1, 8 sockets for CPU 2)					
Memory protection	ECC, memory mirroring, memory sparing					
Disk drive bays	Supports 8 x 3.5", or 8 x 2.5", or 16 x 2.5" disk drive bays					
RAID support	RAID adapter*	RAID support	Cache	Transfer rates	Optional upgrades	
	RAID 500 (LSI® 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support	
	RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)	
	RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key 	
* All RAID adapters supports SAS and SATA drives						
Optical (optional)	One DVD±RW or DVD ROM, slim, SATA interface					
Onboard network	Three onboard Gigabit Ethernet ports (RJ-45): Two Gigabit Ethernet ports by Intel i350; one Gigabit Ethernet port by Intel 82574L, dedicate/share management					
Discrete network (optional)	<ul style="list-style-type: none"> • Intel Ethernet Server Adapter I350-T2 • Intel Ethernet Server Adapter I350-T4 • Intel 10Gbps Ethernet X520-SR2 Server adapter • Intel 10Gbps Ethernet X520-DA2 Server adapter • Intel 10Gbps Ethernet Fiber Module for X520-DA2 adapter • Intel 10Gbps Ethernet X540-T2 Server adapter 					
Intelligent Diagnostics Module (IDM, opt)	Supports IDM or IDM Premium on selected models, IDM LED lights indicate failing component category, IDM Premium LED lights indicate individual failing part					
Security features	Power-on password/administrator password, Trusted Platform Module (TCG 1.2-compliant)					
Systems management (Optional iKVM)	<ul style="list-style-type: none"> • Onboard Aspeed AST2300 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC); optional ThinkServer Management Module Premium for iKVM functions • Control Panel LEDs shows the status of power, ID, network, system • Lenovo SmartGrid Manager • ThinkServer EasyStartup/EasyManage/EasyUpdate 					
Cable mgmt (opt)	Optional cable management arm on selected models					
Power supply	One or two 800 watts standard, two maximum, rear access, hot-swap, 80 PLUS® Gold qualified, redundant with two power supplies					
Environmental certifications	<ul style="list-style-type: none"> • Energy Star Server 2.0 qualified • RoHS-compliant More environmental information and requirements, please see ThinkServer RD640 Platform Specifications					
Front - 3.5" bay 						
Front - 2.5" bay (Bay 9-16 comes with 16x2.5" models) 						
Rear 						
Front and Rear Ports Front: 2 USB 2.0, 1 VGA Rear: 4 USB 2.0, 1 serial (9-pin), 2 ethernet (RJ-45), 1 RJ-45 (dedicate/share mgmt), 1 VGA						
Expansion Slots Slot 1: half-length, full-height, PCIe 3.0 x16 (x8 elec) Slot 2: half-length, full-height, PCIe 3.0 x8 Slot 3: half-length, full-height, PCIe 3.0 x8 Slot 4: Low Profile, PCIe 3.0 x8 Slot 5-6 are available on dual processors models: Slot 5: half-length, full-height, PCIe 3.0 x16 (x8 elec) Slot 6: half-length, full-height, PCIe 3.0 x8						
Mechanical <ul style="list-style-type: none"> • 2U rack with rail kit • 19"W x 28.9"D x 3.45"H (with rack handles) • 482.4mm W x 734mm D x 87.6mm H (with rack handles) • 26.5 kg (58.42 lb) when fully configured 						

Type-model ¹	Intel Xeon Processor(s)	1600MHz LV RDIMM memory	Disk Bays	RAID controller	Storage	Slim optical	Intelligent Diagnostics	Remote mgmt	Discrete ethernet	Cable mgmt	PSU	Windows Server 2012 Preloaded	Base on-site warranty (-year)
70AW0009++	2xXeon E5-2690 v2 10C/3GHz/ 25MB/1866MHz	8GBx4	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM Premium	IPMI	X520DA2	No	800Wx2	No	3
70AW000A++	2xXeon E5-2650 v2 8C/2.6GHz/ 20MB/1866MHz	8GBx4	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM Premium	IPMI	350-T2	No	800Wx2	No	3
70AW000B++	2xXeon E5-2660 v2 10C/2.2GHz/ 25MB/1866MHz	8GBx4	16x2.5"	RAID710 +CacheVault	Open	DVD±RW	IDM Premium	IPMI	X520DA2	No	800Wx2	No	3

1. Model in italics is Global model

- For detailed platform specifications, please see [ThinkServer RD640 Platform Specifications sheets](#)
- For optional configurations of ThinkServer RD640, please see [ThinkServer RD640 Optional Configurations sheets](#)

Chipset	Intel C602J Chipset, two LGA2011 sockets for processors					<p>2U Rack top</p> 
Memory type	1600MHz, LV RDIMM, DDR3, 4-channel per processor, 240-pin					
Memory DIMMs	Twenty DIMM sockets (12 sockets for CPU 1, 8 sockets for CPU 2)					
Memory protection	ECC, memory mirroring, memory sparing					
Disk drive bays	Supports 8 x 3.5", or 8 x 2.5", or 16 x 2.5" disk drive bays					
RAID support	RAID adapter*	RAID support	Cache	Transfer rates	Optional upgrades	
	RAID 500 (LSI® 9240-8i)	0, 1, 10		6Gb/s	optional upgrade key, add RAID 5, 50 support	
	RAID 700 (LSI 9260-8i)	0, 1, 10, 5, 50, 6, 60	512MB	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)	
	RAID 710 (LSI 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	1GB	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault (CV) flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath key 	
* All RAID adapters supports SAS and SATA drives						
Optical (optional)	One DVD±RW or DVD ROM, slim, SATA interface					
Onboard network	Three onboard Gigabit Ethernet ports (RJ-45): Two Gigabit Ethernet ports by Intel i350; one Gigabit Ethernet port by Intel 82574L, dedicate/share management					
Discrete network (optional)	<ul style="list-style-type: none"> • Intel Ethernet Server Adapter I350-T2 • Intel Ethernet Server Adapter I350-T4 • Intel 10Gbps Ethernet X520-SR2 Server adapter • Intel 10Gbps Ethernet X520-DA2 Server adapter • Intel 10Gbps Ethernet Fiber Module for X520-DA2 adapter • Intel 10Gbps Ethernet X540-T2 Server adapter 					
Intelligent Diagnostics Module (IDM, opt)	Supports IDM or IDM Premium on selected models, IDM LED lights indicate failing component category, IDM Premium LED lights indicate individual failing part					
Security features	Power-on password/administrator password, Trusted Platform Module (TCG 1.2-compliant)					
Systems management (Optional iKVM)	<ul style="list-style-type: none"> • Onboard Aspeed AST2300 graphics/management processor, IPMI 2.0-compliant baseboard management controller (BMC); optional ThinkServer Management Module Premium for iKVM functions • Control Panel LEDs shows the status of power, ID, network, system • Lenovo SmartGrid Manager • ThinkServer EasyStartup/EasyManage/EasyUpdate 					
Cable mgmt (opt)	Optional cable management arm on selected models					
Power supply	One or two 800 watts standard, two maximum, rear access, hot-swap, 80 PLUS® Gold qualified, redundant with two power supplies					
Environmental certifications	<ul style="list-style-type: none"> • Energy Star Server 2.0 qualified • RoHS-compliant More environmental information and requirements, please see ThinkServer RD640 Platform Specifications					
<p>Front - 3.5" bay</p> 						
<p>Front - 2.5" bay (Bay 9-16 comes with 16x2.5" models)</p> 						
<p>Rear</p> 						
<p>Front and Rear Ports</p> Front: 2 USB 2.0, 1 VGA Rear: 4 USB 2.0, 1 serial (9-pin), 2 ethernet (RJ-45), 1 RJ-45 (dedicate/share mgmt), 1 VGA						
<p>Expansion Slots</p> Slot 1: half-length, full-height, PCIe 3.0 x16 (x8 elec) Slot 2: half-length, full-height, PCIe 3.0 x8 Slot 3: half-length, full-height, PCIe 3.0 x8 Slot 4: Low Profile, PCIe 3.0 x8 Slot 5-6 are available on dual processors models: Slot 5: half-length, full-height, PCIe 3.0 x16 (x8 elec) Slot 6: half-length, full-height, PCIe 3.0 x8						
<p>Mechanical</p> <ul style="list-style-type: none"> • 2U rack with rail kit • 19"W x 28.9"D x 3.45"H (with rack handles) • 482.4mm W x 734mm D x 87.6mm H (with rack handles) • 26.5 kg (58.42 lb) when fully configured 						

ThinkServer RD640 Optional Configurations - Processor and Memory

Rack kit	Included in models																																																																																																																																																																																																																																																																																																																																																					
Processor	<p>Two LGA2011 sockets, supports up to two processors from Intel Xeon E5-2600 or Xeon E5-2600 v2 families, up to 8 cores (E5-2600 series)/12 cores (E5-2600 v2 series), two QPI links up to 8.0GT/s each, up to 20MB (E5-2600 series)/30MB (E5-2600 v2 series) cache, integrated 4-channel DDR3 memory controller up to 1600MHz (E5-2600 series)/1866MHz (E5-2600 v2 series).</p> <p>The following processor options are available:</p> <table border="1"> <thead> <tr> <th rowspan="2">Processor Number</th> <th colspan="9">Processors Specifications*</th> <th rowspan="2">Part Number</th> </tr> <tr> <th># of Cores</th> <th># of Threads</th> <th>Clock Speed</th> <th>Max Turbo Frequency</th> <th>Cache</th> <th>QPI Speed</th> <th>Max TDP</th> <th>Memory Speed</th> </tr> </thead> <tbody> <tr> <td colspan="11">Intel Xeon E5-2600 Series</td> </tr> <tr> <td>Xeon E5-2690</td> <td>8</td> <td>16</td> <td>2.9 GHz</td> <td>3.8 GHz</td> <td>20MB</td> <td>8 GT/s</td> <td>135 W</td> <td>DDR3-1600</td> <td>0A89429</td> </tr> <tr> <td>Xeon E5-2680</td> <td>8</td> <td>16</td> <td>2.7 GHz</td> <td>3.5 GHz</td> <td>20MB</td> <td>8 GT/s</td> <td>130 W</td> <td>DDR3-1600</td> <td>0A89430</td> </tr> <tr> <td>Xeon E5-2670</td> <td>8</td> <td>16</td> <td>2.6 GHz</td> <td>3.3 GHz</td> <td>20MB</td> <td>8 GT/s</td> <td>115 W</td> <td>DDR3-1600</td> <td>0A89431</td> </tr> <tr> <td>Xeon E5-2667</td> <td>6</td> <td>12</td> <td>2.9 GHz</td> <td>3.5 GHz</td> <td>15MB</td> <td>8 GT/s</td> <td>130 W</td> <td>DDR3-1600</td> <td>0A89435</td> </tr> <tr> <td>Xeon E5-2665</td> <td>8</td> <td>16</td> <td>2.4 GHz</td> <td>3.1 GHz</td> <td>20MB</td> <td>8 GT/s</td> <td>115 W</td> <td>DDR3-1600</td> <td>0A89432</td> </tr> <tr> <td>Xeon E5-2660</td> <td>8</td> <td>16</td> <td>2.2 GHz</td> <td>3 GHz</td> <td>20MB</td> <td>8 GT/s</td> <td>95 W</td> <td>DDR3-1600</td> <td>0A89462</td> </tr> <tr> <td>Xeon E5-2650L</td> <td>8</td> <td>16</td> <td>1.8 GHz</td> <td>2.3 GHz</td> <td>20MB</td> <td>8 GT/s</td> <td>70 W</td> <td>DDR3-1600</td> <td>0A89434</td> </tr> <tr> <td>Xeon E5-2650</td> <td>8</td> <td>16</td> <td>2 GHz</td> <td>2.8 GHz</td> <td>20MB</td> <td>8 GT/s</td> <td>95 W</td> <td>DDR3-1600</td> <td>0A89433</td> </tr> <tr> <td>Xeon E5-2643</td> <td>4</td> <td>8</td> <td>3.3 GHz</td> <td>3.5 GHz</td> <td>10MB</td> <td>8 GT/s</td> <td>130 W</td> <td>DDR3-1600</td> <td>0A89440</td> </tr> <tr> <td>Xeon E5-2640</td> <td>6</td> <td>12</td> <td>2.5 GHz</td> <td>3 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>95 W</td> <td>DDR3-1333</td> <td>0A89436</td> </tr> <tr> <td>Xeon E5-2630L</td> <td>6</td> <td>12</td> <td>2 GHz</td> <td>2.5 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>60 W</td> <td>DDR3-1333</td> <td>0A89439</td> </tr> <tr> <td>Xeon E5-2630</td> <td>6</td> <td>12</td> <td>2.3 GHz</td> <td>2.8 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>95 W</td> <td>DDR3-1333</td> <td>0A89437</td> </tr> <tr> <td>Xeon E5-2620</td> <td>6</td> <td>12</td> <td>2 GHz</td> <td>2.5 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>95 W</td> <td>DDR3-1333</td> <td>0A89438</td> </tr> <tr> <td>Xeon E5-2609</td> <td>4</td> <td>4</td> <td>2.4 GHz</td> <td></td> <td>10MB</td> <td>6.4 GT/s</td> <td>80 W</td> <td>DDR3-1066</td> <td>0A89441</td> </tr> <tr> <td>Xeon E5-2603</td> <td>4</td> <td>4</td> <td>1.8 GHz</td> <td></td> <td>10MB</td> <td>6.4 GT/s</td> <td>80 W</td> <td>DDR3-1066</td> <td>0A89442</td> </tr> <tr> <td colspan="11">Intel Xeon E5-2600 v2 Series</td> </tr> <tr> <td>Xeon E5-2697 v2</td> <td>12</td> <td>24</td> <td>2.7 GHz</td> <td>3.5 GHz</td> <td>30MB</td> <td>8 GT/s</td> <td>130 W</td> <td>DDR3-1866</td> <td>0C19546</td> </tr> <tr> <td>Xeon E5-2695 v2</td> <td>12</td> <td>24</td> <td>2.4 GHz</td> <td>3.2 GHz</td> <td>30MB</td> <td>8 GT/s</td> <td>115 W</td> <td>DDR3-1866</td> <td>0C19547</td> </tr> <tr> <td>Xeon E5-2690 v2</td> <td>10</td> <td>20</td> <td>3 GHz</td> <td>3.6 GHz</td> <td>25MB</td> <td>8 GT/s</td> <td>130 W</td> <td>DDR3-1866</td> <td>0C19548</td> </tr> <tr> <td>Xeon E5-2680 v2</td> <td>10</td> <td>20</td> <td>2.8 GHz</td> <td>3.6 GHz</td> <td>25MB</td> <td>8 GT/s</td> <td>115 W</td> <td>DDR3-1866</td> <td>0C19549</td> </tr> <tr> <td>Xeon E5-2670 v2</td> <td>10</td> <td>20</td> <td>2.5 GHz</td> <td>3.3 GHz</td> <td>25MB</td> <td>8 GT/s</td> <td>115 W</td> <td>DDR3-1866</td> <td>0C19550</td> </tr> <tr> <td>Xeon E5-2667 v2</td> <td>8</td> <td>16</td> <td>3.3 GHz</td> <td>4 GHz</td> <td>25MB</td> <td>8 GT/s</td> <td>130 W</td> <td>DDR3-1866</td> <td>0C19553</td> </tr> <tr> <td>Xeon E5-2660 v2</td> <td>10</td> <td>20</td> <td>2.2 GHz</td> <td>3 GHz</td> <td>25MB</td> <td>8 GT/s</td> <td>95 W</td> <td>DDR3-1866</td> <td>0C19551</td> </tr> <tr> <td>Xeon E5-2650 v2</td> <td>8</td> <td>16</td> <td>2.6 GHz</td> <td>3.4 GHz</td> <td>20MB</td> <td>8 GT/s</td> <td>95 W</td> <td>DDR3-1866</td> <td>0C19552</td> </tr> <tr> <td>Xeon E5-2650L v2</td> <td>10</td> <td>20</td> <td>1.7 GHz</td> <td>2.1 GHz</td> <td>25MB</td> <td>7.2 GT/s</td> <td>70 W</td> <td>DDR3-1600</td> <td>0C19554</td> </tr> <tr> <td>Xeon E5-2640 v2</td> <td>8</td> <td>16</td> <td>2 GHz</td> <td>2.5 GHz</td> <td>20MB</td> <td>7.2 GT/s</td> <td>95 W</td> <td>DDR3-1600</td> <td>0C19555</td> </tr> <tr> <td>Xeon E5-2630 v2</td> <td>6</td> <td>12</td> <td>2.6 GHz</td> <td>3.1 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>80 W</td> <td>DDR3-1600</td> <td>0C19558</td> </tr> <tr> <td>Xeon E5-2630L v2</td> <td>6</td> <td>12</td> <td>2.4 GHz</td> <td>2.8 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>60 W</td> <td>DDR3-1600</td> <td>0C19556</td> </tr> <tr> <td>Xeon E5-2620 v2</td> <td>6</td> <td>12</td> <td>2.1 GHz</td> <td>2.6 GHz</td> <td>15MB</td> <td>7.2 GT/s</td> <td>80 W</td> <td>DDR3-1600</td> <td>0C19557</td> </tr> <tr> <td>Xeon E5-2609 v2</td> <td>4</td> <td>4</td> <td>2.5 GHz</td> <td></td> <td>10MB</td> <td>6.4 GT/s</td> <td>80 W</td> <td>DDR3-1333</td> <td>0C19559</td> </tr> <tr> <td>Xeon E5-2603 v2</td> <td>4</td> <td>4</td> <td>1.8 GHz</td> <td></td> <td>10MB</td> <td>6.4 GT/s</td> <td>80 W</td> <td>DDR3-1333</td> <td>0C19560</td> </tr> </tbody> </table> <p><i>Notes:</i> All processors specifications is provided by Intel and may be changed at any time without notice. The information herein is provided "as-is". Intel may update this information in non-scheduled. For latest information, please see http://ark.intel.com/</p>	Processor Number	Processors Specifications*									Part Number	# of Cores	# of Threads	Clock Speed	Max Turbo Frequency	Cache	QPI Speed	Max TDP	Memory Speed	Intel Xeon E5-2600 Series											Xeon E5-2690	8	16	2.9 GHz	3.8 GHz	20MB	8 GT/s	135 W	DDR3-1600	0A89429	Xeon E5-2680	8	16	2.7 GHz	3.5 GHz	20MB	8 GT/s	130 W	DDR3-1600	0A89430	Xeon E5-2670	8	16	2.6 GHz	3.3 GHz	20MB	8 GT/s	115 W	DDR3-1600	0A89431	Xeon E5-2667	6	12	2.9 GHz	3.5 GHz	15MB	8 GT/s	130 W	DDR3-1600	0A89435	Xeon E5-2665	8	16	2.4 GHz	3.1 GHz	20MB	8 GT/s	115 W	DDR3-1600	0A89432	Xeon E5-2660	8	16	2.2 GHz	3 GHz	20MB	8 GT/s	95 W	DDR3-1600	0A89462	Xeon E5-2650L	8	16	1.8 GHz	2.3 GHz	20MB	8 GT/s	70 W	DDR3-1600	0A89434	Xeon E5-2650	8	16	2 GHz	2.8 GHz	20MB	8 GT/s	95 W	DDR3-1600	0A89433	Xeon E5-2643	4	8	3.3 GHz	3.5 GHz	10MB	8 GT/s	130 W	DDR3-1600	0A89440	Xeon E5-2640	6	12	2.5 GHz	3 GHz	15MB	7.2 GT/s	95 W	DDR3-1333	0A89436	Xeon E5-2630L	6	12	2 GHz	2.5 GHz	15MB	7.2 GT/s	60 W	DDR3-1333	0A89439	Xeon E5-2630	6	12	2.3 GHz	2.8 GHz	15MB	7.2 GT/s	95 W	DDR3-1333	0A89437	Xeon E5-2620	6	12	2 GHz	2.5 GHz	15MB	7.2 GT/s	95 W	DDR3-1333	0A89438	Xeon E5-2609	4	4	2.4 GHz		10MB	6.4 GT/s	80 W	DDR3-1066	0A89441	Xeon E5-2603	4	4	1.8 GHz		10MB	6.4 GT/s	80 W	DDR3-1066	0A89442	Intel Xeon E5-2600 v2 Series											Xeon E5-2697 v2	12	24	2.7 GHz	3.5 GHz	30MB	8 GT/s	130 W	DDR3-1866	0C19546	Xeon E5-2695 v2	12	24	2.4 GHz	3.2 GHz	30MB	8 GT/s	115 W	DDR3-1866	0C19547	Xeon E5-2690 v2	10	20	3 GHz	3.6 GHz	25MB	8 GT/s	130 W	DDR3-1866	0C19548	Xeon E5-2680 v2	10	20	2.8 GHz	3.6 GHz	25MB	8 GT/s	115 W	DDR3-1866	0C19549	Xeon E5-2670 v2	10	20	2.5 GHz	3.3 GHz	25MB	8 GT/s	115 W	DDR3-1866	0C19550	Xeon E5-2667 v2	8	16	3.3 GHz	4 GHz	25MB	8 GT/s	130 W	DDR3-1866	0C19553	Xeon E5-2660 v2	10	20	2.2 GHz	3 GHz	25MB	8 GT/s	95 W	DDR3-1866	0C19551	Xeon E5-2650 v2	8	16	2.6 GHz	3.4 GHz	20MB	8 GT/s	95 W	DDR3-1866	0C19552	Xeon E5-2650L v2	10	20	1.7 GHz	2.1 GHz	25MB	7.2 GT/s	70 W	DDR3-1600	0C19554	Xeon E5-2640 v2	8	16	2 GHz	2.5 GHz	20MB	7.2 GT/s	95 W	DDR3-1600	0C19555	Xeon E5-2630 v2	6	12	2.6 GHz	3.1 GHz	15MB	7.2 GT/s	80 W	DDR3-1600	0C19558	Xeon E5-2630L v2	6	12	2.4 GHz	2.8 GHz	15MB	7.2 GT/s	60 W	DDR3-1600	0C19556	Xeon E5-2620 v2	6	12	2.1 GHz	2.6 GHz	15MB	7.2 GT/s	80 W	DDR3-1600	0C19557	Xeon E5-2609 v2	4	4	2.5 GHz		10MB	6.4 GT/s	80 W	DDR3-1333	0C19559	Xeon E5-2603 v2	4	4	1.8 GHz		10MB	6.4 GT/s	80 W	DDR3-1333	0C19560
Processor Number	Processors Specifications*									Part Number																																																																																																																																																																																																																																																																																																																																												
	# of Cores	# of Threads	Clock Speed	Max Turbo Frequency	Cache	QPI Speed	Max TDP	Memory Speed																																																																																																																																																																																																																																																																																																																																														
Intel Xeon E5-2600 Series																																																																																																																																																																																																																																																																																																																																																						
Xeon E5-2690	8	16	2.9 GHz	3.8 GHz	20MB	8 GT/s	135 W	DDR3-1600	0A89429																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2680	8	16	2.7 GHz	3.5 GHz	20MB	8 GT/s	130 W	DDR3-1600	0A89430																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2670	8	16	2.6 GHz	3.3 GHz	20MB	8 GT/s	115 W	DDR3-1600	0A89431																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2667	6	12	2.9 GHz	3.5 GHz	15MB	8 GT/s	130 W	DDR3-1600	0A89435																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2665	8	16	2.4 GHz	3.1 GHz	20MB	8 GT/s	115 W	DDR3-1600	0A89432																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2660	8	16	2.2 GHz	3 GHz	20MB	8 GT/s	95 W	DDR3-1600	0A89462																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2650L	8	16	1.8 GHz	2.3 GHz	20MB	8 GT/s	70 W	DDR3-1600	0A89434																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2650	8	16	2 GHz	2.8 GHz	20MB	8 GT/s	95 W	DDR3-1600	0A89433																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2643	4	8	3.3 GHz	3.5 GHz	10MB	8 GT/s	130 W	DDR3-1600	0A89440																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2640	6	12	2.5 GHz	3 GHz	15MB	7.2 GT/s	95 W	DDR3-1333	0A89436																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2630L	6	12	2 GHz	2.5 GHz	15MB	7.2 GT/s	60 W	DDR3-1333	0A89439																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2630	6	12	2.3 GHz	2.8 GHz	15MB	7.2 GT/s	95 W	DDR3-1333	0A89437																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2620	6	12	2 GHz	2.5 GHz	15MB	7.2 GT/s	95 W	DDR3-1333	0A89438																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2609	4	4	2.4 GHz		10MB	6.4 GT/s	80 W	DDR3-1066	0A89441																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2603	4	4	1.8 GHz		10MB	6.4 GT/s	80 W	DDR3-1066	0A89442																																																																																																																																																																																																																																																																																																																																													
Intel Xeon E5-2600 v2 Series																																																																																																																																																																																																																																																																																																																																																						
Xeon E5-2697 v2	12	24	2.7 GHz	3.5 GHz	30MB	8 GT/s	130 W	DDR3-1866	0C19546																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2695 v2	12	24	2.4 GHz	3.2 GHz	30MB	8 GT/s	115 W	DDR3-1866	0C19547																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2690 v2	10	20	3 GHz	3.6 GHz	25MB	8 GT/s	130 W	DDR3-1866	0C19548																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2680 v2	10	20	2.8 GHz	3.6 GHz	25MB	8 GT/s	115 W	DDR3-1866	0C19549																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2670 v2	10	20	2.5 GHz	3.3 GHz	25MB	8 GT/s	115 W	DDR3-1866	0C19550																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2667 v2	8	16	3.3 GHz	4 GHz	25MB	8 GT/s	130 W	DDR3-1866	0C19553																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2660 v2	10	20	2.2 GHz	3 GHz	25MB	8 GT/s	95 W	DDR3-1866	0C19551																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2650 v2	8	16	2.6 GHz	3.4 GHz	20MB	8 GT/s	95 W	DDR3-1866	0C19552																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2650L v2	10	20	1.7 GHz	2.1 GHz	25MB	7.2 GT/s	70 W	DDR3-1600	0C19554																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2640 v2	8	16	2 GHz	2.5 GHz	20MB	7.2 GT/s	95 W	DDR3-1600	0C19555																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2630 v2	6	12	2.6 GHz	3.1 GHz	15MB	7.2 GT/s	80 W	DDR3-1600	0C19558																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2630L v2	6	12	2.4 GHz	2.8 GHz	15MB	7.2 GT/s	60 W	DDR3-1600	0C19556																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2620 v2	6	12	2.1 GHz	2.6 GHz	15MB	7.2 GT/s	80 W	DDR3-1600	0C19557																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2609 v2	4	4	2.5 GHz		10MB	6.4 GT/s	80 W	DDR3-1333	0C19559																																																																																																																																																																																																																																																																																																																																													
Xeon E5-2603 v2	4	4	1.8 GHz		10MB	6.4 GT/s	80 W	DDR3-1333	0C19560																																																																																																																																																																																																																																																																																																																																													
Memory type	1600MHz, RDIMM and LV RDIMM, DDR3, 4-channel per processor, 240-pin																																																																																																																																																																																																																																																																																																																																																					
Memory DIMM sockets	twenty DIMM sockets (12 sockets for CPU 1, 8 sockets for CPU 2)																																																																																																																																																																																																																																																																																																																																																					
Memory capacity	Up to 320GB (16GBx20)																																																																																																																																																																																																																																																																																																																																																					
Memory protection	ECC, memory mirroring, memory sparing																																																																																																																																																																																																																																																																																																																																																					
Memory options	<table border="1"> <thead> <tr> <th>Memory options</th> <th>Part Number</th> </tr> </thead> <tbody> <tr> <td>ThinkServer 4GB DDR3L-1600MHz (1RX8) RDIMM</td> <td>0C19533</td> </tr> <tr> <td>ThinkServer 8GB DDR3L-1600MHz (2RX8) RDIMM</td> <td>0C19534</td> </tr> <tr> <td>ThinkServer 16GB DDR3L-1600MHz (2RX4) RDIMM</td> <td>0C19535</td> </tr> </tbody> </table> <p><i>Notes:</i> <ul style="list-style-type: none"> Actual memory operating speed depends on processor memory controller speed, installed memory speed, and quantity of memory DIMMs By default, the voltage of LV RDIMM is 1.5V and can be changed to 1.35V in BIOS setting When using Intel Xeon E5-2600 series processors, LV RIMM is needed to run at 1.5V to support all 20 memory DIMM sockets. If LV RIMM runs at 1.35V, only 16 memory DIMM sockets are functional (8 of 12 for CPU 1, 8 for CPU 2) </p>	Memory options	Part Number	ThinkServer 4GB DDR3L-1600MHz (1RX8) RDIMM	0C19533	ThinkServer 8GB DDR3L-1600MHz (2RX8) RDIMM	0C19534	ThinkServer 16GB DDR3L-1600MHz (2RX4) RDIMM	0C19535																																																																																																																																																																																																																																																																																																																																													
Memory options	Part Number																																																																																																																																																																																																																																																																																																																																																					
ThinkServer 4GB DDR3L-1600MHz (1RX8) RDIMM	0C19533																																																																																																																																																																																																																																																																																																																																																					
ThinkServer 8GB DDR3L-1600MHz (2RX8) RDIMM	0C19534																																																																																																																																																																																																																																																																																																																																																					
ThinkServer 16GB DDR3L-1600MHz (2RX4) RDIMM	0C19535																																																																																																																																																																																																																																																																																																																																																					

ThinkServer RD640 Optional Configurations - Storage and RAID

Disk drive bays	Supports one of the following configurations: <ul style="list-style-type: none"> • 8 x 3.5" SAS/SATA disk drive bays • 8 x 2.5" SAS/SATA disk drive bays • 16 x 2.5" SAS/SATA disk drive bays 						
Disk drive options	Disk drive options						Part Number
	Hot-swap Disk drive for 3.5" bay						
	3.5" SATA Hard Drive						
	ThinkServer 3.5" 500GB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive						0A89473
	ThinkServer 3.5" 1TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive						0A89474
	ThinkServer 3.5" 2TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive						0A89475
	ThinkServer 3.5" 3TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive						0A89477
	ThinkServer 3.5" 4TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive						0C19520
	3.5" SAS Hard Drive						
	ThinkServer 3.5" 1TB 7.2K SAS 6Gbps Hot Swap Hard Drive						0C19530
	ThinkServer 3.5" 2TB 7.2K SAS 6Gbps Hot Swap Hard Drive						0C19531
	ThinkServer 3.5" 3TB 7.2K SAS 6Gbps Hot Swap Hard Drive						0C19532
	ThinkServer 3.5" 300GB 15K SAS 6Gbps Hot Swap Hard Drive						67Y2616
	ThinkServer 3.5" 600GB 15K SAS 6Gbps Hot Swap Hard Drive						67Y2618
	2.5" SSD for 3.5" disk bay						
	ThinkServer 2.5" 100GB MLC SATA Solid State Drive to 3.5" Kit						0C19571
	ThinkServer 2.5" 200GB MLC SATA Solid State Drive to 3.5" Kit						0C19572
	ThinkServer 2.5" 400GB MLC SATA Solid State Drive to 3.5" Kit						0C19573
	Hot-swap Disk drive for 2.5" bay						
	2.5" SATA Hard Drive						
	ThinkServer 2.5" 500GB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive						0C19495
	ThinkServer 2.5" 1TB 7.2K Enterprise SATA 6Gbps Hot Swap Hard Drive						0C19496
	2.5" SAS Hard Drive						
	ThinkServer 2.5" 300GB 10K SAS 6Gbps Hot Swap Hard Drive						67Y2619
	ThinkServer 2.5" 600GB 10K SAS 6Gbps Hot Swap Hard Drive						67Y2621
	ThinkServer 2.5" 900GB 10K SAS 6Gbps Hot Swap Hard Drive						0A89409
	ThinkServer 2.5" 300GB 15K SAS 6Gbps Hot Swap Hard Drive						0C19494
	2.5" SSD						
ThinkServer 2.5" 100GB MLC SATA Solid State Drive						0A89420	
ThinkServer 2.5" 200GB MLC SATA Solid State Drive						0A89418	
ThinkServer 2.5" 400GB MLC SATA Solid State Drive						0A89419	
RAID support	RAID adapter	RAID support	Device Support	Cache	Host bus type	Data transfer rates (per port)	Optional upgrades
	ThinkServer RAID 500 (LSI® SAS 9240-8i)	0, 1, 10	SAS/SATA		PCI Express	6Gb/s	optional upgrade key, add RAID 5, 50 support
	ThinkServer RAID 700 (LSI SAS 9260-8i)	0, 1, 10, 5, 50, 6, 60	SAS/SATA	512MB	PCI Express	6Gb/s	optional intelligent Battery Backup Unit (iBBU08)
	ThinkServer RAID 710 (LSI SAS 9270CV-8i)	0, 1, 10, 5, 50, 6, 60	SAS/SATA	1GB	PCI Express	6Gb/s	<ul style="list-style-type: none"> • optional CacheVault flash cache with super capacitor • optional CacheCade® Pro 2.0 • optional FastPath
RAID options	RAID controller and RAID upgrade options						Part Number
	ThinkServer RAID 500 Adapter II						0A89464
	ThinkServer RAID 500 Upgrade Key for Advanced RAID						0A89407
	ThinkServer RAID 700 Adapter II						0A89463
	ThinkServer RAID 700 Battery						67Y2647
	ThinkServer RAID 710 Adapter						0C19489
	ThinkServer RAID 710 Super Capacitor Module (CacheVault)						0C19490
	ThinkServer RAID 710 FastPath Software Key						0C19491
ThinkServer RAID 710 CacheCade Pro 2.0 Software Key						0C19492	

ThinkServer RD640 Optional Configurations - Network, System Management, Power Supply

Network options	Network and HBA options	Part Number
	ThinkServer 1 Gbps Ethernet I350-T2 Server Adapter by Intel	0C19506
	ThinkServer 1 Gbps Ethernet I350-T4 Server Adapter by Intel	0C19507
	Lenovo 10Gbps Ethernet X540-T2 Server Adapter by Intel	0C19497
	Lenovo 10Gbps Ethernet X520-DA2 Server Adapter by Intel	0C19486
	Lenovo 10Gbps Ethernet Fiber Module by Intel	0C19488
	Lenovo 10Gbps Ethernet X520-SR2 Server Adapter by Intel	0C19487
	ThinkServer QLE8242-CU-CK Dual Port CNA by QLogic	0C19483
	HBA	
	ThinkServer LPe1250 Single Port 8Gb Fibre Channel HBA by Emulex	0C19476
ThinkServer LPe12002 Dual Port 8Gb Fibre Channel HBA by Emulex	0C19478	
Security options	Trusted Platform Module options	Part Number
	ThinkServer Trusted Platform Module	0A89428
Systems management options for iKVM	System Management options	Part Number
	ThinkServer Management Module Premium	67Y2624
Power supply options	Power supply options	Part Number
	ThinkServer 800W Gold Hot Swap Redundant Power Supply for Rack	4X20E54690

ThinkServer SA120 Direct Attached Storage Photography



Front View



Rear View
(With optional 2nd I/O module and 2nd power supply)



Rear View
(With optional 4 x 2.5" SATA SSD hot-swap disk drive bays, 2nd I/O module, and 2nd power supply)


ThinkServer SA120 Direct Attached Storage - Standard Models

Type	Type-model	I/O Module (1 or 2)	Front 12 x 3.5" disk bays for SAS disk drives	Rear 4 x 2.5" disk bays for SATA SSD	Front 3.5" SAS hot-swap drives (up to 12)	Rear 2.5" SATA SSD hot-swap drives (up to 4)	External minSAS Cable (SFF8088 to SFF8088)	Power Supply (1 or 2)	Rail kit	Base Warranty
70F1	70F10002xx	2	12 x 3.5"	No	Open	No	2 x 1m	2 x 550W	Rail kit	3
70F1	70F10003xx	1	12 x 3.5"	No	Open	No	1 x 1m	1 x 550W	Rail kit	3

70F1: TopSeller models


Connection mode	Connects directly to host server, up to 4 enclosures per port (cascading mode)												
Compatible host server and RAID controllers/Host Bus adapters	<p>Supports the following RAID controller or Host Bus adapters on compatible host servers. RAID levels are supported by RAID controller on host server:</p> <table border="1"> <thead> <tr> <th>RAID/HBA adapters</th> <th>PN</th> <th>TD340</th> <th>RD330</th> </tr> </thead> <tbody> <tr> <td>LSI 9280-8e 6Gb SAS RAID HBA by LSI (0/1/10/5/50/6/60)</td> <td>4XB0F28645</td> <td>Yes</td> <td>Yes</td> </tr> <tr> <td>LSI 9286CV-8e 6Gb SAS RAID HBA by LSI (0/1/10/5/50/6/60)</td> <td>4XB0F28646</td> <td>Yes</td> <td></td> </tr> </tbody> </table>	RAID/HBA adapters	PN	TD340	RD330	LSI 9280-8e 6Gb SAS RAID HBA by LSI (0/1/10/5/50/6/60)	4XB0F28645	Yes	Yes	LSI 9286CV-8e 6Gb SAS RAID HBA by LSI (0/1/10/5/50/6/60)	4XB0F28646	Yes	
RAID/HBA adapters	PN	TD340	RD330										
LSI 9280-8e 6Gb SAS RAID HBA by LSI (0/1/10/5/50/6/60)	4XB0F28645	Yes	Yes										
LSI 9286CV-8e 6Gb SAS RAID HBA by LSI (0/1/10/5/50/6/60)	4XB0F28646	Yes											
I/O Module	Supports 1 or 2 ThinkServer Storage Array 6Gbps I/O Modules, redundant with two I/O modules												
Front 3.5" Disk Bays	12 x 3.5" SAS hard drive bays, hot-swap, supports 1TB/2TB/3TB/4TB 3.5" SAS 6.0Gb/s 7200 rpm hard drives												
Rear 2.5" Disk Bays (optional)	Optional 4 x 2.5" SATA SSD hot-swap disk drive bays. Requires optional ThinkServer 2.5" SATA SSD Cage with SATA Interposers (4XF0F28766, includes two SSD cages for 4 bays)												
Maximum storage per enclosure	Front 3.5" Disk Bays: up to 48TB (using 12 x 4TB 3.5" SAS hard drives) Optional rear 2.5" Disk Bays: up to 3.2TB (using 4 x 800GB 2.5" SSD drives)												
External minSAS Cable (option)	Optional 0.5m/1.0m/2.0m/4.0m/6.0m SFF8088 to SFF8088 26-pin Mini-SAS cables												
Fan module	Two fan modules standard, hot-swap, redundant, two fans per fan module												
Power supply	One or two 550 watts standard, two maximum, rear access, hot-swap, 80 PLUS Gold qualified, redundant with two power supplies												
Rail kit	Includes static rail kit for rack mount												
Systems Management	<ul style="list-style-type: none"> • SCSI Enclosure Services (SES) command set • Enclosure management via IOCC controller • Includes one RS232 to RJ11 cable for remote debug and firmware upgrade 												
Mechanical	<ul style="list-style-type: none"> • 2U rack, static rail kit included • 19"W x 15.51"D x 3.4"H (with rack handles) • 482.6mm W x 394.05mm D x 86.6mm H (with rack handles) • 22 kg (48.5 lb) when fully configured 												
Environment	<ul style="list-style-type: none"> • Air temperature: Operating: 10°C to 35°C (50°F to 95°F) Storage: -40°C to 70°C (-40°F to 158°F) in original package • Altitude: 0-10000ft (0-3048m), unpressurized • Humidity: Operating: 8% to 80% (non-condensing) Storage without package: 8% to 80% (non-condensing) Storage with package: 8% to 90% (non-condensing) 												

Front



12 x 3.5" hot-swap SAS disk drive bays

Rear

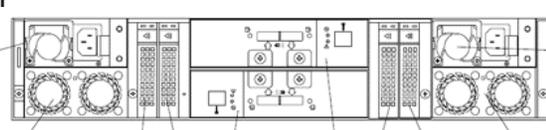

1	Power Supply 1	5	I/O module 1
2/9	Fan modules	6	I/O module 2 (optional)
3/4/7/8	Rear 4 x 2.5" SATA SSD drive bays (optional)	10	Power Supply 2 (optional)

Rear Ports (per I/O module)

- 1 SAS (SFF8088) IN connector for connection to host server
- 1 SAS (SFF8088) OUT connector for connection to another enclosure
- 1 RJ-11 port for remote debug and firmware upgrade

Core Options

3.5" 1TB 7.2K SAS 6Gbps Hot Swap Hard Drive	0C19530
3.5" 2TB 7.2K SAS 6Gbps Hot Swap Hard Drive	0C19531
3.5" 3TB 7.2K SAS 6Gbps Hot Swap Hard Drive	0C19532
3.5" 4TB 7.2K SAS 6Gbps Hot Swap Hard Drive	4XB0F28635
3.5" 6TB 7.2K SAS 12Gbps Hot Swap Hard Drive	4XB0F28683
2.5" 100GB Mainstream Multipurpose SATA 6Gbps Hot Swap SSD	4XB0F28636
2.5" 200GB Mainstream Multipurpose SATA 6Gbps Hot Swap SSD	4XB0F28637
2.5" 400GB Mainstream Multipurpose SATA 6Gbps Hot Swap SSD	4XB0F28638
2.5" 800GB Mainstream Multipurpose SATA 6Gbps Hot Swap SSD	4XB0F28639
2.5" 120GB Value Read-Optimized SATA 6Gbps Hot Swap SSD	4XB0F28615
2.5" 240GB Value Read-Optimized SATA 6Gbps Hot Swap SSD	4XB0F28616
2.5" 300GB Value Read-Optimized SATA 6Gbps Hot Swap SSD	4XB0F28640
2.5" 480GB Value Read-Optimized SATA 6Gbps Hot Swap SSD	4XB0F28617
2.5" 800GB Value Read-Optimized SATA 6Gbps Hot Swap SSD	4XB0F28641
550W Gold Hot Swap Redundant Power Supply	4X20E54689
ThinkServer Storage Array 6Gbps IO Module	4XF0F28765
ThinkServer 2.5" SATA SSD Cage with SATA Interposers (includes two SSD cages for 4 bays)	4XF0F28766
0.5 meters 26 Pin (SFF-8088 to SFF-8088) External mini-SAS cable	4X90F31494
1 meter 26 Pin (SFF-8088 to SFF-8088) External mini-SAS cable	4X90F31495
2 meters 26 Pin (SFF-8088 to SFF-8088) External mini-SAS cable	4X90F31496
4 meters 26 Pin (SFF-8088 to SFF-8088) External mini-SAS cable	4X90F31497
6 meters 26 Pin (SFF-8088 to SFF-8088) External mini-SAS cable	4X90F31498

Disclaimer

Lenovo provides the information in the Product Specifications Reference (PSREF) withdrawn product books on an "AS-IS" basis. Because the actual products have been withdrawn from marketing, the information in these withdrawn product books is no longer maintained or updated. The referenced footnote numbering may not correspond with the listed footnotes.

PSREF books for the withdrawn systems:

http://www.lenovo.com/psref/psrefs_withdrawn.html

Availability: All offers subject to availability. Lenovo reserves the right to alter product offerings and specifications at any time, without notice. Lenovo is not responsible for photographic or typographic errors.

Warranty: For a copy of applicable product warranties, write to: Warranty Support Dept., EMEA Services, Lenovo, Eisteinova 21, 851 01 Bratislava, Slovakia. Lenovo makes no representation or warranty regarding third party products or services.

¹ **Limited warranty:** Support unrelated to a warranty issue may be subject to additional charges.

² **Hard drive:** GB = billion bytes, TB = trillion bytes. Accessible capacity is less.

³ **Systems with limited onsite service** are designed to be repaired during the applicable warranty period primarily with customer-replaceable parts provided by Lenovo. Lenovo will only send a technician onsite to perform a repair if (a) remote telephone diagnosis and/or customer part replacement are unable to resolve the problem, or (b) the part is one of the few designated by Lenovo for onsite replacement. For a list of onsite replaceable parts, contact Lenovo. Support unrelated to a warranty issue may be subject to additional charges. Support phone list available at www-307.ibm.com/pc/support/site.wss/document.do?Indocid=MIGR-70552

⁴ **SATA/SAS:** The system configuration supports the installation of either SATA or SAS disks. A configuration including both SATA and SAS disks is not supported.

⁷ **Lenovo Services:** These services are available for machines normally used for business, professional, or trade purposes, rather than personal, family, or household purposes. Not all machine types and models are covered. Service period begins with the equipment date of purchase. Service must be purchased during the original limited product warranty period. Service levels are response time objectives and are not guarantees. If the machine problem turns out to be a Customer Replaceable Unit (CRU), a part will be express shipped to you for quick replacement. See Lenovo Warranty Services terms and conditions for complete details and restrictions.

⁸ **RAID:** Supported RAID levels for a system will vary from the stated capabilities of the RAID controller due to dependencies on the number and capacity of physical disks in the system and on customer requirements for performance, fault tolerance, or data redundancy.

RAID levels and requirements:

- **RAID 0 (striping)** provides increased performance by writing data across multiple drives.
- **RAID 1 (mirroring)** provides fault tolerance by writing the data on two drives.
- **RAID 5 (striping with parity)** uses distributed parity data to provide fault tolerance more efficiently than RAID 1. Requires three or more drives.
- **RAID 6 (striped set with dual distributed parity)** provides fault tolerance from two drive failures; array continues to operate with up to two failed drives. Requires four drives.
- **RAID 10 (or RAID 1+0)** combines RAID 1 and RAID 0 to create a stripe of mirrors that is fault tolerant while offering increased performance. Requires four drives.
- **RAID 50 (or RAID 5+0)** combines RAID 5 and RAID 0 to create block-level striping with distributed parity improving performance over RAID 5. Requires six drives.
- **RAID 60 (or RAID 6+0)** combines RAID 6 and RAID 0 to create block-level striping with distributed double parity improving performance over RAID 6. Requires eight drives.

¹⁴ **Response times may vary.** Response time is an average target and omitted service level. May exclude some holidays. Telephone support may be subject to additional charges.

ThinkServer™

This publication was developed for products and services offered in Europe, Middle East, and Africa. Lenovo may not offer the products, services or features discussed in this document in other countries. Lenovo may withdraw an offering at any time. Information is subject to change without notice. Consult your local representative for information on offerings available in your area.

Lenovo reserves the right to change specifications and other product information at any time without prior notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions; therefore this disclaimer may not apply to you.

Trademarks: Lenovo, the Lenovo logo, New World, New Thinking., Access Connections, Rescue and Recovery, ThinkCentre, ThinkPad, ThinkServer, ThinkStation, ThinkVantage, and ThinkVision are trademarks of Lenovo. Microsoft, Windows, and Vista are registered trademarks of Microsoft Corporation. Intel, the Intel logo, Intel Inside logo, Intel Core and Core Inside are trademarks of Intel Corporation in the US and other countries. Other company, product, or service names may be trademarks or service marks of others.

Visit www.lenovo.com/safecomputing periodically for the latest information on safe and effective computing.

Visit www.lenovo.com/thinkserver/europe for the latest version of Product Specifications Reference.

© Lenovo, 2015.
All rights reserved.

Lenovo
1009 Think Place
Morrisville, NC 27560
U.S.A.

svbook_WE.pdf