

Shenzhen Reflying Electronic Co., Ltd

# TEST REPORT

**SCOPE OF WORK**

FCC TESTING–AW001-PB, RPB39

**REPORT NUMBER**

180111017SZN-001

**ISSUE DATE**

24 January 2018

**[REVISED DATE]**

[-----]

**PAGES**

34

**DOCUMENT CONTROL NUMBER**

FCC Part 18\_b

© 2017 INTERTEK



**Shenzhen Reflying Electronic Co., Ltd**Application  
For  
Certification**FCC ID: A7M-AW001-PB****Keychain Power Bank****Model: AW001-PB**  
Additional Model: RPB39

Report No.: 180111017SZN-001

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 18, mention 47 CFR [10-1-16]

**Prepared and Checked by:****Approved by:****Sign on File**  
**Surel Guo**  
**Engineer**

---

**Kidd Yang**  
**Senior Project Engineer**  
**Date: 24 January 2018**

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**Intertek Testing Service Shenzhen Ltd. Longhua Branch**

1F/2F, Building B, QiaoAn Scientific Technology Park, Shangheng Community, Guanhu Subdistrict, Longhua District, Shenzhen, P.R. China.

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

## LIST OF EXHIBITS

### *INTRODUCTION*

<i>EXHIBIT 1:</i>	Summary of Tests
<i>EXHIBIT 2:</i>	General Description
<i>EXHIBIT 3:</i>	System Test Configuration
<i>EXHIBIT 4:</i>	Measurement Results
<i>EXHIBIT 5:</i>	Equipment Photographs
<i>EXHIBIT 6:</i>	Product Labeling
<i>EXHIBIT 7:</i>	Technical Specifications
<i>EXHIBIT 8:</i>	Instruction Manual
<i>EXHIBIT 9:</i>	Confidentiality Request
<i>EXHIBIT 10:</i>	Miscellaneous Information
<i>EXHIBIT 11:</i>	Test Equipment List

## GENERAL INFORMATION

<b>Applicant / Company:</b>	Shenzhen Reflying Electronic Co., Ltd 6 Bldg, GaoXinJian Industrial zone, HePing village, Fuyong Town, Bao'an district, Shenzhen, Guangdong, China.
<b>Equipment Under Test (EUT):</b>	
Product Description:	Keychain Power Bank
Model:	AW001-PB, RPB39
Brand Name:	NA
Nominal operating frequency	550KHz
Maximum RF energy generated	2W
<b>Sample Receipt Date:</b>	11 January 2018
<b>Test Conducted Date:</b>	11 January 2018 to 22 January 2018
<b>Issue Date:</b>	23 January 2018
<b>Test Site and Location:</b>	Intertek Testing Services Shenzhen Ltd. Longhua Branch 1F/2F, Building B, QiaoAn Scientific Technology Park, Shangkeng Community, Guanhu Subdistrict, Longhua District, Shenzhen, P.R. China
<b>Environmental Conditions:</b>	Temperature: +10 to 40 °C Humidity: 10 to 90%

## Table of Contents

<b>1.0</b>	<b><u>Summary of Test Results</u></b> .....	<b>7</b>
<b>2.0</b>	<b><u>General Description</u></b> .....	<b>9</b>
2.1	Product Description .....	9
2.2	Related Submittal(s) Grants .....	9
2.3	Test Methodology .....	9
2.4	Test Facility .....	9
<b>3.0</b>	<b><u>System Test Configuration</u></b> .....	<b>11</b>
3.1	Justification .....	11
3.2	EUT Exercising Software .....	11
3.3	Special Accessories .....	11
3.4	Measurement Uncertainty .....	11
3.5	Equipment Modification .....	11
3.6	Support Equipment List and Description .....	12
<b>4.0</b>	<b><u>Measurement Results</u></b> .....	<b>14</b>
4.1	Field Strength Calculation .....	14
4.2	Radiated Emission Configuration Photograph .....	15
4.3	Radiated Spurious Emission .....	15
4.4	Conducted Emission Configuration Photograph .....	17
4.5	Conducted Emission .....	17
<b>5.0</b>	<b><u>Equipment Photographs</u></b> .....	<b>21</b>
<b>6.0</b>	<b><u>Product Labelling</u></b> .....	<b>23</b>
<b>7.0</b>	<b><u>Technical Specifications</u></b> .....	<b>25</b>
<b>8.0</b>	<b><u>Instruction Manual</u></b> .....	<b>27</b>
<b>9.0</b>	<b><u>Miscellaneous Information</u></b> .....	<b>29</b>
9.1	Emissions Test Procedures .....	29
9.2	Radiated Emissions Test Setup .....	30
9.3	Conducted Emissions Test Configuration .....	30
9.4	Conducted Emissions Test Setup .....	30
<b>10.0</b>	<b><u>Confidentiality Request</u></b> .....	<b>32</b>
<b>11.0</b>	<b><u>Test Equipment List</u></b> .....	<b>34</b>

## List of attached file

Exhibit type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
External Photo	External Photo	external photos.pdf
Internal Photo	Internal Photo	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
Operation Description	Technical Description	descri.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidentiality Letter	request.pdf
Cover Letter	Letter of Agency	agency.pdf

**EXHIBIT 1**  
**SUMMARY OF TEST RESULTS**

**1.0 Summary of Test results**

**Keychain Power Bank**

**Model: AW001-PB**

**FCC ID: A7M-AW001-PB**

TEST ITEM	REFERENCE	RESULTS
Field Strength Limit	18.305	Pass
Conduction Limit	18.307	Pass



## **EXHIBIT 2**

### **GENERAL DESCRIPTION**

## 2.0 General Description

### 2.1 Product Description

The Equipment Under Test (EUT) is a Keychain Power Bank operating at 550 kHz. The EUT designed to work with client devices is incapable of transmitting any form of intelligent communication wirelessly. The EUT is powered by DC 3.7V, 1000mAh rechargeable battery which can be charged by DC 5V, 1A. For more detailed features description, please refer to the user's manual.

The Model: RPB39 is the same as the Model: AW001-PB in hardware and electronic aspect. The difference in model number and appearance serve as marketing strategy.

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

### 2.2 Related Submittal(s) Grants

This is an application for certification of a wireless charger. And related report for FCC SDOC is subjected to report number: 180111016SZN-001.

### 2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the FCC procedures in MP-5, "Methods of Measurements of Radio Noise Emissions from Industrial, Scientific and Medical equipment (February 1986)", Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

### 2.4 Test Facility

The Semi-Anechoic chamber and shield room used to collect the radiated data and conducted data are Intertek **Testing Services Shenzhen Ltd. Longhua Branch** and located at 1F/2F, Building B, QiaoAn Scientific Technology Park, ShangKeng Community, Guanhu Subdistrict, Longhua District, Shenzhen, P.R. China. This test facility and site measurement data have been fully placed on file with File Number: CN1188.

**EXHIBIT 3**  
**SYSTEM TEST CONFIGURATION**

## 3.0 System Test Configuration

### 3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in MP5-1986.

The EUT was powered by DC 3.7V, 1000mAh rechargeable battery which was charged by DC 5V, 1A with an adapter during the test. Only the worst case data was shown in the report.

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data report in Exhibit 4.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the styrene turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

### 3.2 EUT Exercising Software

N/A.

### 3.3 Special Accessories

There is no special accessories necessary for compliance of this product.

### 3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

### 3.5 Equipment Modification

Any modifications installed previous to testing by Shenzhen Reflying Electronic Co., Ltd will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

### 3.6 Support Equipment List and Description

This product was tested in the following configuration:

Refer List:

Description	Manufacturer	Detail
Adapter (Provided by Intertek)	SimpliSafe	Model: HNBB050100UB Input: AC 100-240V, 50/60Hz, 0.35A Output: DC 5V, 1.0A
USB Cable	Reflying	unshielded, Length 30cm
Apple Watch	Apple	Series2

**EXHIBIT 4**  
**MEASUREMENT RESULTS**

## 4.0 Measurement Results

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

### 4.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where

- FS = Field Strength in dB $\mu$ V/m
- RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where

- FS = Field Strength in dB $\mu$ V/m
- RR = RA - AG - AV in dB $\mu$ V
- LF = CF + AF in dB

Assume a receiver reading of 52.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

$$RA = 52.0 \text{ dB}\mu\text{V/m}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$AV = 5.0 \text{ dB}$$

$$FS = RR + LF$$

$$FS = 18 + 9 = 27 \text{ dB}\mu\text{V/m}$$

$$RR = 18.0 \text{ dB}\mu\text{V}$$

$$LF = 9.0 \text{ dB}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(27 \text{ dB}\mu\text{V/m})/20] = 22.4 \mu\text{V/m}$$

## 4.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

## 4.3 Radiated Spurious Emission

Worst Case Radiated Spurious Emission  
at  
0.030MHz

Judgement: Passed by 5.7dB margin

For the electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.



Applicant: Shenzhen Reflying Electronic Co., Ltd

Date of Test: January 22, 2018

Model: AW001-PB

Worst Case Operating Mode: Charging and power transfer

### Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBµV/m)	Limit at 3m (dBµV/m)	Margin (dB)
Horizontal	0.030	40.6	0.0	17.2	57.8	63.5	-5.7
Horizontal	0.036	38.5	0.0	15.9	54.4	63.5	-9.1
Horizontal	0.090	34.5	0.0	16.4	50.9	63.5	-12.6
Horizontal	0.161	34.2	0.0	16.3	50.5	63.5	-13.0
Horizontal	0.195	34.4	0.0	16.2	50.6	63.5	-12.9
Horizontal	0.381	37.2	0.0	16.8	54.0	63.5	-9.5
Horizontal	0.550	31.8	0.0	17.8	49.6	63.5	-13.9

- Notes:
1. Peak Detector Data unless otherwise stated.
  2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Loop antenna is used for the emission under 30MHz.
  5. Limits at 3 meter for radiated emissions below 30 MHz is converted from the Limits at 300 meter according to the Formula:  

$$\text{Limits at 3 meter (dBµV/m)} = \text{Limits at 30 meter (dBµV/m)} + 20 \log(300/3)$$
  6. Other emissions more than 20dB below the limit are not reported.
  7. The measurement uncertainty is  $\pm 4.8\text{dB}$  at a level of confidence of 95%.

#### 4.4 Conducted Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: conducted photos.pdf.

#### 4.5 Conducted Emission

Worst Case Conducted Configuration  
at  
0.150MHz

Judgement: Passed by 10.4dB margin

Applicant: Shenzhen Reflying Electronic Co., Ltd

Date of Test: January 22, 2018


Model: AW001-PB

Worst Case Operating Mode: Charging and power transfer

Phase: Live

## Graphic / Data Table

### Conducted Emissions Pursuant to FCC 18.307: Emissions Requirement

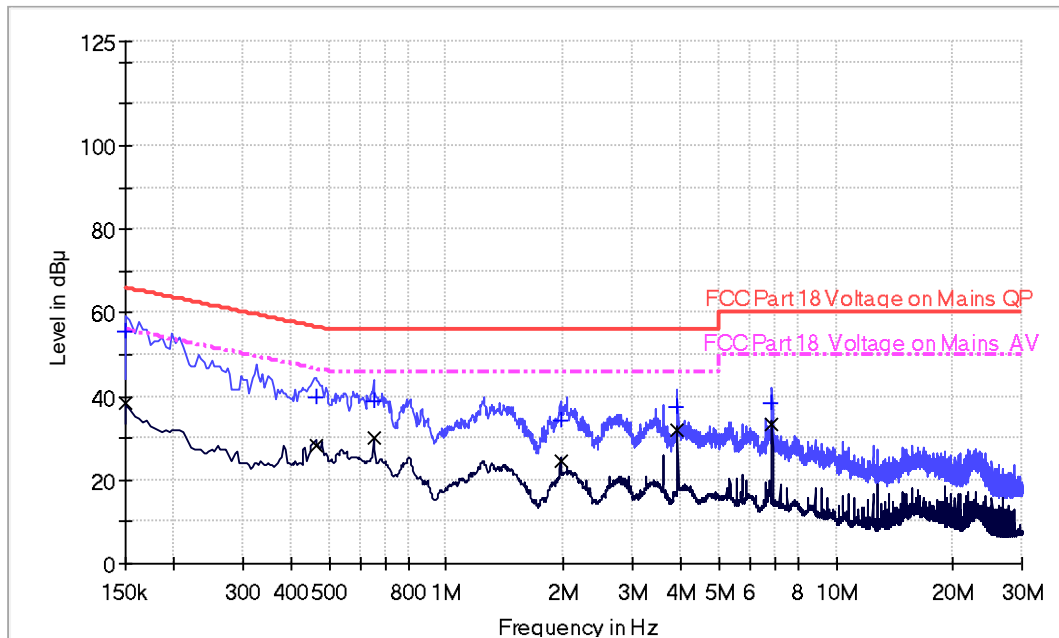

#### Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	55.6	9.000	L1	9.6	10.4	66.0
0.462000	39.9	9.000	L1	9.7	16.8	56.7
0.650000	38.9	9.000	L1	9.7	17.1	56.0
1.962000	34.4	9.000	L1	9.7	21.6	56.0
3.918000	37.7	9.000	L1	9.8	18.3	56.0
6.858000	38.5	9.000	L1	9.8	21.5	60.0

#### Limit and Margin AV

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	38.4	9.000	L1	9.6	17.6	56.0
0.462000	28.3	9.000	L1	9.7	18.4	46.7
0.650000	30.0	9.000	L1	9.7	16.0	46.0
1.962000	24.7	9.000	L1	9.7	21.3	46.0
3.918000	31.8	9.000	L1	9.8	14.2	46.0
6.858000	33.3	9.000	L1	9.8	16.7	50.0

Note: The measurement uncertainty is  $\pm 3.6$ dB at a level of confidence of 95%.

Applicant: Shenzhen Reflying Electronic Co., Ltd

Date of Test: January 22, 2018


Model: AW001-PB

Worst Case Operating Mode: Charging and power transfer

Phase: N

## Graphic / Data Table

### Conducted Emissions Pursuant to FCC 18.307: Emissions Requirement

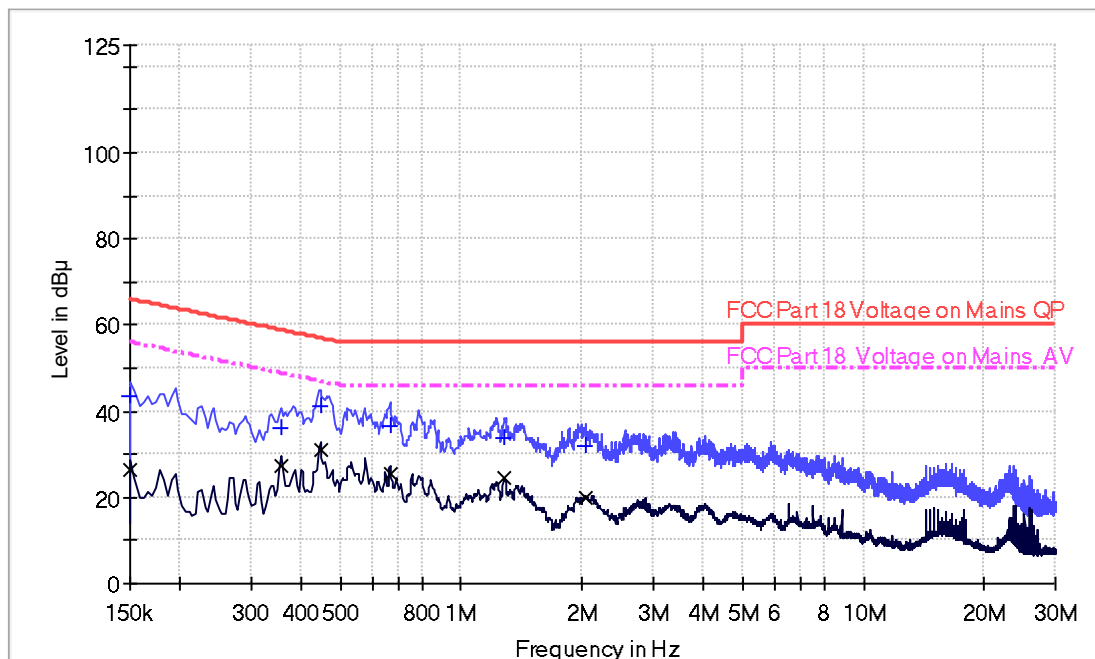

#### Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	43.4	9.000	N	9.6	22.6	66.0
0.358000	36.0	9.000	N	9.7	22.8	58.8
0.446000	41.1	9.000	N	9.7	15.8	56.9
0.666000	36.4	9.000	N	9.7	19.6	56.0
1.282000	33.9	9.000	N	9.7	22.1	56.0
2.038000	31.8	9.000	N	9.7	24.2	56.0

#### Limit and Margin AV

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	26.3	9.000	N	9.6	29.7	56.0
0.358000	27.5	9.000	N	9.7	21.3	48.8
0.446000	31.0	9.000	N	9.7	15.9	46.9
0.666000	25.5	9.000	N	9.7	20.5	46.0
1.282000	24.7	9.000	N	9.7	21.3	46.0
2.038000	19.8	9.000	N	9.7	26.2	46.0

Note: The measurement uncertainty is  $\pm 3.6$ dB at a level of confidence of 95%.

**EXHIBIT 5**  
**EQUIPMENT PHOTOGRAPHS**

## 5.0 Equipment Photographs

For electronic filing, the photographs are saved with filename: external photos.pdf & internal photos.pdf.

**EXHIBIT 6**  
**PRODUCT LABELLING**

## 6.0 Product Labeling

For electronic filing, the FCC ID label artwork and location is saved with filename: label.pdf.



**EXHIBIT 7**  
**TECHNICAL SPECIFICATIONS**

## 7.0 Technical Specifications

For electronic filing, the block diagram and circuit diagram are saved with filename: block.pdf and circuit.pdf respectively.

**EXHIBIT 8**  
**INSTRUCTION MANUAL**

## 8.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

**EXHIBIT 9**

**MISCELLANEOUS INFORMATION**

## 9.0 Miscellaneous Information

This miscellaneous information includes emission measuring procedure.

### 9.1 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of Industrial, Scientific and Medical equipment operating under FCC methods of measurements of radio noise emissions from Industrial, Scientific and Medical equipment.


Initial measurements are made near the EUT with the measuring antenna 3 meters from the nearest part of the EUT. The dummy load specified in Sections 4.1 or 4.2 is used, as applicable. The EUT is rotated about its horizontal axis on the turntable, and the polarization and height of the receiving antenna are varied to obtain the highest field strength on the particular frequency under observation. Measurements at the 3 meter distance are made in a large room or outdoors; with the equipment and antenna located so as to minimize effects due to reflections from the building structure or other items in the field. For measurements above ICE: and at 3 meters, an antenna of small aperture (i.e. , a small horn, without its reflector) is used, because the field over the area of a large antenna would be non-uniform, and such an antenna would not have the gain normally expected.

At each test frequency, the reading of the field strength meter is observed during the heating cycle as the following factors are varied:

- (1) EUT orientation;
- (2) Antenna orientation;
- (3) Antenna polarization

## 9.2 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

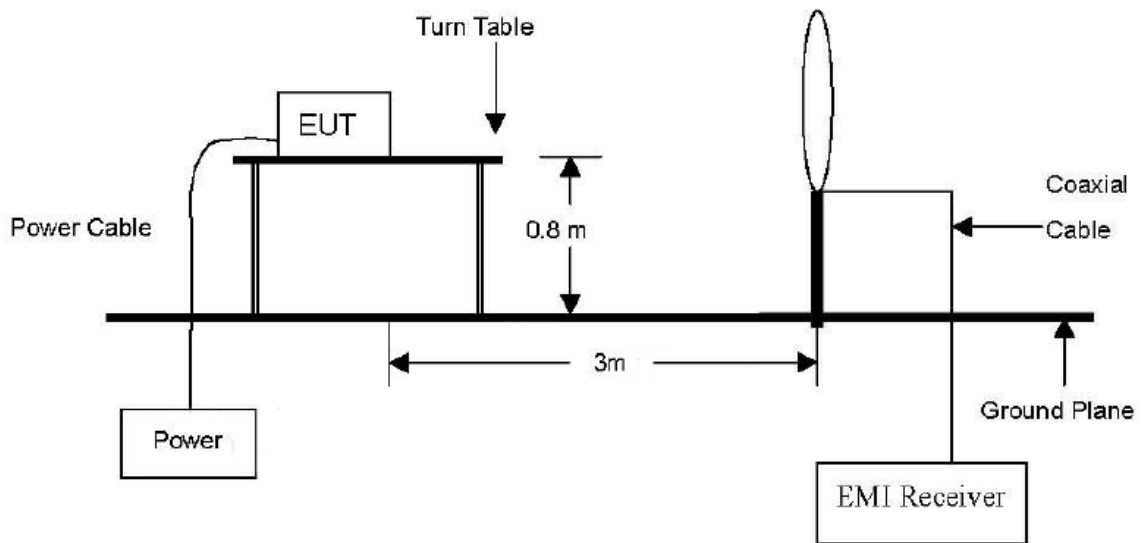


## 9.3 Conducted Emission Test Configuration

Conducted emissions test

Measurements of powerline conducted radio noise shall be expressed as the voltage developed across the 50-ohm port terminated by a 50-ohm measuring instrument. All voltage measurement shall be made at the plug end of the EUT power cord, e.g., by the use of mating plugs and receptacles on the EUT and LISN.

## 9.4 Conducted Emission Test Setup

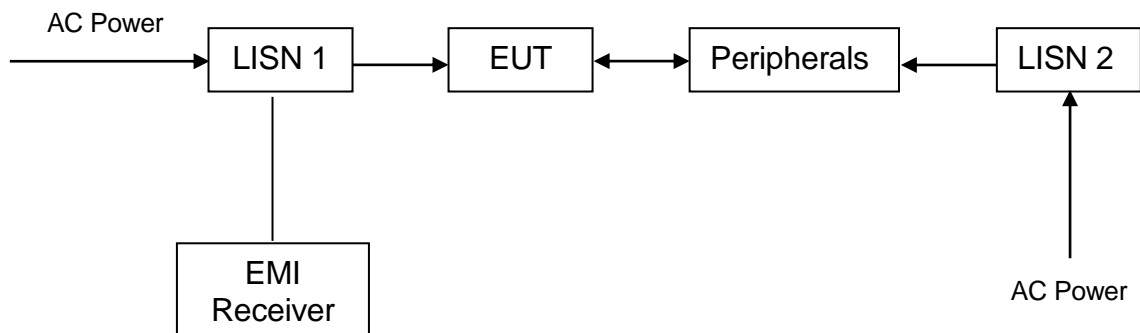

**EXHIBIT 10**  
**CONFIDENTIALITY REQUEST**



## 10.0 Confidentiality Request

For electronic filing, the confidentiality request of the tested EUT is saved with filename: request.pdf.

**EXHIBIT 11**  
**TEST EQUIPMENT LIST**

### 11.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-12	BiConiLog Antenna	ETS	3142E	00166158	20-Sep-2017	20-Sep-2018
SZ185-01	EMI Receiver	R&S	ESCI	100547	9-Feb-2017	9-Feb-2018
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	26-May-2017	26-May-2018
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	1-Jun-2017	1-Jun-2018
SZ056-06	Signal Analyzer	R&S	FSV 40	101101	7-Jul-2017	7-Jul-2018
SZ181-04	Preamplifier	Agilent	8449B	3008A024 74	9-Feb-2017	9-Feb-2018
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	16-Jan-2017	16-Jan-2019
SZ062-02	RF Cable	RADIALL	RG 213U	--	8-Jan-2018	8-Jul-2018
SZ062-05	RF Cable	RADIALL	0.04-26.5GHz	--	16-Sep-2017	16-Mar-2018
SZ062-12	RF Cable	RADIALL	0.04-26.5GHz	--	16-Sep-2017	16-Mar-2018
SZ067-04	Notch Filter	Micro-Tronics	BRM5070 2-02	--	14-Jun-2017	14-Jun-2018
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	30-Oct-2017	30-Oct-2018
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	30-Oct-2017	30-Oct-2018
SZ187-02	Two-Line V-Network	R&S	ENV216	100072	12-Jul-2017	12-Jul-2018
SZ188-03	Shielding Room	ETS	RFD-100	4100	16-Jan-2017	16-Jan-2019