

## iVMS-4200 Client Software

iVMS-4200 is versatile video management software for the DVRs, NVRs, IP cameras, encoders, access control devices, security control panels, video intercom devices, decoders, VCA devices, etc. It provides multiple functionalities, including real-time live view, video recording, remote search and playback, file backup, alarm receiving, etc., for the connected devices to meet the needs of small and medium-sized projects.

With the flexible distributed structure and easy-to-use operations, iVMS-4200 client software is widely applied to the surveillance project of financial, public security, military, telecommunications, transport, electricity, education, water conservancy industries, etc.

### Key Feature

#### Live View

- View settings and instant playback
- Live view on main/auxiliary screen
- Up to 64-window division for standard screen, and 48-window division for the wide screen
- Custom window division configurable
- Live view in fisheye mode for fisheye camera
- Master-slave tracking
- Resuming the latest live view status after client restart

#### Recording

- Recording both main stream and sub-stream for playback (if device supports)
- Remote manual recording
- Recording schedule for continuous recording, event recording and command recording
- Storing alarm pictures on Storage Server
- Providing SAN and CVR configuration for CVR device
- Video file overwritten and expired video file deleting

#### Alarm Management

- Camera linkage and multiple linkage actions
- Device arming and alarm output control
- Alarm configuration for camera event, alarm input, zone event and device exception
- Searching and exporting the linked pictures of alarm logs



- Audible warning and pop up image when alarm triggered
- Custom alarm sound as desired

## **Playback**

- Local and remote playback
- Instant playback, normal playback, alarm input playback, event playback, ATM playback, VCA playback, and fisheye playback
- Up to 16-ch synchronous playback
- Locate the playback time accurately
- Skipping the unconcerned video during VCA playback
- Searching the video files which contain POS information
- Providing Player in the installation directory to view the downloaded video file
- Merging the video files when downloading by date

## **Access Control and Video Intercom**

- Managing video intercom and access control in one module
- Adding cards, fingerprints, and permissions when adding a person
- Checking for duplicate fingerprint information
- Reporting card loss if the card is lost and canceling card loss if the card is found
- New design and interaction for time and attendance: Providing department schedule, multiple shift schedules, and various statistics
- Pre-defining scheduled report that the client will send to the email address automatically
- Real-time alarm management for added access control devices
- Subscribing alarm that the client can display in real-time alarm management when it is triggered
- Alarm linkage with added cameras, including pop-up live view and captured picture
- Adding access control point as hot spot on E-map and viewing the video of the linked camera
- Configuration wizard for access control and time and attendance

## **Security Control Panel**

- Real-time alarm management for added security control panels
- Subscribing alarm that the client can display in real-time alarm management when it is triggered
- Acknowledging the received alarm, viewing the alarm on E-map, etc.
- Alarm linkage with added cameras, including pop-up live view, captured picture
- Adding zone as hot spot on E-map and viewing the video of the linked camera
- Accessing AX-series security control device
- Configuration wizard

## **Statistics**

- Data statistics of heat map, people counting, counting, road traffic, face retrieval, license plate retrieval, behavior analysis, face capture, queuing-up time analysis, queue status analysis and intersection analysis.
- Showing large picture of face retrieval, license plate retrieval, and behavior analysis and the pictures can be exported for local storage

## **Network**

- Encoding devices, decoding devices, Hik-Connect devices, access control devices, security control panels, video intercom devices, storage servers, stream media servers connectable
- Checking device's online users
- NTP protocol for time synchronization
- Searching the active online devices
- Adding devices by Hik-Connect domain which have been added to the Hik-Connect account
- Adding devices by HiDDNS and IP Server; batch importing devices
- Generating QR code for encoding devices to add to the mobile client
- Two-way audio and broadcast function

## **Backup**

- Downloading video files to PC
- Log search and backup
- Importing and exporting the configuration file
- Auto backing up database according to the configured schedule

## **AI Dashboard**

- Displaying detection frames to showing the smart information in live view window
- Real-time checking the matched regular customer, VIP customer, and persons in blacklist information
- Comparing the captured face pictures with the faces in the picture library

## **General**

- Applied in local area network and wide area network
- Facial identification device such as DeepinView and DeepinMind
- H.264, H.264+, H.265, and H.265+ video encoding formats
- Transmission encryption when logging with SDK over TLS mode
- E-map function
- Remote configuration for added devices
- User permission management
- Creating a password to activate the device. For device which supports Hik-Connect, enabling Hik-Connect service when activating it
- Resetting device password
- Hardware decoding for live view and playback
- Linkage between video surveillance and non-video surveillance (access control, video intercom, and security control panel)
- Setting email when activating devices, and resetting the password of devices by the email

## **PTZ Control**

- Remote PTZ control, preset, patrol, and pattern settings
- 3D positioning, auxiliary focus, and wiper function
- Displaying analog speed dome's local menu via PTZ control panel

- PTZ control of one-touch patrol and one-touch park

## Specification

Model			iVMS-4200
Database			SQLite (encrypted)
Supported Language			Bulgarian, Croatian, Czech, Danish, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Korean, Lithuanian, Norwegian, Polish, Portuguese, Romanian, Russian, Serbian, Simplified Chinese, Slovak, Slovenian, Spanish, Swedish, Thai, Traditional Chinese, Turkish, Vietnamese
Client	General	User	Supports up to 50 users and one super user
		E-map	Supports up to 256 maps
		Encoding Device	Supports up to 256 encoding devices
		Decoding Device	Supports up to 64 decoding devices
		Group	Supports up to 256 groups Supports up to 256 channels for each group
		Channel	Supports up to 256 channels for all groups
		Storage Server	Supports up to 16 Storage Servers
		Stream Media Server	Supports up to 16 Stream Media Servers
	Video	Live View	Supports up to 64-ch live view at a time
		Auxiliary Screen Preview	Supports up to 4 auxiliary screens for live view
		Playback	Supports up to 16-ch playback at a time
		Synchronous Playback	Supports up to 16-ch synchronous playback
		Download	Supports up to 16 downloading tasks at a time
	Access Control	Person	Supports up to 10,000 persons Supports up to 5 cards for each person
		Organization	Supports up to 10 hierarchies
		Fingerprint	Supports up to 10 fingerprints per person, and 100,000 fingerprints in total
		Access Control Device	Supports up to 16 access control devices
		Access Control Point	Supports up to 64 access control points
		Template	Supports up to 255 templates
		Permission	Supports up to 128 access control permission groups
		Door Station	Supports up to 16 door stations
		Indoor Station/ Master Station	Supports up to 512 indoor stations or master stations
		Time and Attendance Data	Retention period of attendance result: one year Retention period of original data: three months
		Shift	Supports up to 64 shifts
		Attendance Report	Supports 12 reports, including check-in/out correction report, leave and business trip report, attendance summary, attendance details report, abnormal

			attendance report, overtime report, card swiping log report, total overtime monthly report, overtime details monthly report, attendance monthly report, start/end-work time report, and department attendance report
	Security Control Panel	Security Control Panel	Supports up to 256 security control panels
		Zone	Supports up to 2,048 zones
Storage Server		User	Supports up to 32 users
		Recording Performance	Supports up to 64-ch × 2 Mbps at a time
		VOD Performance	Supports up to 64-ch × 2 Mbps at a time
		iVMS-4200 Client	Supports up to 128 iVMS-4200 clients connected to the Storage Server
Stream Media Server		Incoming/ Outgoing Stream	Supports up to 64-ch incoming video stream
			Supports up to 200-ch outgoing video stream

## System Requirement

Features		Requirements
Minimum	Processor	Intel® Core™ i5-4590 @ 3.30 GHz
	Memory	8 GB of RAM
	Operating System	Microsoft® Windows 7 (64-bit)
	Video Card	NVIDIA® GeForce GTX 970
Recommended	Processor	Intel® Xeon® E3-1226 V3 @ 3.30GHz
	Memory	8 GB of RAM
	Operating System	Microsoft® Windows 7 (64-bit)
	Video Card	Intel® HD Graphics P4600
High Performance	Processor	Intel® Core™ i7-6700K @ 4GHz
	Memory	16 GB of RAM
	Operating System	Microsoft® Windows 7 (64-bit)
	Video Card	NVIDIA® GeForce GTX 1070

## Live View Performance

### Performance under Different Client Requirements (Software Decoding)

Encoding Format	Resolution	Bit Rate (Mbps)	Frame Rate (fps)	Maximum Number of Cameras Viewed Simultaneously		
				Minimum	Recommended	High Performance
H.264	720p	3	30	27	25	45
	1080p	6	30	13	12	24
	3 MP	8	30	9	9	14
	8 MP	16	30	3	2	5
H.264+	720p	1	30	33	29	65
	1080p	3	30	18	14	29
	3 MP	4	30	10	9	18
H.265	720p	1	30	26	24	41
	1080p	3	30	10	9	16
	3 MP	4	30	6	6	11
H.265+	720p	0.5	30	29	26	45
	1080p	1	30	13	11	21
	3 MP	2	30	8	7	14

### Performance under Different Client Requirements (Hardware Decoding)

Encoding Format	Resolution	Bit Rate (Mbps)	Frame Rate (fps)	Maximum Number of Cameras Viewed Simultaneously		
				Minimum	Recommended	High Performance
H.264	1080p	6	30	18	25	25
	8 MP	16	30	4	6	6
H.264+	720p	1	30	38	45	45
	1080p	3	30	18	24	23
	3 MP	4	30	12	19	17
H.265	720p	1	30	N/A	N/A	45
	1080p	3	30	N/A	N/A	23
	3 MP	4	30	N/A	N/A	15
H.265+	720p	0.5	30	N/A	N/A	45
	1080p	1	30	N/A	N/A	22
	3 MP	2	30	N/A	N/A	15


\* For the field of N/A, the video card under the recommended system requirement does not support H.265 or H.265+.

\* The above parameters are for reference only. Under the same resolution and frame rate, the bit rate of cameras from different manufacturers may be different. Moreover, the decoding performance from different manufacturers may also be different.




## Typical Application


### Application for Video Surveillance

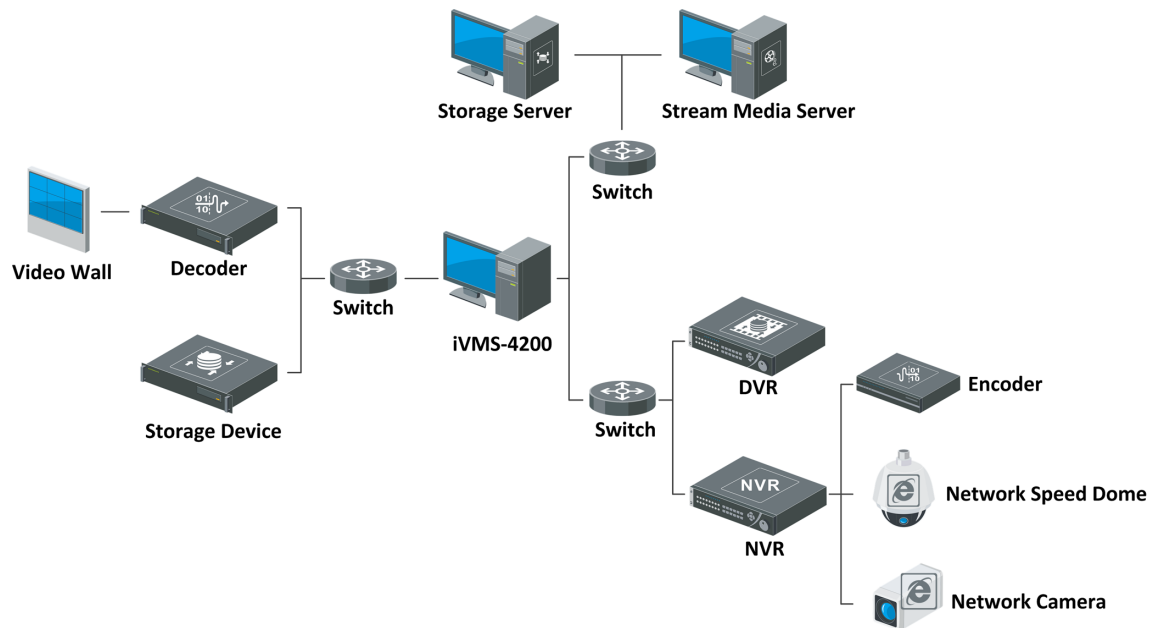


### Application for Video Intercom

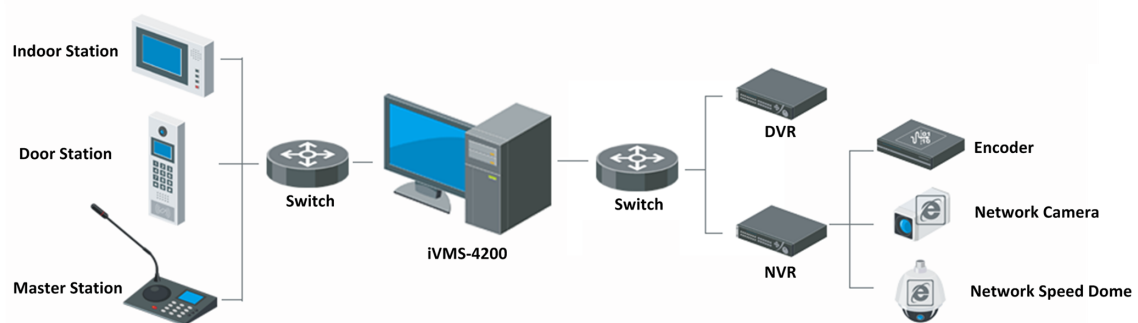

### Application for Security Control Panel

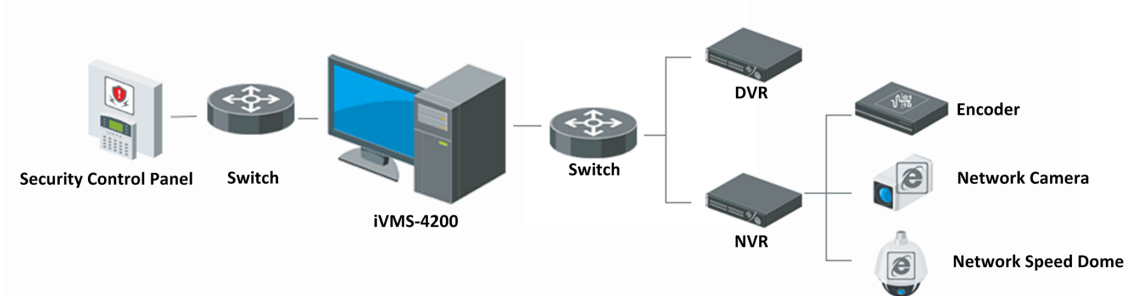

### Application for Access Control

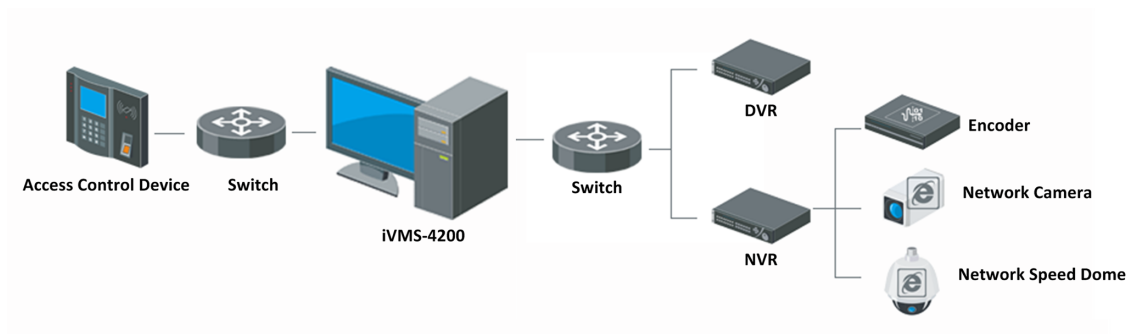

Distributed by



## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com