



# TEST REPORT

**APPLICANT** : Linkplay Technology Inc.  
**PRODUCT NAME** : WiiM Pro Plus Hi-Res Audio Streamer  
**MODEL NAME** : ASR003  
**BRAND NAME** : WiiM  
**FCC ID** : 2BABF-ASR003  
**STANDARD(S)** : 47 CFR Part 15 Subpart C  
**RECEIPT DATE** : 2023-06-25  
**TEST DATE** : 2023-07-02 to 2023-07-07  
**ISSUE DATE** : 2023-07-19



Edited by: Su Xiaoxian  
Su Xiaoxian (Rapporteur)  
Approved by: Shen Junsheng  
Shen Junsheng (Supervisor)

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





# DIRECTORY

- 1. Technical Information ..... 3
- 1.1. Applicant and Manufacturer Information ..... 3
- 1.2. Equipment Under Test (EUT) Description ..... 3
- 1.3. The Channel Number and Frequency ..... 5
- 1.4. Test Standards and Results ..... 6
- 1.5. Environmental Conditions ..... 7
- 2. 47 CFR Part 15C Requirements ..... 8
- 2.1. Conducted Emission ..... 8
- 2.2. Restricted Frequency Bands ..... 12
- 2.3. Radiated Emission ..... 22
- Annex A Test Uncertainty ..... 35
- Annex B Testing Laboratory Information ..... 36

Change History		
Version	Date	Reason for change
1.0	2023-07-19	First edition



# 1. Technical Information

Note: Provide by applicant.

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	Linkplay Technology Inc.
<b>Applicant Address:</b>	8000 Jarvis Avenue Suite #130, Newark, CA 94560
<b>Manufacturer:</b>	Linkplay Technology Inc.
<b>Manufacturer Address:</b>	8000 Jarvis Avenue Suite #130, Newark, CA 94560

## 1.2. Equipment Under Test (EUT) Description

<b>Product Name:</b>	WiiM Pro Plus Hi-Res Audio Streamer	
<b>Sample No.:</b>	3#	
<b>Hardware Version:</b>	Main Board V01+Audio Board V03+Touch Board V04	
<b>Software Version:</b>	Linkplay.4.8.518646	
<b>Equipment Type:</b>	Bluetooth classic	
<b>Bluetooth Version:</b>	5.0	
<b>Modulation Type:</b>	FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))	
<b>Operating Frequency Range:</b>	2402MHz–2480MHz	
<b>Antenna Type:</b>	PIFA Antenna	
<b>Antenna Gain:</b>	1.90dBi	
<b>Accessory Information:</b>	AC Adapter 1	
	<b>Brand Name:</b>	N/A
	<b>Model No.:</b>	MDY-08-EZ
	<b>Serial No.:</b>	N/A
	<b>Rated Output:</b>	5V $\overline{=}$ 2A
	<b>Rated Input:</b>	100-240V $\sim$ 50/60Hz, 0.35A
	<b>Manufacturer:</b>	Jiangsu Chenyang Electron Co.,Ltd.



<b>Accessory Information:</b>	AC Adapter 2	
	Brand Name:	N/A
	Model No.:	TPA-147A050200UU01
	Serial No.:	N/A
	Rated Output:	5V $\pm$ 2A
	Rated Input:	100-240V $\sim$ 50/60Hz, 0.3A
	Manufacturer:	SHENZHEN TIANYIN ELECTRONICS CO.,LTD.

**Note 1:** The test results of all conducted test items please refer to the module FCC test report (Report No.: SZ20110203W02, FCC ID: 2ANOG-A98M), which issued on December 18, 2020 by Shenzhen Morlab Communications Technology Co., Ltd. We only recorded the radiated test result in this report.



### 1.3. The Channel Number and Frequency

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
<b>0</b>	<b>2402</b>	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	<b>78</b>	<b>2480</b>
19	2421	<b>39</b>	<b>2441</b>	59	2461		

**Note 1:** The black bold channels were selected for test.



## 1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A <sub>Note1</sub>	N/A	N/A
2	15.247(a) 15.247(h)	Hopping Mechanism	N/A	N/A <sub>Note1</sub>	N/A	N/A
3	15.247(a)	Number of Hopping Frequency	N/A	N/A <sub>Note1</sub>	N/A	N/A
4	ANSI C63.10	Duty Cycle	N/A	N/A <sub>Note1</sub>	N/A	N/A
5	15.247(b)	Maximum Peak Conducted Output Power	N/A	N/A <sub>Note1</sub>	N/A	N/A
6	15.247(b)	Maximum Average Conducted Output Power	N/A	N/A <sub>Note1</sub>	N/A	N/A
7	15.247(a)	20dB Bandwidth	N/A	N/A <sub>Note1</sub>	N/A	N/A
8	15.247(a)	Carrier Frequency Separation	N/A	N/A <sub>Note1</sub>	N/A	N/A
9	15.247(a)	Time of Occupancy (Dwell time)	N/A	N/A <sub>Note1</sub>	N/A	N/A
10	15.247(d)	Conducted Spurious Emission	N/A	N/A <sub>Note1</sub>	N/A	N/A
11	15.207	Conducted Emission	Jul. 03, 2023	Fan Zehang	PASS	No deviation
12	15.247(d)	Restricted Frequency Bands	Jul. 01, 2023	Gao Jianrou	PASS	No deviation
13	15.209, 15.247(d)	Radiated Emission	Jul. 02, 2023	Gao Jianrou	PASS	No deviation



**Note 1:** The test results of all conducted test items please refer to the module FCC test report (Report No.: SZ20110203W02, FCC ID: 2ANOG-A98M), which issued on December 18, 2020 by Shenzhen Morlab Communications Technology Co., Ltd.

**Note 2:** The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013, KDB558074 D01 v05r02 and DA 00-075.

**Note 3:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 4:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

### 1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106

## 2.47 CFR Part 15C Requirements

### 2.1. Conducted Emission

#### 2.1.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).


Frequency Range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5- 30	60	50

**Note:**

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

#### 2.1.2. Test Description

**Test Setup:**

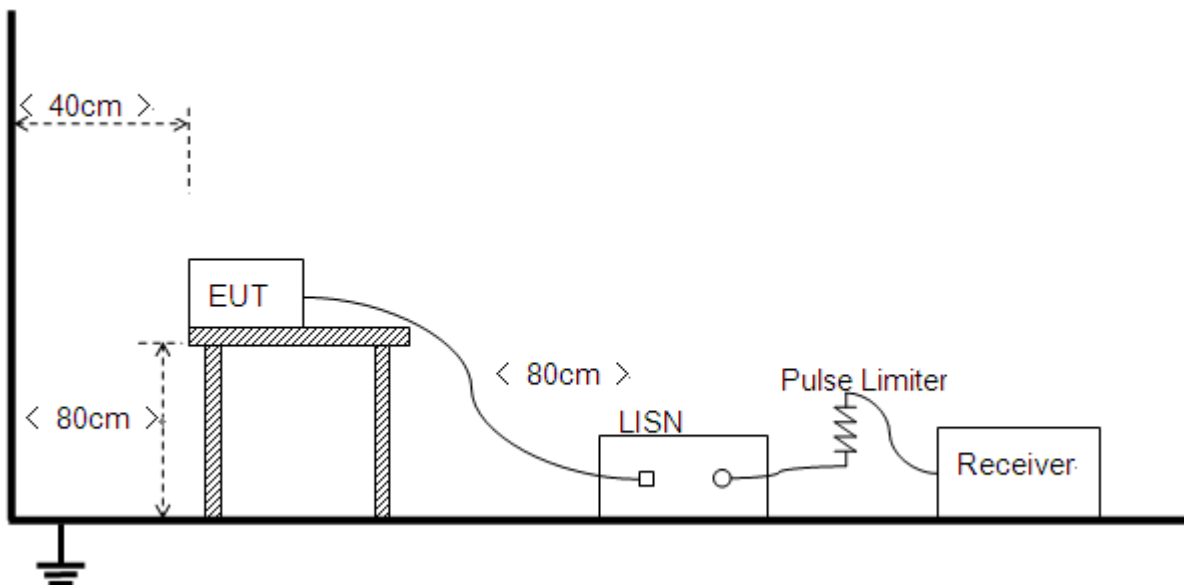

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference





Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

### 2.1.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

**Note:** Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

#### A. Test Setup:

Test Mode: EUT + Adapter + USB cable + BT TX

Test Voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

$U_R$ : Receiver Reading


$A_{\text{Factor}}$ : Voltage division factor of LISN

**B. Test Plot:**

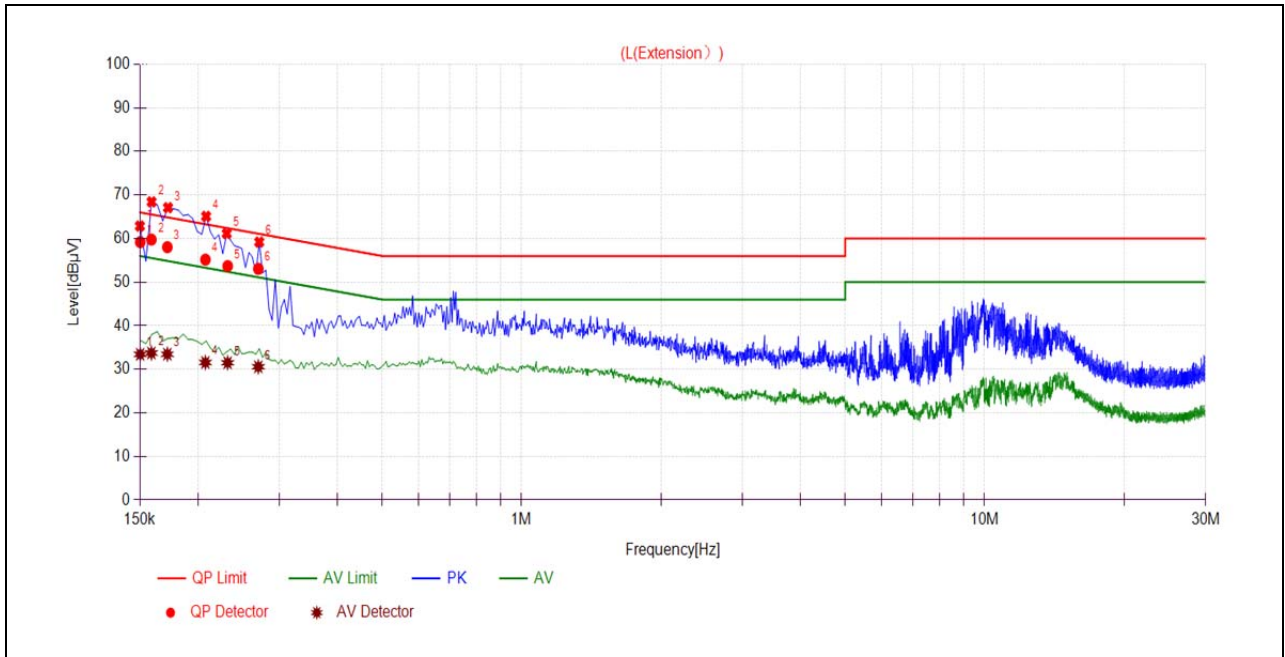

(L Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1502	59.18	33.43	65.99	55.99	Line	PASS
2	0.1588	59.77	33.72	65.52	55.52		PASS
3	0.1719	58.02	33.46	64.87	54.87		PASS
4	0.2077	55.16	31.56	63.30	53.30		PASS
5	0.2320	53.69	31.49	62.38	52.38		PASS
6	0.2702	53.06	30.57	61.11	51.11		PASS

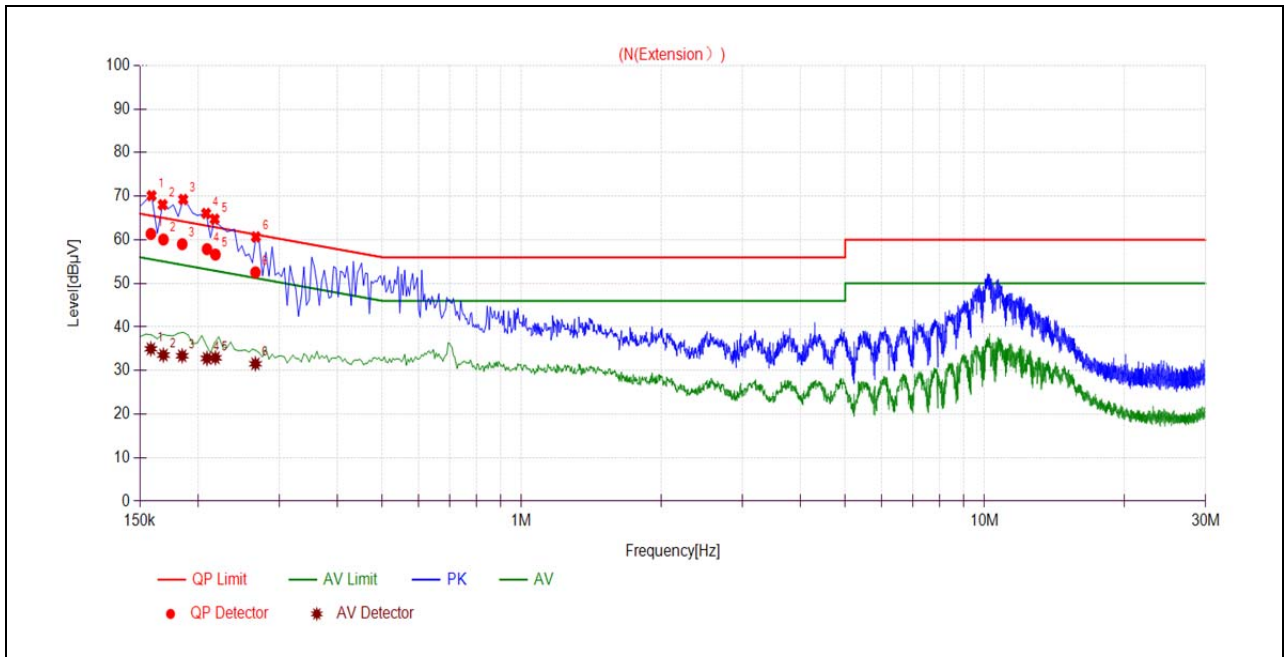

(N Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1584	61.36	34.98	65.54	55.54	Neutral	PASS
2	0.1686	60.08	33.55	65.03	55.03		PASS
3	0.1851	59.00	33.38	64.25	54.25		PASS
4	0.2094	57.87	32.79	63.23	53.23		PASS
5	0.2183	56.63	32.92	62.88	52.88		PASS
6	0.2664	52.53	31.55	61.23	51.23		PASS


## 2.2. Restricted Frequency Bands

### 2.2.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### 2.2.2. Test Description

#### Test Setup:

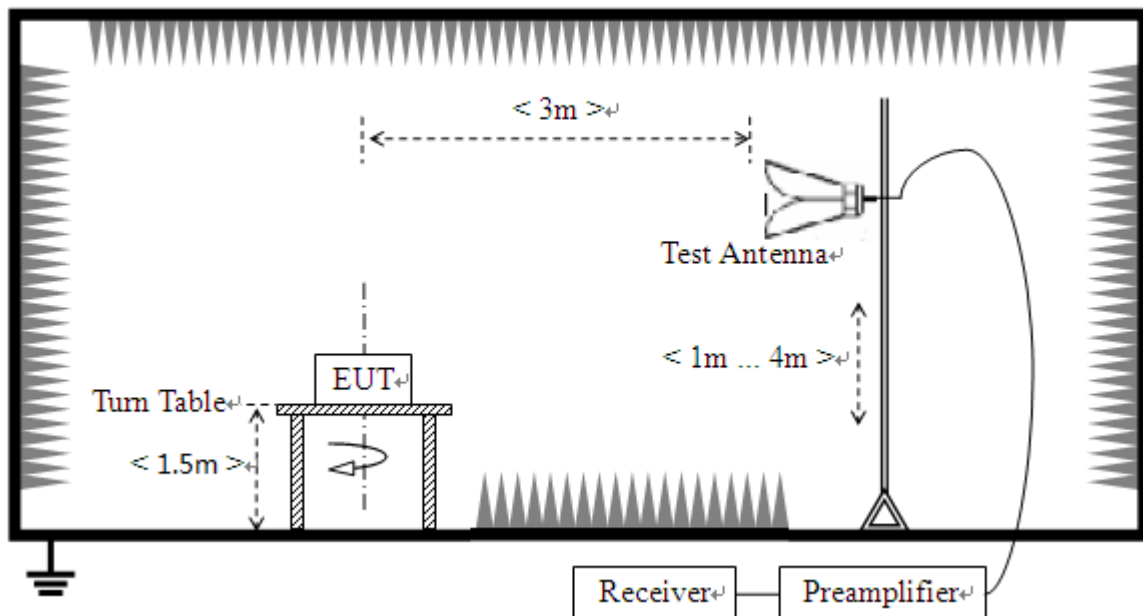

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.



### 2.2.3. Test Procedure

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1\text{GHz}$ , 100 kHz for  $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

### 2.2.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

AT: Total correction Factor except Antenna

UR: Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

**Note:** Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


#### GFSK Mode

##### A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading $U_R$ (dB $\mu$ V)	$A_T$ (dB)	$A_{\text{Factor}}$ (dB@3m)	Max. Emission E (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Verdict
		PK/ AV						
0	2366.77	PK	22.23	6.74	27.20	56.17	74	PASS
0	2390.00	AV	10.31	6.74	27.20	44.25	54	PASS
78	2484.05	PK	21.81	6.74	27.20	55.75	74	PASS
78	2483.61	AV	11.68	6.74	27.20	45.62	54	PASS




B. Test Plot:

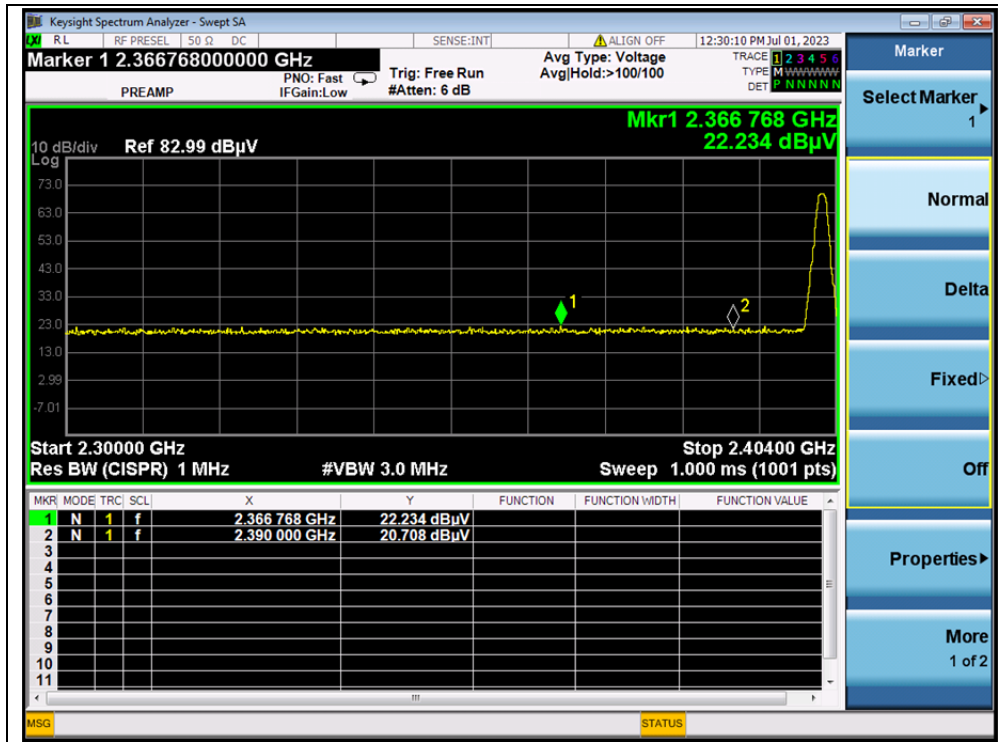


(PEAK, Channel 0, GFSK)

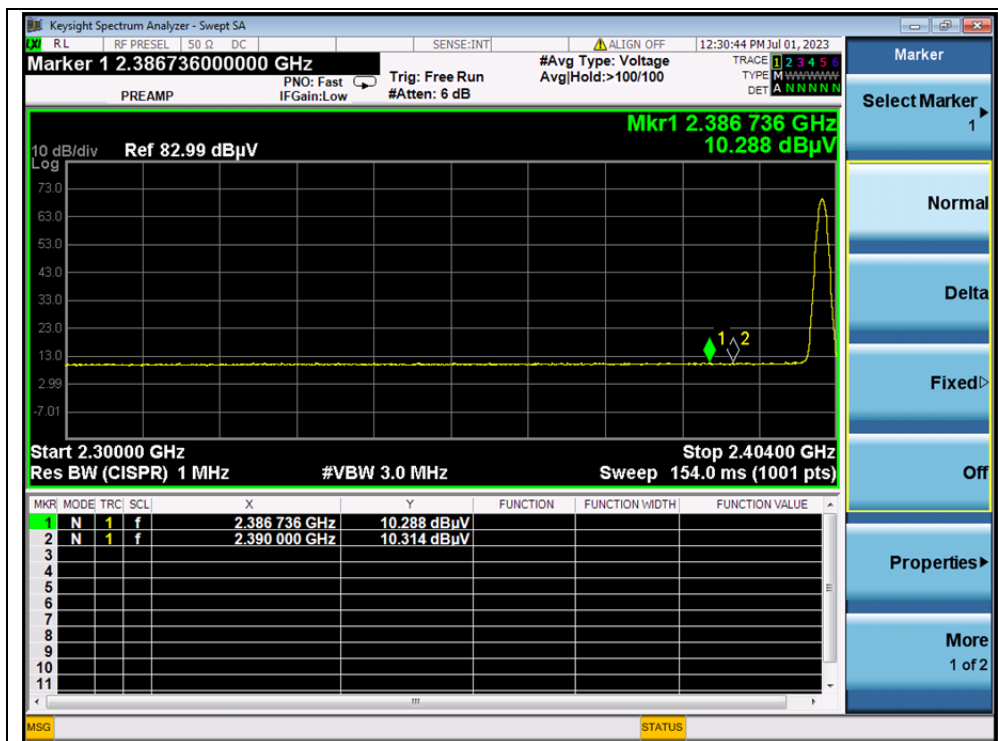

(AVERAGE, Channel 0, GFSK)

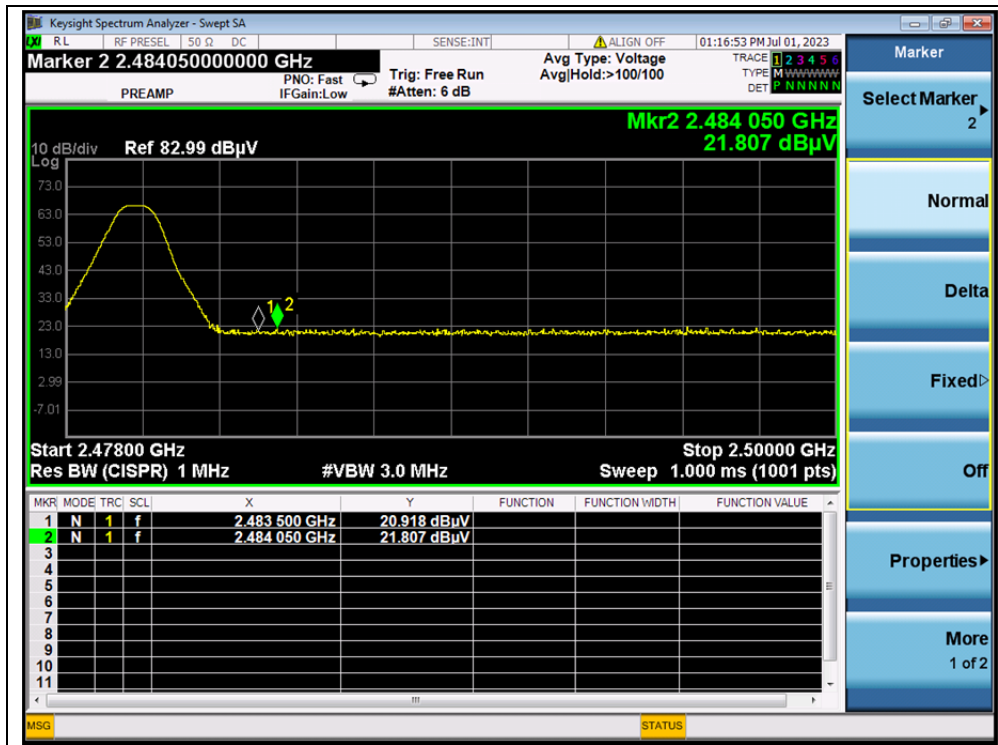

(PEAK, Channel 78, GFSK)

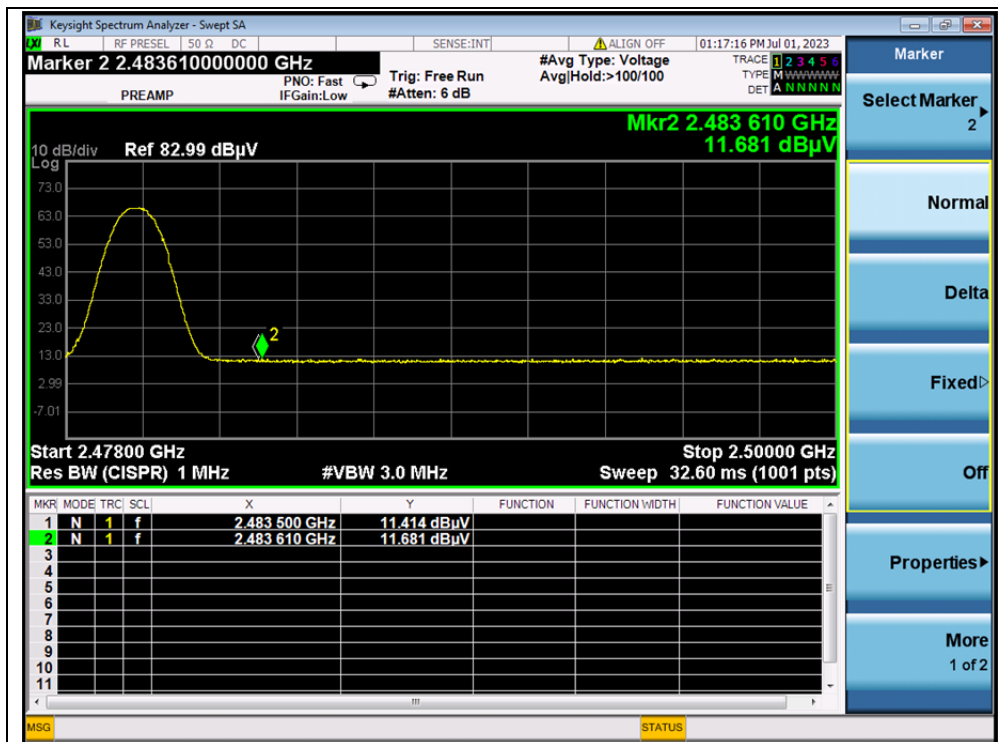

(AVERAGE, Channel 78, GFSK)




$\pi/4$ -DQPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading	A <sub>T</sub> (dB)	A <sub>Factor</sub> (dB@3m)	Max. Emission	Limit (dBμV/m)	Verdict
		PK/ AV	U <sub>R</sub> (dBμV)			E (dBμV/m)		
0	2387.36	PK	22.12	6.74	27.20	56.06	74	PASS
0	2378.42	AV	10.45	6.74	27.20	44.39	54	PASS
78	2492.74	PK	22.59	6.74	27.20	56.53	74	PASS
78	2487.59	AV	12.13	6.74	27.20	46.07	54	PASS

B. Test Plot:

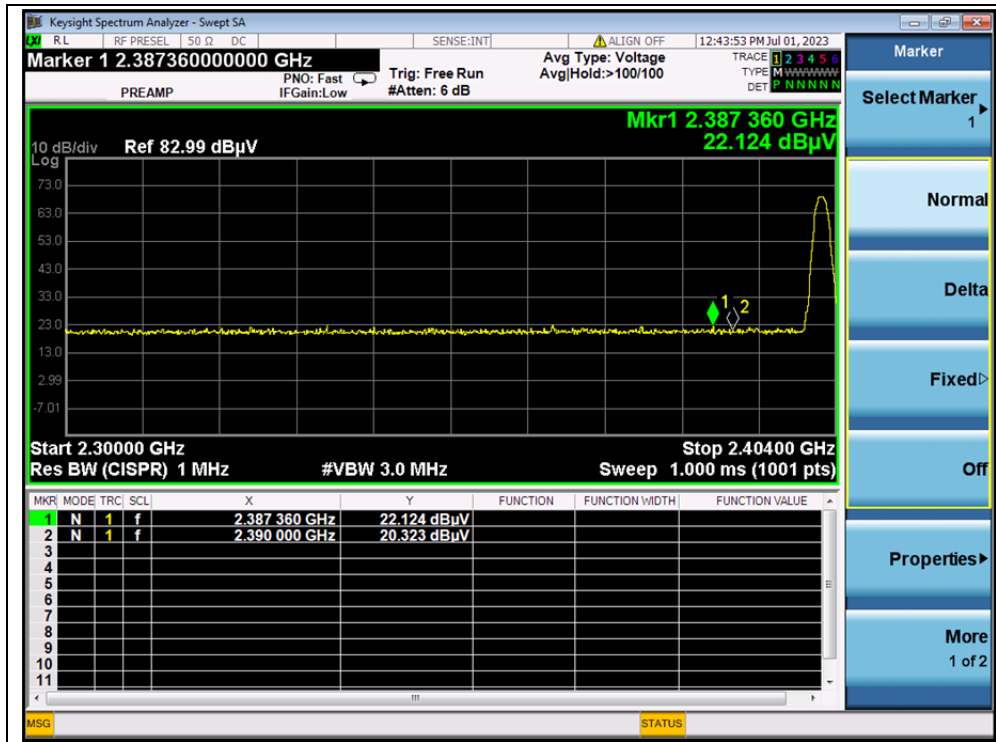


(PEAK, Channel 0,  $\pi/4$ -DQPSK)



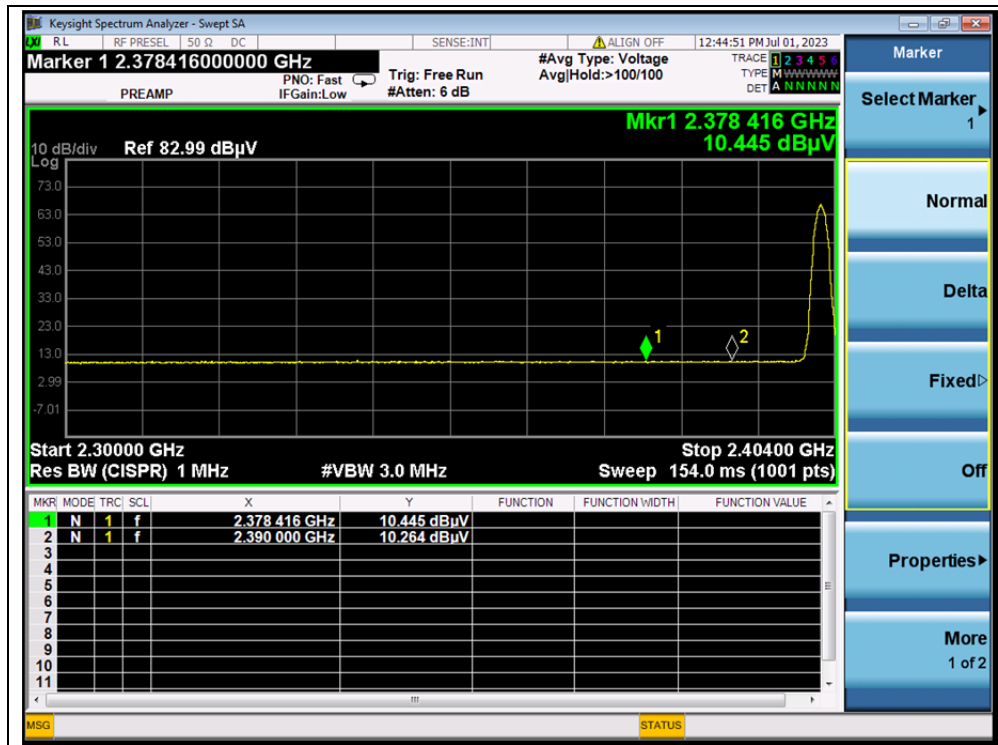

(AVERAGE, Channel 0,  $\pi/4$ -DQPSK)

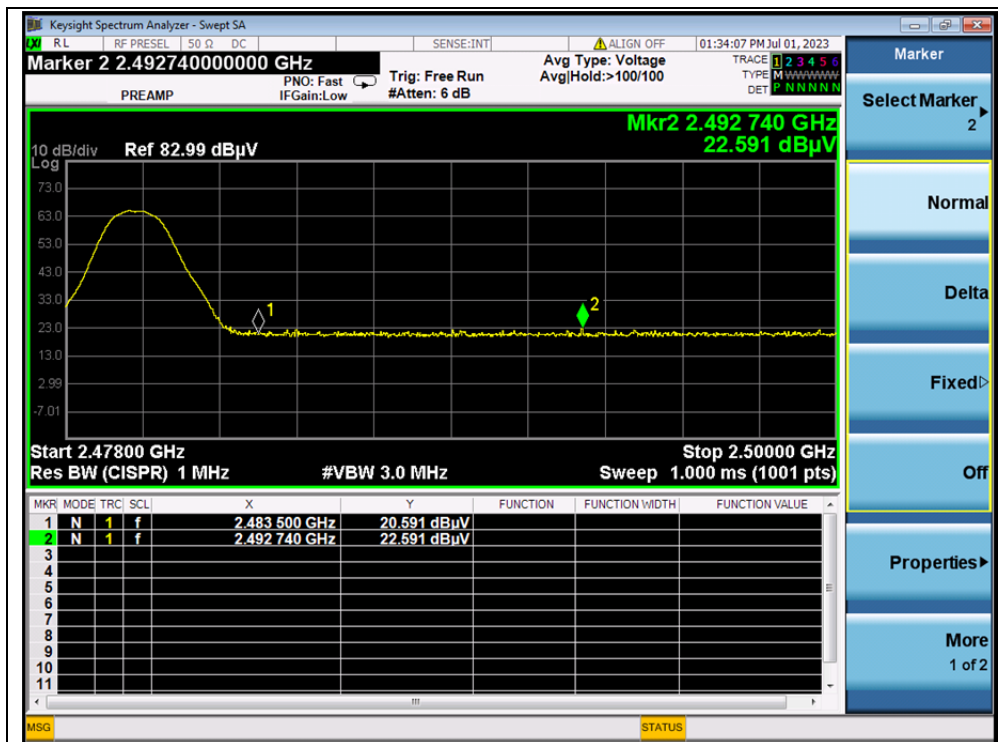

(PEAK, Channel 78,  $\pi/4$ -DQPSK)



(AVERAGE, Channel 78, π/4-DQPSK)




8-DPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading	A <sub>T</sub> (dB)	A <sub>Factor</sub> (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV	U <sub>R</sub> (dBμV)					
0	2350.96	PK	22.28	6.74	27.20	56.22	74	PASS
0	2390.00	AV	10.37	6.74	27.20	44.31	54	PASS
78	2483.74	PK	22.17	6.74	27.20	56.11	74	PASS
78	2490.85	AV	11.68	6.74	27.20	45.62	54	PASS


B. Test Plot:

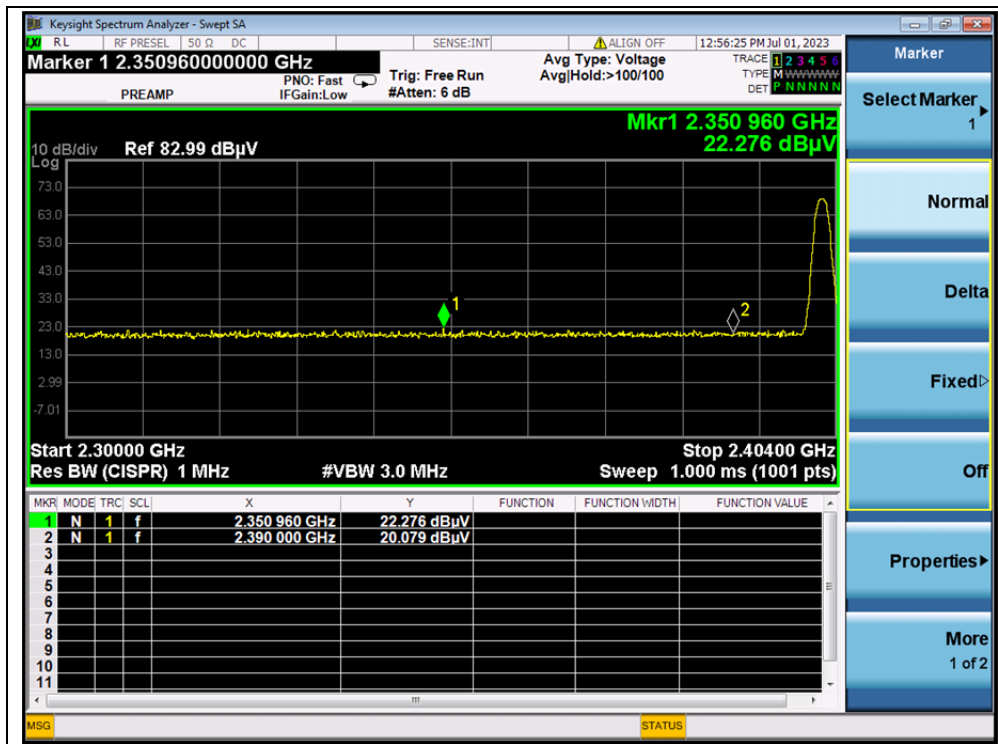


(PEAK, Channel 0, 8-DPSK)

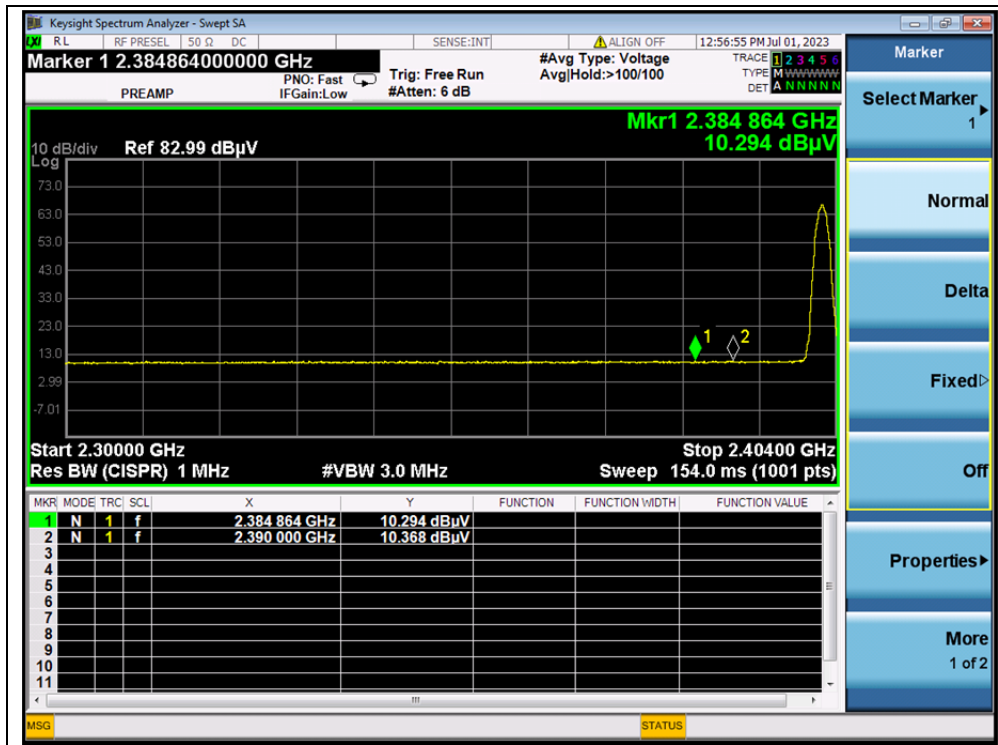

(AVERAGE, Channel 0, 8-DPSK)

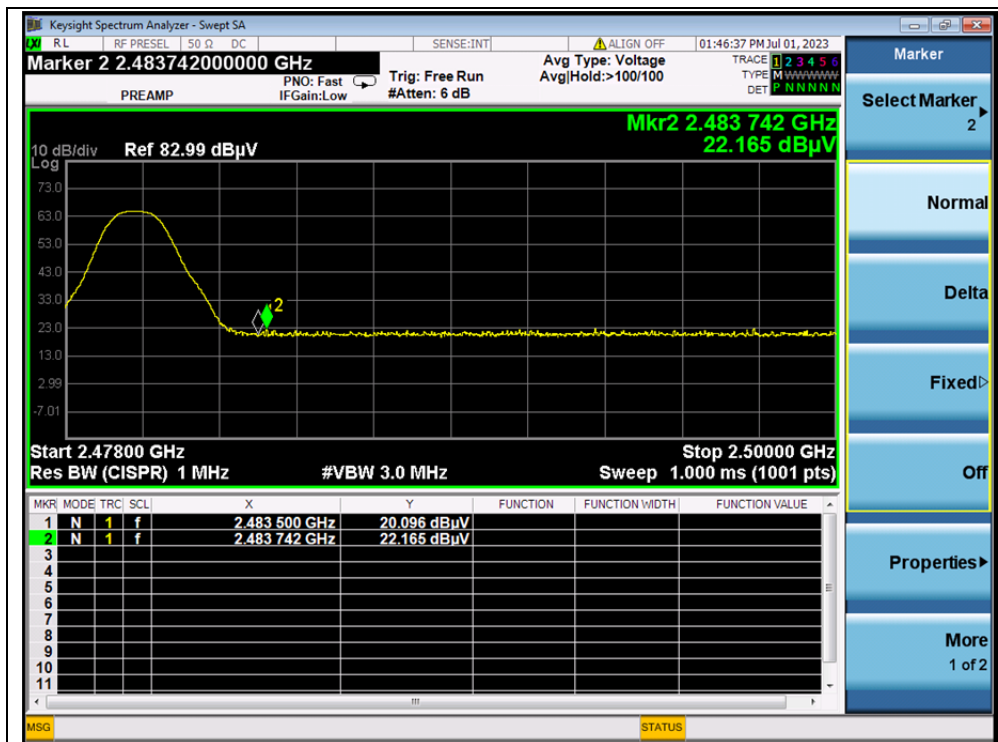

(PEAK, Channel 78, 8-DPSK)

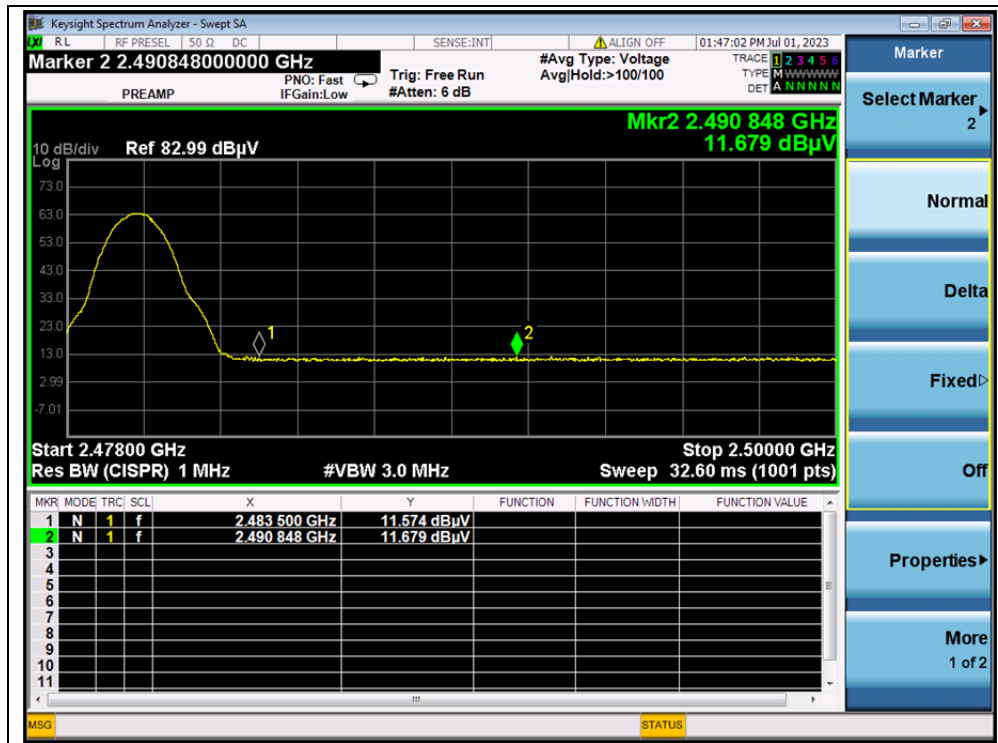

(AVERAGE, Channel 78, 8-DPSK)

## 2.3. Radiated Emission

### 2.3.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


**Note1:** For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

**Note2:** For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).


2.3.2. Test Description

Test Setup:


1) For radiated emissions from 9kHz to 30MHz

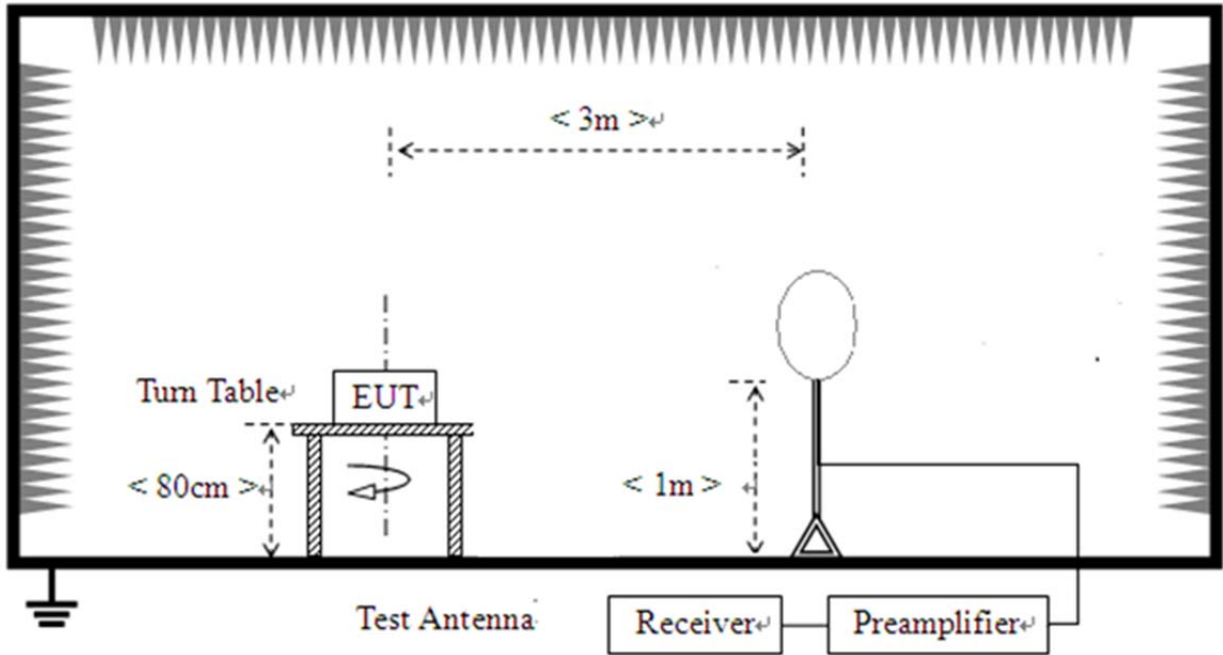

2) For radiated emissions from 30MHz to 1GHz

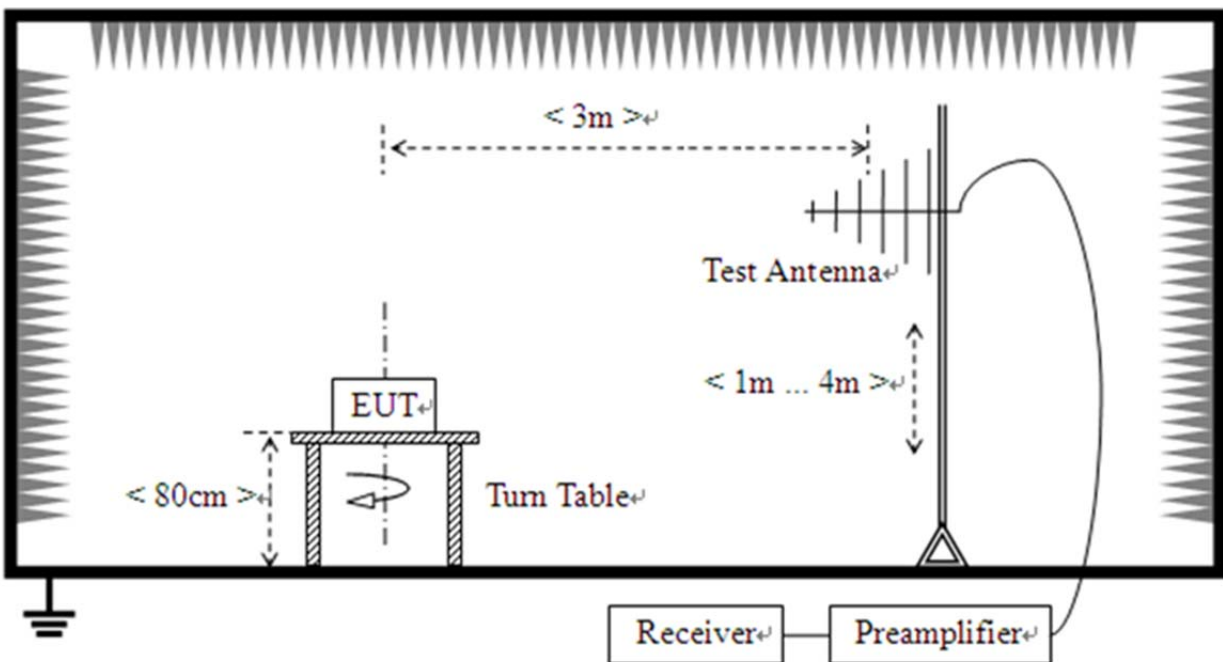

## 3) For radiated emissions above 1GHz

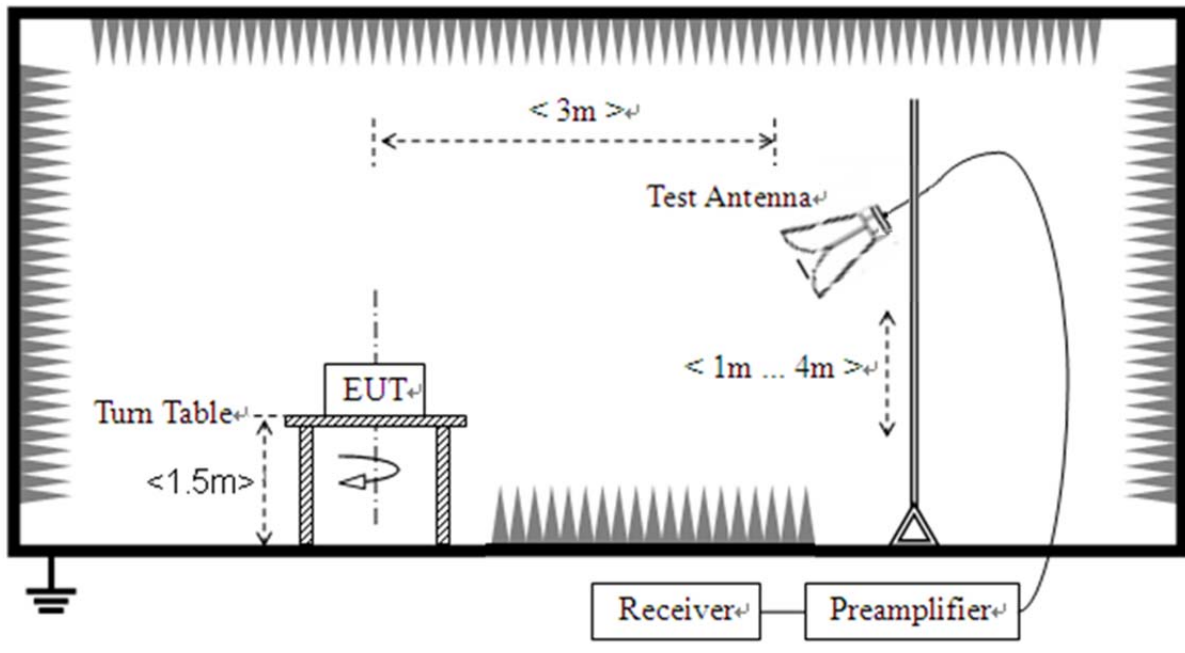

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.





### 2.3.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

During the test, the total correction Factor  $A_T$  and  $A_{\text{Factor}}$  were built in test software.

**Note 1:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


**Note 2:** For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

**Note3:** For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.




**GFSK Mode**

Plots for Channel 0

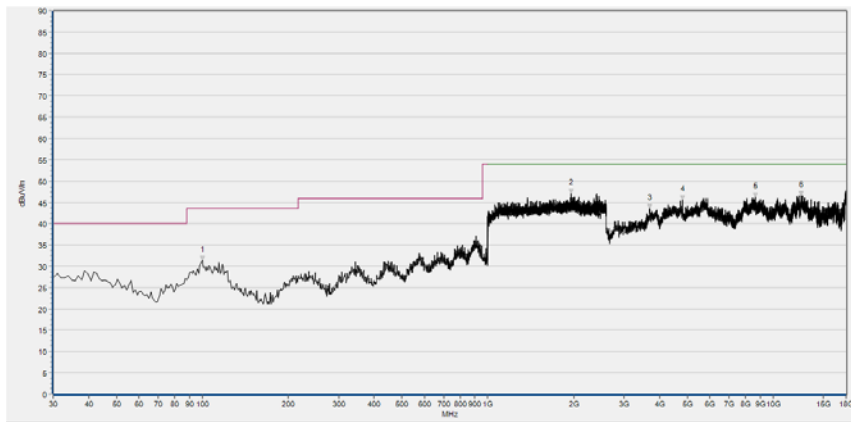

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
99.840	31.35	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1962.133	47.10	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3690.320	43.55	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4805.280	45.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8649.120	46.24	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12548.400	46.55	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

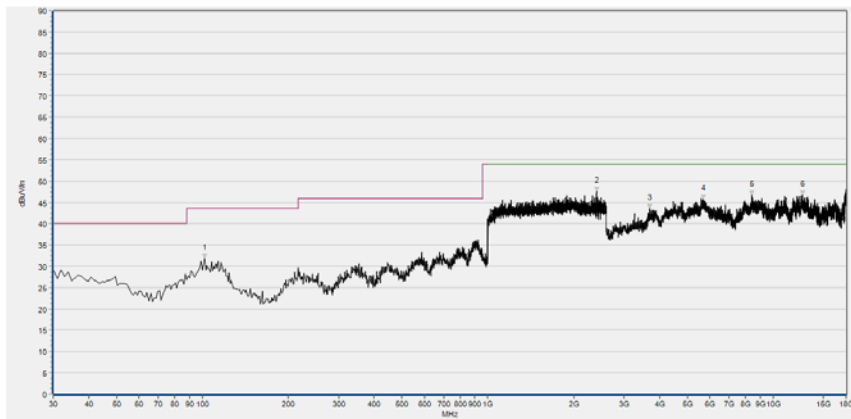

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
101.780	31.79	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2402.133	47.55	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3693.400	43.51	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5680.000	45.68	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8421.200	46.73	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12690.080	46.70	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 39

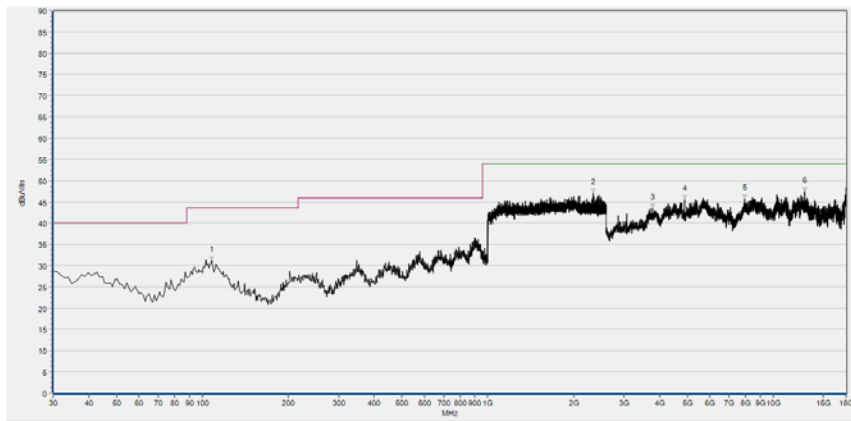

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.600	31.24	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2341.867	47.08	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3779.640	43.66	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4882.280	45.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7962.280	45.78	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12884.120	47.50	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

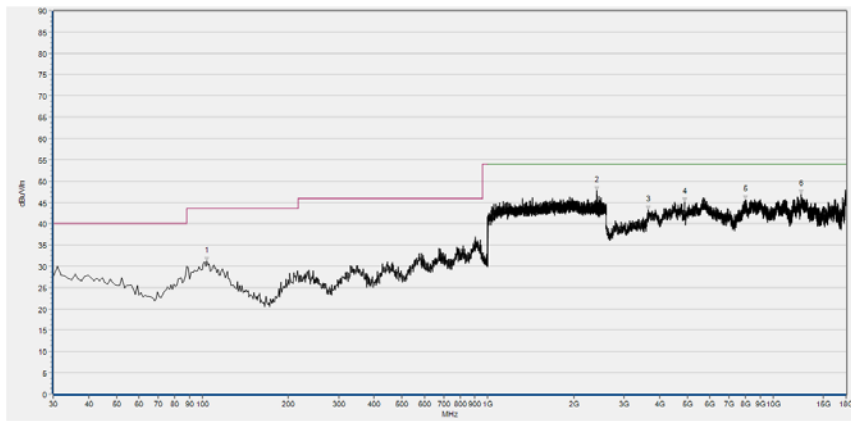

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
103.720	31.10	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2403.733	47.73	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3656.440	43.25	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4882.280	45.06	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7974.600	45.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12542.240	46.99	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 78

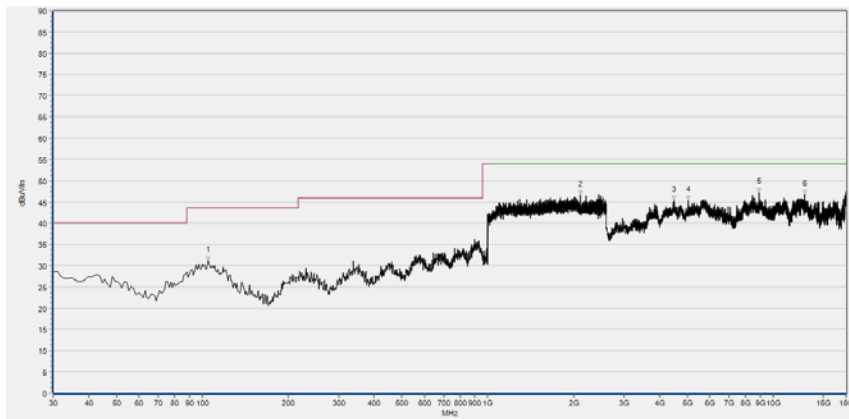

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
104.690	31.10	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2106.667	46.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4500.360	45.37	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5036.280	45.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8935.560	47.27	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12890.280	46.76	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)




Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
107.600	31.36	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1428.800	47.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4112.280	45.08	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5880.200	46.55	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8960.200	45.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12157.240	47.06	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

**$\pi/4$ -DQPSK Mode**

Plots for Channel 0

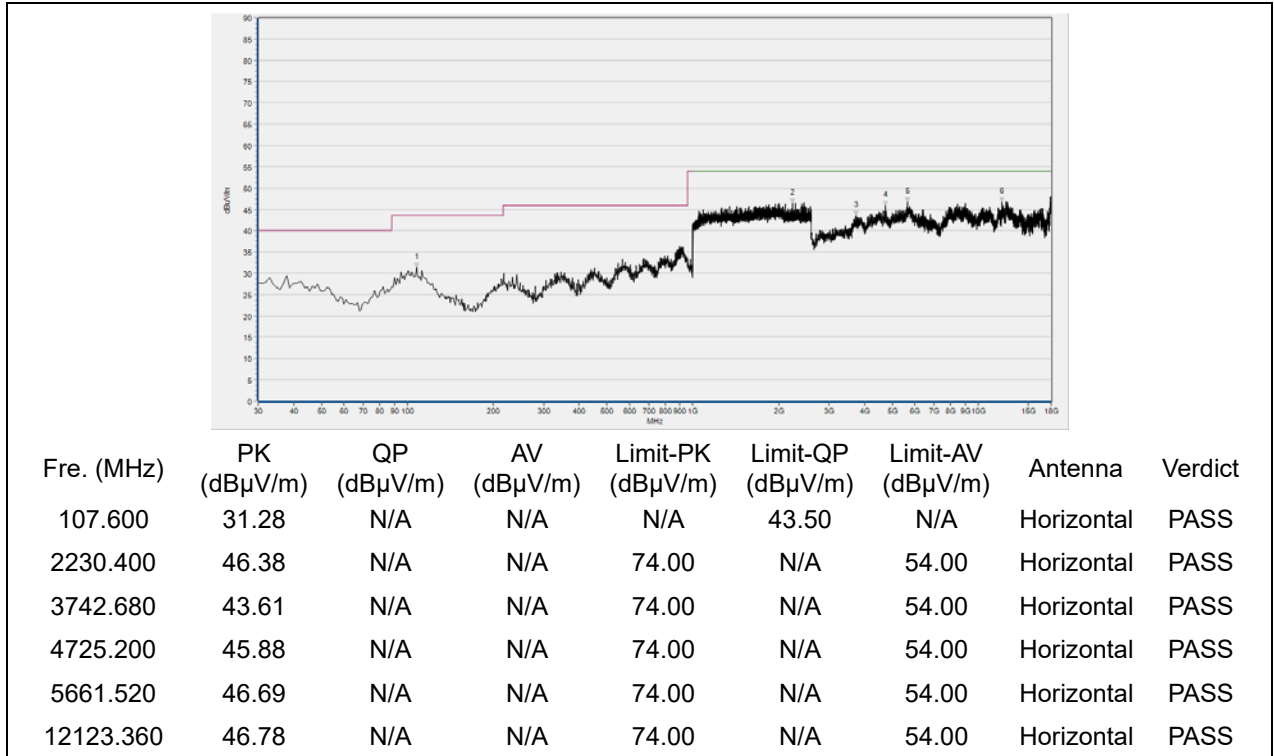


(Antenna Horizontal, 30MHz to 18GHz)

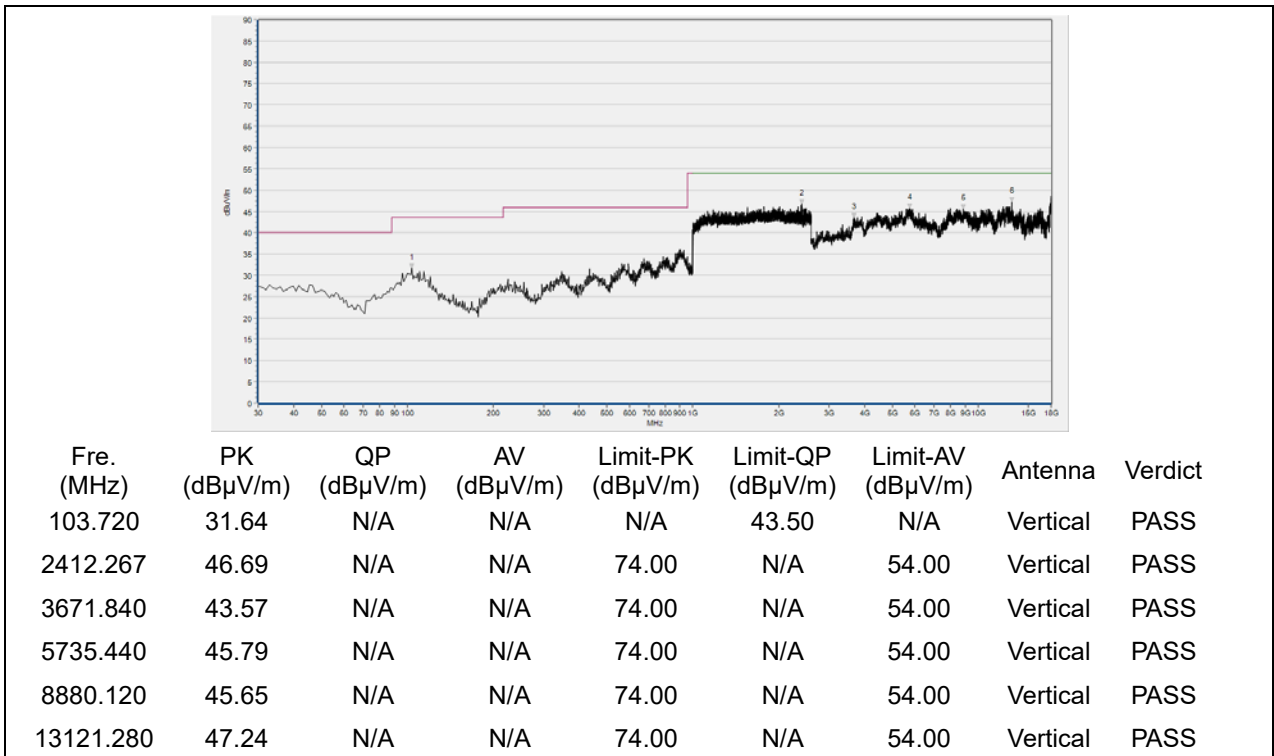


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 39

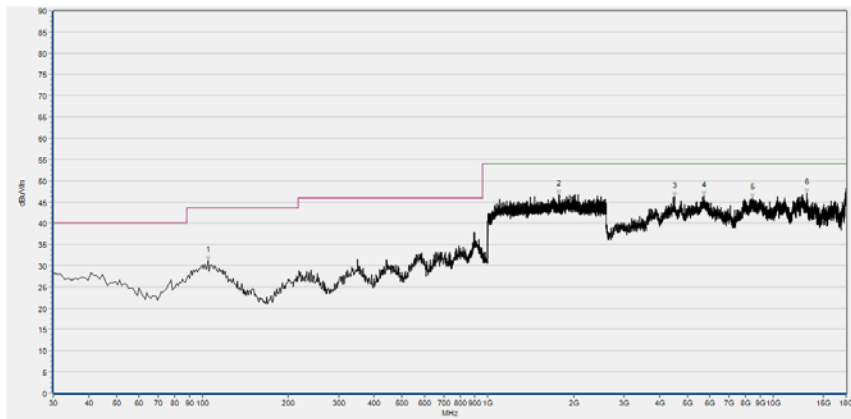

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
104.690	31.15	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1779.733	46.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4503.440	46.27	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5710.800	46.35	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8442.760	45.95	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13084.320	47.06	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

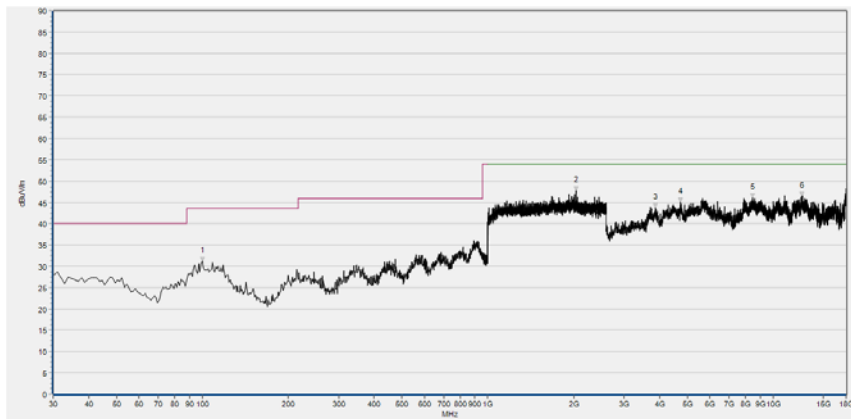

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
99.840	31.10	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2042.667	47.69	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3856.640	43.78	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4740.600	45.11	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8482.800	46.13	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12585.360	46.36	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 78

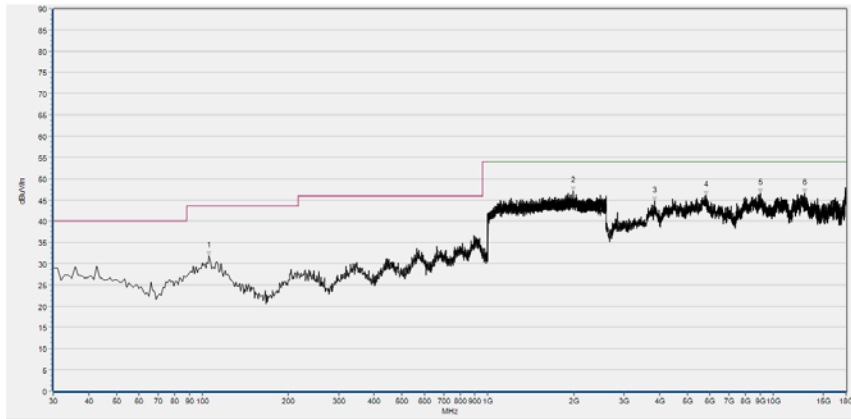

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
105.660	31.82	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1991.467	47.16	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3844.320	44.67	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5821.680	46.04	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9040.280	46.67	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12881.040	46.52	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

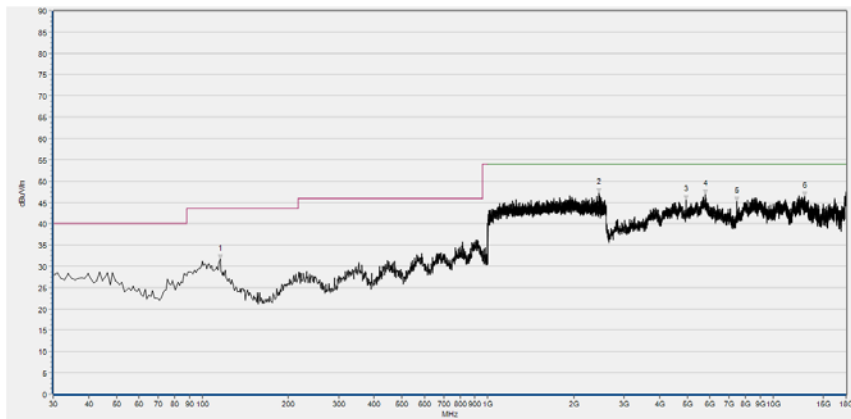


Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
115.360	31.66	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2444.800	47.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4959.280	45.52	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5790.880	46.95	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7438.680	45.30	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12896.440	46.46	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

**8-DPSK Mode**

Plots for Channel 0

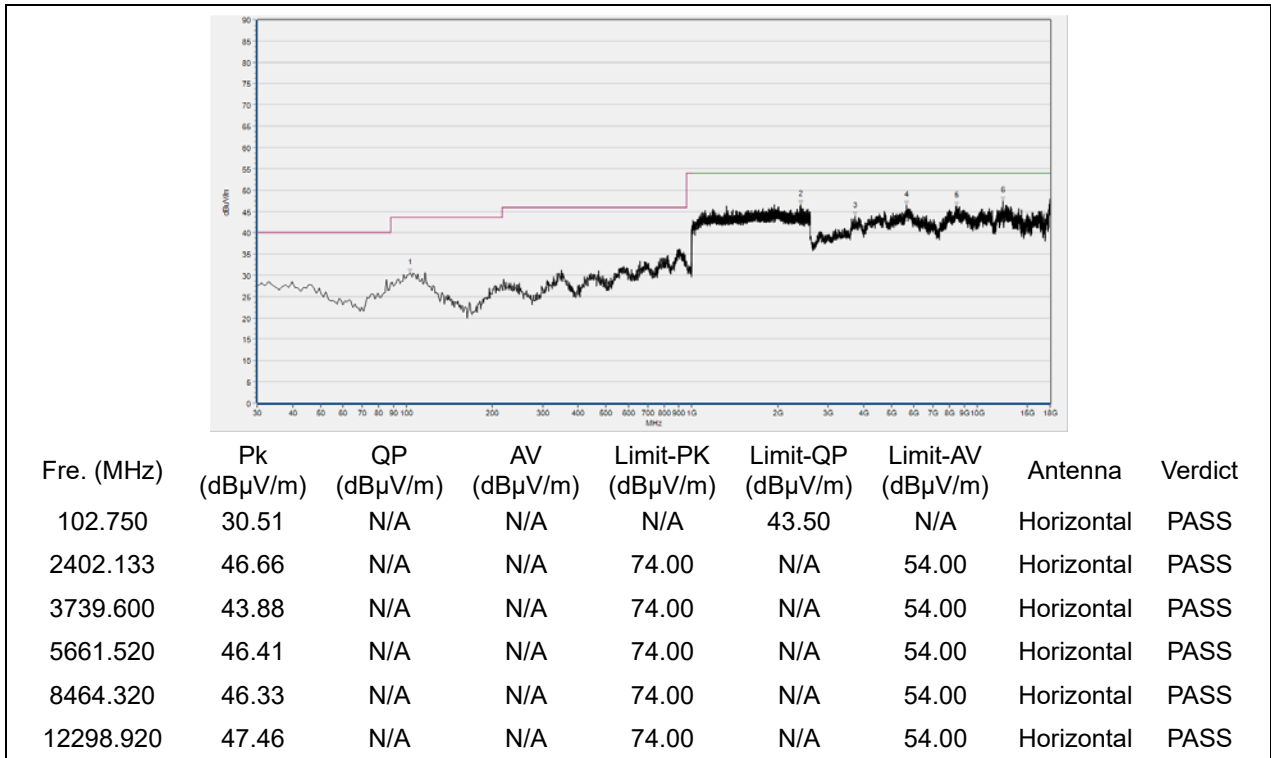


(Antenna Horizontal, 30MHz to 18GHz)

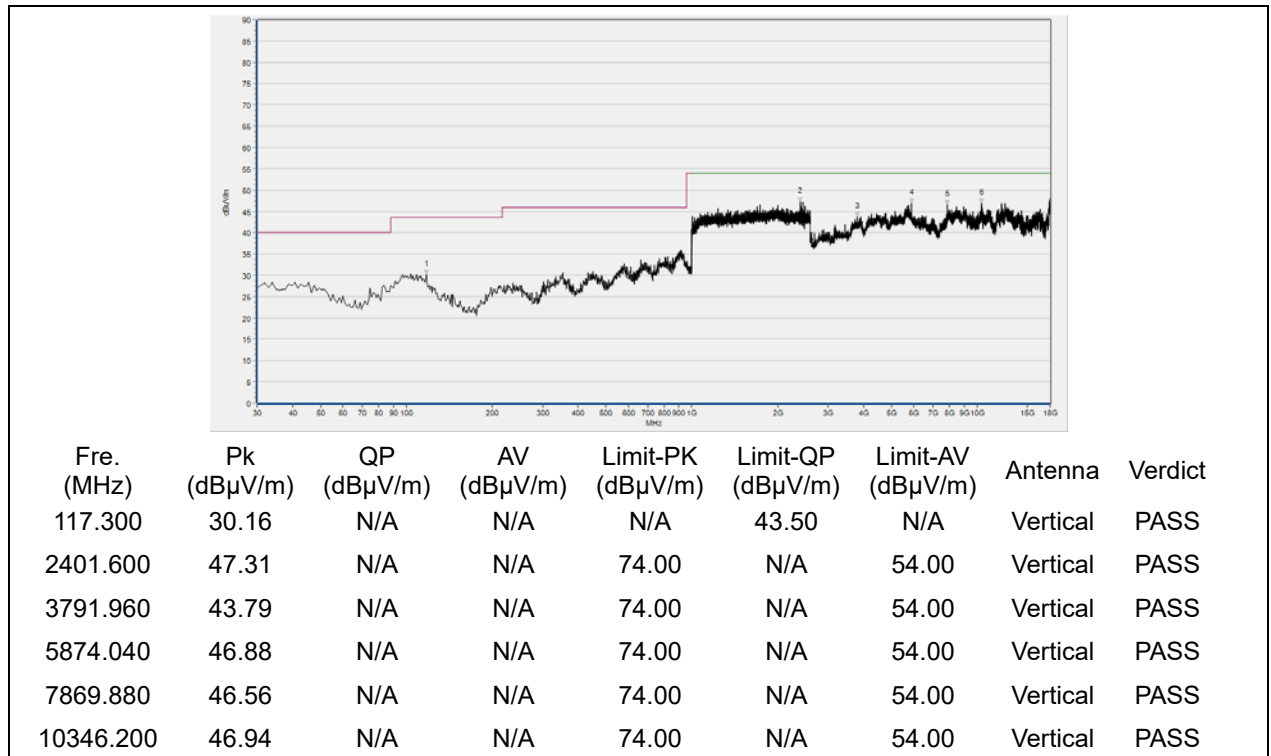

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 39

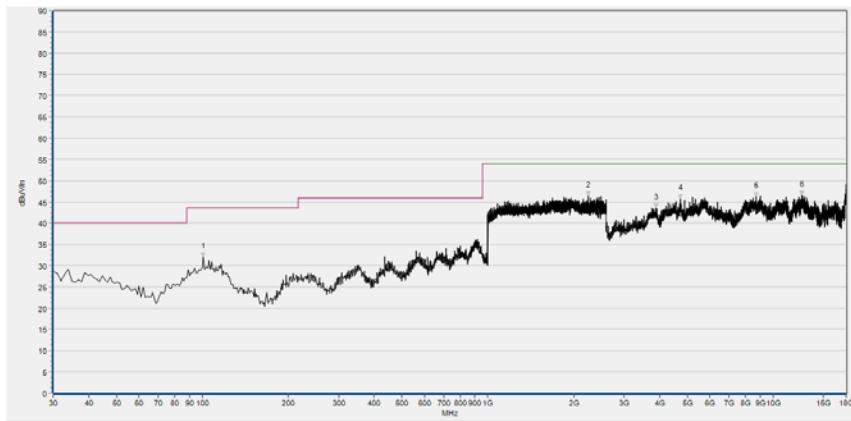

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
100.810	31.94	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2242.133	46.37	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3890.520	43.63	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4740.600	45.74	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8723.040	46.19	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12573.040	46.63	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

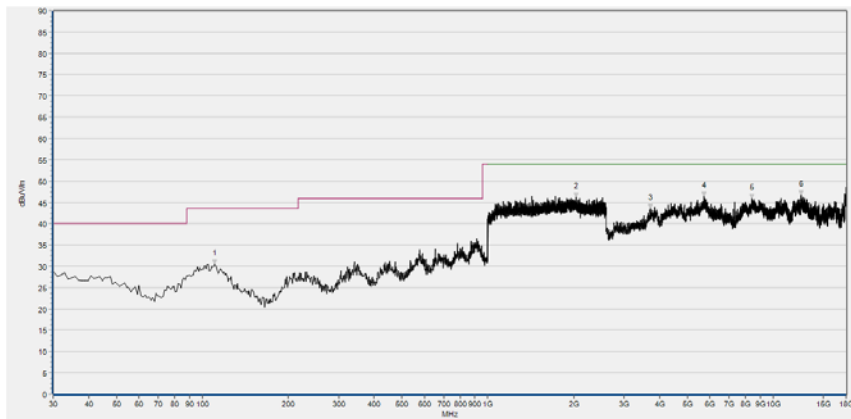

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
110.510	30.47	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2042.133	46.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3705.720	43.62	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5716.960	46.50	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8418.120	45.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12526.840	46.72	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 78

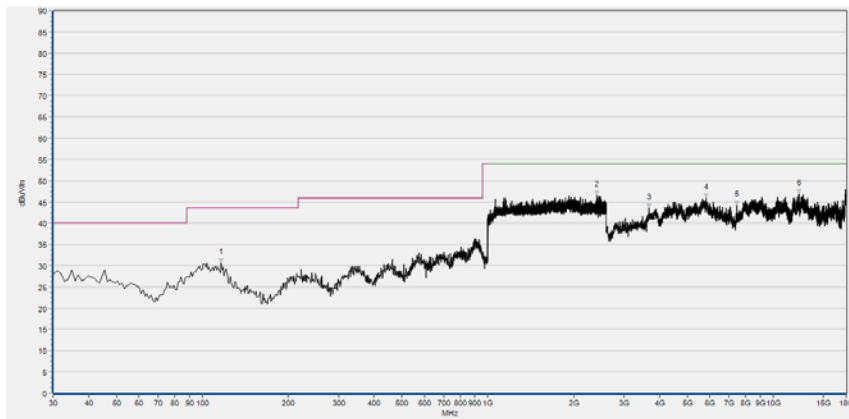

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
116.330	30.74	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2413.867	46.53	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3668.760	43.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5806.280	45.85	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7441.760	44.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12280.440	46.95	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

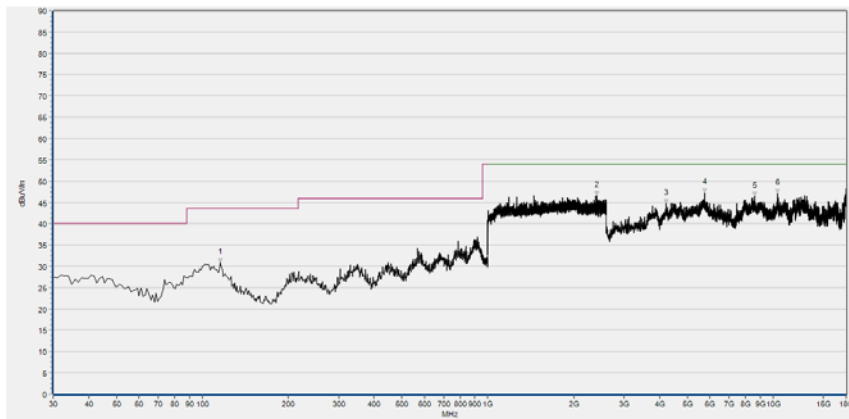

Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
115.360	30.84	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2410.667	46.56	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4210.840	44.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5738.520	47.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8615.240	46.37	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10358.520	47.06	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)



## Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test Items	Uncertainty
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

<b>Laboratory Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Laboratory Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
<b>Telephone:</b>	+86 755 36698555
<b>Facsimile:</b>	+86 755 36698525

### 2. Identification of the Responsible Testing Location

<b>Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

### 3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



#### 4. Test Equipments Utilized

##### 4.1 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2023.02.09	2024.02.08
LISN	8127449	NSLK 8127	Schwarzbeck	2023.02.21	2024.02.20
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2022.06.27	2024.06.26
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	2022.07.08	2023.07.07

##### 4.2 List of Software Used

Description	Manufacturer	Software Version
Morlab EMCR V1.2	Morlab	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**4.3 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2022.05.25	2025.05.24
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2022.02.11	2025.02.10
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2022.07.13	2025.07.12
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2022.07.14	2025.07.13
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2022.07.08	2023.07.07
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2022.07.08	2023.07.07
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2022.07.23	2023.07.22
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2022.07.08	2023.07.07
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2022.07.08	2023.07.07
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2022.07.08	2023.07.07
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2022.07.08	2023.07.07
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2022.07.08	2023.07.07
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-N N-5	Qualwave	2022.07.08	2023.07.07
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	2022.07.08	2023.07.07
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09

END OF REPORT