

The Photos of SAR test

No. I16Z42015-SEM01

For

TCL Communication Ltd.

HSUPA/HSDPA/UMTS Quad Band/GSM Quad Band/LTE Tri Band/CDMA EVDO Tri Band mobile phone

Model Name: 4044T

With

Hardware Version: 03

Software Version: A4J

FCC ID: 2ACCJN010

Issued Date: 2016-12-22



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:


CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191 Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email: cttl terminals@catr.cn, website: www.chinattl.com







Picture 1: Constituents of the sample

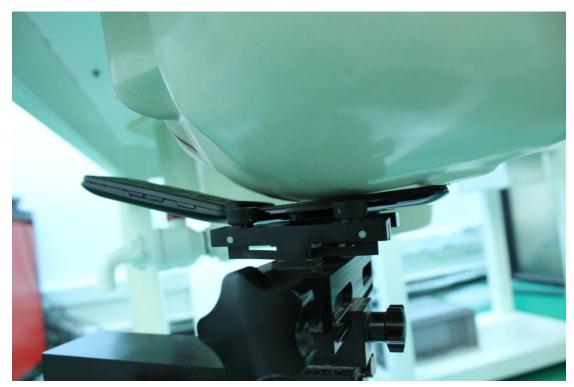


Picture 2: Left Hand Touch Cheek Position

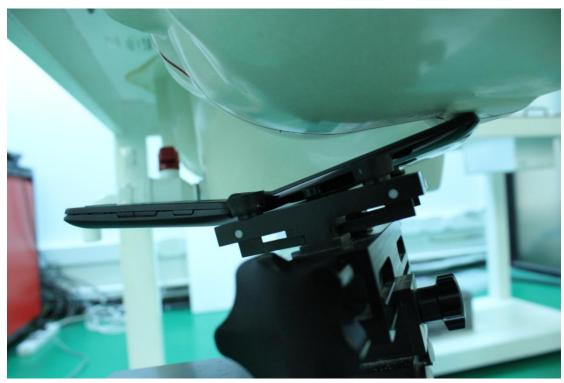

Picture 3: Left Hand Tilt 15° Position

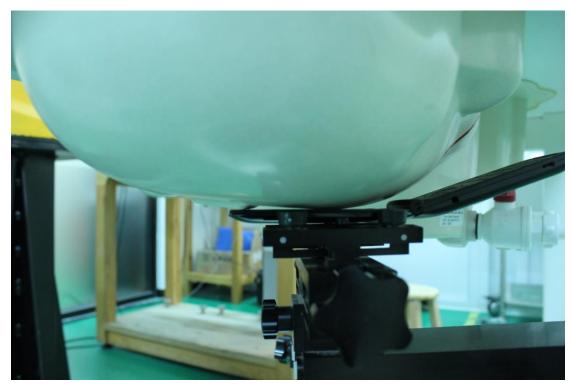

Picture 4: Right Hand Touch Cheek Position

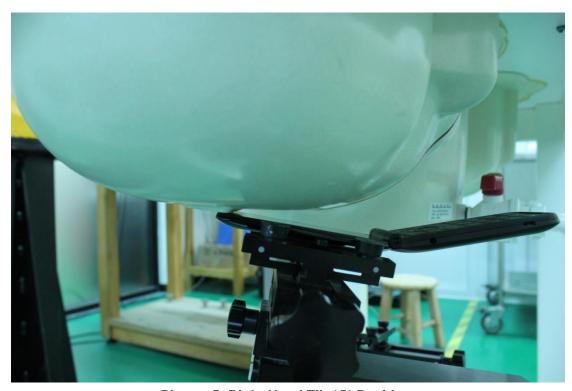

Picture 5: Right Hand Tilt 15° Position

Test positions for body:

The Body SAR is tested at the following 10 test positions all with the distance = 10mm or 15mm between the EUT and the phantom bottom:



Picture 6: Front closed - 10mm




Picture 6-1: Front closed - 15mm




Picture 7: Rear closed – 10mm



Picture 7-1: Rear closed – 15mm

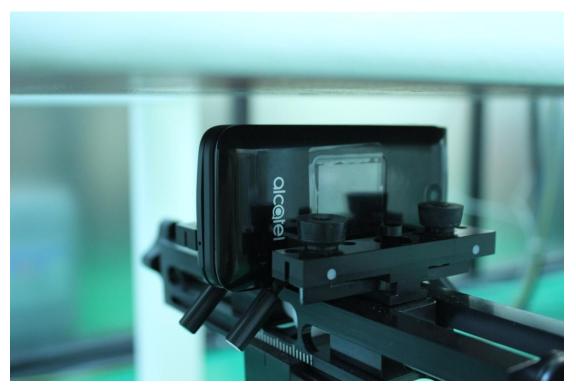

Picture 8: Left closed - 10mm

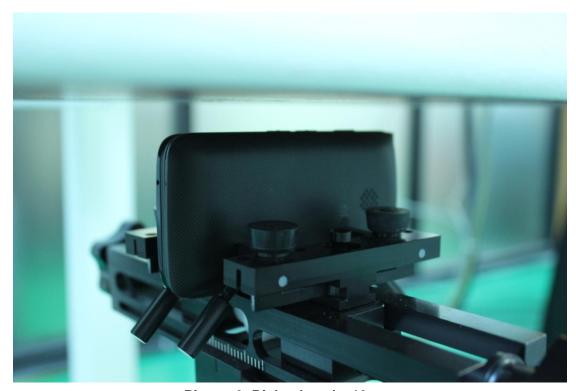

Picture 9: Right closed – 10mm




Picture 10: Bottom closed – 10mm



Picture 11: Top closed – 10mm




Picture 12: Rear open – 10mm

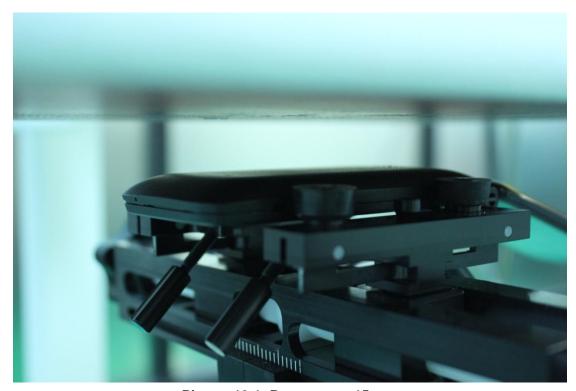


Picture 12-1: Rear open – 15mm



Picture 13: Left open – 10mm

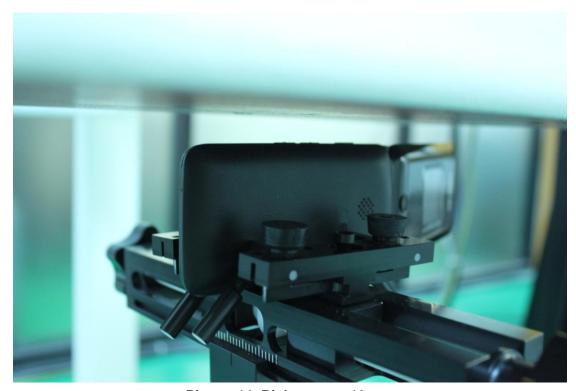

Picture 14: Right open – 10mm

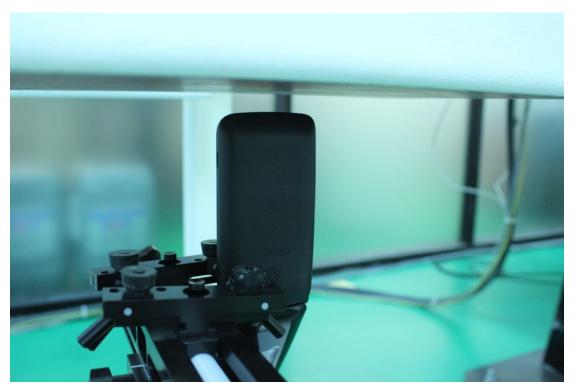

Picture 15: Bottom open – 10mm