



# TEST REPORT

## No. I19Z60613-EMC01

for

**TCL Communication Ltd.**

**HSUPA/HSDPA/UMTS Tri Band/GSM Quad Band/CDMA Tri Band/LTE**

**9 Band Mobile Phone**

**4052W, 4052Z**

**FCC ID: 2ACCJN032**

**Hardware Version: 04**

**Software Version: YWX9**

**Issued Date: 2019-06-18**



**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

Report Number	Revision	Description	Issue Date
I19Z60613-EMC01	Rev.0	1 <sup>st</sup> edition	2019-06-18

## **CONTENTS**

<b>1. TEST LABORATORY.....</b>	<b>4</b>
<b>1.1. TESTING LOCATION .....</b>	<b>4</b>
<b>1.2. TESTING ENVIRONMENT .....</b>	<b>4</b>
<b>1.3. PROJECT DATA.....</b>	<b>4</b>
<b>1.4. SIGNATURE .....</b>	<b>4</b>
<b>2. CLIENT INFORMATION.....</b>	<b>5</b>
<b>2.1. APPLICANT INFORMATION.....</b>	<b>5</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>5</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>6</b>
<b>3.1. ABOUT EUT .....</b>	<b>6</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>6</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....</b>	<b>6</b>
<b>3.4. EUT SET-UPS .....</b>	<b>8</b>
<b>4. REFERENCE DOCUMENTS .....</b>	<b>9</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING.....</b>	<b>9</b>
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>10</b>
<b>6. SUMMARY OF TEST RESULTS.....</b>	<b>11</b>
<b>7. TEST EQUIPMENTS UTILIZED.....</b>	<b>12</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>13</b>
<b>ANNEX B: PERSONS INVOLVED IN THIS TESTING.....</b>	<b>23</b>

## **1. Test Laboratory**

### **1.1. Testing Location**

CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191


### **1.2. Testing Environment**

Normal Temperature: 15-25°C  
Relative Humidity: 20-75%

### **1.3. Project data**

Testing Start Date: 2019-05-15  
Testing End Date: 2019-06-04

### **1.4. Signature**




---

Wang Junqing  
(Prepared this test report)



---

Zhang Ying  
(Reviewed this test report)



---

Liu Baodian  
Deputy Director of the laboratory  
(Approved this test report)

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address: 7/F, Block F4, TCL International E City, Zhong Shan Yuan Road,  
Nanshan District, Shenzhen, Guangdong, P.R. China 518052  
City: Shenzhen  
Postal Code: 518052  
Country: China  
Contact Person: Gong Zhizhou  
Contact Email: zhizhou.gong@tcl.com  
Telephone: 0086-755-36611722  
Fax: 0086-755-36612000-81722

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address: 7/F, Block F4, TCL Communication Technology Building, TCL  
International E City, Zhong Shan Yuan Road, Nanshan District,  
Shenzhen, Guangdong, P.R. China 518052  
City: Shenzhen  
Postal Code: 518052  
Country: China  
Telephone: 0086-755-36611722  
Fax: 0086-75536612000-81722

### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

Description	HSUPA/HSDPA/UMTS Tri Band/GSM Quad Band/CDMA Tri Band/LTE 9 Band Mobile Phone
Model Name	4052W, 4052Z
FCC ID	2ACCJN032
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.7VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, CAICT.

#### 3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	015490000004784	04	YWX9

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Remarks
AE1	Battery	/	/
AE2	Charger	/	/
AE3	USB Cable	/	/
AE4	Headset	/	/

##### AE1

Type	TLi013C1
Model	CAB1350001C1
Manufacturer	BYD
Capacitance	1350mAh
Nominal voltage	3.7V

##### AE2

Model	CBA0066AGNC5
Manufacturer	Puan
Length of cable	/

##### AE3

Model	/
Manufacturer	/
Length of cable	95cm

##### AE4

Model	/
Manufacturer	/
Length of cable	/



\*AE ID: is used to identify the test sample in the lab internally.  
Note: The USB cables are shielded.



### 3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.3	EUT1+ AE1+ AE2+ AE3+ AE4	Charger+Headset(including FM function)
Set.6	EUT1+ AE1+ AE3	USB mode



## **4. Reference Documents**

### **4.1. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2016
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.

## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber SAC-1** (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 10 m distance
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 6GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Semi-anechoic chamber SAC-2** (10 meters×6.7meters×6.1meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Shielded room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

## 6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	B.1	P	CTTL(huayuan North Road)
2	Conducted Emission	15.107(a)	B.2	P	CTTL(huayuan North Road)

**7. Test Equipments Utilized**

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATI ON INTERVAL
1	Test Receiver	ESC17	100948	R&S	2019-06-27	1 Year
2	Universal Radio Communication Tester	CMW500	143008	R&S	2019-11-26	1 year
3	LISN	ENV216	101200	R&S	2020-03-14	1 year
4	EMI Antenna	VULB 9163	9163-483	Schwarzbeck	2019-08-21	1 year
5	EMI Antenna	3115	00167250	ETS-Lindgren	2019-06-17	1 year
6	PC	OPTIPLEX 380	2X1YV2X	DELL	N/A	N/A
7	Printer	P1606dn	VNC3L52122	HP	N/A	N/A
8	Keyboard	L100	CN0RH6596589 07ATOI40	DELL	N/A	N/A
9	Mouse	M-UAE119	LZ935220ZRC	Lenovo	N/A	N/A

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 Radiated Emission**

#### **Reference**

FCC: CFR Part 15.109(a).

#### **A.1.1 Method of measurement**

The field strength of radiated emissions from the unintentional radiator (USB mode of EUT and charging mode of EUT) at distances of 10 meters(for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3. The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

#### **A.1.2 EUT Operating Mode**

The EUT is operating in the USB mode and charging mode. During the test EUT is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode.

The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to EUT, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

#### **A.1.3 Measurement Limit**

Frequency range (MHz)	Field strength limit ( $\mu\text{V/m}$ )		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

#### **A.1.4 Test Condition**

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average

### A.1.5 Measurement Results

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

$G_A$ : Antenna factor of receive antenna

$G_{\text{PL}}$ : Path Loss

$P_{\text{Mea}}$ : Measurement result on receiver.

Measurement uncertainty (worst case):  $U = 5.44 \text{ dB}$ ,  $k=2$ .

### Measurement results for Set.3:

#### Charging Mode/Average detector

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Antenna Pol. (H/V)
17952.967	35.4	-17.7	45.6	7.500	V
17975.067	35.3	-17.7	45.6	7.400	V
17892.900	35.3	-18.5	45.6	8.200	V
17633.933	35.2	-18.9	45.6	8.500	H
17863.433	35.2	-18.5	45.6	8.100	H
17972.800	35.2	-17.7	45.6	7.300	V

#### Charging Mode/Peak detector

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Antenna Pol. (H/V)
17884.967	47.1	-18.5	45.6	20.000	V
17522.300	46.9	-19.2	45.6	20.500	H
17676.433	46.8	-18.9	45.6	20.100	V
17811.867	46.7	-18.5	45.6	19.600	H
17766.533	46.6	-18.5	45.6	19.500	H
17612.967	46.6	-18.9	45.6	19.900	H

**Measurement results for Set.6:****USB Mode/Average detector**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Antenna Pol. (H/V)
17974.500	43.7	-17.7	45.6	15.800	H
17840.767	43.7	-18.5	45.6	16.600	V
17988.667	43.6	-17.7	45.6	15.700	H
17933.700	43.6	-17.7	45.6	15.700	H
17950.133	43.5	-17.7	45.6	15.600	V
17892.333	43.4	-18.5	45.6	16.300	V

**USB Mode/ Peak detector**

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Antenna Pol. (H/V)
17867.967	54.6	-18.5	45.6	27.500	H
17937.100	54.6	-17.7	45.6	26.700	H
17527.967	54.5	-19.2	45.6	28.100	H
17920.667	54.5	-17.7	45.6	26.600	H
17727.433	54.2	-18.9	45.6	27.500	H
17589.733	54.1	-18.9	45.6	27.400	H

Note: The measurement results of Set.3 and Set.6 showed here are worst cases of the combinations of different batteries and USB cables.

### Charging Mode, Set.3:

Full Spectrum

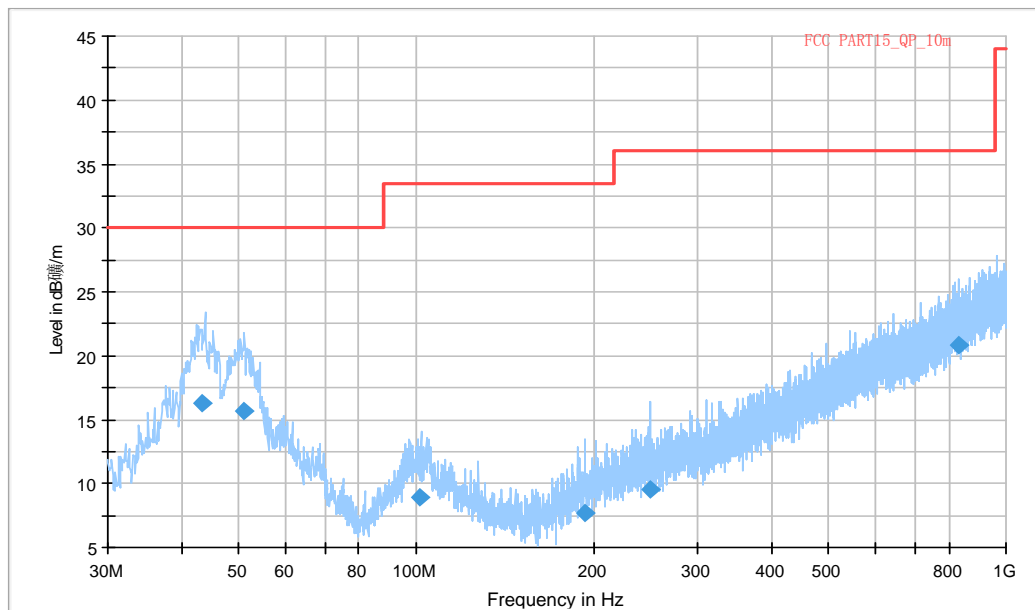



Fig A.1 Radiated Emission from 30MHz to 1GHz

### Final\_Result

Frequency (MHz)	QuasiPeak (dBμ/m)	Limit (dBμ/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
43.451000	16.24	30.00	13.76	102.0	V	68.0
50.906000	15.65	30.00	14.35	109.0	V	160.0
101.697000	8.98	33.50	24.54	290.0	V	210.0
193.191000	7.71	33.50	25.81	284.0	V	102.0
250.176000	9.48	36.00	26.54	125.0	V	61.0
830.347000	20.78	36.00	15.24	125.0	V	-30.0



Full Spectrum

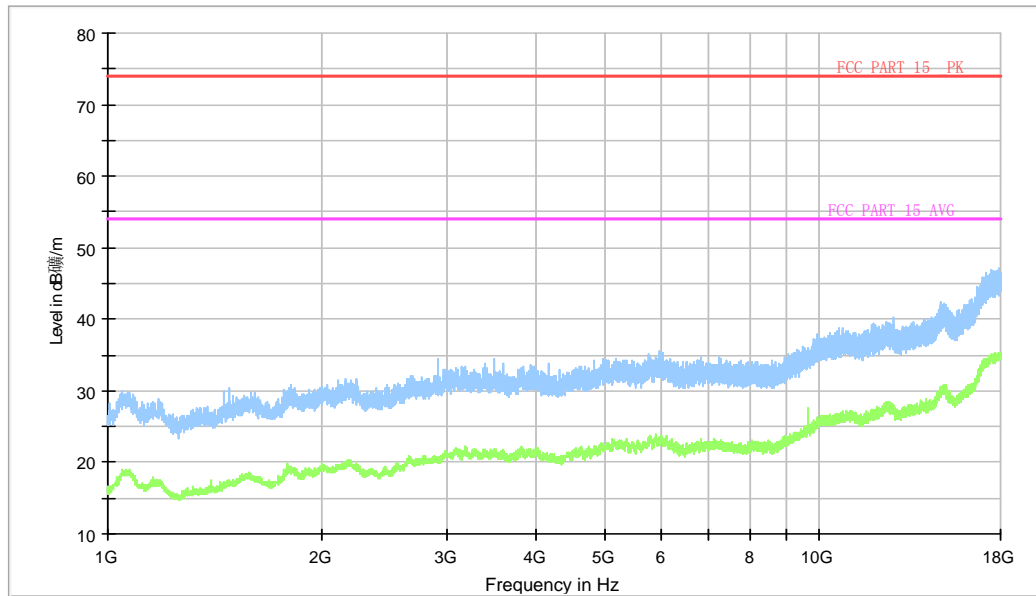

**Fig A.2 Radiated Emission from 1GHz to 18GHz**

## USB Mode, Set.6

Full Spectrum


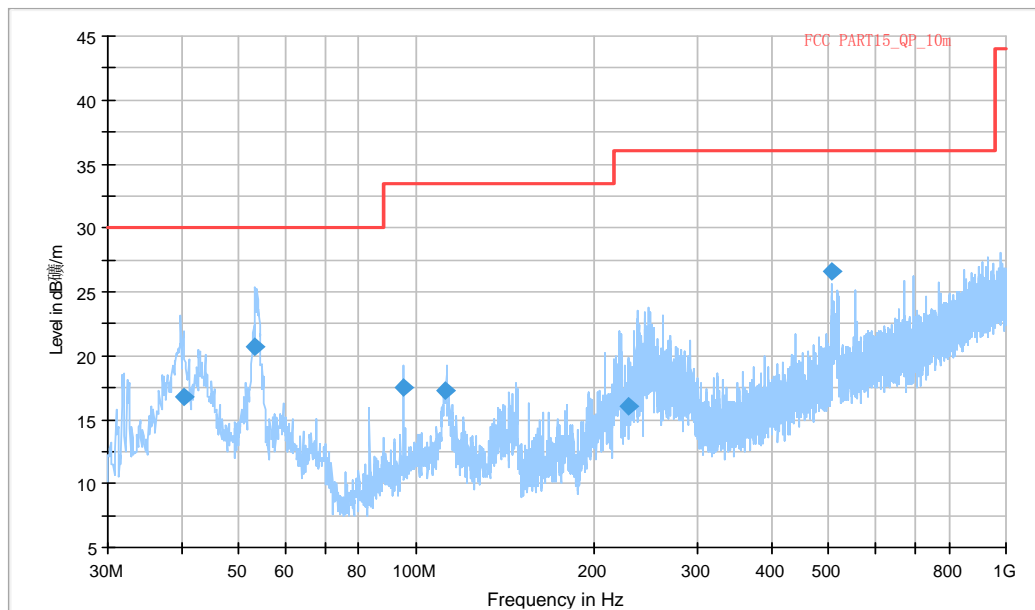


Fig A.3 Radiated Emission from 30MHz to 1GHz

## Final\_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
40.314000	16.76	30.00	13.24	121.0	V	159.0
53.257000	20.71	30.00	9.29	119.0	V	120.0
95.258000	17.47	33.50	16.05	279.0	V	112.0
112.127000	17.28	33.50	16.24	314.0	V	-30.0
228.707000	16.04	36.00	19.98	125.0	V	155.0
506.446000	26.56	36.00	9.46	282.0	V	-30.0

Full Spectrum

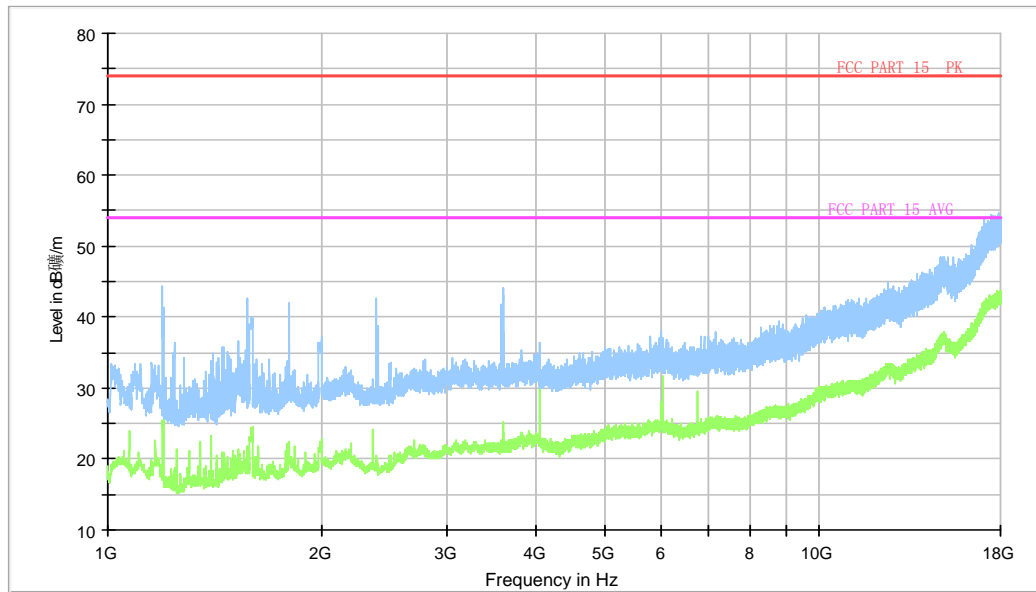

**Fig A.4 Radiated Emission from 1GHz to 18GHz**

## A.2 Conducted Emission

### Reference

FCC: CFR Part 15.107(a).

### A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

### A.2.2 EUT Operating Mode

The EUT is operating in the USB mode and charging mode. During the test EUT is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. And during the test, FM, Camera recording are turned on for each mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to EUT, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

### A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency		

### A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

### A.2.5 Measurement Results

Measurement uncertainty:  $U= 3.08 \text{ dB}$ ,  $k=2$ .

#### Charging Mode, Set.3

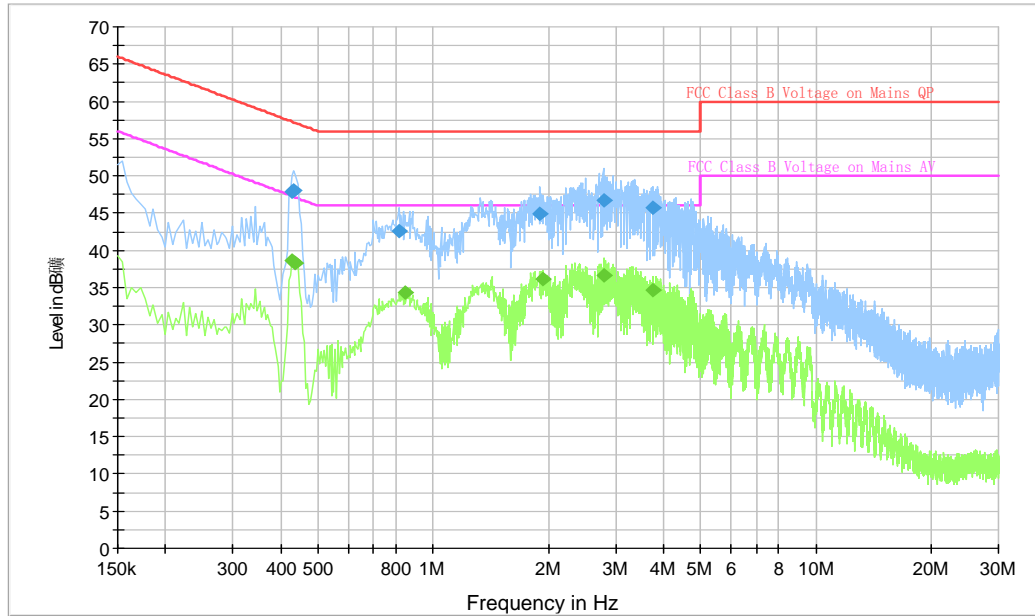


Fig A.5 Conducted Emission

#### Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.429000	47.9	2000.0	9.000	L1	19.8	9.4	57.3
0.433500	48.1	2000.0	9.000	L1	19.8	9.1	57.2
0.816000	42.6	2000.0	9.000	L1	19.7	13.4	56.0
1.905000	45.0	2000.0	9.000	L1	19.6	11.0	56.0
2.787000	46.7	2000.0	9.000	L1	19.6	9.3	56.0
3.741000	45.7	2000.0	9.000	L1	19.6	10.3	56.0

#### Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.429000	38.6	2000.0	9.000	L1	19.8	8.7	47.3
0.438000	38.3	2000.0	9.000	L1	19.8	8.8	47.1
0.843000	34.3	2000.0	9.000	L1	19.7	11.7	46.0
1.941000	36.2	2000.0	9.000	L1	19.6	9.8	46.0
2.800500	36.7	2000.0	9.000	L1	19.6	9.3	46.0
3.750000	34.6	2000.0	9.000	L1	19.6	11.4	46.0

Note: The measurement results showed here are worst cases of the combinations of different batteries and USB cables.

## USB Mode, Set.6

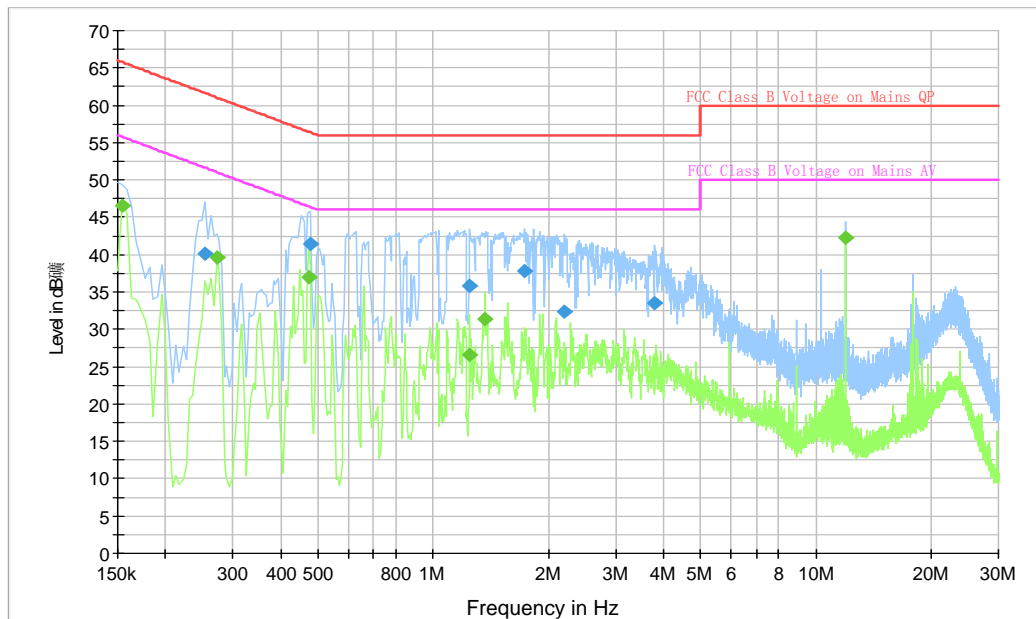


Fig A.6 Conducted Emission

## Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.253500	40.1	2000.0	9.000	L1	19.8	21.5	61.6
0.478500	41.5	2000.0	9.000	N	19.8	14.9	56.4
1.248000	35.8	2000.0	9.000	N	19.6	20.2	56.0
1.734000	37.8	2000.0	9.000	L1	19.6	18.2	56.0
2.206500	32.4	2000.0	9.000	L1	19.6	23.6	56.0
3.804000	33.5	2000.0	9.000	N	19.6	22.5	56.0

## Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.154500	46.5	2000.0	9.000	N	29.6	9.2	55.8
0.271500	39.6	2000.0	9.000	N	19.8	11.5	51.1
0.474000	37.0	2000.0	9.000	N	19.8	9.4	46.4
1.248000	26.6	2000.0	9.000	N	19.6	19.4	46.0
1.369500	31.4	2000.0	9.000	N	19.6	14.6	46.0
11.917500	42.2	2000.0	9.000	L1	19.7	7.8	50.0

Note: The measurement results showed here are worst cases of the combinations of different batteries and USB cables.

## **ANNEX B: PERSONS INVOLVED IN THIS TESTING**

Test Item	Test Software and Version	Software Vendor	Test operator
Conducted Emission	EMC32 V8.5.2	R&S	Wang Huan
Radiated Emission	EMC32 V9.01.00	R&S	Wang Huan

**\*\*\*END OF REPORT\*\*\***