

APPLICATION FOR CERTIFICATION  
On Behalf of  
Continental Conair Limited

2.4GHz Clock Radio Cordless Phone With CID & Speakerphone

Model Number: GH3060

Prepared for : Continental Conair Limited  
35/F., Standard Chartered Tower, Millennium City,  
388 Kwun Tong Road, Kwun Tong, Kowloon, Hong Kong

Prepared By : Audix Technology (Shenzhen) Co., Ltd.  
No. 6, Ke Feng Rd., 52 Block,  
Shenzhen Science & Industrial Park,  
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F03113  
Date of Test : May.15~22, 2003  
Date of Report : Jun.02, 2003

## TABLE OF CONTENTS

Description	Page
Test Report Declaration	
<b>1. GENERAL INFORMATION .....</b>	<b>1-1</b>
1.1. Description of Device (EUT) .....	1-1
1.2. Tested Supporting System Details.....	1-1
1.3. Channel Frequencies.....	1-2
1.4. Test Facility .....	1-5
1.5. Test Uncertainty .....	1-5
<b>2. POWER LINE CONDUCTED EMISSION TEST .....</b>	<b>2-1</b>
2.1. Test Equipment.....	2-1
2.2. Block Diagram of Test Setup .....	2-1
2.3. Power Line Conducted Emission Test Limits .....	2-1
2.4. Configuration of EUT on Test.....	2-2
2.5. Operating Condition of EUT .....	2-2
2.6. Test Procedure .....	2-2
2.7. Power Line Conducted Emission Test Results.....	2-3
<b>3. RADIATED EMISSION TEST .....</b>	<b>3-1</b>
3.1. Test Equipment.....	3-1
3.2. Block Diagram of Test Setup .....	3-1
3.3. Radiated Emission Limit .....	3-2
3.4. EUT Configuration on Test .....	3-2
3.5. Operating Condition of EUT .....	3-3
3.6. Test Procedure .....	3-3
3.7. Radiated Emission Test Results .....	3-4
<b>4. PHOTOGRAPH.....</b>	<b>4-1</b>
4.1. Photos of Power Line Conducted Emission Test .....	4-1
4.2. Photos of Radiated Emission Test (In Anechoic Chamber) .....	4-2

APPENDIX I (13 pages)  
APPENDIX II (55 pages)



## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

Description	:	2.4GHz Clock Radio Cordless Phone With CID & Speakerphone
Model Number	:	GH3060
Applicant	:	Continental Conair Limited 35/F., Standard Chartered Tower, Millennium City, 388 Kwun Tong Road, Kwun Tong, Kowloon, Hong Kong
Manufacturer	:	Telefield Ltd. Flat D, 2/F., Valiant Industrial Centre, 2-12 Au Pui Wan Street, Fo Tan, Shatin, N.T., Hong Kong
Date of Test	:	May.15~22, 2003

### 1.2. Tested Supporting System Details

#### 1.2.1. Power Adaptor

Manufacturer	:	Southwestern Bell
Model Number	:	UD-1006
Cable Line	:	Unshielded, Undetachable, 1.0m

## 1.3. Channel Frequencies

CH.	BASE TX	HANDSET TX	CH.	BAST TX	HANDSET TX
1	2400.75	2472.75	21	2403.75	2475.75
2	2400.90	2472.90	22	2403.90	2475.90
3	2401.05	2473.05	23	2404.05	2476.05
4	2401.20	2473.20	24	2404.20	2476.20
5	2401.35	2473.35	25	2404.35	2476.35
6	2401.50	2473.50	26	2404.50	2476.50
7	2401.65	2473.65	27	2404.65	2476.65
8	2401.80	2473.80	28	2404.80	2476.80
9	2401.95	2473.95	29	2404.95	2476.95
10	2402.10	2474.10	30	2405.10	2477.10
11	2402.25	2474.25	31	2405.25	2477.25
12	2402.40	2474.40	32	2405.40	2477.40
13	2402.55	2474.55	33	2405.55	2477.55
14	2402.70	2474.70	34	2405.70	2477.70
15	2402.85	2474.85	35	2405.85	2477.85
16	2403.00	2475.00	36	2406.00	2478.00
17	2403.15	2475.15	37	2406.15	2478.15
18	2403.30	2475.30	38	2406.30	2478.30
19	2403.45	2475.45	39	2406.45	2478.45
20	2403.60	2475.60	40	2406.60	2478.60




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
 Shenzhen Science & Industry Park  
 Nantou, Shenzhen, Guangdong, China  
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 188 File#: C:\EMI TEST DATA\T\Telefield.EMI

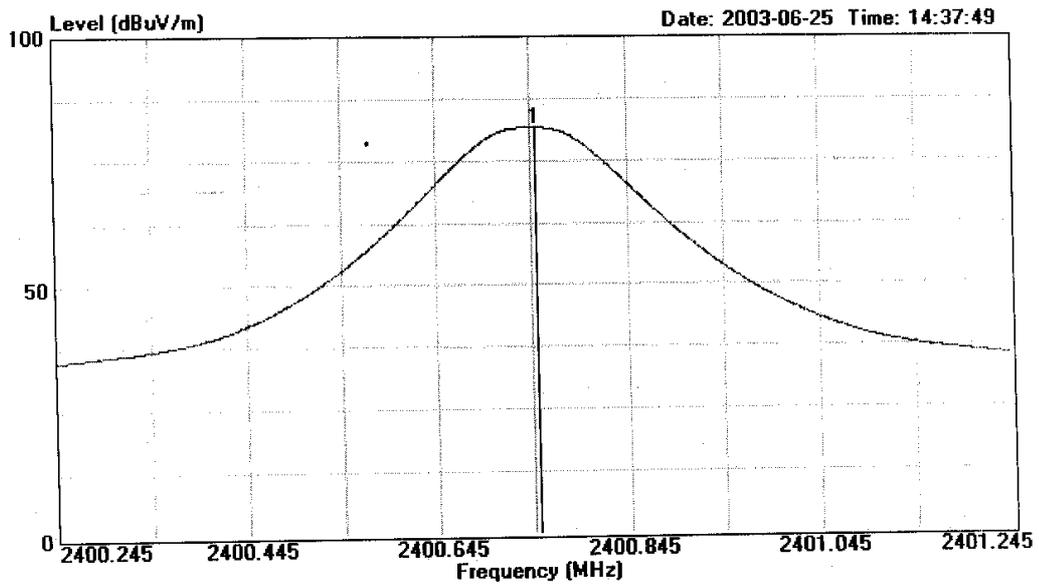

Site : 1# Chamber  
 Condition : 3m 3115FACTOR VERTICAL  
 EUT : 2.4G Clock Radio Cordless  
 : with CID&Speakerphone  
 M/N : GH3060  
 Power : DC 9V Adaptor 120V 60Hz  
 Test Engineer : Tomy  
 Memo : Base CH1

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor	Remark
			dB	dBuV/m	dBuV	dB	dB	dB	
1	2400.750	81.55	-----	-----	82.83	5.67	28.04	34.99	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 167 File#: C:\EMI TEST DATA\T\Telefield.EMI

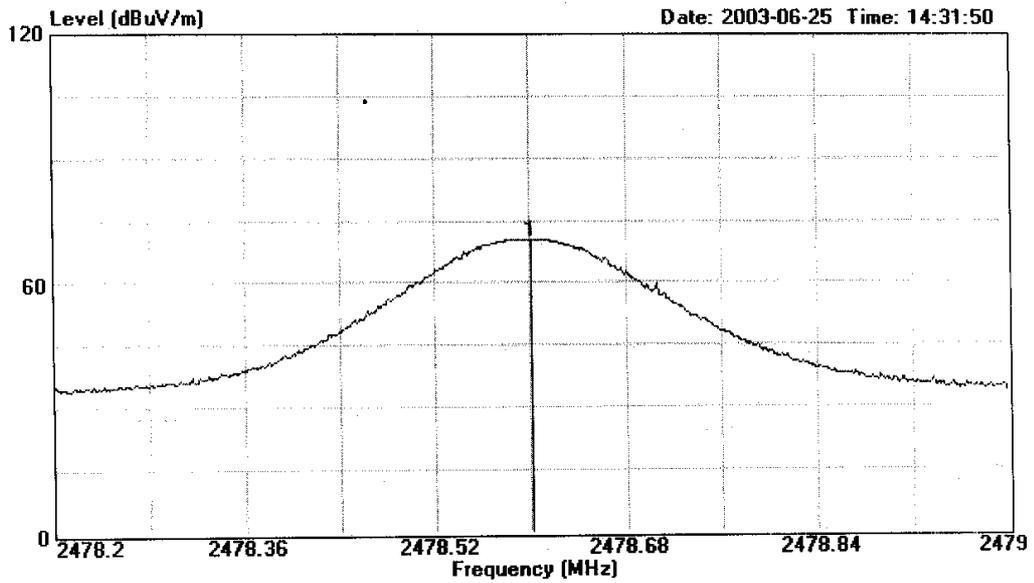

Site : 1# Chamber  
Condition : 3m 3115FACTOR VERTICAL  
EUT : 2.4G Clock Radio Cordless  
' : with CID&Speakerphone  
M/N : GH3060  
Power : DC 3.6V  
Test Engineer : Tomy  
Memo : Handset CH40

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	2478.600	70.47	-----	-----	71.46	5.78	28.20	34.97	Peak

#### 1.4. Test Facility

##### Site Description

3m Anechoic Chamber : Certificated by FCC, USA  
Aug. 24, 2000

EMC Lab. : Certificated by DATech, German  
Feb. 02, 1999

Certificated by NVLAP, USA  
NVLAP Code: 200372-0  
Mar. 31, 2003

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.

Site Location : No. 6, Ke Feng Rd., 52 Block,  
Shenzhen Science & Industrial Park,  
Nantou, Shenzhen, Guangdong, China

#### 1.5. Test Uncertainty

Conducted Emission Uncertainty =  $\pm 2.66\text{dB}$

Radiated Emission Uncertainty =  $\pm 4.26\text{dB}$

## 2. POWER LINE CONDUCTED EMISSION TEST


### 2.1. Test Equipment

The following test equipments are used during the power line conducted emission test:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS20	836600/006	May.31, 03	1 Year
2.	L.I.S.N. #1	Kyoritsu	KNW-407	8-541-4	May.31, 03	1 Year
3.	L.I.S.N. #2	R&S	ESH2-Z5	834066/011	May.31, 03	1 Year
4.	Terminator	EMCO	50Ω	No. 1	May.31, 03	1 Year
5.	Terminator	EMCO	50Ω	No. 2	May.31, 03	1 Year
6.	RF Cable	FUJIKURA	RG-55/U	LISN Cable	Feb. 22, 03	1/2 Year
7.	Coaxial Switch	Anritsu	MP59B	M74389	May.29, 03	1/2 Year
8.	PC	N/A	586ATXS	N/A	N/A	N/A
9.	Printer	HP	Laserjet2100	SGGJ092351	N/A	N/A

### 2.2. Block Diagram of Test Setup

#### 2.2.1. Block diagram of connection between the EUT and simulators

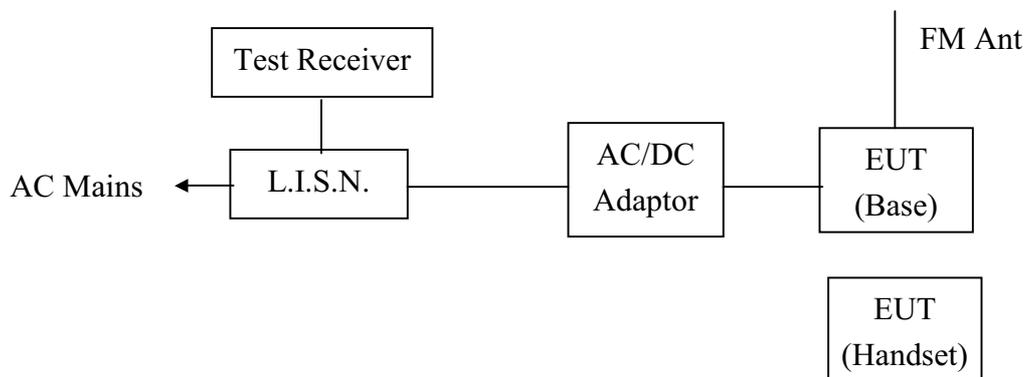

*(EUT: 2.4GHz Clock Radio Cordless Phone With CID & Speakerphone)*

### 2.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150KHz ~ 500KHz	66 ~ 56*	56 ~ 46*
500KHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. \* Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

## 2.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

### 2.4.1. 2.4GHz Clock Radio Cordless Phone With CID & Speakerphone (EUT)

Model Number : GH3060  
Serial Number : F2003060201  
Manufacturer : Telefield Ltd.

### 2.4.2. Support Equipment : As Tested Supporting System Detail, in Section 1.2..

## 2.5. Operating Condition of EUT

2.5.1. Setup the EUT and simulator as shown as Section 2.2.

2.5.2. Turn on the power of all equipment.

2.5.3. Let the EUT work in test mode (Base FM 88MHz/Base FM 98MHz/  
Base FM 108MHz/Base CH1/Base CH20/Base CH40) and test it.

## 2.6. Test Procedure

The EUT is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm coupling impedance for the EUT. Please refer the block diagram of the test setup and photographs. Power on the EUT and let it work normally, we use a keyboard test soft ware, let EUT working in test mode, then test it. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-1992 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS20) is set at 10KHz.

The frequency range from 150KHz to 30MHz is checked.

The test result are reported on Section 2.7., all the scanning waveforms for Conducted Emission Test are attached in Appendix I.

## 2.7. Power Line Conducted Emission Test Results

**PASS.**

The frequency range from 150KHz to 30 MHz is investigated.

All emissions not reported below are too low against the prescribed limits.

Date of Test : May.21, 2003 Temperature : 24.6°C  
 EUT : 2.4GHz Clock Radio Cordless Phone Humidity : 54%  
           With CID & Speakerphone  
 Model No. : GH3060 Test Mode : Base FM 88MHz  
 Test Engineer : Tomy

Frequency (MHz)	Reading (dB $\mu$ V)				Limit (dB $\mu$ V)	
	VA		VB		Quasi-Peak	Average
	Quasi-Peak	Average	Quasi-Peak	Average		
0.162	37.42	26.50	*	*	65.35	55.35
0.169	*	*	23.44	10.60	65.01	55.01
0.185	*	*	21.56	11.17	64.25	54.25
0.246	22.07	21.71	*	*	61.89	51.89
0.250	*	*	4.82	1.48	61.75	51.75
0.286	13.03	3.67	*	*	60.63	50.63
10.736	10.26	8.78	*	*	60.00	50.00
10.739	*	*	8.20	6.21	60.00	50.00
21.475	21.13	20.48	*	*	60.00	50.00
21.502	*	*	11.38	7.36	60.00	50.00
26.846	*	*	18.47	16.72	60.00	50.00
26.847	16.93	15.80	*	*	60.00	50.00

"" As the QP value is too low against AV limit, So AV Value had been omitted.

Reviewer: \_\_\_\_\_

Date of Test : May.22, 2003 Temperature : 24.6°C  
EUT : 2.4GHz Clock Radio Cordless Phone Humidity : 54%  
With CID & Speakerphone  
Model No. : GH3060 Test Mode : Base CH40  
Test Engineer : Tomy

Frequency (MHz)	Reading (dBμV)				Limit (dBμV)	
	VA		VB		Quasi-Peak	Average
	Quasi-Peak	Average	Quasi-Peak	Average		
0.153	32.09	15.34	*	*	65.84	55.84
0.156	*	*	33.60	29.73	65.67	55.67
0.218	*	*	19.82	11.19	62.90	52.90
0.230	18.74	8.14	*	*	62.44	52.44
10.734	*	*	8.24	6.47	60.00	50.00
10.737	9.28	7.56	*	*	60.00	50.00
13.423	*	*	11.35	9.85	60.00	50.00
13.424	10.71	9.16	*	*	60.00	50.00
21.476	23.48	22.93	22.18	21.59	60.00	50.00
26.844	18.42	17.57	*	*	60.00	50.00
26.845	*	*	18.62	17.75	60.00	50.00

\*\*\* As the QP value is too low against AV limit, So AV Value had been omitted.

Reviewer: \_\_\_\_\_

### 3. RADIATED EMISSION TEST

#### 3.1. Test Equipment


The following test equipments are used during the radiated emission Test :

##### 3.1.1. For Anechoic Chamber

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Spectrum	HP	85422E	3625A00181	May.31, 03	1 Year
2.	Test Receiver	Rohde & Schwarz	ESVS10	834468/011	May.31, 03	1 Year
3.	Amplifier	HP	8447D	2944A07794	Mar.19, 03	1/2 Year
4.	Bilog Antenna	Schaffner	CBL6111C	2598	Jan. 14, 03	1 Year
5.	PC	N/A	586ATX3	N/A	N/A	N/A
6.	Printer	HP	Laserjet6P	SGCF019673	N/A	N/A
7.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.1	Feb. 03, 03	1/2 Year
8.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.2	Feb. 03, 03	1/2 Year
9.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.3	Feb. 03, 03	1/2 Year
10.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.4	Feb. 03, 03	1/2 Year
11.	Coaxial Switch	Anritsu	MP59B	M73989	May.29, 03	1/2 Year
12.	Spectrum	Agilent	E4407B	MY41440292	Mar.28, 03	1 Year
13.	Amp	HP	8449B	3008A00863	May.31, 03	1 Year
14.	Antenna	EMCO	3115	9607-4877	Dec. 04, 02	1.5 Year

#### 3.2. Block Diagram of Test Setup

##### 3.2.1. Block Diagram of connection between EUT and simulators

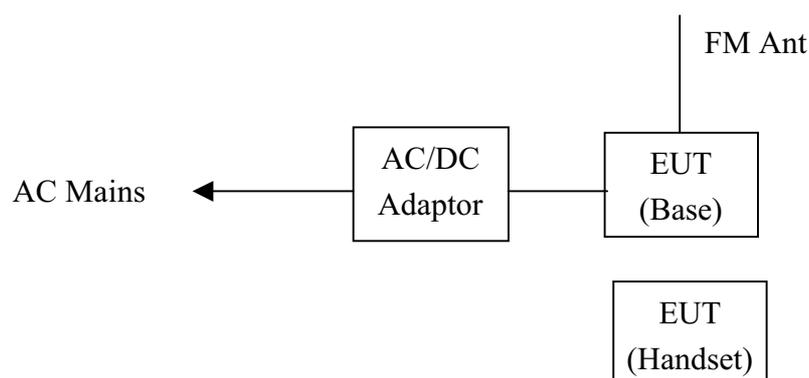


*(EUT: 2.4GHz Clock Radio Cordless Phone With CID & Speakerphone)*

## 3.2.2. Anechoic Chamber Setup Diagram

ANTENNA TOWER

ANTENNA ELEVATION VARIES FROM 1 TO 4 METERS

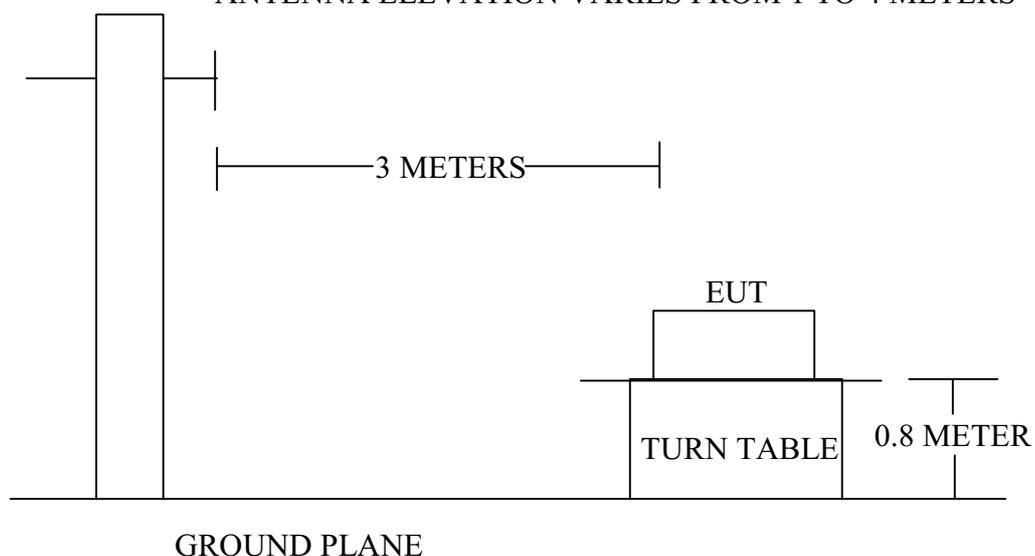

## 3.3. Radiated Emission Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Local Oscillator: 114.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 94.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average) Other: 74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remark :
- (1) Emission level  $\text{dB}\mu\text{V} = 20 \log$  Emission level  $\mu\text{V}/\text{m}$
  - (2) The smaller limit shall apply at the cross point between two frequency bands.
  - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

## 3.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

## 3.4.1. 2.4GHz Clock Radio Cordless Phone With CID &amp; Speakerphone (EUT)

Model Number : GH3060  
 Serial Number : F2003060201  
 Manufacturer : Telefield Ltd.

### 3.5. Operating Condition of EUT

- 3.5.1. Setup the EUT as shown in Section 3.2..
- 3.5.2. Let the EUT work in test modes (Base FM 88MHz/Base FM 98MHz/  
Base FM 108MHz/Base CH1/Base CH20/Base CH40/Handset CH1/  
Handset CH20/Handset CH40) and test it.

### 3.6. Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-1992 on radiated emission Test.

The bandwidth of the EMI test receiver (R&S ESVS20) is set at 120KHz.

The frequency range from 30MHz to 1000MHz and above 1000MHz are checked.

The test modes (Base FM 88MHz/Base FM 98MHz/Base FM 108MHz/  
Base CH1/Base CH20/Base CH40/Handset CH1/Handset CH20/Handset CH40) is tested in Anechoic Chamber and all the scanning waveforms are attached in Appendix II.

### 3.7. Radiated Emission Test Results

**PASS.**

The frequency range from 30MHz to 1000MHz is investigated.  
Please see the following pages.

Date of Test :	May. 19, 2003	Temperature :	23°C
EUT :	2.4GHz Clock Radio Cordless Phone With CID & Speakerphone	Humidity :	58%
Model No. :	GH3060	Test Mode :	Base FM 88MHz
Test Engineer:	Tomy		

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dB $\mu$ V	Emission Level Horizontal dB $\mu$ V/m	Over Limits dB	Limits dB $\mu$ V/m
98.870	9.79	2.01	20.94	32.74	-10.76	43.50
196.840	9.32	2.94	19.13	31.39	-12.11	43.50
295.780	13.15	3.73	19.49	36.37	-9.63	46.00
392.780	16.12	4.53	13.19	33.84	-12.16	46.00
<b>489.780</b>	<b>17.61</b>	<b>5.48</b>	<b>18.92</b>	<b>42.01</b>	<b>-3.99</b>	<b>46.00</b>
820.550	21.69	7.05	10.11	38.85	-7.15	46.00

Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The worst emission was detected at 489.780MHz with corrected signal level of 42.01dB $\mu$ V/m(Limit is 46.00 dB $\mu$ V/m) when the antenna was at horizontal polarization and at 1.55m high and the turn table was at 320 ° .

4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer: \_\_\_\_\_

Date of Test : May.19, 2003 Temperature : 23°C  
 EUT : 2.4GHz Clock Radio Cordless Humidity : 58%  
Phone With CID & Speakerphone  
 Model No. : GH3060 Test Mode : Base FM 88MHz  
 Test Engineer: Tomy

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dB $\mu$ V	Emission Level Vertical dB $\mu$ V/m	Over Limits dB	Limits dB $\mu$ V/m
39.700	10.48	1.21	15.03	26.72	-13.28	40.00
<b>96.930</b>	<b>9.72</b>	<b>2.01</b>	<b>27.80</b>	<b>39.53</b>	<b>-3.97</b>	<b>43.50</b>
196.840	9.60	2.94	19.30	31.84	-11.66	43.50
295.780	13.58	3.76	15.33	32.67	-13.33	46.00
489.780	18.57	5.41	11.12	35.10	-10.90	46.00
819.580	22.22	6.93	5.07	34.22	-11.78	46.00

Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The worst emission was detected at 96.930MHz with corrected signal level of 39.53dB $\mu$ V/m(Limit is 43.50 dB $\mu$ V/m) when the antenna was at horizontal polarization and at 1.0m high and the turn table was at 45 ° .

4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer: \_\_\_\_\_

Date of Test : May. 19, 2003 Temperature : 23°C  
 EUT : 2.4GHz Clock Radio Cordless Humidity : 58%  
Phone With CID & Speakerphone  
 Model No. : GH3060 Test Mode : Base CH40  
 Test Engineer: Tomy

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dB $\mu$ V	Emission Level Horizontal dB $\mu$ V/m	Over Limits dB	Limits dB $\mu$ V/m
33.880	14.20	1.14	4.63	19.97	-20.03	40.00
90.140	8.00	1.91	10.41	20.32	-23.18	43.50
104.690	10.55	2.08	9.65	22.28	-21.22	43.50
<b>803.090</b>	<b>21.56</b>	<b>7.09</b>	<b>10.95</b>	<b>39.60</b>	<b>-6.40</b>	<b>46.00</b>

- Remark: 1. All readings are Quasi-Peak values.  
 2. Emission Level = Antenna Factor + Cable Loss + Meter Reading  
 3. The worst emission was detected at 803.090MHz with corrected signal level of 39.60dB $\mu$ V/m(Limit is 46.00 dB $\mu$ V/m) when the antenna was at horizontal polarization and at 1.55m high and the turn table was at 310 ° .  
 4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer: \_\_\_\_\_

Date of Test : May.19, 2003 Temperature : 23°C  
 EUT : 2.4GHz Clock Radio Cordless Humidity : 58%  
Phone With CID & Speakerphone  
 Model No. : GH3060 Test Mode : Base CH40  
 Test Engineer: Tomy

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dB $\mu$ V	Emission Level Vertical dB $\mu$ V/m	Over Limits dB	Limits dB $\mu$ V/m
<b>33.880</b>	<b>12.29</b>	<b>1.14</b>	<b>18.82</b>	<b>32.25</b>	<b>-7.75</b>	<b>40.00</b>
96.930	9.72	2.01	10.58	22.31	-21.19	43.50
141.550	12.03	2.43	5.65	20.11	-23.39	43.50
298.690	13.55	3.81	3.55	20.91	-25.09	46.00
803.090	21.22	7.09	6.42	34.73	-11.27	46.00

- Remark: 1. All readings are Quasi-Peak values.  
 2. Emission Level = Antenna Factor + Cable Loss + Meter Reading  
 3. The worst emission was detected at 33.880MHz with corrected signal level of 32.25dB $\mu$ V/m(Limit is 40.00 dB $\mu$ V/m) when the antenna was at horizontal polarization and at 1.0m high and the turn table was at 50 ° .  
 4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer: \_\_\_\_\_

Date of Test :	<u>May.15, 2003</u>	Temperature :	<u>23°C</u>
EUT :	<u>2.4GHz Clock Radio Cordless Phone With CID &amp; Speakerphone</u>	Humidity :	<u>58%</u>
Model No. :	<u>GH3060</u>	Test Mode :	<u>Base CH1</u>
Test Engineer:	<u>Tomy</u>		

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m	Remark
1600.520	25.63	35.29	4.35	45.89	40.58	-13.42	54.00	Average
2400.780	28.07	34.99	5.69	71.78	70.55	-23.45	94.00	Average
3201.025	29.82	34.78	6.65	39.89	41.57	-12.43	54.00	Average
4924.250	33.13	34.46	8.04	40.99	47.70	-6.30	54.00	Average
5601.800	33.14	34.36	8.46	40.92	48.16	-5.84	54.00	Average

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m	Remark
1600.520	25.63	35.29	4.35	46.91	41.60	-32.40	74.00	Peak
2400.780	28.07	34.99	5.69	72.31	71.08	-42.92	114.00	Peak
3201.025	29.82	34.78	6.64	40.40	42.08	-31.92	74.00	Peak
4924.250	33.13	34.46	8.04	41.86	48.57	-25.43	74.00	Peak
5601.990	33.14	34.36	8.46	42.54	49.78	-24.22	74.00	Peak

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading– Preamp Factor

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer : \_\_\_\_\_

Date of Test : May.15, 2003 Temperature : 23°C  
 EUT : 2.4GHz Clock Radio Cordless Humidity : 58%  
Phone With CID & Speakerphone  
 Model No. : GH3060 Test Mode : Base CH1  
 Test Engineer: Tomy

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Vertical dB $\mu$ V	Emission Level Vertical dB $\mu$ V/m	Over Limits dB	Limits dB $\mu$ V/m	Remark
1600.514	25.63	35.29	4.35	47.60	42.29	-11.71	54.00	Average
2400.780	28.07	34.99	5.69	73.92	72.69	-21.31	94.00	Average
3201.044	29.82	34.78	6.64	44.44	46.12	-7.88	54.00	Average
4924.250	33.13	34.46	8.04	38.91	45.62	-8.38	54.00	Average
5601.805	33.14	34.36	8.46	42.90	50.14	-3.86	54.00	Average

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Vertical dB $\mu$ V	Emission Level Vertical dB $\mu$ V/m	Over Limits dB	Limits dB $\mu$ V/m	Remark
1600.514	25.63	35.29	4.35	46.46	41.15	-32.85	74.00	Peak
2400.780	28.06	34.99	5.68	71.97	70.72	-3.28	74.00	Peak
3201.044	29.82	34.78	6.64	41.11	42.79	-31.21	74.00	Peak
4924.250	33.15	34.45	8.05	38.81	45.56	-28.44	74.00	Peak
5601.805	33.14	34.36	8.48	42.11	49.37	-24.63	74.00	Peak

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading– Preamp Factor

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer : \_\_\_\_\_

Date of Test :	<u>May.15, 2003</u>	Temperature :	<u>23°C</u>
EUT :	<u>2.4GHz Clock Radio Cordless Phone With CID &amp; Speakerphone</u>	Humidity :	<u>58%</u>
Model No. :	<u>GH3060</u>	Test Mode :	<u>Base CH20</u>
Test Engineer:	<u>Tomy</u>		

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m	Remark
1602.415	25.63	35.29	4.35	47.26	41.95	-12.05	54.00	Average
2403.621	28.07	34.99	5.69	69.47	68.24	-25.76	94.00	Average
3204.823	29.82	34.78	6.64	40.34	42.02	-11.98	54.00	Average
4929.949	33.14	34.46	8.05	40.25	46.98	-7.02	54.00	Average
5608.450	33.14	34.36	8.47	39.58	46.83	-7.17	54.00	Average

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m	Remark
1602.415	25.63	35.29	4.35	47.64	42.33	-31.67	74.00	Peak
2403.620	28.07	34.99	5.69	69.96	68.73	-45.27	114.00	Peak
3204.823	29.82	34.78	6.64	41.46	43.14	-30.86	74.00	Peak
4929.949	33.14	34.46	8.05	40.36	47.09	-26.91	74.00	Peak
5608.450	33.14	34.36	8.47	40.26	47.51	-26.49	74.00	Peak

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading– Preamp Factor

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer : \_\_\_\_\_

Date of Test : May.15, 2003 Temperature : 23°C  
 EUT : 2.4GHz Clock Radio Cordless Humidity : 58%  
Phone With CID & Speakerphone  
 Model No. : GH3060 Test Mode : Base CH20  
 Test Engineer: Tomy

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Vertical dB $\mu$ V	Emission Level Vertical dB $\mu$ V/m	Over Limits dB	Limits dB $\mu$ V/m	Remark
1602.414	25.63	35.29	4.35	47.18	41.87	-12.13	54.00	Average
2403.630	28.07	34.99	5.69	74.29	73.06	-20.94	94.00	Average
3204.833	29.82	34.78	6.64	43.66	45.34	-8.66	54.00	Average
4929.950	33.14	34.46	8.05	36.77	43.50	-10.50	54.00	Average
5608.455	33.14	34.36	8.47	42.32	49.57	-4.43	54.00	Average

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Vertical dB $\mu$ V	Emission Level Vertical dB $\mu$ V/m	Over Limits dB	Limits dB $\mu$ V/m	Remark
1602.414	25.63	35.29	4.35	47.62	42.31	-31.69	74.00	Peak
2403.626	28.07	34.99	5.69	75.00	73.77	-40.23	114.00	Peak
3204.833	29.82	34.78	6.64	44.49	46.17	-27.83	74.00	Peak
4929.950	33.14	34.46	8.05	37.44	44.17	-29.83	74.00	Peak
5608.455	33.14	34.36	8.47	42.62	49.87	-24.13	74.00	Peak

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading– Preamp Factor

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer : \_\_\_\_\_

Date of Test :	<u>May.15, 2003</u>	Temperature :	<u>23°C</u>
EUT :	<u>2.4GHz Clock Radio Cordless Phone With CID &amp; Speakerphone</u>	Humidity :	<u>58%</u>
Model No. :	<u>GH3060</u>	Test Mode :	<u>Base CH40</u>
Test Engineer:	<u>Tomy</u>		

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m	Remark
1604.419	25.63	35.29	4.35	46.70	41.39	-12.61	54.00	Average
2406.624	28.07	34.99	5.69	70.08	68.85	-25.15	94.00	Average
3208.829	29.82	34.78	6.64	39.84	41.52	-12.48	54.00	Average
4935.951	33.14	34.46	8.05	39.86	46.59	-7.41	54.00	Average
5615.450	33.14	34.36	8.48	38.86	46.12	-7.88	54.00	Average

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m	Remark
1604.419	25.63	35.29	4.35	47.40	42.09	-31.91	74.00	Peak
2406.624	28.09	34.99	5.70	70.37	69.17	-44.83	114.00	Peak
3208.829	29.82	34.78	6.64	40.40	42.08	-31.92	74.00	Peak
4935.951	33.15	34.45	8.05	40.61	47.36	-26.64	74.00	Peak
5615.450	33.14	34.36	8.48	39.75	47.01	-26.99	74.00	Peak

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading– Preamp Factor

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer : \_\_\_\_\_

Date of Test : May.15, 2003 Temperature : 23°C  
 EUT : 2.4GHz Clock Radio Cordless Humidity : 58%  
Phone With CID & Speakerphone  
 Model No. : GH3060 Test Mode : Base CH40  
 Test Engineer: Tomy

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Vertical dB $\mu$ V	Emission Level Vertical dB $\mu$ V/m	Over Limits dB	Limits dB $\mu$ V/m	Remark
1604.418	25.63	35.29	4.35	47.34	42.03	-11.97	54.00	Average
2406.628	28.07	34.99	5.69	74.21	72.98	-21.02	94.00	Average
3208.835	29.82	34.78	6.64	43.30	44.98	-9.02	54.00	Average
4935.950	33.14	34.46	8.05	38.28	45.01	-8.99	54.00	Average
5615.453	33.14	34.36	8.48	43.23	50.49	-3.51	54.00	Average

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Vertical dB $\mu$ V	Emission Level Vertical dB $\mu$ V/m	Over Limits dB	Limits dB $\mu$ V/m	Remark
1604.418	25.63	35.29	4.35	48.42	43.11	-30.89	74.00	Peak
2406.628	28.09	34.99	5.70	74.28	73.08	-40.92	114.00	Peak
3208.835	29.82	34.78	6.64	43.54	45.22	-28.78	74.00	Peak
4935.950	33.03	34.47	7.98	39.57	46.11	-27.89	74.00	Peak
5615.453	33.14	34.36	8.48	43.97	51.23	-22.77	74.00	Peak

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading– Preamp Factor

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer : \_\_\_\_\_

Date of Test : May. 19, 2003 Temperature : 23°C  
 EUT : 2.4GHz Clock Radio Cordless Humidity : 58%  
Phone With CID & Speakerphone  
 Model No. : GH3060 Test Mode : Handset CH40  
 Test Engineer: Tomy

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dB $\mu$ V	Emission Level Horizontal dB $\mu$ V/m	Over Limits dB	Limits dB $\mu$ V/m
80.440	7.62	1.78	12.46	21.86	-18.14	40.00
100.810	10.01	2.03	5.16	17.20	-26.30	43.50
151.250	11.41	2.54	5.67	19.63	-23.87	43.50
232.730	11.03	3.27	8.68	22.98	-23.02	46.00
<b>827.340</b>	<b>21.70</b>	<b>7.35</b>	<b>7.21</b>	<b>36.25</b>	<b>-9.75</b>	<b>46.00</b>

- Remark: 1. All readings are Quasi-Peak values.  
 2. Emission Level = Antenna Factor + Cable Loss + Meter Reading  
 3. The worst emission was detected at 827.340MHz with corrected signal level of 36.25dB $\mu$ V/m(Limit is 46.00 dB $\mu$ V/m) when the antenna was at horizontal polarization and at 1.6m high and the turn table was at 300 ° .  
 4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer: \_\_\_\_\_

Date of Test : May.19, 2003 Temperature : 23°C  
 EUT : 2.4GHz Clock Radio Cordless Humidity : 58%  
Phone With CID & Speakerphone  
 Model No. : GH3060 Test Mode : Handset CH40  
 Test Engineer: Tomy

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dB $\mu$ V	Emission Level Vertical dB $\mu$ V/m	Over Limits dB	Limits dB $\mu$ V/m
108.570	11.81	2.09	2.78	16.67	-26.83	43.50
225.940	10.92	3.24	4.50	18.66	-27.34	46.00
586.780	19.13	5.95	3.23	28.31	-17.70	46.00
807.940	21.38	6.80	5.32	33.50	-12.50	46.00
<b>827.340</b>	<b>22.60</b>	<b>7.42</b>	<b>13.23</b>	<b>43.25</b>	<b>-2.75</b>	<b>46.00</b>

- Remark: 1. All readings are Quasi-Peak values.  
 2. Emission Level = Antenna Factor + Cable Loss + Meter Reading  
 3. The worst emission was detected at 827.340MHz with corrected signal level of 43.25dB $\mu$ V/m(Limit is 46.00 dB $\mu$ V/m) when the antenna was at horizontal polarization and at 1.0m high and the turn table was at 45 ° .  
 4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer: \_\_\_\_\_

Date of Test :	<u>May.16, 2003</u>	Temperature :	<u>23°C</u>
EUT :	<u>2.4GHz Clock Radio Cordless Phone With CID &amp; Speakerphone</u>	Humidity :	<u>58%</u>
Model No. :	<u>GH3060</u>	Test Mode :	<u>Handset CH1</u>
Test Engineer:	<u>Tomy</u>		

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m	Remark
1607.602	25.66	35.29	4.37	41.29	36.03	-17.97	54.00	Average
2472.751	28.20	34.97	5.78	63.37	62.38	-31.62	94.00	Average
3297.002	30.08	34.75	6.72	44.70	46.75	-7.25	54.00	Average
4945.503	33.15	34.45	8.05	40.80	47.55	-6.45	54.00	Average

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m	Remark
1607.602	25.66	35.29	4.37	42.59	37.33	-36.67	74.00	Peak
2472.751	28.20	34.97	5.78	64.82	63.83	-50.17	114.00	Peak
3297.002	30.08	34.75	6.72	45.60	47.65	-26.35	74.00	Peak
4945.503	33.15	34.45	8.05	41.50	48.25	-25.75	74.00	Peak

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading– Preamp Factor

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer : \_\_\_\_\_

Date of Test : May.16, 2003      Temperature : 23°C  
 EUT : 2.4GHz Clock Radio Cordless      Humidity : 58%  
           Phone With CID & Speakerphone  
 Model No. : GH3060      Test Mode : Handset CH1  
 Test Engineer: Tomy

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Vertical dB $\mu$ V	Emission Level Vertical dB $\mu$ V/m	Over Limits dB	Limits dB $\mu$ V/m	Remark
1607.606	25.66	35.29	4.37	45.72	40.46	-13.54	54.00	Average
2472.745	28.20	34.97	5.78	71.87	70.88	-23.12	94.00	Average
3297.010	30.08	34.75	6.72	44.46	46.51	-7.49	54.00	Average

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Vertical dB $\mu$ V	Emission Level Vertical dB $\mu$ V/m	Over Limits dB	Limits dB $\mu$ V/m	Remark
1607.606	25.66	35.29	4.37	46.61	41.35	-32.65	74.00	Peak
2472.745	28.20	34.97	5.78	72.32	71.33	-42.67	114.00	Peak
3297.010	30.08	34.75	6.72	45.17	47.22	-26.78	74.00	Peak

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading– Preamp Factor

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer : \_\_\_\_\_

Date of Test : May.16, 2003      Temperature : 23°C  
 EUT : 2.4GHz Clock Radio Cordless      Humidity : 58%  
           Phone With CID & Speakerphone  
 Model No. : GH3060      Test Mode : Handset CH20  
 Test Engineer: Tomy

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m	Remark
1609.504	25.66	35.29	4.37	40.72	35.46	-18.54	54.00	Average
2475.601	28.20	34.97	5.78	61.80	60.81	-33.19	94.00	Average
3300.800	30.13	34.75	6.73	46.57	48.68	-5.32	54.00	Average
4951.200	33.16	34.45	8.06	41.92	48.69	-5.31	54.00	Average

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m	Remark
1609.504	25.66	35.29	4.37	47.76	42.50	-31.50	74.00	Peak
2475.601	28.20	34.97	5.78	61.29	60.30	-53.70	114.00	Peak
3300.800	30.13	34.75	6.73	44.93	47.04	-26.96	74.00	Peak
4951.200	33.16	34.45	8.06	38.72	45.49	-28.51	74.00	Peak

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading– Preamp Factor

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer : \_\_\_\_\_

Date of Test : May.16, 2003 Temperature : 23°C  
 EUT : 2.4GHz Clock Radio Cordless Humidity : 58%  
Phone With CID & Speakerphone  
 Model No. : GH3060 Test Mode : Handset CH20  
 Test Engineer: Tomy

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Vertical dB $\mu$ V	Emission Level Vertical dB $\mu$ V/m	Over Limits dB	Limits dB $\mu$ V/m	Remark
1650.403	25.84	35.27	4.45	52.04	47.06	-6.94	54.00	Average
2475.600	28.20	34.97	5.78	67.38	66.39	-27.61	94.00	Average
3300.800	30.13	34.75	6.73	47.14	49.25	-4.75	54.00	Average

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Vertical dB $\mu$ V	Emission Level Vertical dB $\mu$ V/m	Over Limits dB	Limits dB $\mu$ V/m	Remark
1650.403	25.84	35.27	4.45	51.06	46.08	-27.92	74.00	Peak
2475.600	28.20	34.97	5.78	66.69	65.70	-48.30	114.00	Peak
3300.800	30.13	34.75	6.73	46.15	48.26	-25.74	74.00	Peak

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading– Preamp Factor

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer : \_\_\_\_\_

Date of Test :	<u>May.16, 2003</u>	Temperature :	<u>23°C</u>
EUT :	<u>2.4GHz Clock Radio Cordless Phone With CID &amp; Speakerphone</u>	Humidity :	<u>58%</u>
Model No. :	<u>GH3060</u>	Test Mode :	<u>Handset CH40</u>
Test Engineer:	<u>Tomy</u>		

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m	Remark
1652.402	25.84	35.27	4.45	47.91	42.93	-11.07	54.00	Average
2478.604	28.20	34.97	5.78	60.92	59.93	-34.07	94.00	Average
3304.800	30.13	34.75	6.73	38.73	40.84	-13.16	54.00	Average
4960.001	33.17	34.45	8.06	36.55	43.33	-10.67	54.00	Average

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m	Remark
1652.402	25.84	35.27	4.45	46.40	41.42	-32.58	74.00	Peak
2478.604	28.20	34.97	5.78	59.91	58.92	-55.08	114.00	Peak
3304.800	30.13	34.75	6.73	44.79	46.90	-27.10	74.00	Peak
4960.001	33.17	34.45	8.06	37.87	44.65	-29.35	74.00	Peak

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading– Preamp Factor

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer : \_\_\_\_\_

Date of Test : May.16, 2003 Temperature : 23°C  
 EUT : 2.4GHz Clock Radio Cordless Humidity : 58%  
Phone With CID & Speakerphone  
 Model No. : GH3060 Test Mode : Handset CH40  
 Test Engineer: Tomy

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Vertical dB $\mu$ V	Emission Level Vertical dB $\mu$ V/m	Over Limits dB	Limits dB $\mu$ V/m	Remark
1652.403	25.84	35.27	4.45	56.59	51.61	-2.39	54.00	Average
2478.600	28.20	34.97	5.78	70.01	69.02	-24.98	94.00	Average
3304.804	30.13	34.75	6.73	47.72	49.83	-4.17	54.00	Average

Frequency MHz	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Meter Reading Vertical dB $\mu$ V	Emission Level Vertical dB $\mu$ V/m	Over Limits dB	Limits dB $\mu$ V/m	Remark
1652.403	25.84	35.27	4.45	55.36	50.38	-23.62	74.00	Peak
2478.600	28.20	34.97	5.78	70.37	69.38	-44.62	114.00	Peak
3304.804	30.13	34.75	6.73	45.72	47.83	-26.17	74.00	Peak

Remark: 1. All readings are Peak and Average values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading– Preamp Factor

3. The bandwidth of the RBW is set at 1MHz and VBW is set at 1MHz.

Reviewer : \_\_\_\_\_




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park  
 Tel: 0755-26639495~7  
 Fax: 0755-26632877

Data#: 340 File#: TELEFIELD LIMITED.FMT

Date: 2003-05-19 Time: 10:00:53

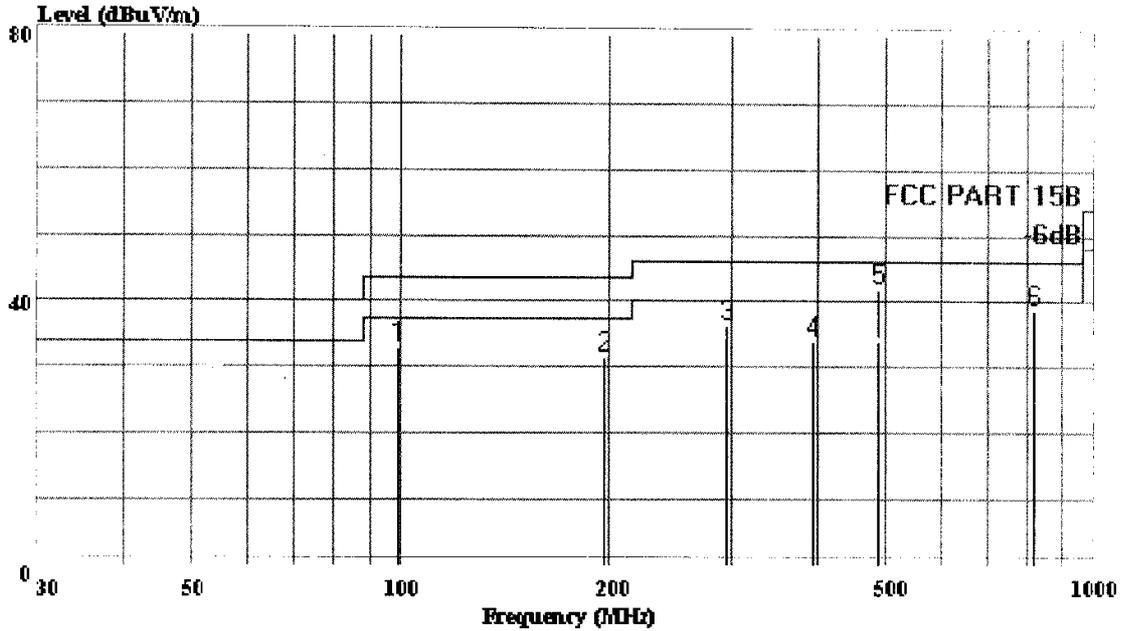

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL  
 EUT: : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120V 60Hz  
 Test Engineer: Tomv  
 MEMO: : Base FM 88MHz  
 : H:1.55m Deg:320'

Page: 1

	Freq	Level	Limit	Over	Read	Probe	Cable
	MHz	dBuV/m	Line	Limit	Level	Factor	Loss
			dBuV/m	dB	dBuV	dB	dB
1	98.870	32.74	43.50	-10.76	20.94	9.79	2.01
2	196.840	31.39	43.50	-12.11	19.13	9.32	2.94
3	295.780	36.37	46.00	-9.63	19.49	13.15	3.73
4	392.780	33.84	46.00	-12.16	13.19	16.12	4.53
5	489.780	42.01	46.00	-3.99	18.92	17.61	5.48
6	820.550	38.85	46.00	-7.15	10.11	21.69	7.05




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park  
Tel: 0755-26639495~7  
Fax: 0755-26632877

Data#: 341 File#: TELEFIELD LIMITED.EMT

Date: 2003-05-19 Time: 10:15:44

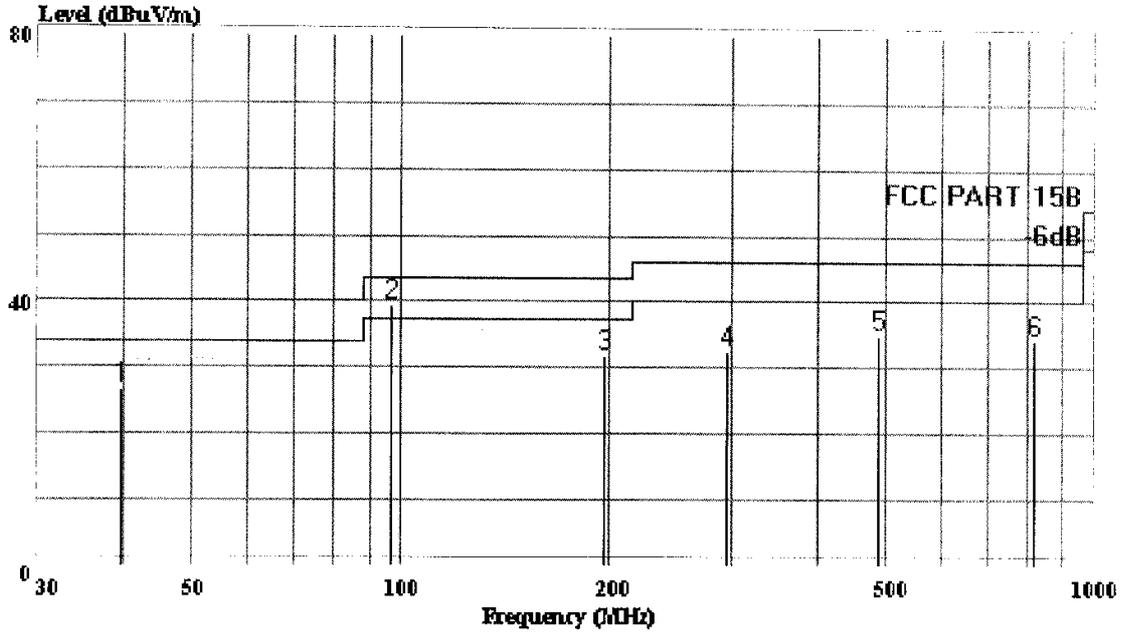

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL  
EUT: : 2.4GHz Clock Radio Cordless Phone  
: with CID&Speakerphone  
M/N: : GH3060  
Power: : DC 9V Adaptor 120V 60Hz  
Test Engineer: Tomv  
MEMO: : Base FM 88MHz  
: H:lm Deg:45'

Page: 1

	Freq	Level	Limit	Over	Read	Probe	Cable
	MHz	dBuV/m	Line	Limit	Level	Factor	Loss
			dBuV/m	dB	dBuV	dB	dB
1	39.700	26.72	40.00	-13.28	15.03	10.48	1.21
2	96.930	39.53	43.50	-3.97	27.80	9.72	2.01
3	196.840	31.84	43.50	-11.66	19.30	9.60	2.94
4	295.780	32.67	46.00	-13.33	15.33	13.58	3.76
5	489.780	35.10	46.00	-10.90	11.12	18.57	5.41
6	819.580	34.22	46.00	-11.78	5.07	22.22	6.93




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park  
 Tel: 0755-26639495~7  
 Fax: 0755-26632877

Data#: 333 File#: TELEFIELD LIMITED.FMT

Date: 2003-05-19 Time: 09:39:10

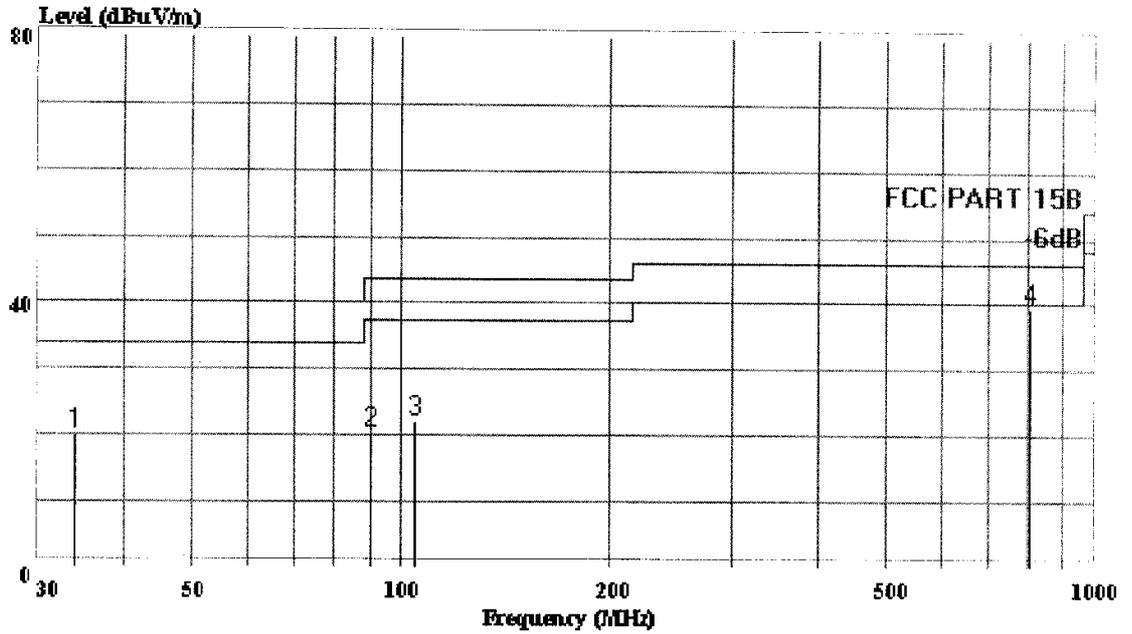

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL  
 EUT: : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120v 60Hz  
 Test Engineer: Tomv  
 MEMO: : Base CH40  
 : H:1.55m Deg:310'

Page: 1

	Freq	Level	Limit	Over	Read	Probe	Cable
	MHz	dBuV/m	Line	Limit	Level	Factor	Loss
			dBuV/m	dB	dBuV	dB	dB
1	33.880	19.97	40.00	-20.03	4.63	14.20	1.14
2	90.140	20.32	43.50	-23.18	10.41	8.00	1.91
3	104.690	22.28	43.50	-21.22	9.65	10.55	2.08
4	803.090	39.60	46.00	-6.40	10.95	21.56	7.09




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park  
 Tel: 0755-26639495~7  
 Fax: 0755-26632877

Data#: 332 File#: TELEFIELD LIMITED.FMT

Date: 2003-05-19 Time: 09:38:27

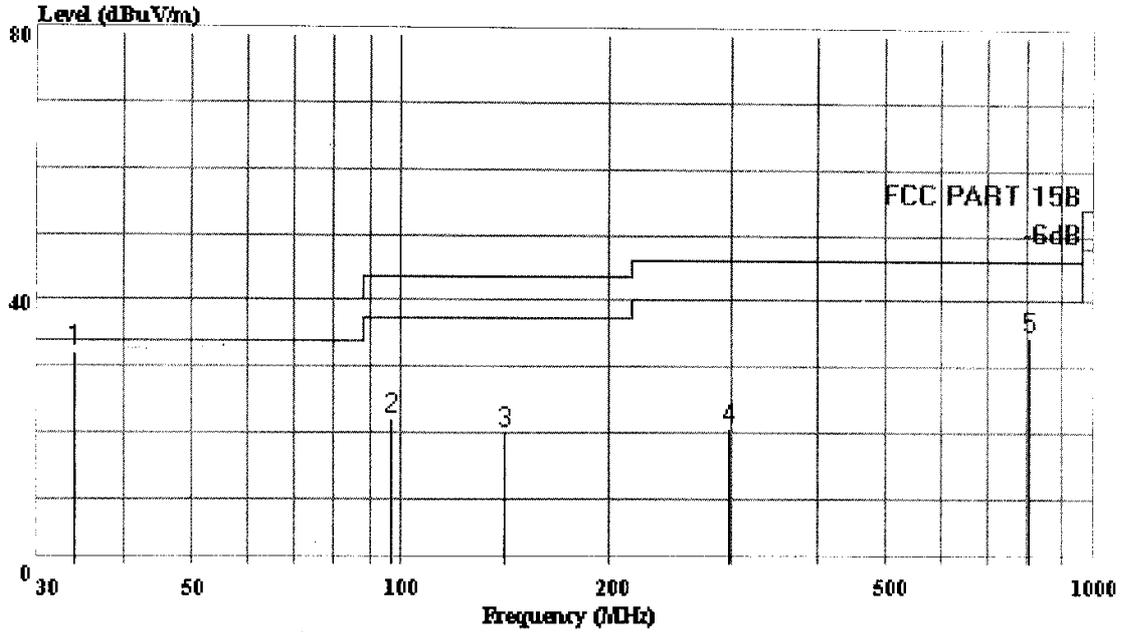

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL  
 EUT: : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120v 60Hz  
 Test Engineer: Tomv  
 MEMO: : Base CH40  
 : H:1m Deg:50'

Page: 1

	Freq	Level	Limit	Over	Read	Probe	Cable
	MHz	dBuV/m	Line	Limit	Level	Factor	Loss
			dBuV/m	dB	dBuV	dB	dB
1	33.880	32.25	40.00	-7.75	18.82	12.29	1.14
2	96.930	22.31	43.50	-21.19	10.58	9.72	2.01
3	141.550	20.11	43.50	-23.39	5.65	12.03	2.43
4	298.690	20.91	46.00	-25.09	3.55	13.55	3.81
5	803.090	34.73	46.00	-11.27	6.42	21.22	7.09




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 123 File#: C:\EMI TEST DATA\T\Telefield.EMI

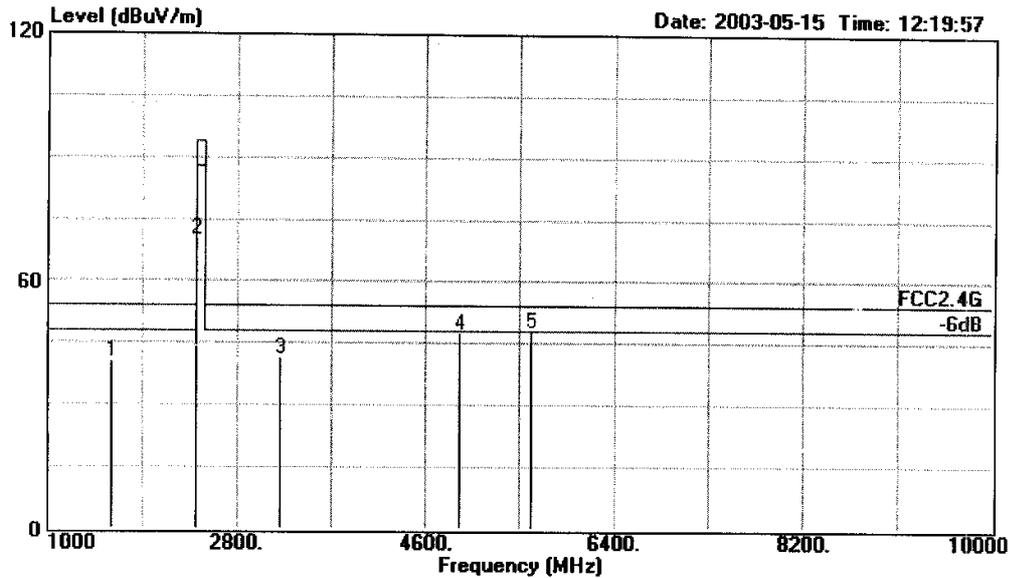

Site : 1# Chamber  
Condition : FCC2.4G 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Base ch1

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor	
			dB	dBuV/m	dBuV	dB	dB	dB	
1	1600.520	40.58	-13.42	54.00	45.89	4.35	25.63	35.29	Average
2	2400.780	70.55	-23.45	94.00	71.78	5.69	28.07	34.99	Average
3	3201.025	41.57	-12.43	54.00	39.89	6.64	29.82	34.78	Average
4	4924.250	47.70	-6.30	54.00	40.99	8.04	33.13	34.46	Average
5	5601.800	48.16	-5.84	54.00	40.92	8.46	33.14	34.36	Average




**信華科技(深圳)有限公司**

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 142 File#: C:\EMI TEST DATA\T\Telefield.EMI

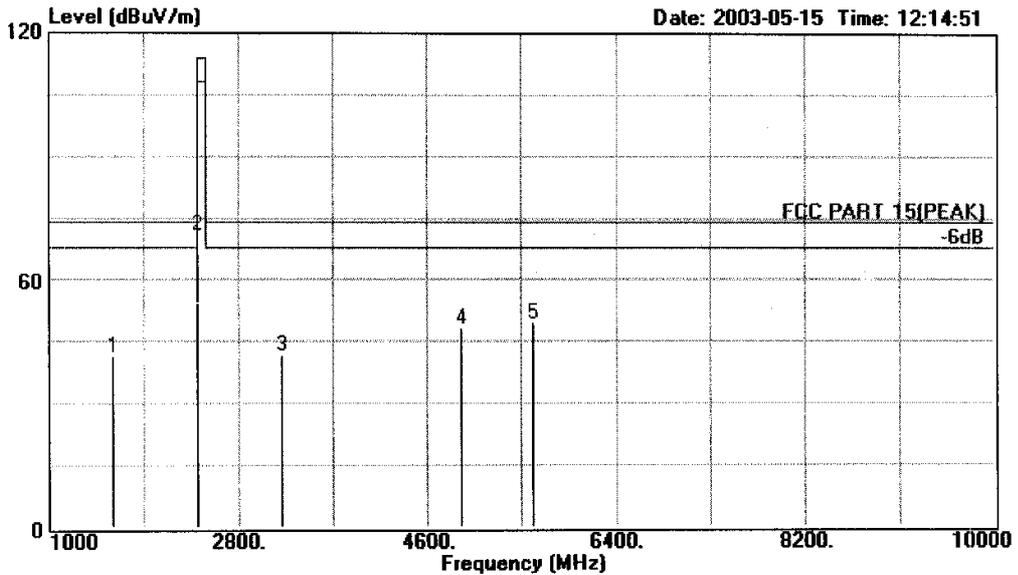

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Base ch1

	Over	Limit	Read	Cable	Probe	Preamp		
Freq	Level	Limit	Line	Level	Loss	Factor	Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1600.520	41.60	-32.40	74.00	46.91	4.35	25.63	35.29 Peak
2	2400.780	71.08	-42.92	114.00	72.31	5.69	28.07	34.99 Peak
3	3201.025	42.08	-31.92	74.00	40.40	6.64	29.82	34.78 Peak
4	4924.250	48.57	-25.43	74.00	41.86	8.04	33.13	34.46 Peak
5	5601.990	49.78	-24.22	74.00	42.54	8.46	33.14	34.36 Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 119 File#: C:\EMI TEST DATA\T\Telefield.EMI

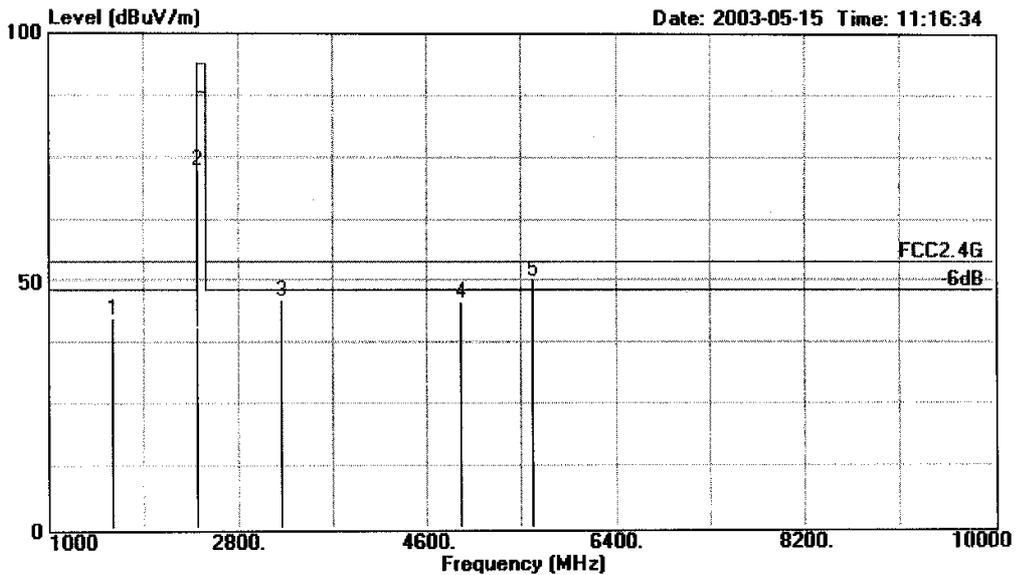

Site : 1# Chamber  
Condition : FCC2.4G 3m 3115FACTOR VERTICAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Base ch1

	Freq	Level	Over Limit	Limit	Read	Cable	Probe	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1600.514	42.29	-11.71	54.00	47.60	4.35	25.63	35.29	Average
2	2400.780	72.69	-21.31	94.00	73.92	5.69	28.07	34.99	Average
3	3201.044	46.12	-7.88	54.00	44.44	6.64	29.82	34.78	Average
4	4924.250	45.62	-8.38	54.00	38.91	8.04	33.13	34.46	Average
5	5601.805	50.14	-3.86	54.00	42.90	8.46	33.14	34.36	Average




**信華科技(深圳)有限公司**

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 141 File#: C:\EMI TEST DATA\T\Telefield.EMI

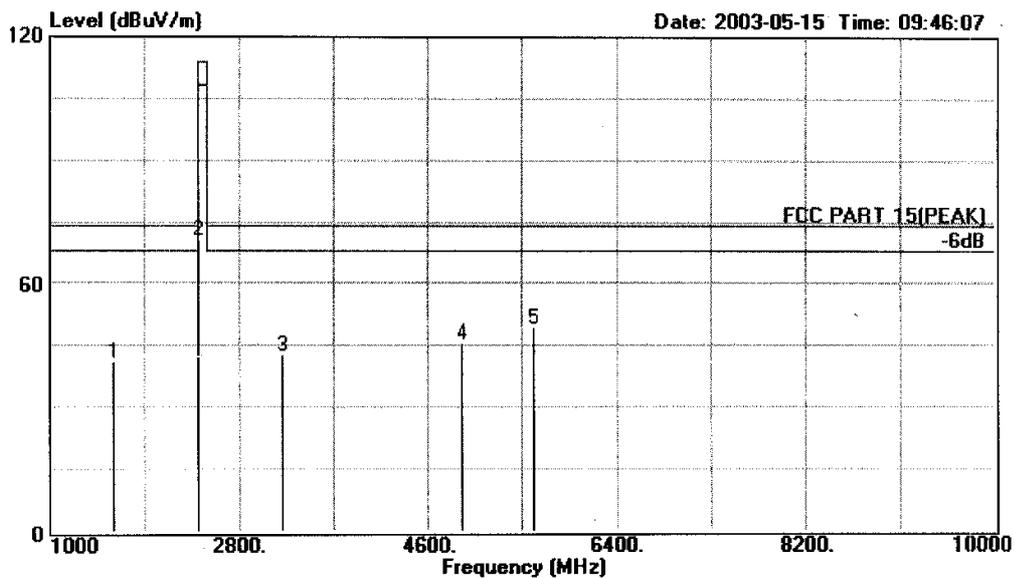

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Base ch1

	Freq	Level	Over Limit	Limit	Read	Cable	Probe	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1600.514	41.15	-32.85	74.00	46.46	4.35	25.63	35.29	Peak
2	2400.780	70.72	-3.28	74.00	71.97	5.68	28.06	34.99	Peak
3	3201.044	42.79	-31.21	74.00	41.11	6.64	29.82	34.78	Peak
4	4924.250	45.56	-28.44	74.00	38.81	8.05	33.15	34.45	Peak
5	5601.805	49.37	-24.63	74.00	42.11	8.48	33.14	34.36	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 127 File#: C:\EMI TEST DATA\T\Telefield.EMI

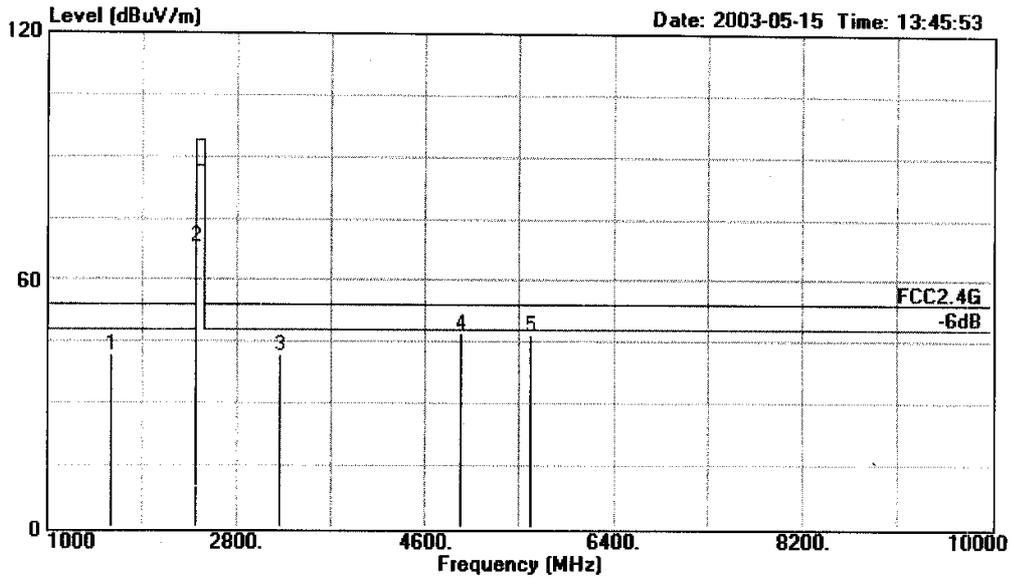

Site : 1# Chamber  
Condition : FCC2.4G 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Base ch20

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark
	MHz	dBuV/m	Limit	dB	dBuV/m	dB	dB	dB	
1	1602.415	41.95	-12.05	54.00	47.26	4.35	25.63	35.20	Average
2	2403.621	68.24	-25.76	94.00	69.47	5.69	28.07	34.99	Average
3	3204.823	42.02	-11.98	54.00	40.34	6.64	29.82	34.78	Average
4	4929.949	46.98	-7.02	54.00	40.25	8.05	33.14	34.46	Average
5	5608.450	46.83	-7.17	54.00	39.58	8.47	33.14	34.36	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 128 File#: C:\EMI TEST DATA\T\Telefield.EMI

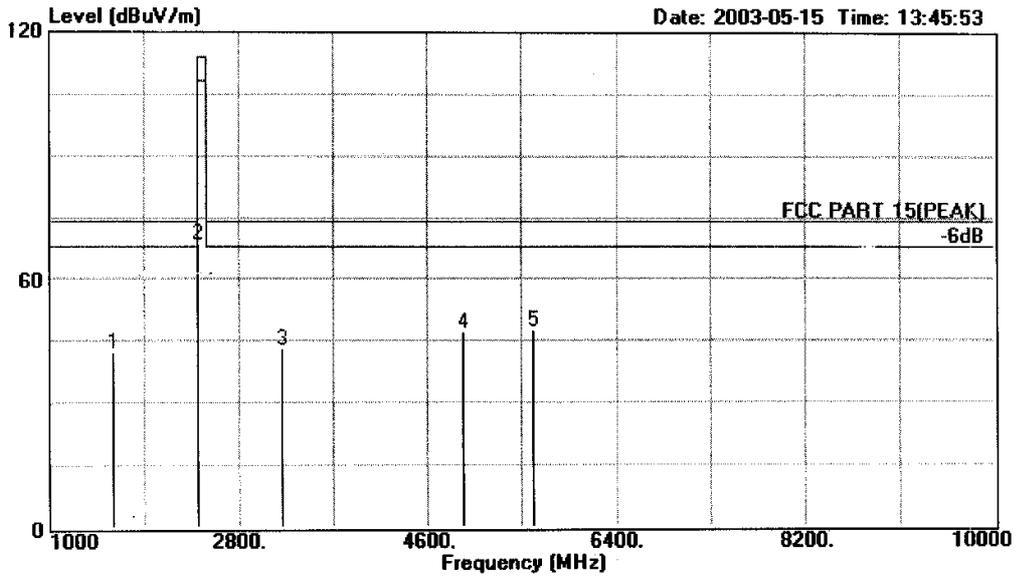

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Base ch20

	Freq	Level	Over Limit	Limit	Read	Cable	Probe	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1602.415	42.33	-31.67	74.00	47.64	4.35	25.63	35.29	Peak
2	2403.620	68.73	-45.27	114.00	69.96	5.69	28.07	34.99	Peak
3	3204.823	43.14	-30.86	74.00	41.46	6.64	29.82	34.78	Peak
4	4929.949	47.09	-26.91	74.00	40.36	8.05	33.14	34.46	Peak
5	5608.450	47.51	-26.49	74.00	40.26	8.47	33.14	34.36	Peak




**信華科技(深圳)有限公司**

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 131 File#: C:\EMI TEST DATA\T\Telefield.EMI

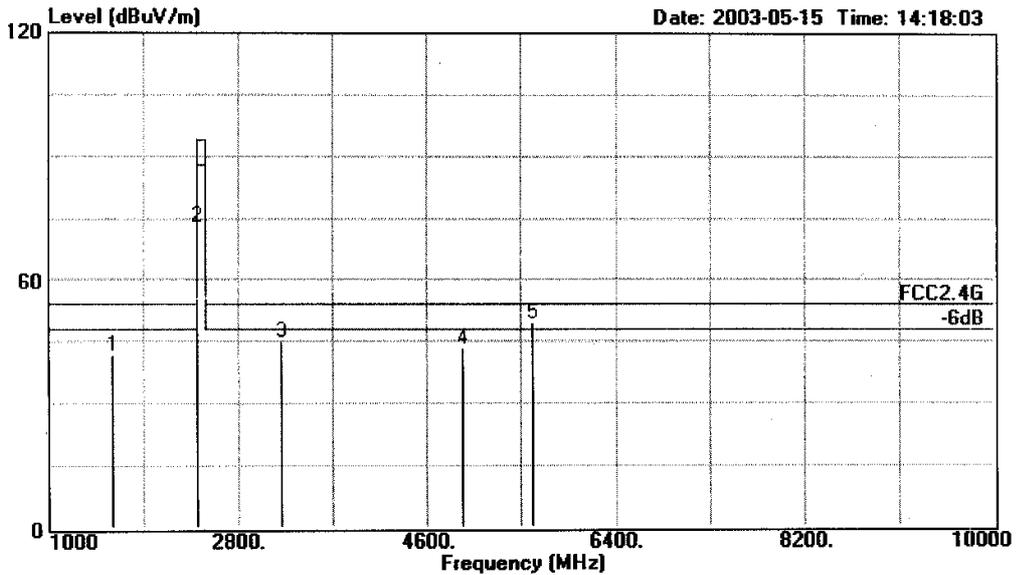

Site : 1# Chamber  
Condition : FCC2.4G 3m 3115FACTOR VERTICAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Base ch20

	Freq	Level	Over Limit	Limit	Read	Cable	Probe	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1602.414	41.87	-12.13	54.00	47.18	4.35	25.63	35.29	Average
2	2403.630	73.06	-20.94	94.00	74.29	5.69	28.07	34.99	Average
3	3204.833	45.34	-8.66	54.00	43.66	6.64	29.82	34.78	Average
4	4929.950	43.50	-10.50	54.00	36.77	8.05	33.14	34.46	Average
5	5608.455	49.57	-4.43	54.00	42.32	8.47	33.14	34.36	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 132 File#: C:\EMI TEST DATA\T\Telefield.EMI

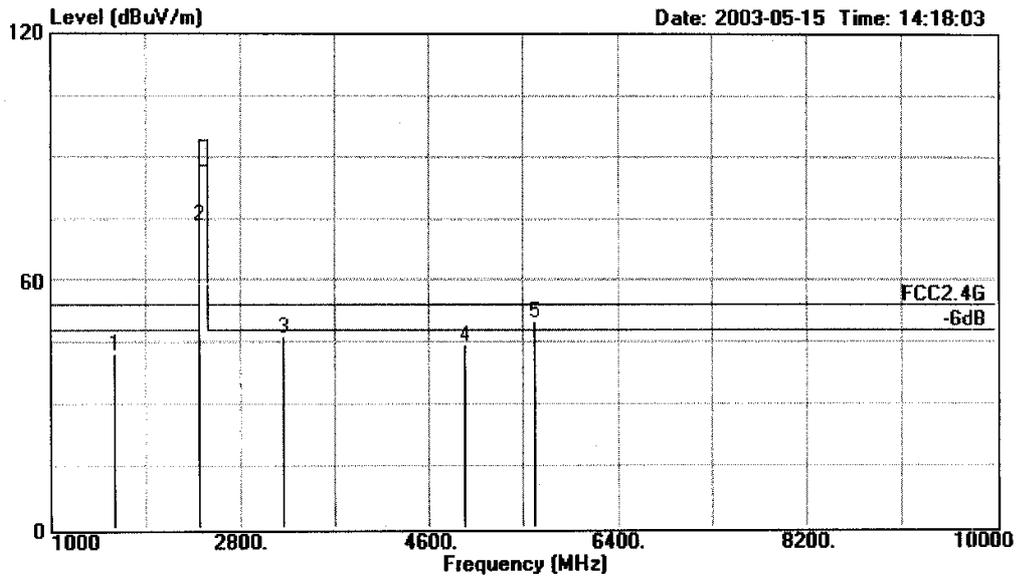

Site : 1# Chamber  
Condition : FCC2.4G 3m 3115FACTOR VERTICAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Base ch20

	Freq	Level	Over Limit	Limit	Read	Cable	Probe	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1602.414	42.31	-11.69	54.00	47.62	4.35	25.63	35.29	Peak
2	2403.626	73.77	-20.23	94.00	75.00	5.69	28.07	34.99	Peak
3	3204.833	46.17	-7.83	54.00	44.49	6.64	29.82	34.78	Peak
4	4929.950	44.17	-9.83	54.00	37.44	8.05	33.14	34.46	Peak
5	5608.455	49.87	-4.13	54.00	42.62	8.47	33.14	34.36	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 140 File#: C:\EMI TEST DATA\T\Telefield.EMI

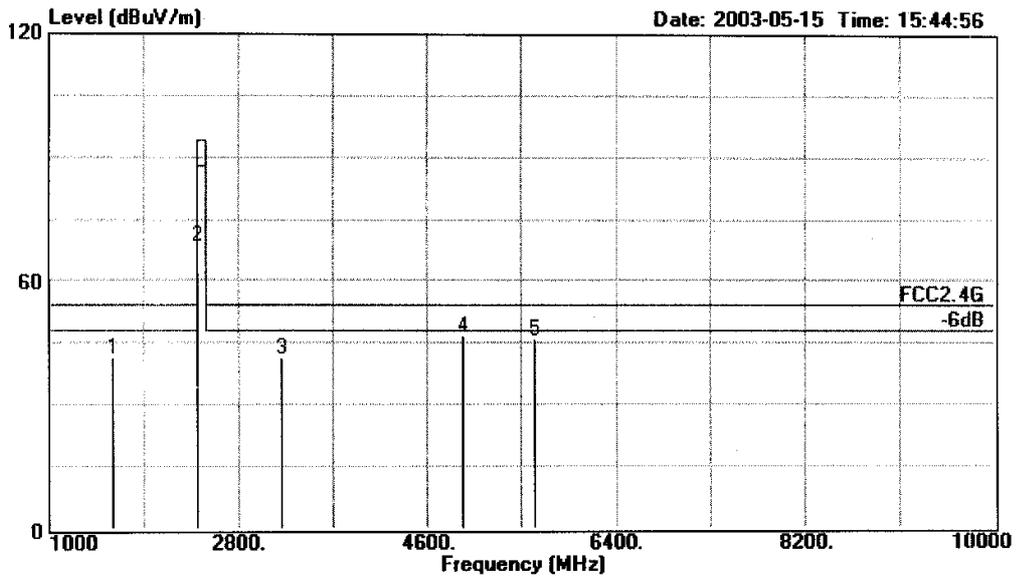

Site : 1# Chamber  
Condition : FCC2.4G 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Base ch40

	Freq	Level	Over Limit	Limit	Read	Cable	Probe	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1604.419	41.39	-12.61	54.00	46.70	4.35	25.63	35.29	Average
2	2406.624	68.85	-25.15	94.00	70.08	5.69	28.07	34.99	Average
3	3208.829	41.52	-12.48	54.00	39.84	6.64	29.82	34.78	Average
4	4935.951	46.59	-7.41	54.00	39.86	8.05	33.14	34.46	Average
5	5615.450	46.12	-7.88	54.00	38.86	8.48	33.14	34.36	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 139 File#: C:\EMI TEST DATA\T\Telefield.EMI

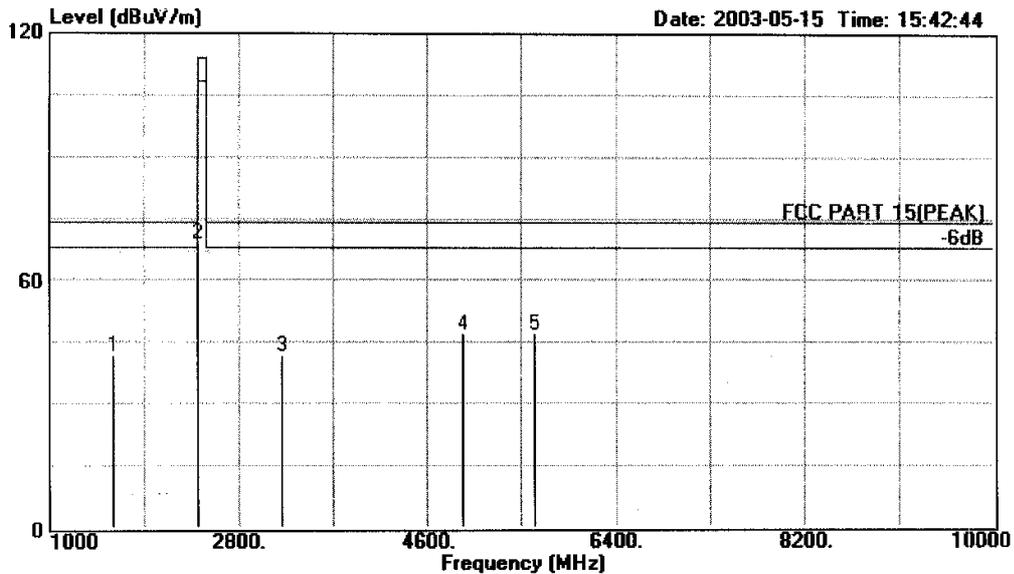

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Base ch40

	Over	Limit	Read	Cable	Probe	Preamp		
Freq	Level	Limit	Line	Level	Loss	Factor	Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1604.419	42.09	-31.91	74.00	47.40	4.35	25.63	35.29 Peak
2	2406.624	69.17	-44.83	114.00	70.37	5.70	28.09	34.99 Peak
3	3208.829	42.08	-31.92	74.00	40.40	6.64	29.82	34.78 Peak
4	4935.951	47.36	-26.64	74.00	40.61	8.05	33.15	34.45 Peak
5	5615.450	47.01	-26.99	74.00	39.75	8.48	33.14	34.36 Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 135 File#: C:\EMI TEST DATA\T\Telefield.EMI

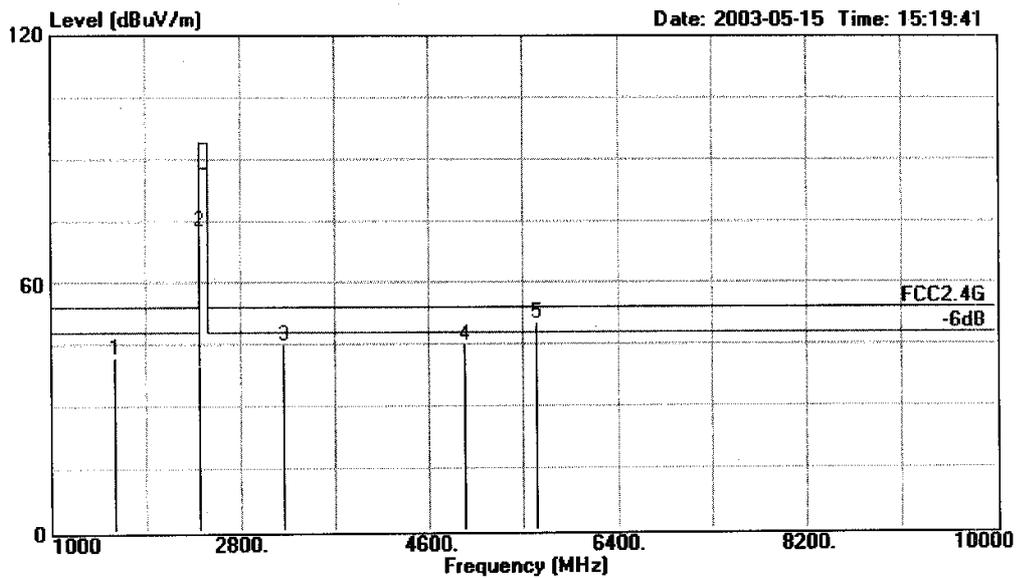

Site : 1# Chamber  
Condition : FCC2.4G 3m 3115FACTOR VERTICAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Base ch40

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1604.418	42.03	-11.97	54.00	47.34	4.35	25.63	35.29	Average
2	2406.628	72.98	-21.02	94.00	74.21	5.69	28.07	34.99	Average
3	3208.835	44.98	-9.02	54.00	43.30	6.64	29.82	34.78	Average
4	4935.950	45.01	-8.99	54.00	38.28	8.05	33.14	34.46	Average
5	5615.453	50.49	-3.51	54.00	43.23	8.48	33.14	34.36	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 134 File#: C:\EMI TEST DATA\T\Telefield.EMI

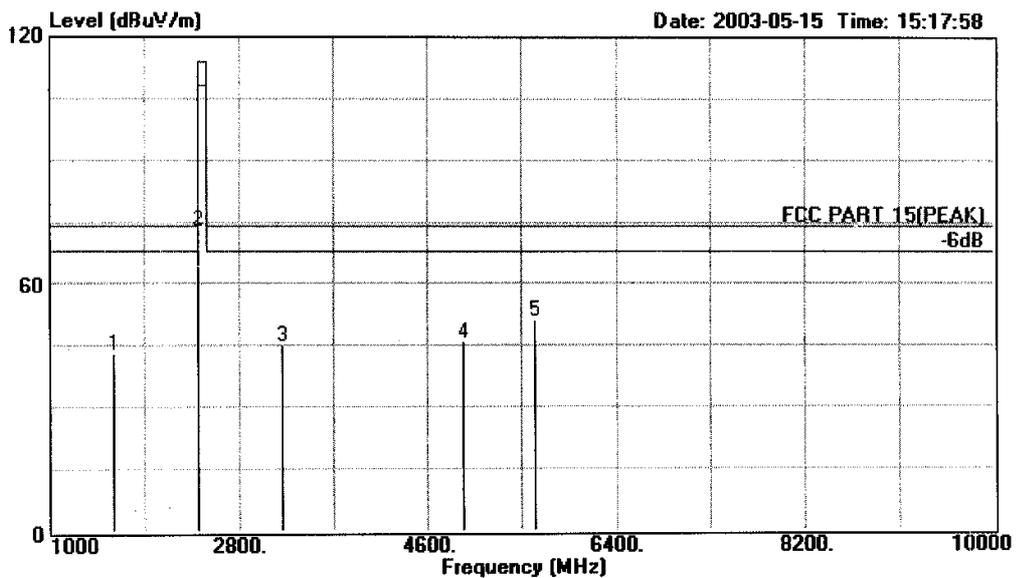

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Base ch40

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1604.418	43.11	-30.89	74.00	48.42	4.35	25.63	35.29	Peak
2	2406.628	73.08	-40.92	114.00	74.28	5.70	28.09	34.99	Peak
3	3208.835	45.22	-28.78	74.00	43.54	6.64	29.82	34.78	Peak
4	4935.950	46.11	-27.89	74.00	39.57	7.98	33.03	34.47	Peak
5	5615.453	51.23	-22.77	74.00	43.97	8.48	33.14	34.36	Peak




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park  
 Tel: 0755-26639495~7  
 Fax: 0755-26632877

Data#: 330 File#: TELEFIELD LIMITED.FMT

Date: 2003-05-19 Time: 09:35:19

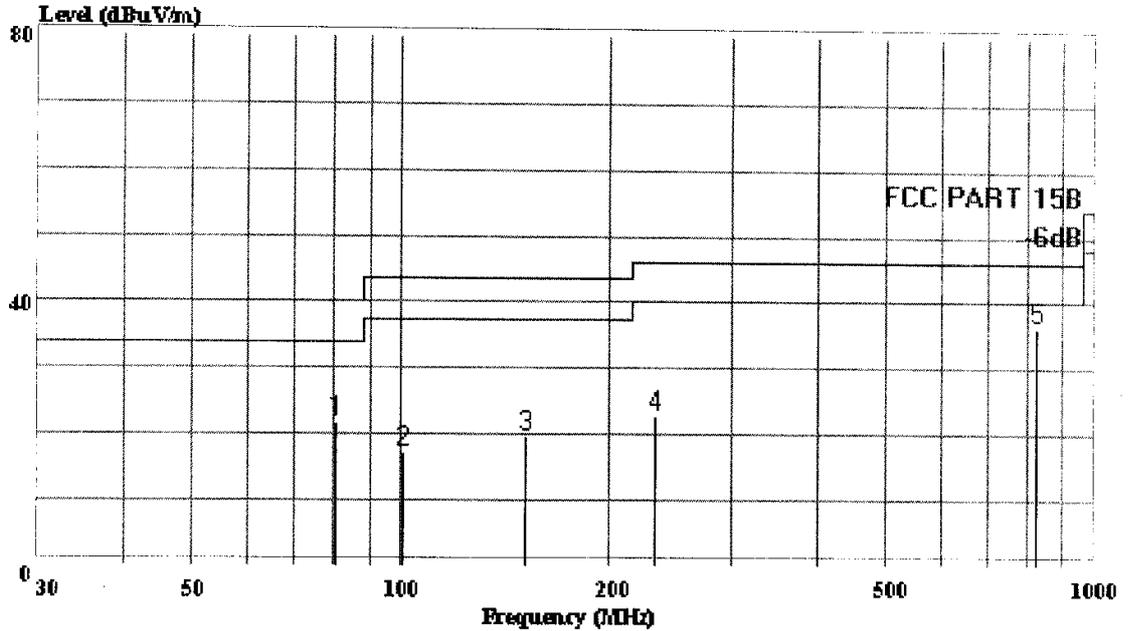

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL  
 EUT: : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 3.6V  
 Test Engineer: Tomv  
 MEMO: : Handset CH40  
 : H:1.6m Deg:300'

Page: 1

	Freq	Level	Limit	Over	Read	Probe	Cable
	MHz	dBuV/m	Line	Limit	Level	Factor	Loss
			dBuV/m	dB	dBuV	dB	dB
1	80.440	21.86	40.00	-18.14	12.46	7.62	1.78
2	100.810	17.20	43.50	-26.30	5.16	10.01	2.03
3	151.250	19.63	43.50	-23.87	5.67	11.41	2.54
4	232.730	22.98	46.00	-23.02	8.68	11.03	3.27
5	827.340	36.25	46.00	-9.75	7.21	21.70	7.35




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park  
 Tel: 0755-26639495~7  
 Fax: 0755-26632877

Data#: 331 File#: TELEFIELD LIMITED.FMT

Date: 2003-05-19 Time: 09:36:38

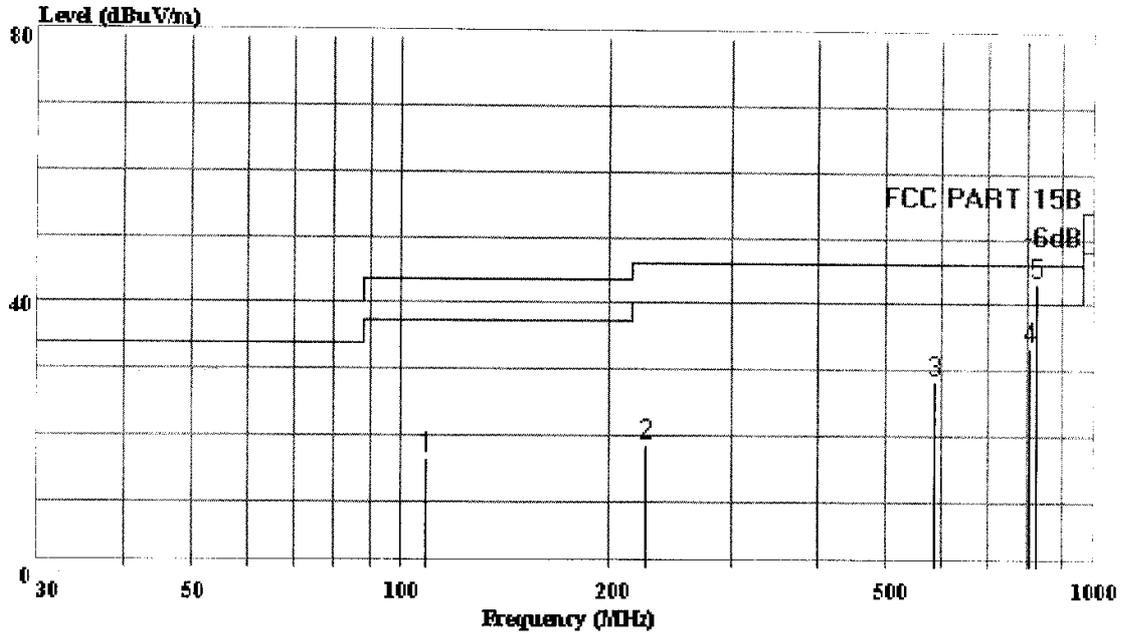

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL  
 EUT: : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 3.6V  
 Test Engineer: Tomv  
 MEMO: : Handset CH40  
 : H:1m Deg:45'

Page: 1

	Freq	Level	Limit	Over	Read	Probe	Cable
	MHz	dBuV/m	Line	Limit	Level	Factor	Loss
			dBuV/m	dB	dBuV	dB	dB
1	108.570	16.67	43.50	-26.83	2.78	11.81	2.09
2	225.940	18.66	46.00	-27.34	4.50	10.92	3.24
3	586.780	28.31	46.00	-17.70	3.23	19.13	5.95
4	807.940	33.50	46.00	-12.50	5.32	21.38	6.80
5	827.340	43.25	46.00	-2.75	13.23	22.60	7.42




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 150 File#: C:\EMI TEST DATA\T\Telefield.EMI

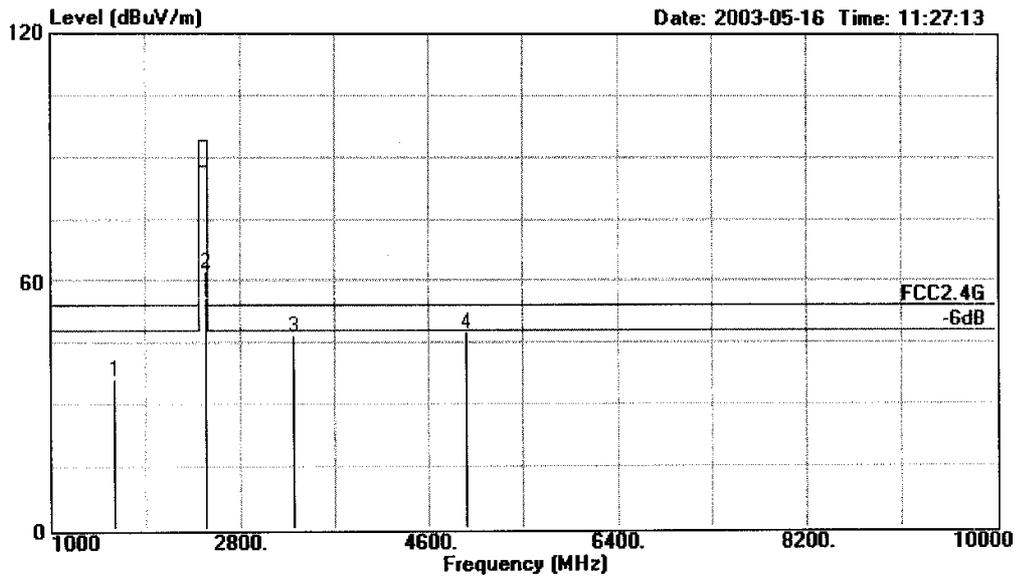

Site : 1# Chamber  
Condition : FCC2.4G 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 3.6V  
Test Engineer : Tomy  
Memo : Handset CH1

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1607.602	36.03	-17.97	54.00	41.29	4.37	25.66	35.29	Average
2	2472.751	62.38	-31.62	94.00	63.37	5.78	28.20	34.97	Average
3	3297.002	46.75	-7.25	54.00	44.70	6.72	30.08	34.75	Average
4	4945.503	47.55	-6.45	54.00	40.80	8.05	33.15	34.45	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 149 File#: C:\EMI TEST DATA\T\Telefield.EMI

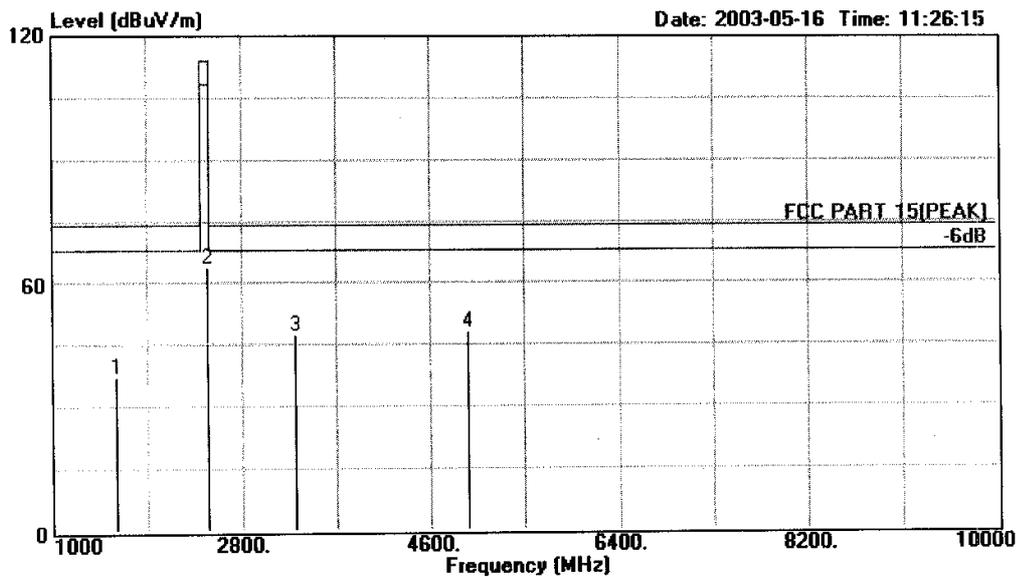

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 3.6V  
Test Engineer : Tomy  
Memo : Handset CH1

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1607.602	37.33	-36.67	74.00	42.59	4.37	25.66	35.29	Peak
2	2472.751	63.83	-50.17	114.00	64.82	5.78	28.20	34.97	Peak
3	3297.002	47.65	-26.35	74.00	45.60	6.72	30.08	34.75	Peak
4	4945.503	48.25	-25.75	74.00	41.50	8.05	33.15	34.45	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 145 File#: C:\EMI TEST DATA\T\Telefield.EMI

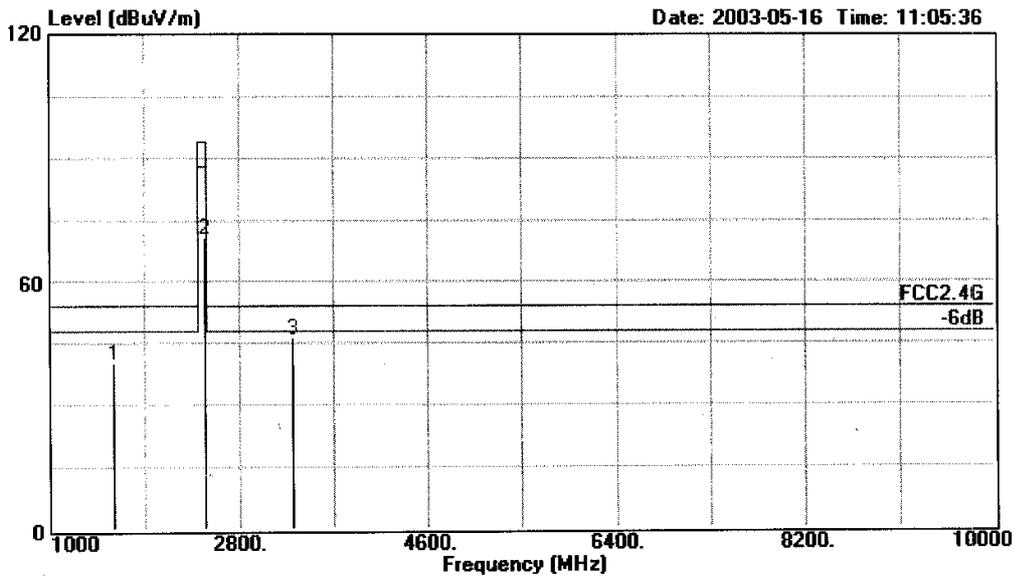

Site : 1# Chamber  
Condition : FCC2.4G 3m 3115FACTOR VERTICAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 3.6V  
Test Engineer : Tomy  
Memo : Handset CH1

	Over	Limit	Read	Cable	Probe	Preamp			
Freq	Level	Limit	Line	Level	Loss	Factor	Factor	Remark	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		
1	1607.606	40.46	-13.54	54.00	45.72	4.37	25.66	35.29	Average
2	2472.745	70.88	-23.12	94.00	71.87	5.78	28.20	34.97	Average
3	3297.010	46.51	-7.49	54.00	44.46	6.72	30.08	34.75	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 144 File#: C:\EMI TEST DATA\T\Telefield.EMI

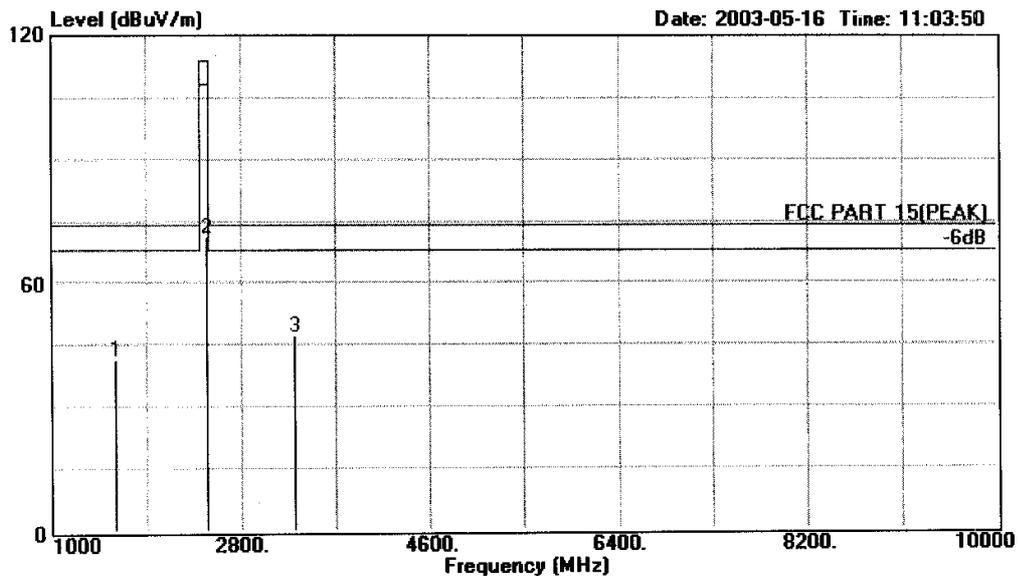

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 3.6V  
Test Engineer : Tomy  
Memo : Handset CH1

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor	
			dB	dBuV/m	dBuV	dB	dB	dB	
1	1607.606	41.35	-32.65	74.00	46.61	4.37	25.66	35.29	Peak
2	2472.745	71.33	-42.67	114.00	72.32	5.78	28.20	34.97	Peak
3	3297.010	47.22	-26.78	74.00	45.17	6.72	30.08	34.73	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 153 File#: C:\EMI TEST DATA\T\Telefield.EMI

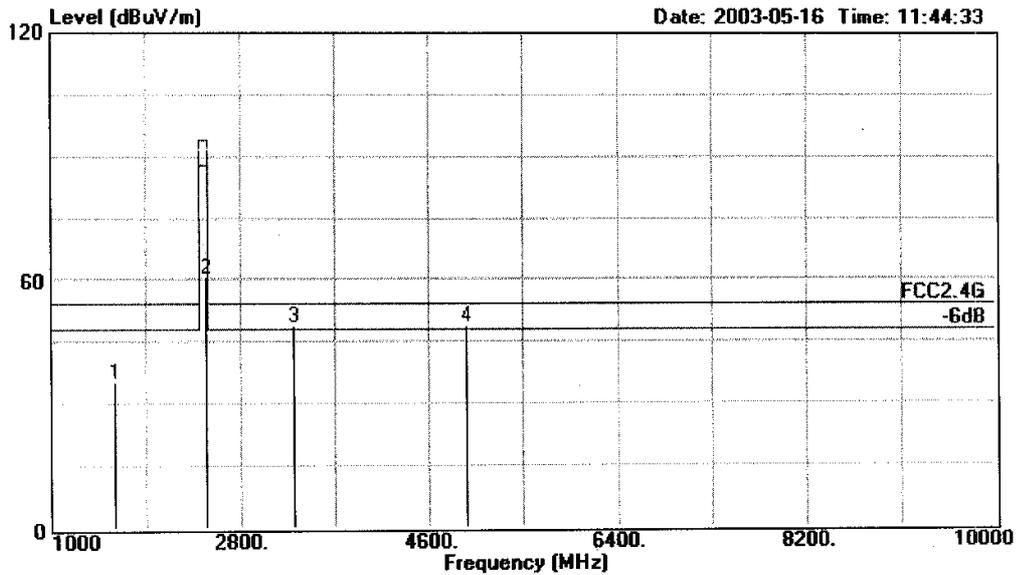

Site : 1# Chamber  
Condition : FCC2.4G 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 3.6V  
Test Engineer : Tomy  
Memo : Handset CH20

	Freq	Level	Over Limit	Limit	Read	Cable	Probe	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1609.504	35.46	-18.54	54.00	40.72	4.37	25.66	35.29	Average
2	2475.601	60.81	-33.19	94.00	61.80	5.78	28.20	34.97	Average
3	3300.800	48.68	-5.32	54.00	46.57	6.73	30.13	34.75	Average
4	4951.200	48.69	-5.31	54.00	41.92	8.06	33.16	34.45	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 152 File#: C:\EMI TEST DATA\T\Telefield.EMI

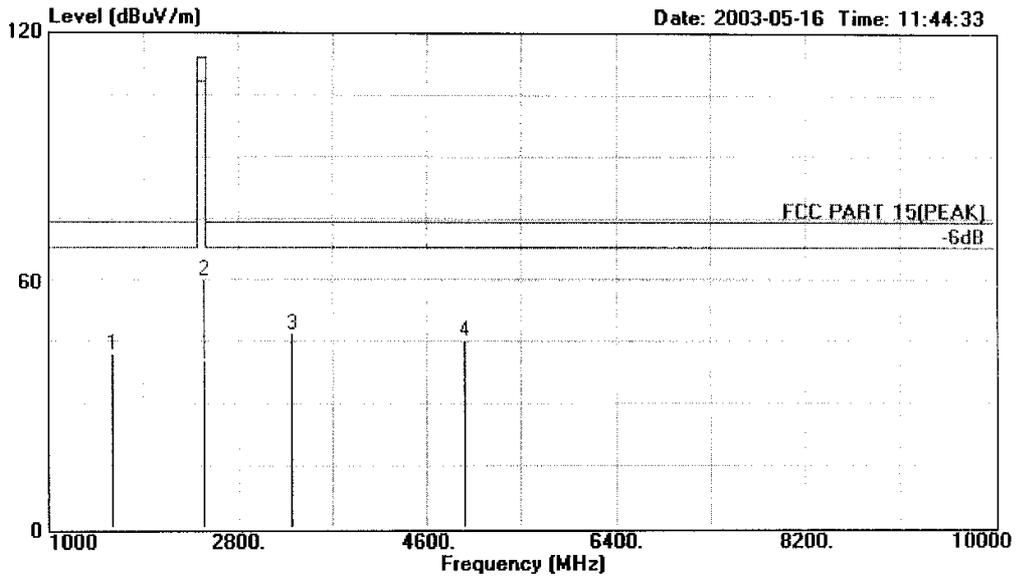

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 3.6V  
Test Engineer : Tomy  
Memo : Handset CH20

	Freq	Level	Over Limit	Limit	Read	Cable	Probe	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1609.504	42.50	-31.50	74.00	47.76	4.37	25.66	35.29	Peak
2	2475.601	60.30	-53.70	114.00	61.29	5.78	28.20	34.97	Peak
3	3300.800	47.04	-26.96	74.00	44.93	6.73	30.13	34.75	Peak
4	4951.200	45.49	-28.51	74.00	38.72	8.06	33.16	34.45	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 158 File#: C:\EMI TEST DATA\T\Telefield.EMI

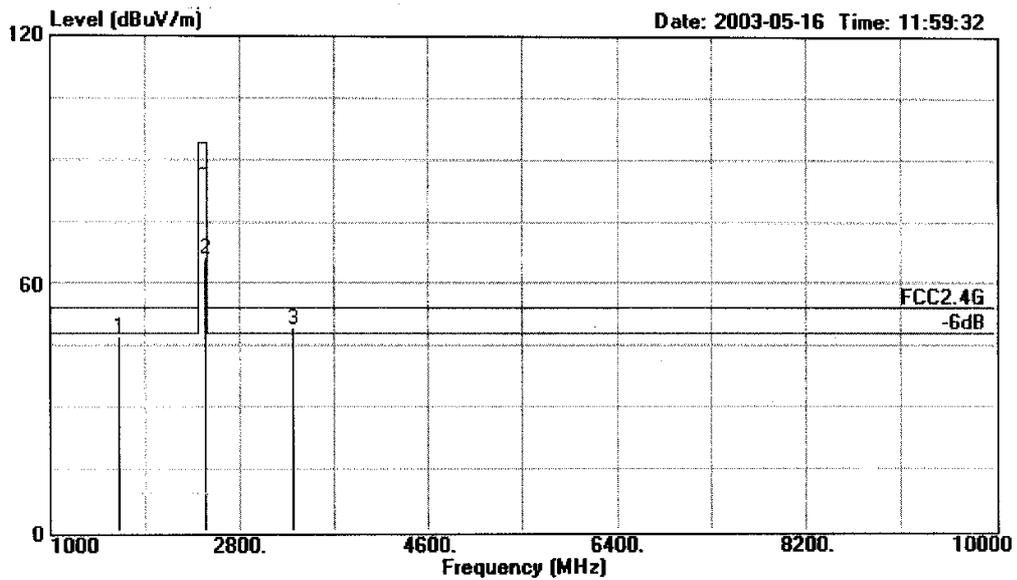

Site : 1# Chamber  
Condition : FCC2.4G 3m 3115FACTOR VERTICAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 3.6V  
Test Engineer : Tomy  
Memo : Handset CH20

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1650.403	47.06	-6.94	54.00	52.04	4.45	25.84	35.2	Average
2	2475.600	66.39	-27.61	94.00	67.38	5.78	28.20	34.97	Average
3	3300.800	49.25	-4.75	54.00	47.14	6.73	30.13	34.75	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 157 File#: C:\EMI TEST DATA\T\Telefield.EMI

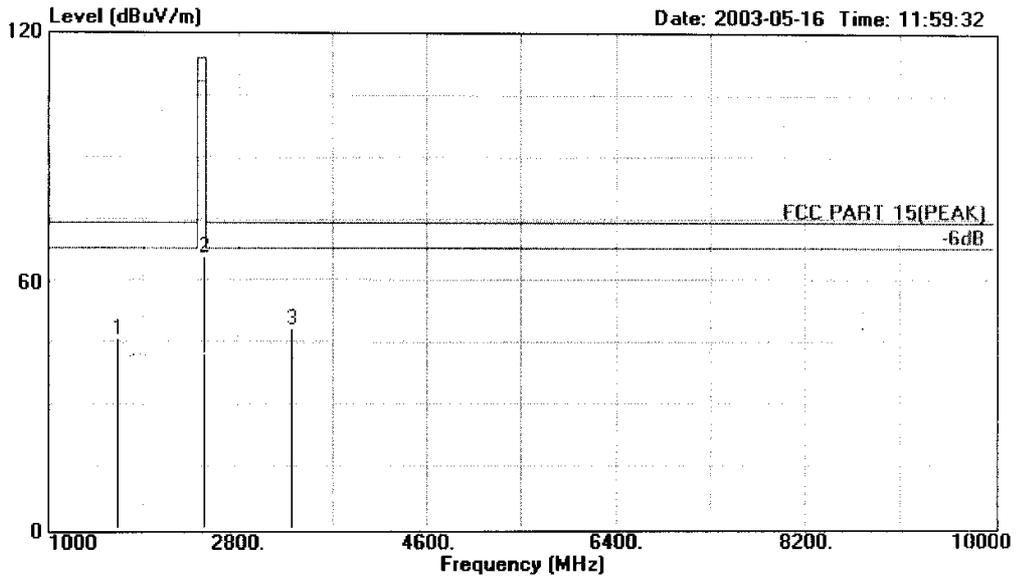

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 3.6V  
Test Engineer : Tomy  
Memo : Handset CH20

	Freq	Level	Over Limit	Limit	Read	Cable	Probe	Preampl	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1650.403	46.08	-27.92	74.00	51.06	4.45	25.84	35.27	Peak
2	2475.600	65.70	-48.30	114.00	66.69	5.78	28.20	34.97	Peak
3	3300.800	48.26	-25.74	74.00	46.15	6.73	30.13	34.75	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 166 File#: C:\EMI TEST DATA\T\Telefield.EMI

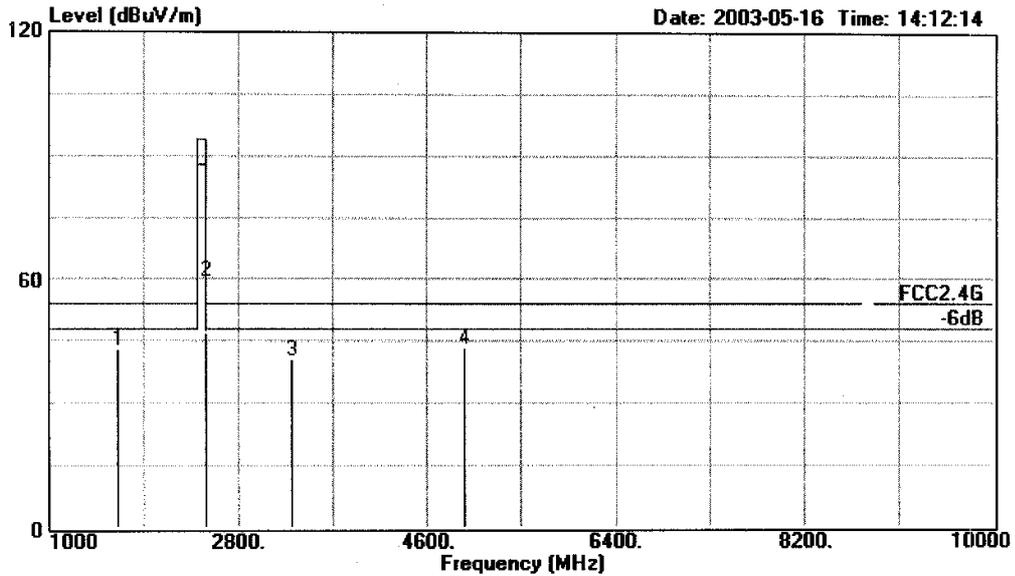

Site : 1# Chamber  
Condition : FCC2.4G 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 3.6V  
Test Engineer : Tomy  
Memo : Handset CH40

	Over	Limit	Read	Cable	Probe	Preamp		
Freq	Level	Limit	Line	Level	Loss	Factor	Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1652.402	42.93	-11.07	54.00	47.91	4.45	25.84	35.27 Average
2	2478.604	59.93	-34.07	94.00	60.92	5.78	28.20	34.97 Average
3	3304.800	40.84	-13.16	54.00	38.73	6.73	30.13	34.75 Average
4	4960.001	43.33	-10.67	54.00	36.55	8.06	33.17	34.45 Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 165 File#: C:\EMI TEST DATA\T\Telefield.EMI

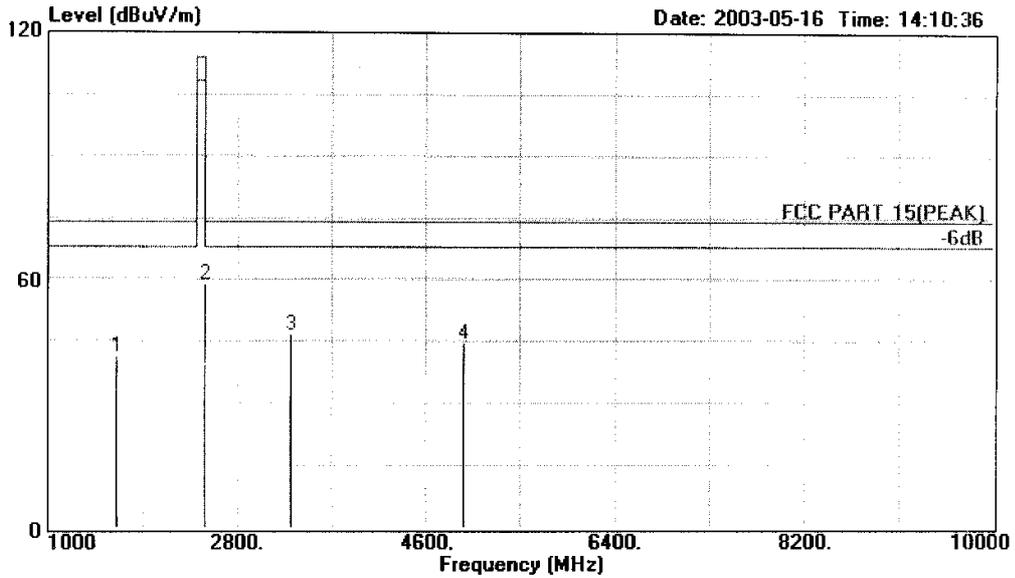

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 3.6V  
Test Engineer : Tomy  
Memo : Handset CH40

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1652.402	41.42	-32.58	74.00	46.40	4.45	25.84	35.27	Peak
2	2478.604	58.92	-55.08	114.00	59.91	5.78	28.20	34.97	Peak
3	3304.800	46.90	-27.10	74.00	44.79	6.73	30.13	34.75	Peak
4	4960.001	44.65	-29.35	74.00	37.87	8.06	33.17	34.45	Peak




**信華科技(深圳)有限公司**

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 161 File#: C:\EMI TEST DATA\T\Telefield.EMI

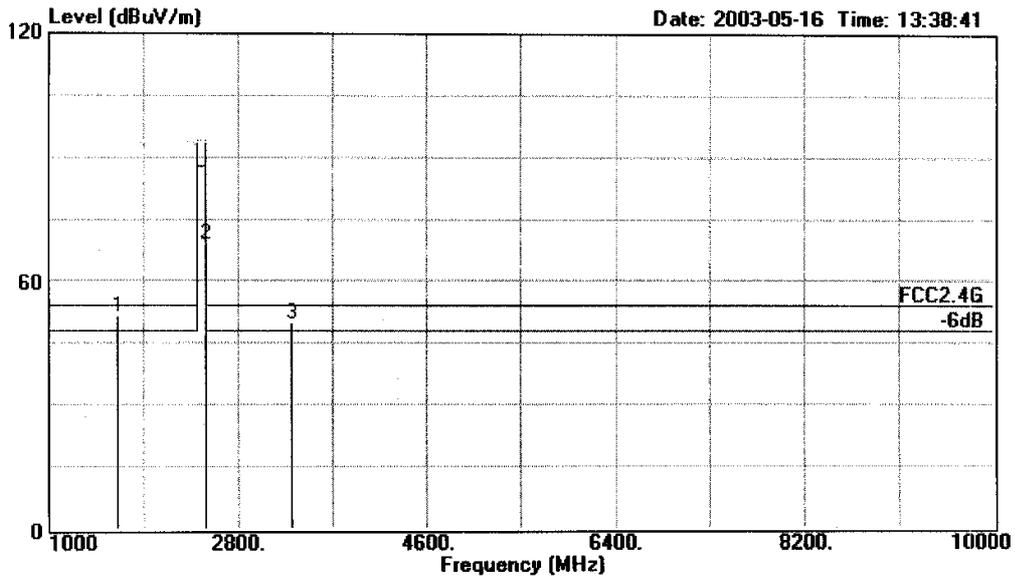

Site : 1# Chamber  
Condition : FCC2.4G 3m 3115FACTOR VERTICAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Handset CH40

	Freq	Level	Over Limit	Limit	Read	Cable	Probe	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1652.403	51.61	-2.39	54.00	56.59	4.45	25.84	35.27	Average
2	2478.600	69.02	-24.98	94.00	70.01	5.78	28.20	34.97	Average
3	3304.804	49.83	-4.17	54.00	47.72	6.73	30.13	34.75	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 160 File#: C:\EMI TEST DATA\T\Telefield.EMI

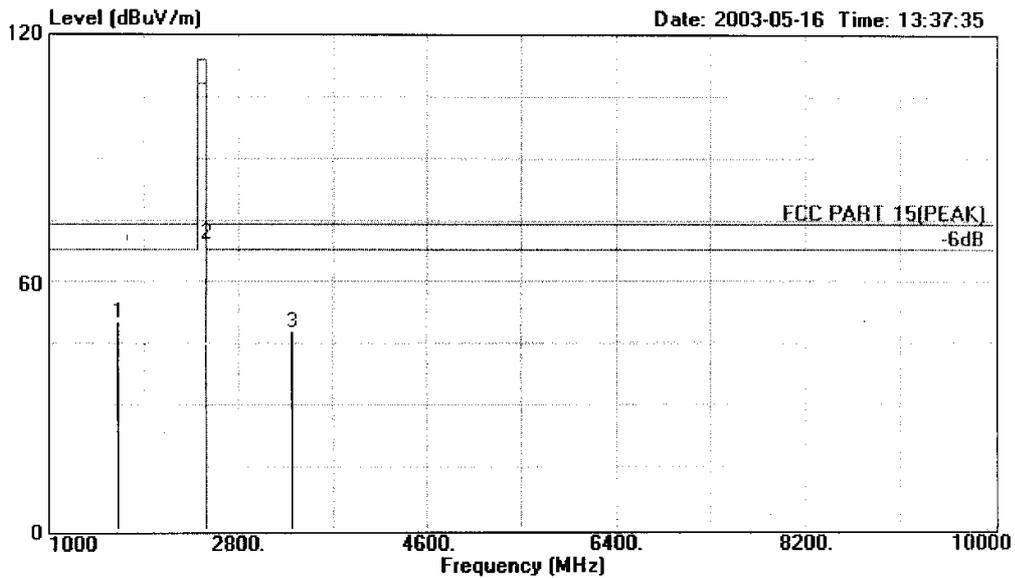

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Handset CH40

	Freq	Level	Over Limit	Limit	Read	Cable	Probe	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	
1	1652.403	50.38	-23.62	74.00	55.36	4.45	25.84	35.27	Peak
2	2478.600	69.38	-44.62	114.00	70.37	5.78	28.20	34.97	Peak
3	3304.804	47.83	-26.17	74.00	45.72	6.73	30.13	34.75	Peak


# APPENDIX I



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park  
 Tel:0755-26639496  
 Fax:26632877

Data#: 1 File#: Telefield.EMI Date: 2003-05-21 Time: 09:02:37

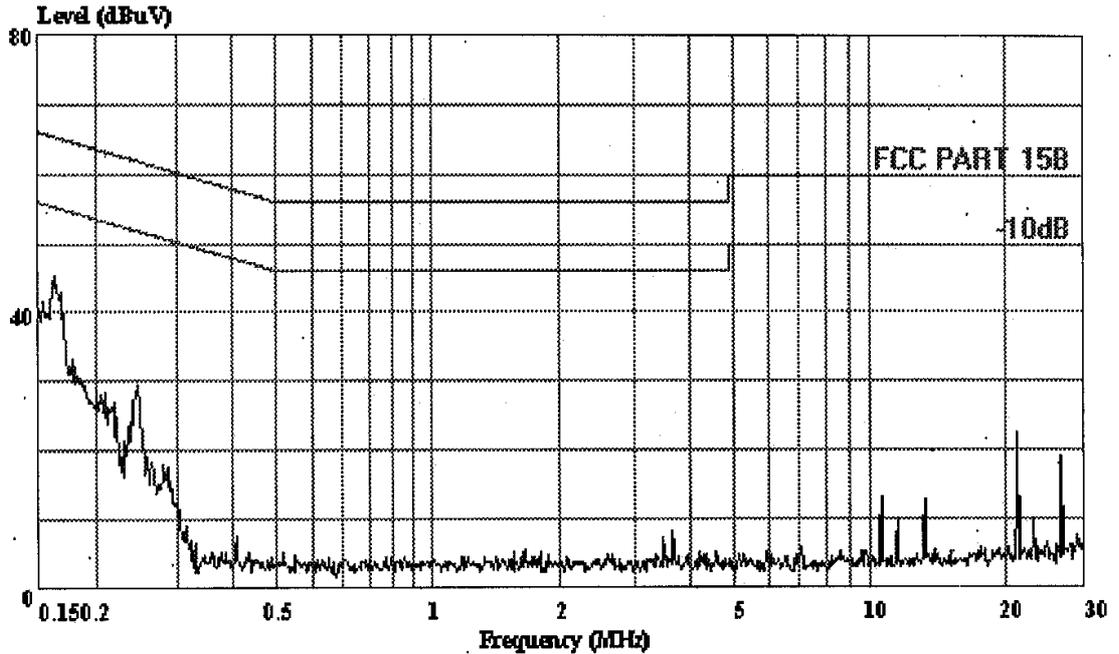

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15B VA(KNW-407)  
 EUT : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120v 60Hz  
 Test Engineer:: Tomy  
 MEMO: : Base FM 88MHz



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park  
 Tel:0755-26639496  
 Fax:26632877

Data#: 3 File#: Telefield.EMI Date: 2003-05-21 Time: 09:07:48

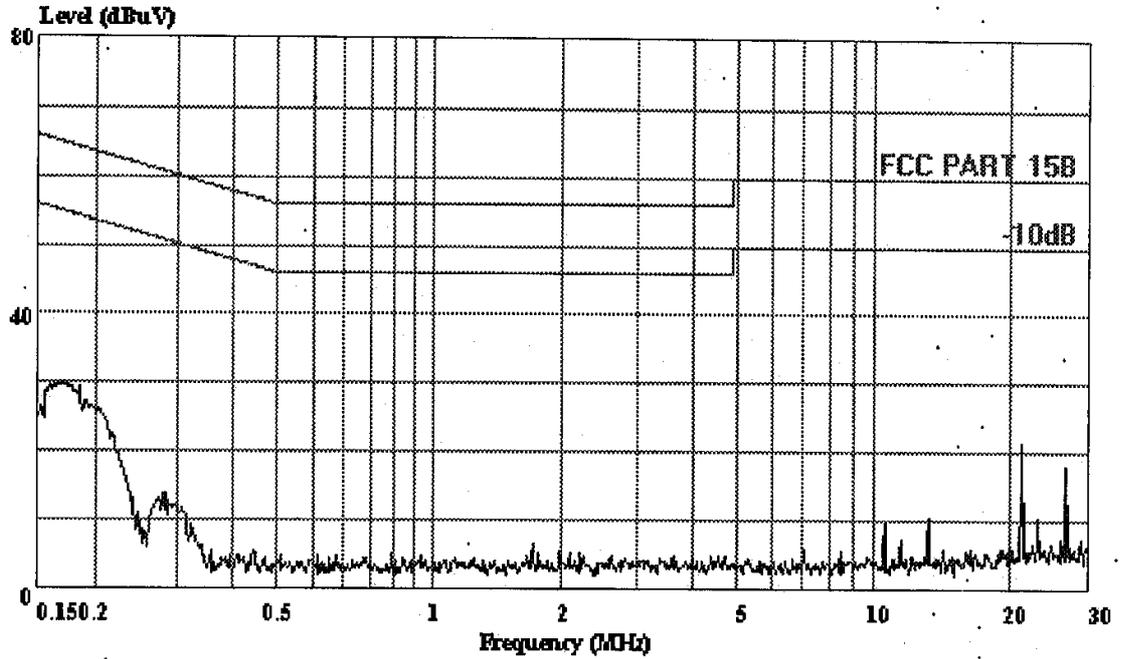

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:.


Condition: FCC PART 15B VB(KNW-407)  
 EUT : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120v 60Hz  
 Test Engineer:: Tomy  
 MEMO: : Base FM 88MHz



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park  
 Tel:0755-26639496  
 Fax:26632877

Data#: 6 File#: Telefield.EMI Date: 2003-05-22 Time: 08:59:06

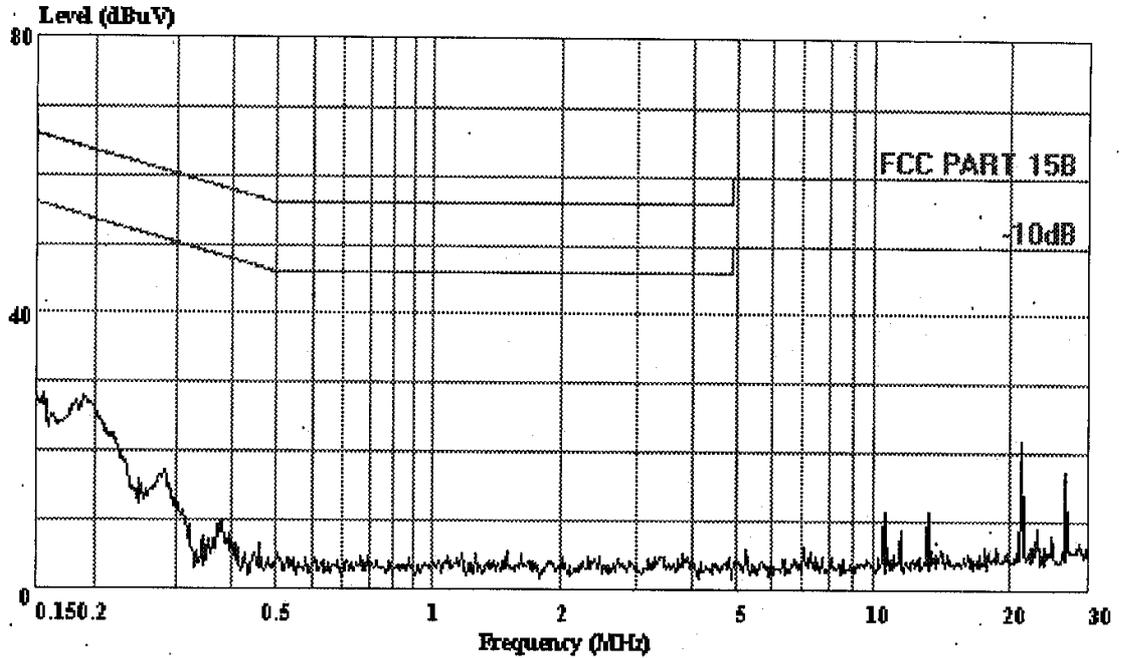

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15B VA(KNW-407)  
 EUT : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120v 60Hz  
 Test Engineer:: Tomy  
 MEMO: : Base FM 98MHz



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park  
 Tel:0755-26639496  
 Fax:26632877

Data#: 5 File#: Telefield.EMI Date: 2003-05-22 Time: 08:55:32

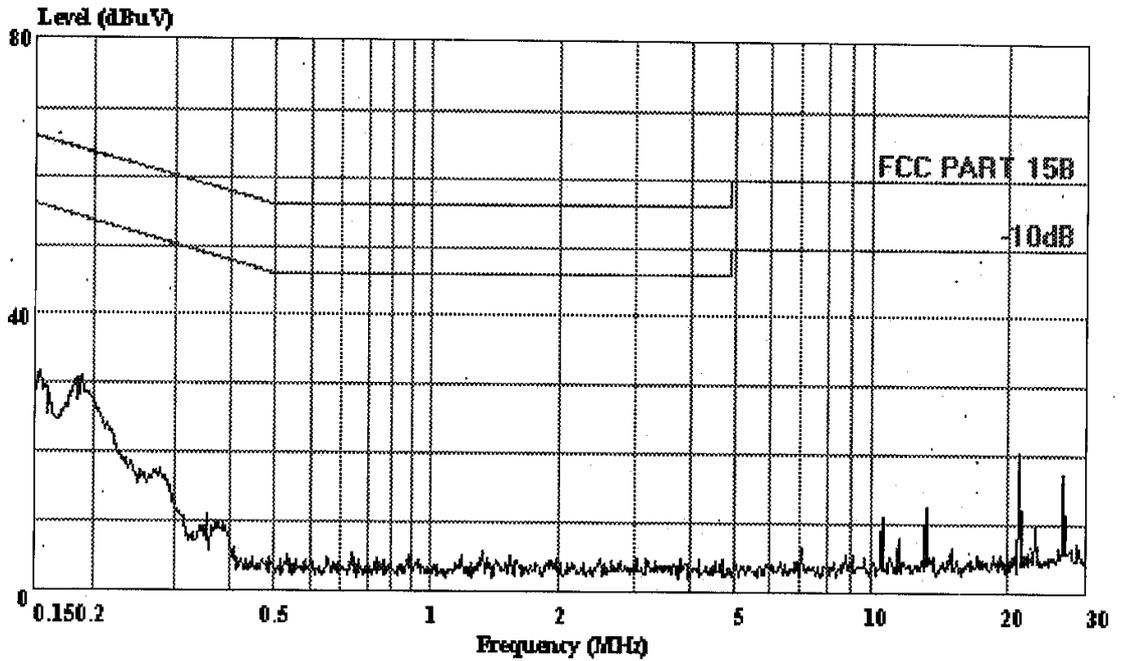

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15B VB(KNW-407)  
 EUT : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120v 60Hz  
 Test Engineer:: Tomy  
 MEMO: : Base FM 98MHz



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park  
 Tel:0755-26639496  
 Fax:26632877

Data#: 7 File#: Telefield.EMI Date: 2003-05-22 Time: 09:01:13

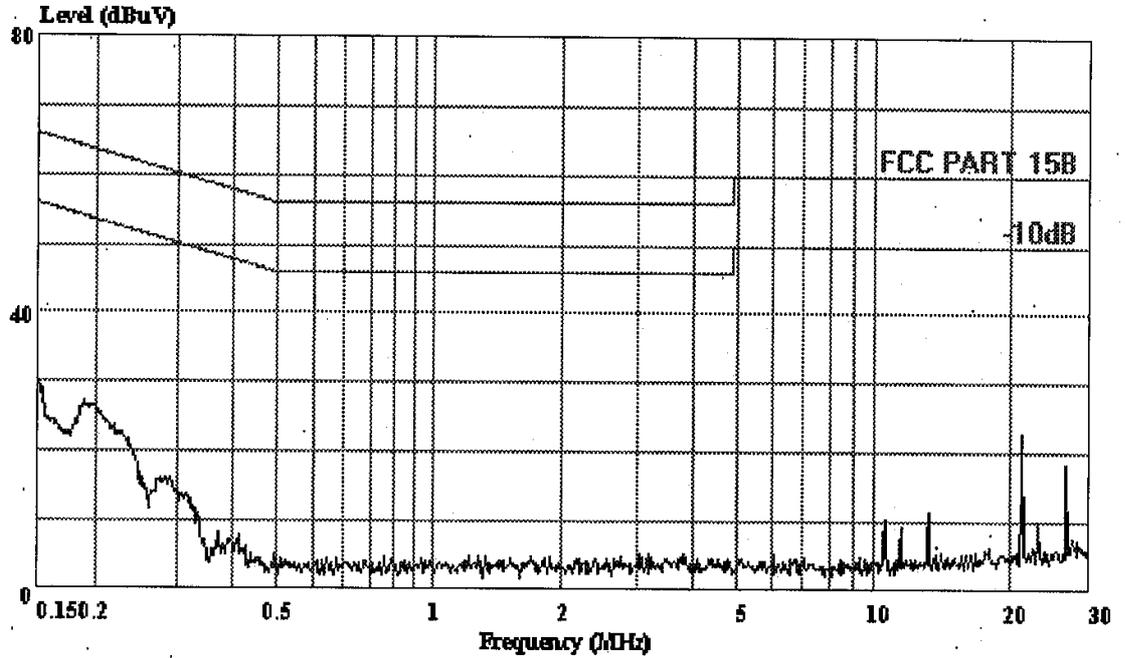

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15B VA(KNW-407)  
 EUT : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120v 60Hz  
 Test Engineer: : Tomy  
 MEMO: : Base FM 108MHz



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park  
 Tel:0755-26639496  
 Fax:26632877

Data#: 8 File#: Telefield.EMI Date: 2003-05-22 Time: 09:02:17

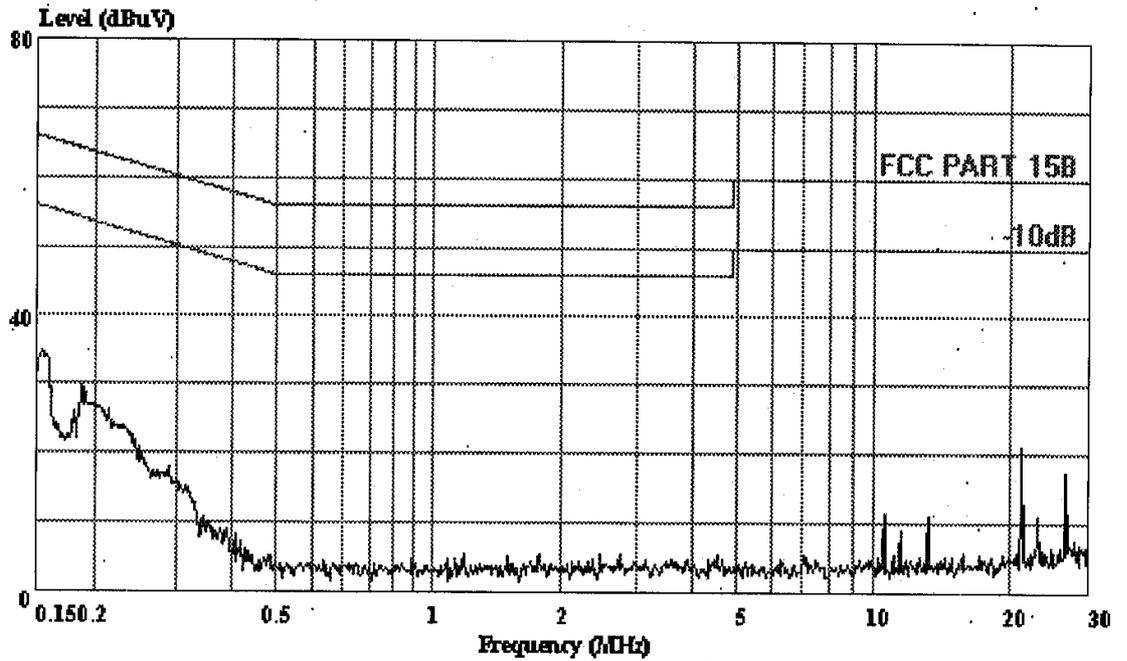

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15B VB(KNW-407)  
 EUT : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120v 60Hz  
 Test Engineer:: Tomy  
 MEMO: : Base FM 108MHz



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park  
 Tel:0755-26639496  
 Fax:26632877

Data#: 10 File#: Telefield.EMI Date: 2003-05-22 Time: 09:06:36

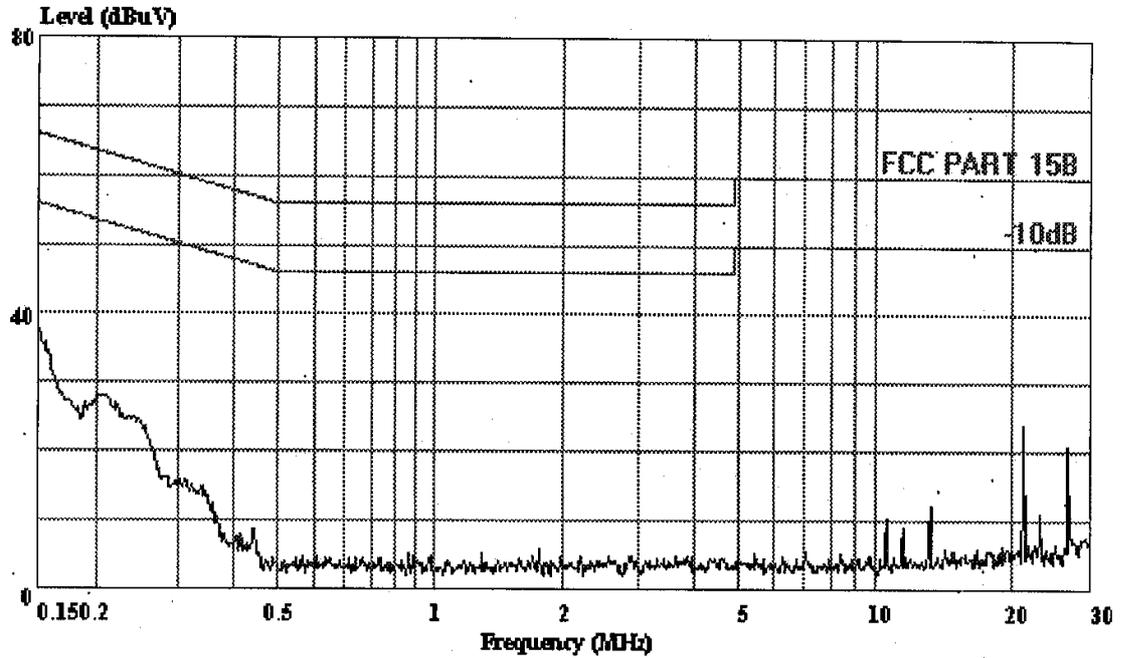

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15B VA(KNW-407)  
 EUT : 2.4GHz Clock Radio Cordless Phone  
      : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120v 60Hz  
 Test Engineer:: Tomy  
 MEMO: : Base CH1



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park  
 Tel:0755-26639496  
 Fax:26632877

Data#: 9 File#: Telefield.EMI Date: 2003-05-22 Time: 09:05:15

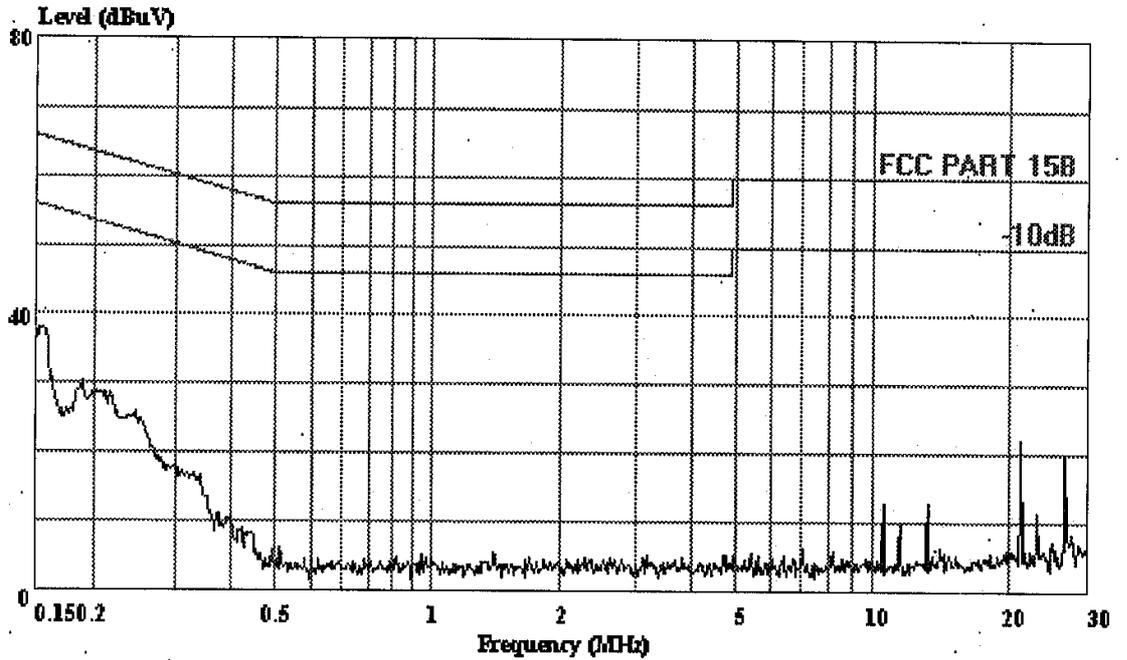

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15B VB (KNW-407)  
 EUT : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120v 60Hz  
 Test Engineer:: Tomy  
 MEMO: : Base CH1



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park  
 Tel:0755-26639496  
 Fax:26632877

Data#: 11 File#: Telefield.EMI Date: 2003-05-22 Time: .09:12:18

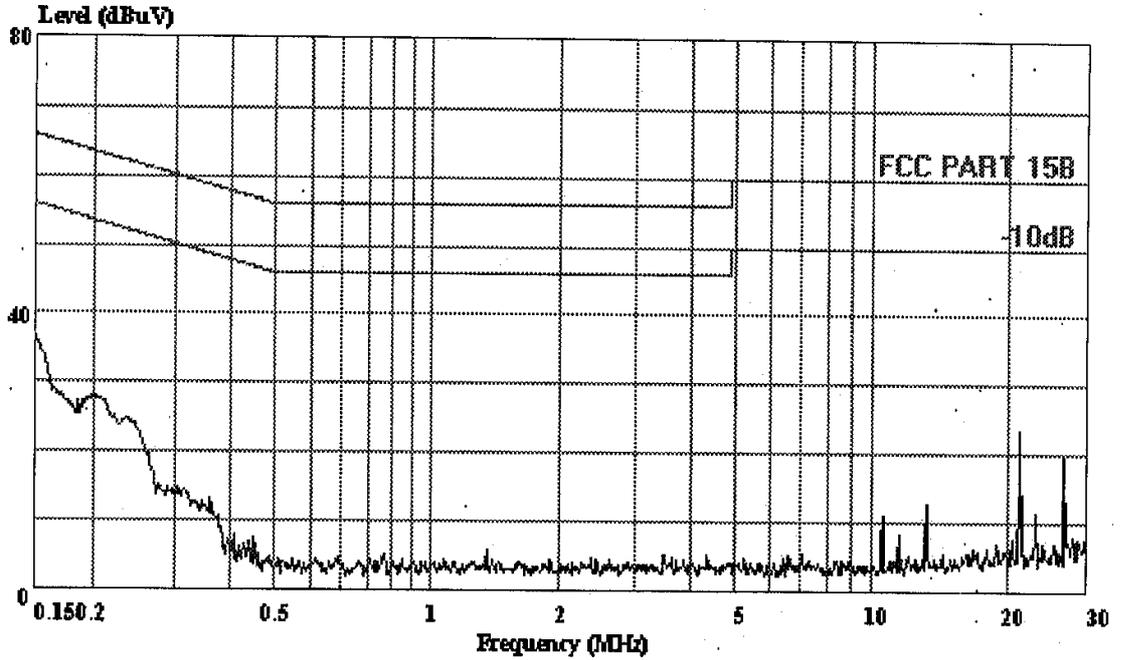

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15B VA(KNW-407)  
 EUT : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120v 60Hz  
 Test Engineer:: Tomy  
 MEMO: : Base CH20



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park  
 Tel:0755-26639496  
 Fax:26632877

Data#: 12 File#: Telefield.EMI Date: 2003-05-22 Time: 09:13:34

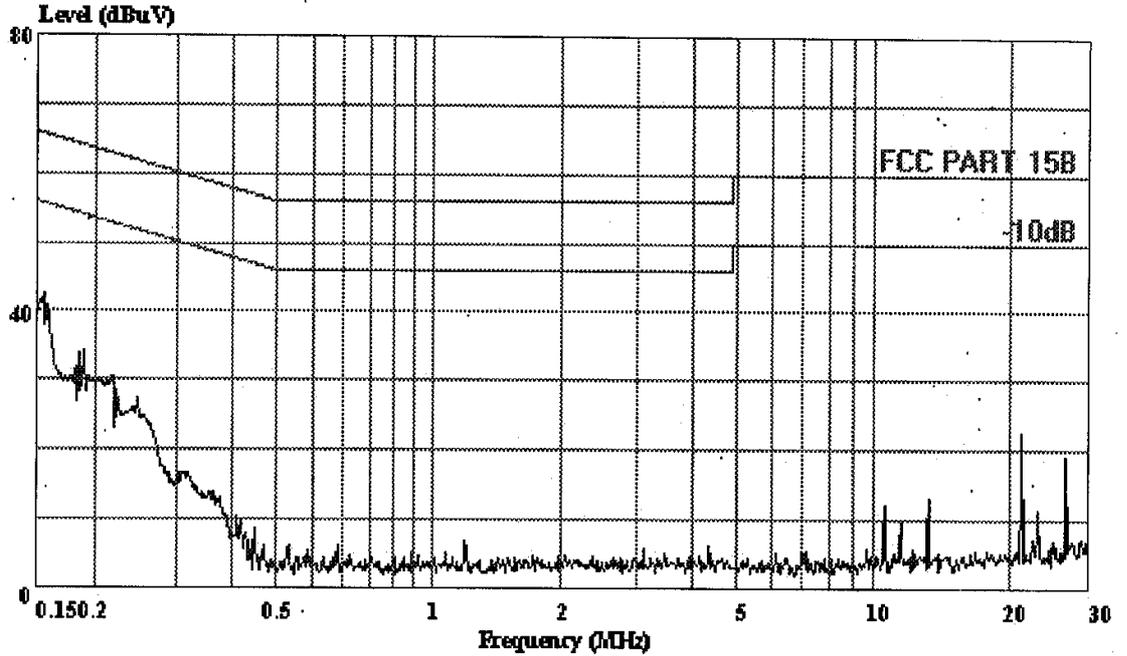

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15B VB(KNW-407)  
 EUT : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120v 60Hz  
 Test Engineer:: Tomy  
 MEMO: : Base CH20



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park  
 Tel:0755-26639496  
 Fax:26632877

Data#: 14 File#: Telefield.EMI Date: 2003-05-22 Time: 09:17:16

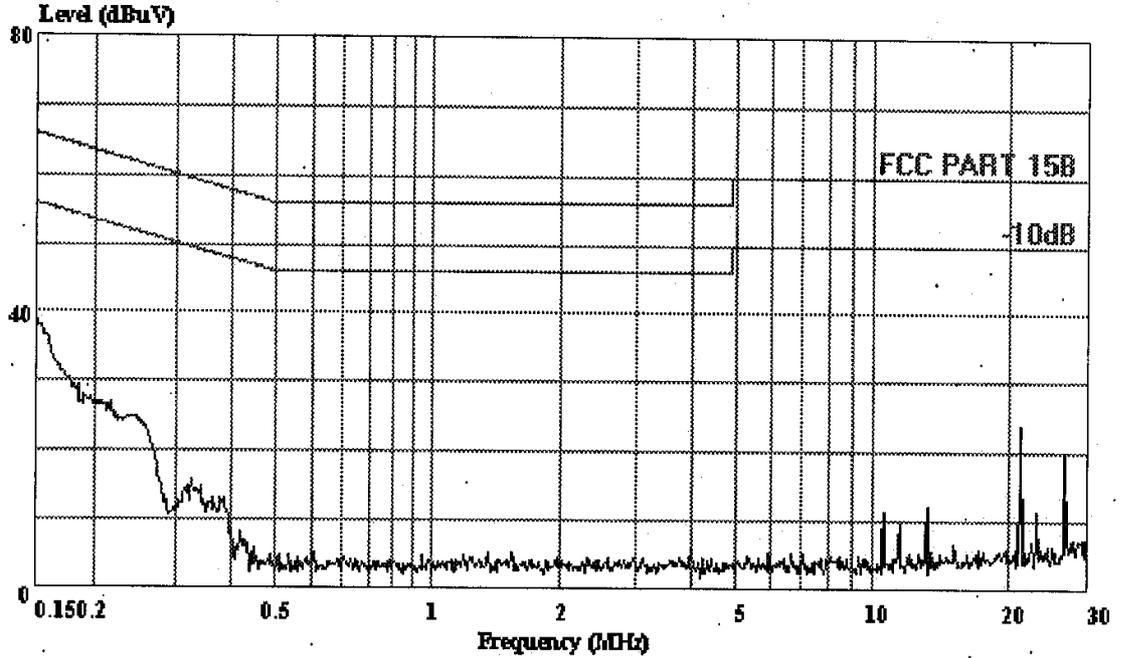

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:


Condition: FCC PART 15B VA (KNW-407)  
 EUT : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120v 60Hz  
 Test Engineer:: Tomy  
 MEMO: : Base CH40



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park  
 Tel:0755-26639496  
 Fax:26632877

Data#: 13 File#: Telefield.EMI Date: 2003-05-22 Time: 09:15:03

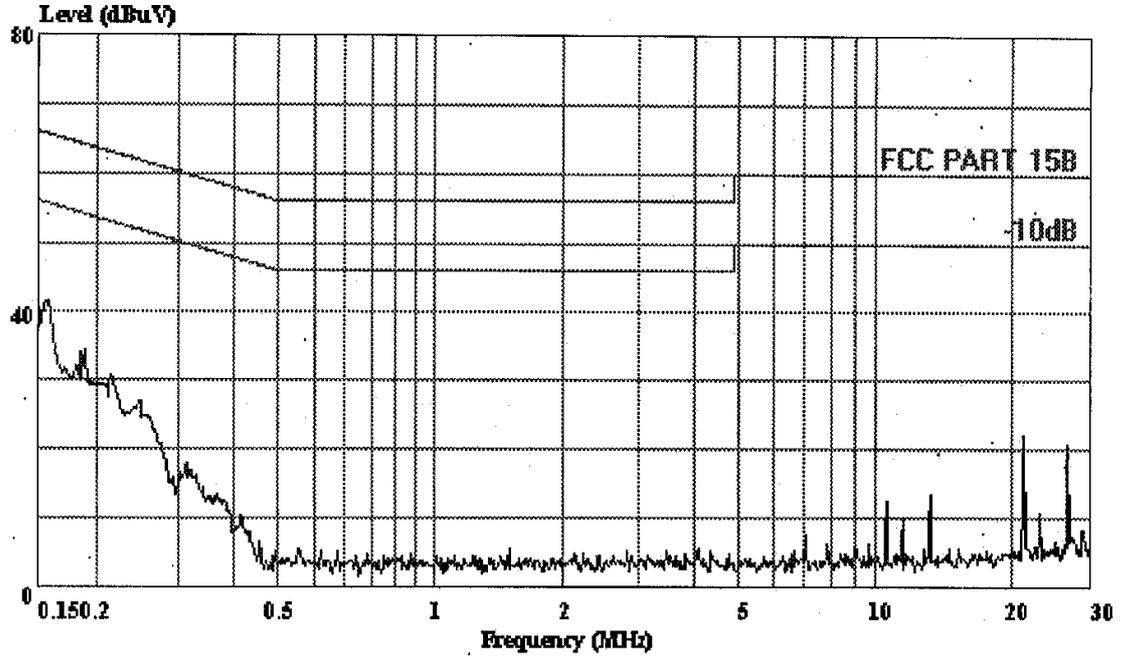

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15B VB(KNW-407)  
 EUT : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120v 60Hz  
 Test Engineer:: Tomy  
 MEMO: : Base CH40

# APPENDIX II




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park  
Tel: 0755-26639495~7  
Fax: 0755-26632877

Data#: 334 File#: TELEFIELD LIMITED.EMI

Date: 2003-05-19 Time: 09:40:17

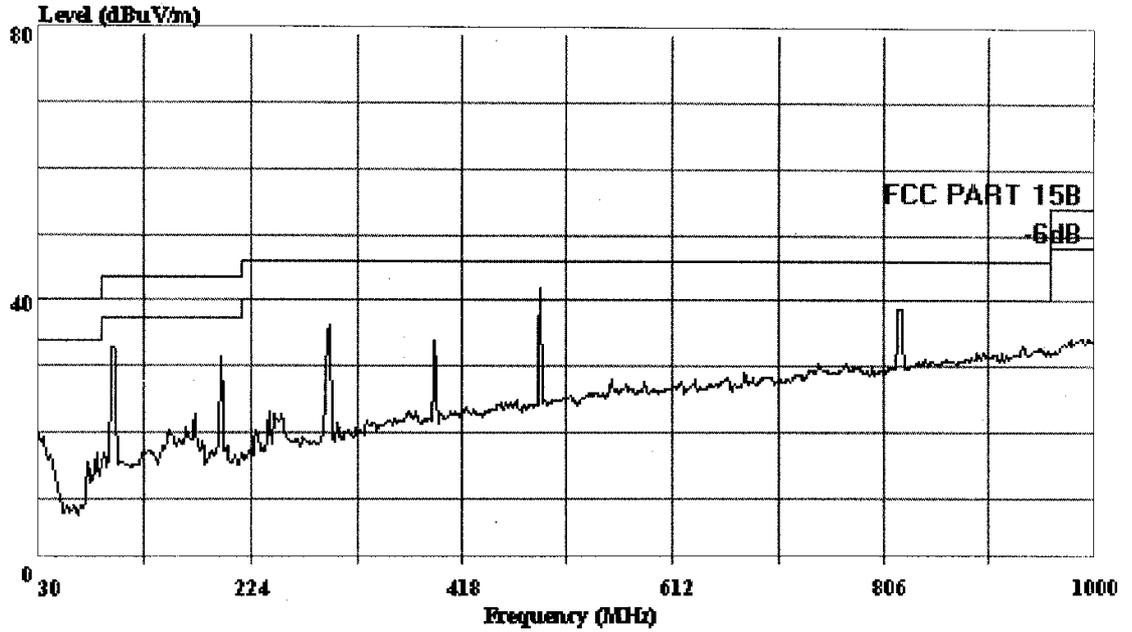

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL  
 EUT: : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120V 60Hz  
 Test Engineer: Tomv  
 MEMO: : Base FM 88MHz




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park  
 Tel: 0755-25639495~7  
 Fax: 0755-26632877

Data#: 335 File#: TELEFIELD LIMITED.FMT

Date: 2003-05-19 Time: 09:42:49

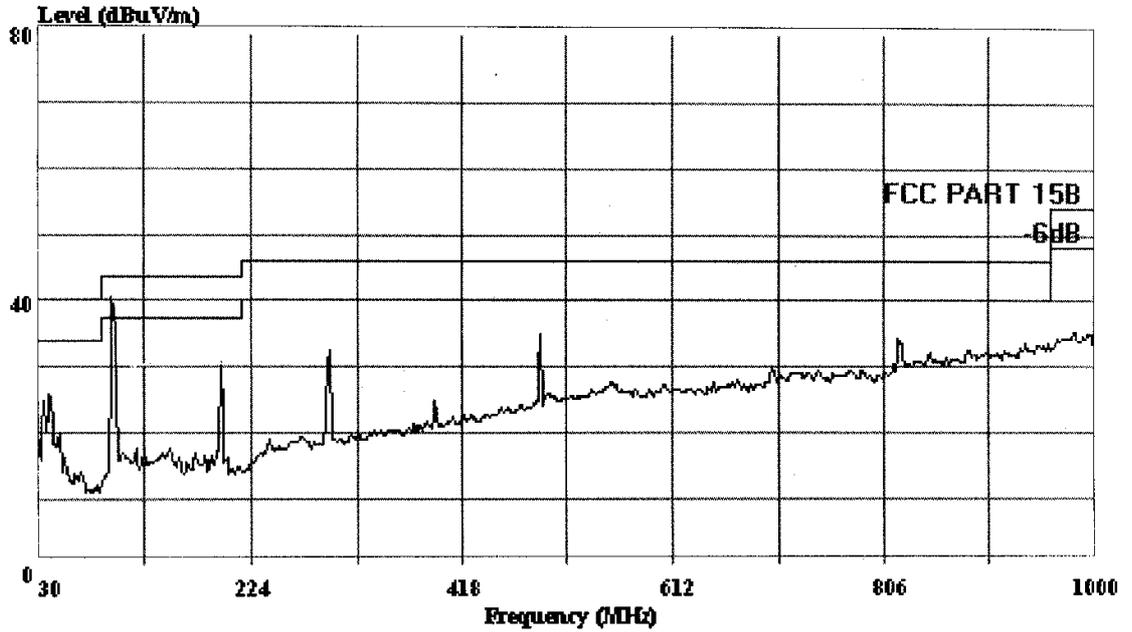

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL.  
 EUT: : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120V 60Hz  
 Test Engineer: Tomv  
 MEMO: : Base FM 88MHz



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 337 File#: TELEFIELD LIMITED.FMT

Date: 2003-05-19 Time: 09:46:15

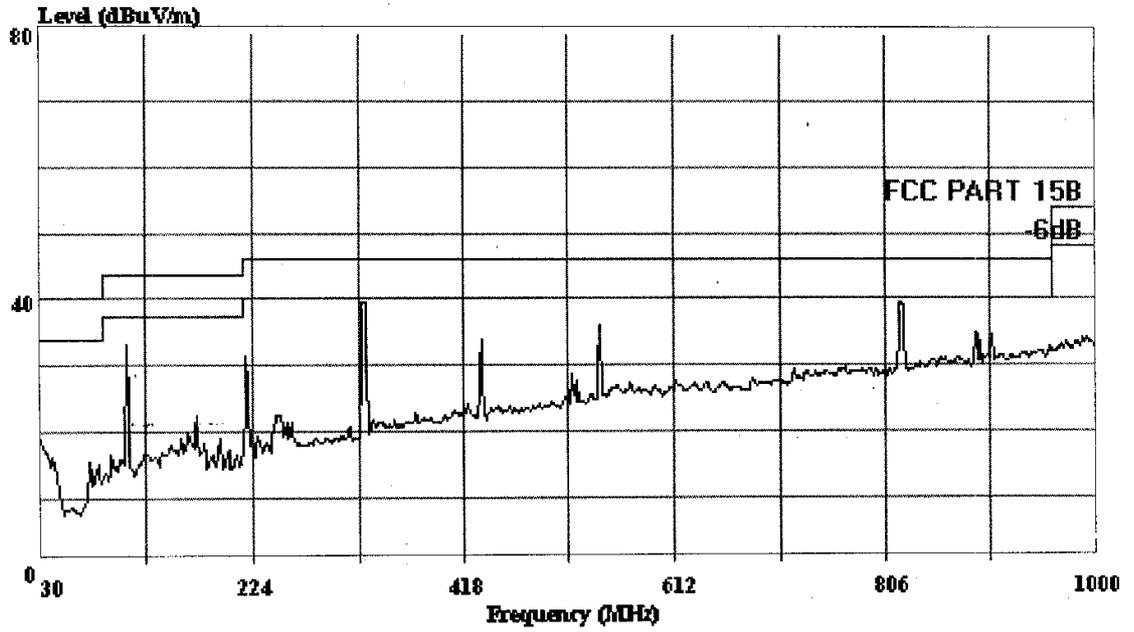

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL.  
 EUT: : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120V 60Hz  
 Test Engineer: Tomv  
 MEMO: : Base FM 98MHz




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park  
Tel: 0755-26639495~7  
Fax: 0755-26632877

Data#: 336 File#: TELEFIELD LIMITED.EMI

Date: 2003-05-19 Time: 09:44:10

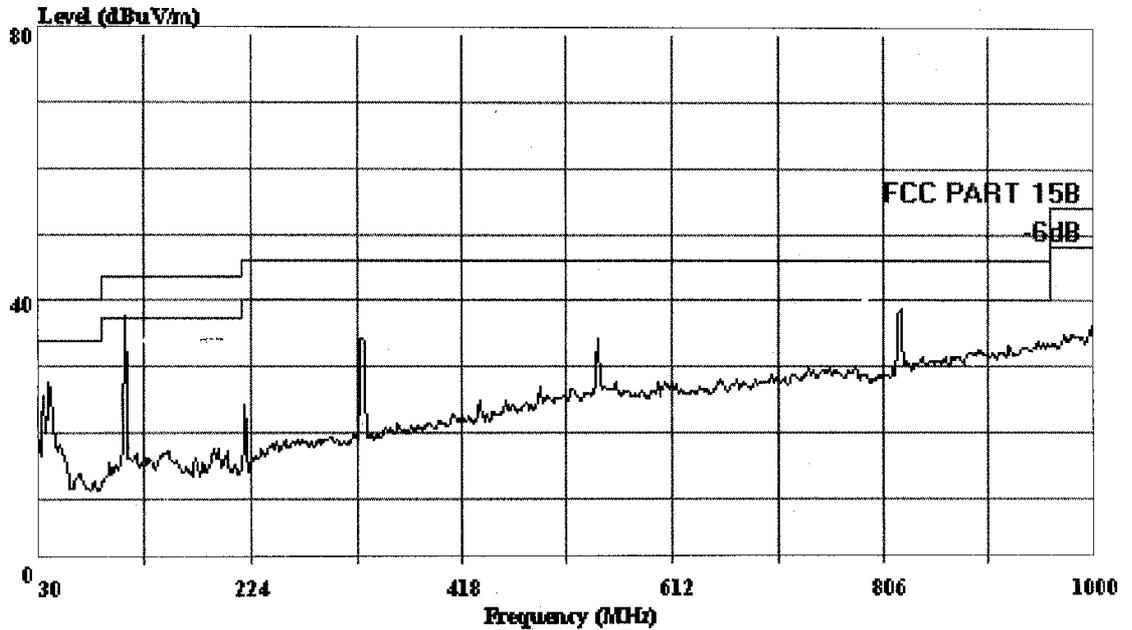

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL  
 EUT: : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120V 60Hz  
 Test Engineer: Tomv  
 MEMO: : Base FM 98MHz




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park  
 Tel: 0755-26639495~7  
 Fax: 0755-26632877

Data#: 338 File#: TELEFIELD LIMITED.EMI

Date: 2003-05-19 Time: 09:48:35

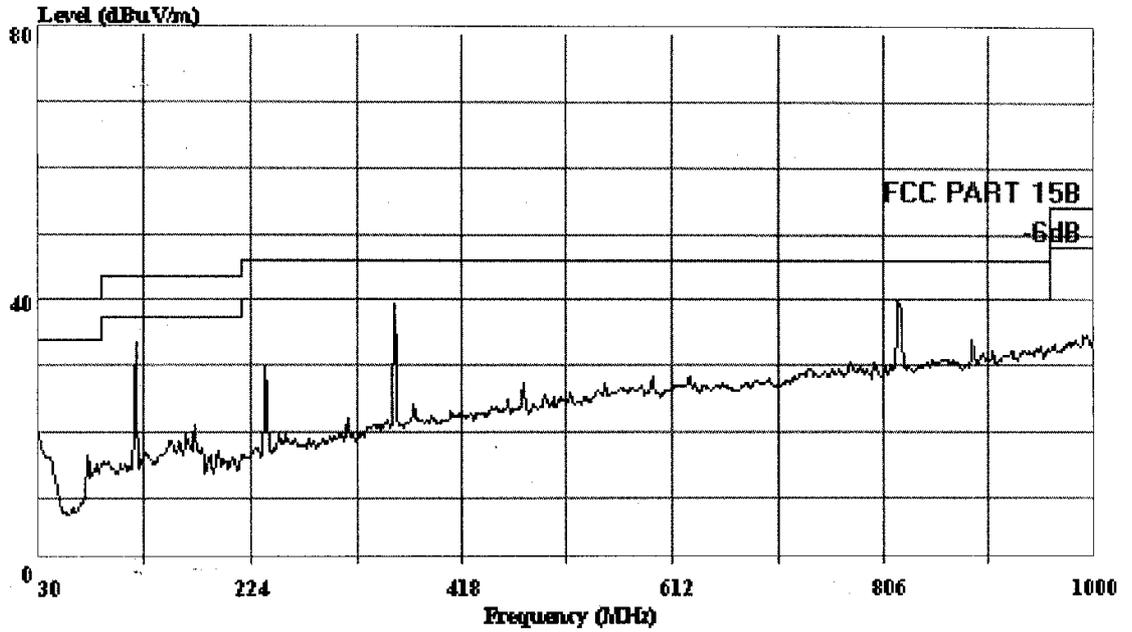

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL.  
 EUT: : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120V 60Hz  
 Test Engineer: Tomv  
 MEMO: : Base FM 108MHz




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park  
 Tel: 0755-26639495~7  
 Fax: 0755-26632877

Data#: 339 File#: TELEFIELD LIMITED.EMI

Date: 2003-05-19 Time: 09:50:08

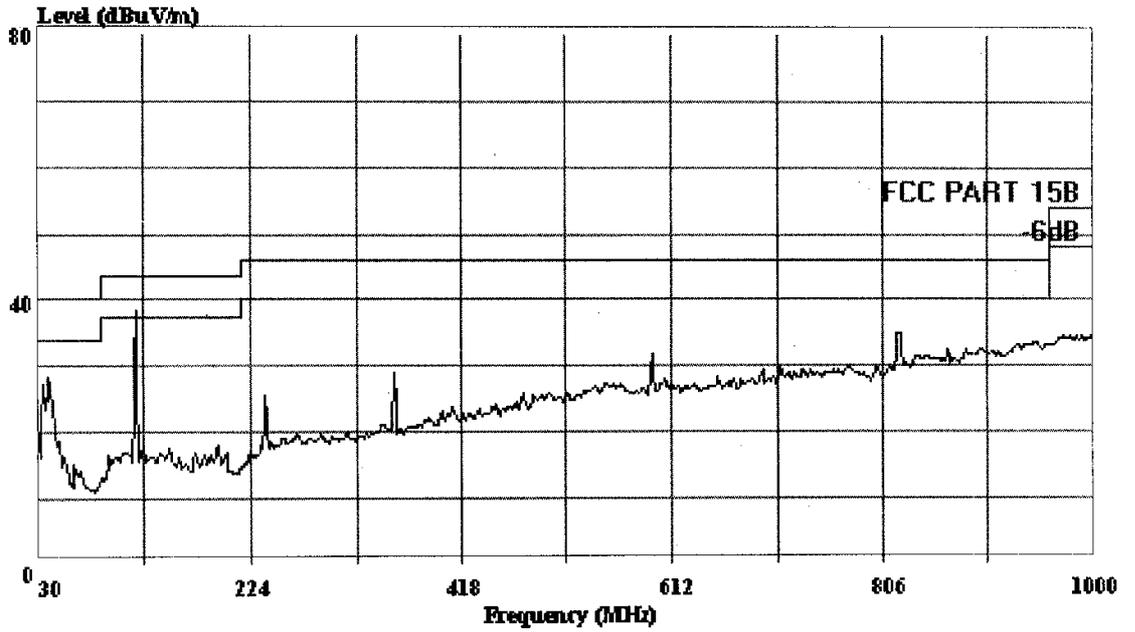

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL.  
 EUT: : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120V 60Hz  
 Test Engineer: Tomv  
 MEMO: : Base FM 108MHz




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park  
Tel: 0755-26639495~7  
Fax: 0755-26632877

Data#: 325 File#: TELEFIELD LIMITED.EMI

Date: 2003-05-19 Time: 09:28:05

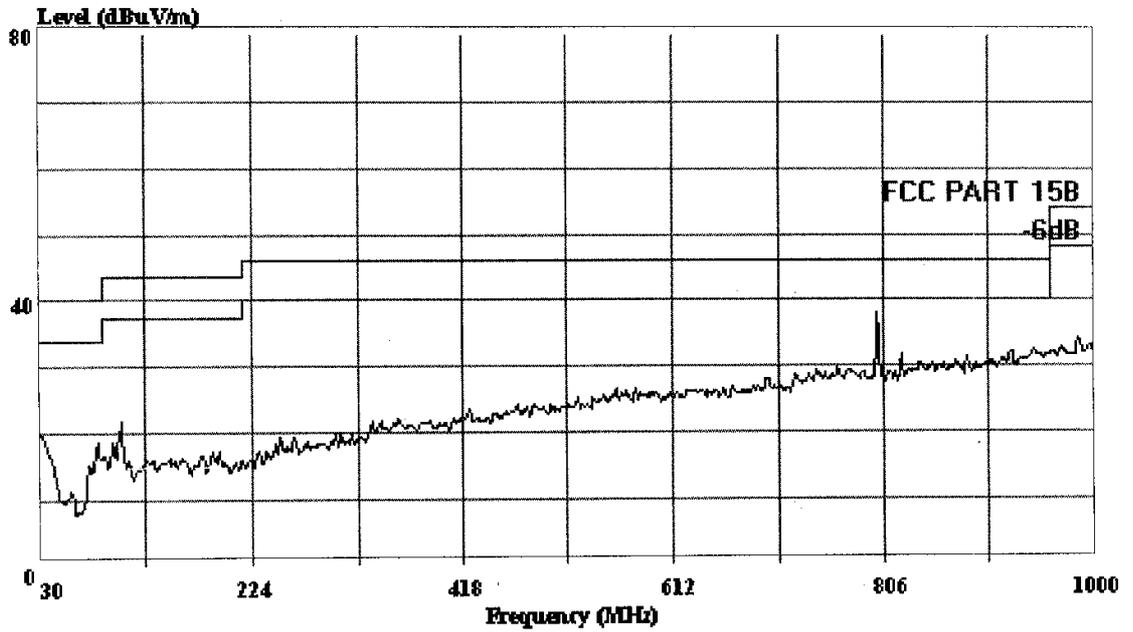

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL  
 EUT: : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120v 60Hz  
 Test Engineer: Tomv  
 MEMO: : Base CH1




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park  
 Tel: 0755-26639495~7  
 Fax: 0755-26632877

Data#: 324 File#: TELEFIELD LIMITED.FMT

Date: 2003-05-19 Time: 09:23:44

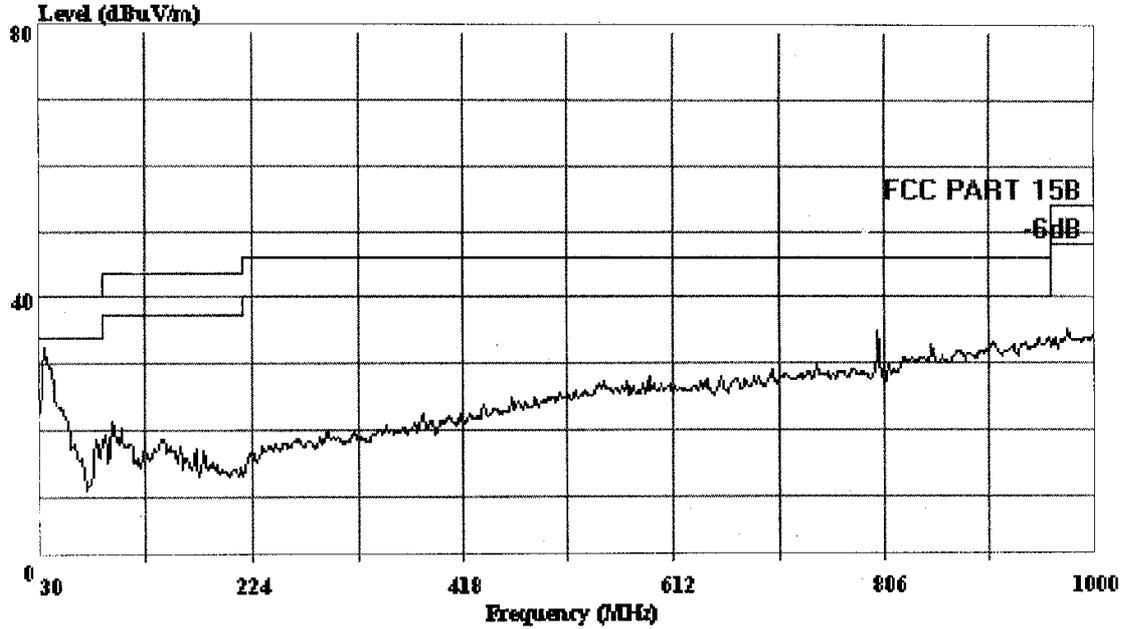

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL  
 EUT: : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120v 60Hz  
 Test Engineer: Tomv  
 MEMO: : Base CH1




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park  
 Tel: 0755-26639495~7  
 Fax: 0755-26632877

Data#: 326 File#: TELEFIELD LIMITED.FMT

Date: 2003-05-19 Time: 09:29:46

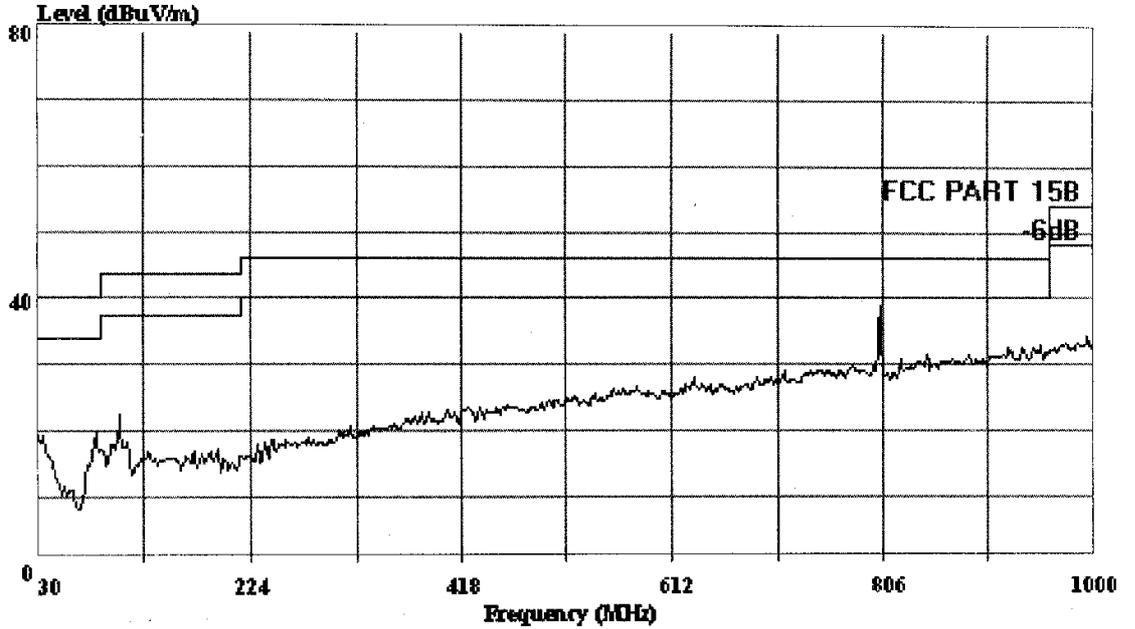

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL  
 EUT: : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120v 60Hz  
 Test Engineer: Tomv  
 MEMO: : Base CH20




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park  
 Tel: 0755-26639495~7  
 Fax: 0755-26632877

Data#: 327 File#: TELEFIELD LIMITED.FMT

Date: 2003-05-19 Time: 09:30:48

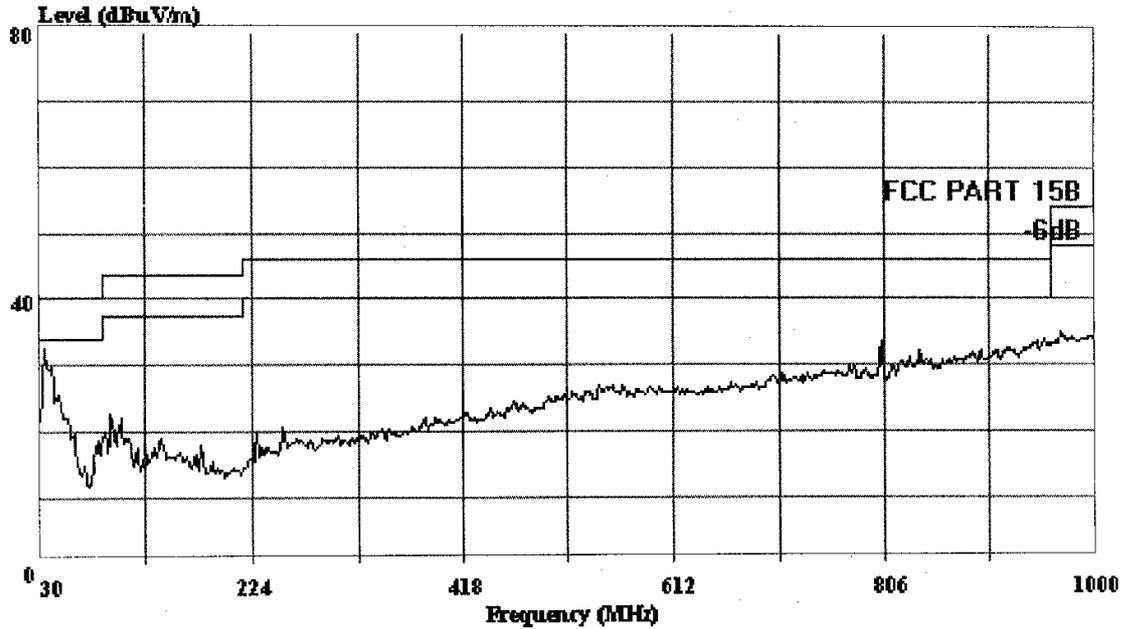

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL.  
 EUT: : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120v 60Hz  
 Test Engineer: Tomv  
 MEMO: : Base CH20




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park  
 Tel: 0755-26639495~7  
 Fax: 0755-26632877

Data#: 329 File#: TELEFIELD LIMITED.EMI

Date: 2003-05-19 Time: 09:33:14

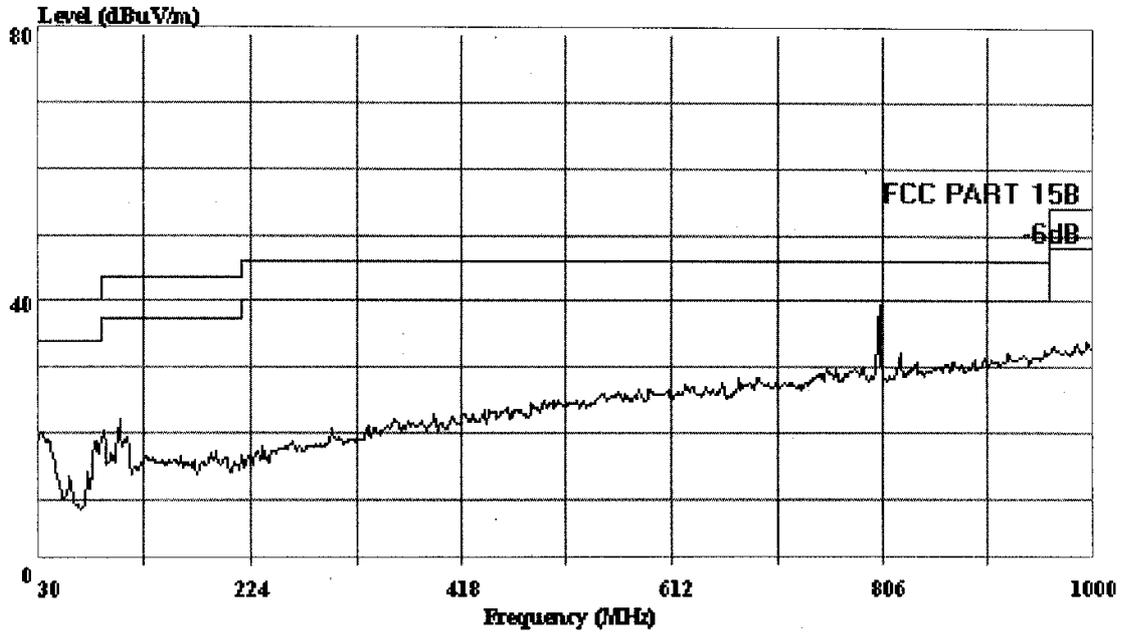

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (# Chamber)

Trace:

Ref. Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL  
 EUT: : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120v 60Hz  
 Test Engineer: Tomv  
 MEMO: : Base CH40




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park  
 Tel: 0755-26639495~7  
 Fax: 0755-26632877

Data#: 328 File#: TELEFIELD LIMITED.EMI

Date: 2003-05-19 Time: 09:32:08

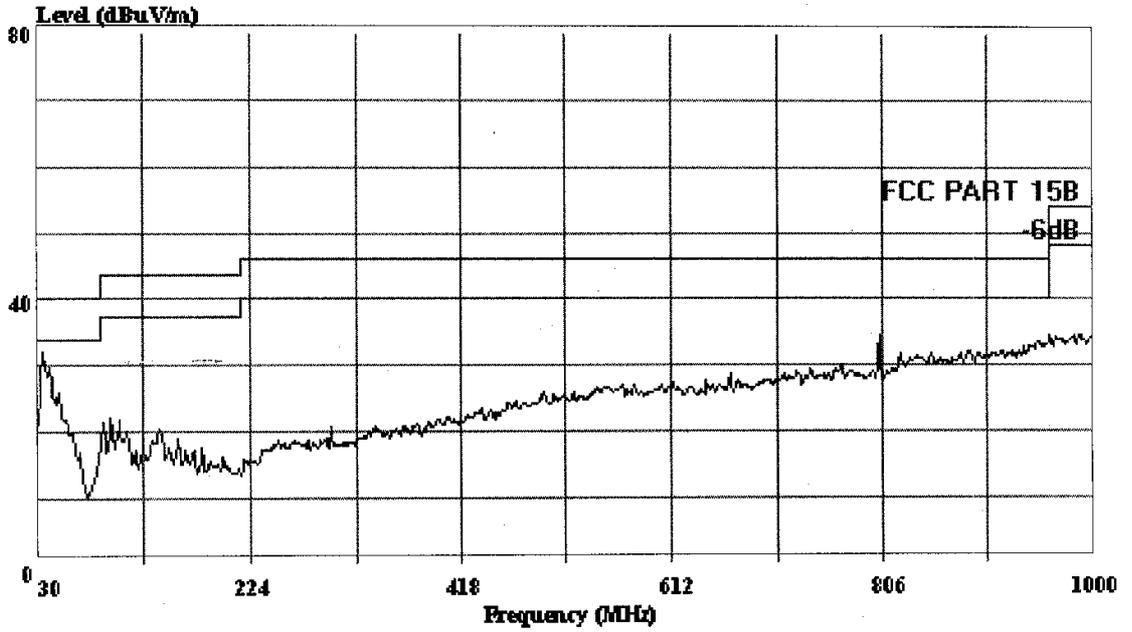

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL.  
 EUT: : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 9V Adaptor 120v 60Hz  
 Test Engineer: Tomv  
 MEMO: : Base CH40




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 122 File#: C:\EMI TEST DATA\T\Telefield.EMI

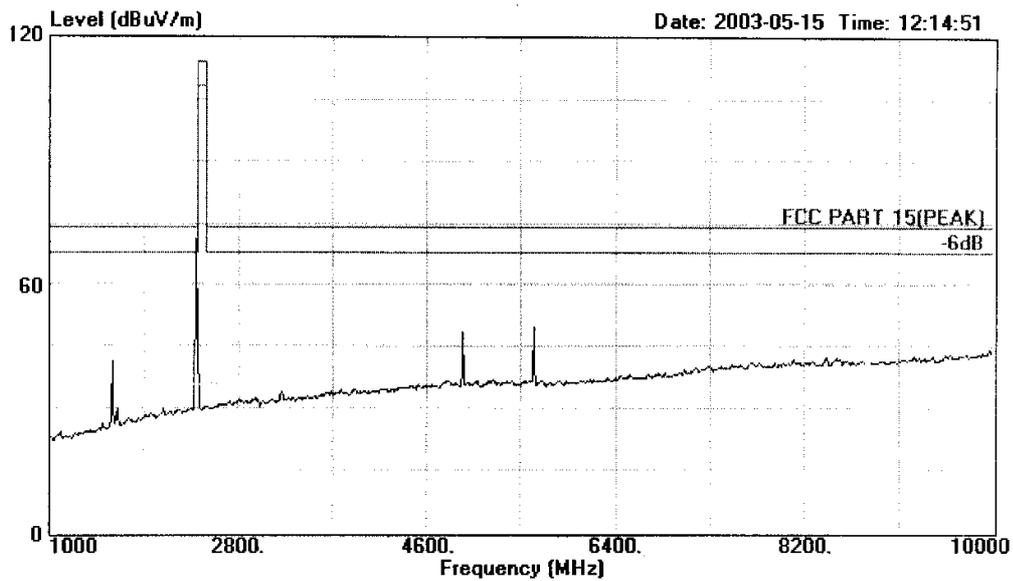

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Base ch1




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
 Shenzhen Science & Industry Park  
 Nantou, Shenzhen, Guangdong, China  
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 111 File#: C:\EMI TEST DATA\T\Telefield.EMI

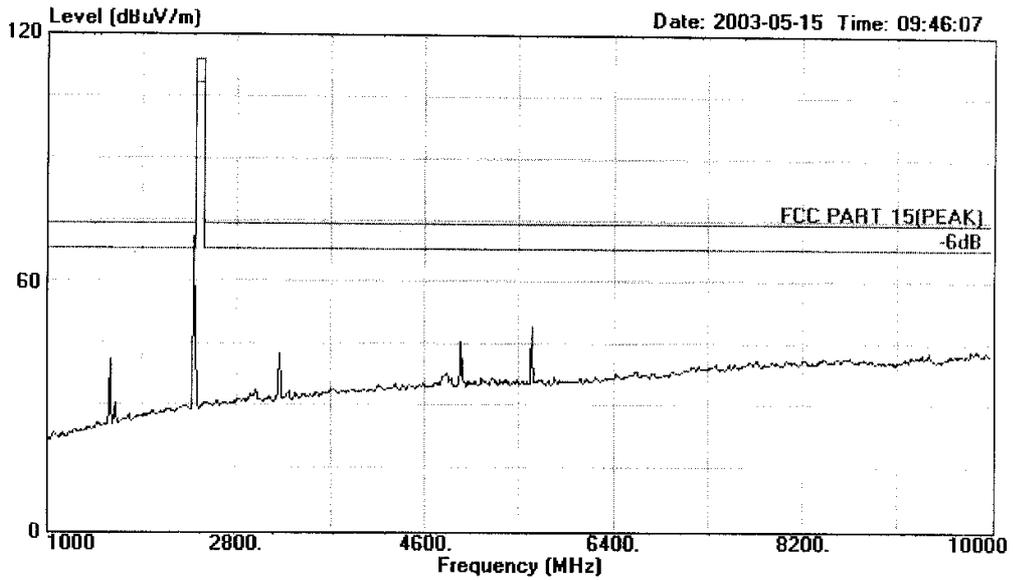

Site : 1# Chamber  
 Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL  
 EUT : 2.4G Clock Radio Cordless  
 M/N : GH3060  
 Power : DC 9V Adaptor 120V 60Hz  
 Test Engineer : Tomy  
 Memo : Base ch1




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 125 File#: C:\EMI TEST DATA\T\Telefield.EMI

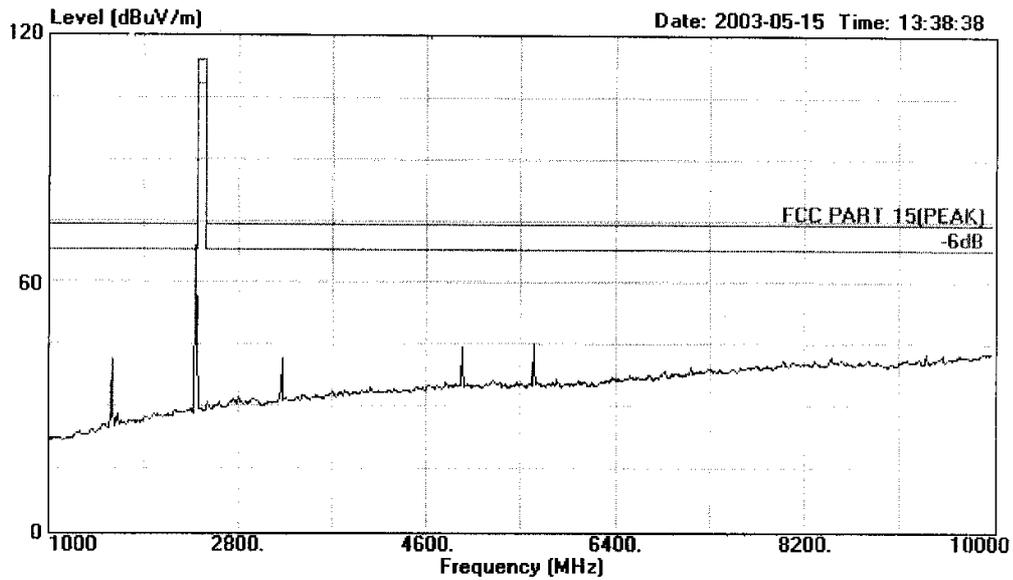

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Base ch20




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
 Shenzhen Science & Industry Park  
 Nantou, Shenzhen, Guangdong, China  
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 129 File#: C:\EMI TEST DATA\T\Telefield.EMI

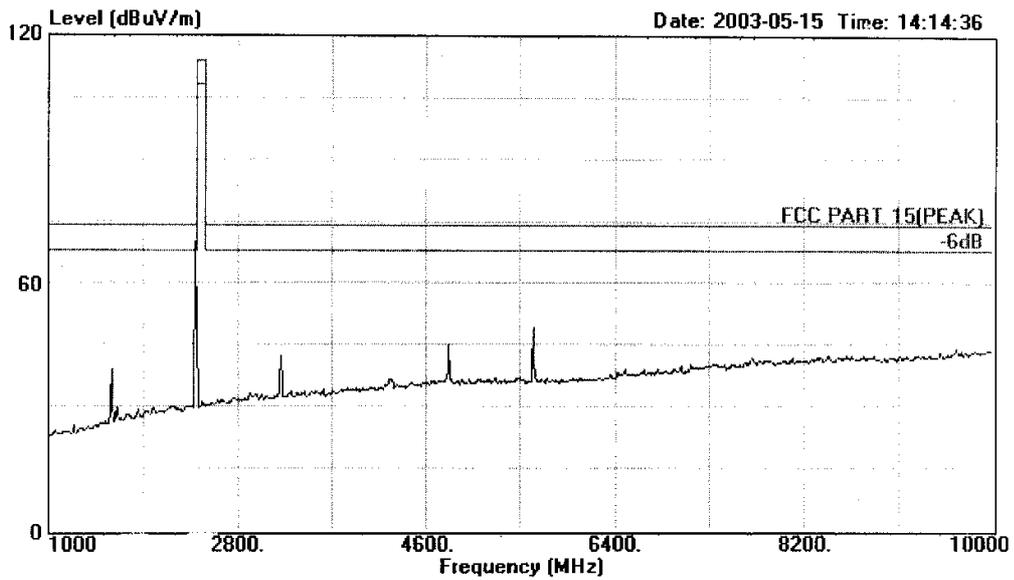

Site : 1# Chamber  
 Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL  
 EUT : 2.4G Clock Radio Cordless  
 M/N : GH3060  
 Power : DC 9V Adaptor 120V 60Hz  
 Test Engineer : Tomy  
 Memo : Base ch20




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 138 File#: C:\EMI TEST DATA\T\Telefield.EMI

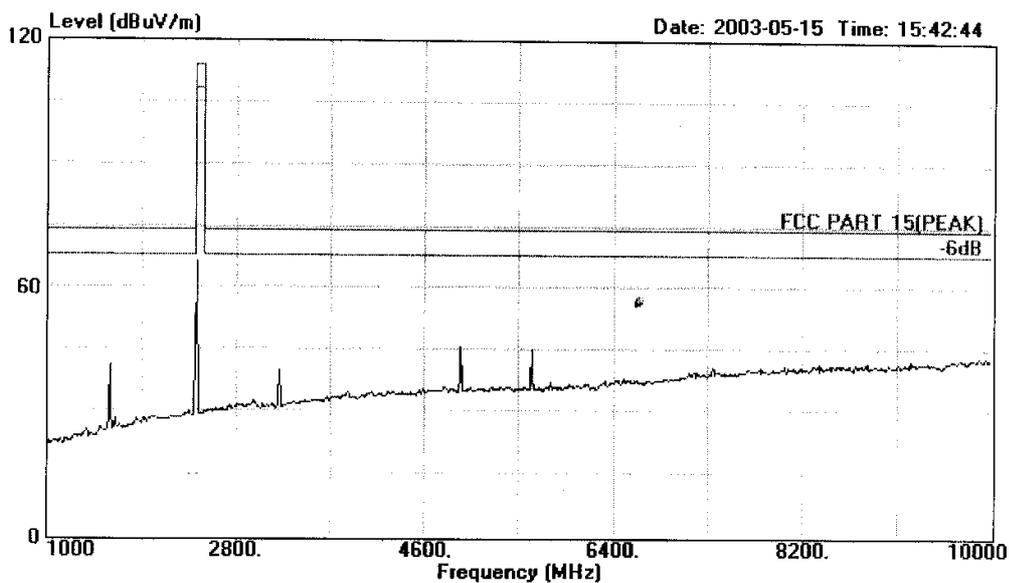

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Base ch40




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 133 File#: C:\EMI TEST DATA\T\Telefield.EMI

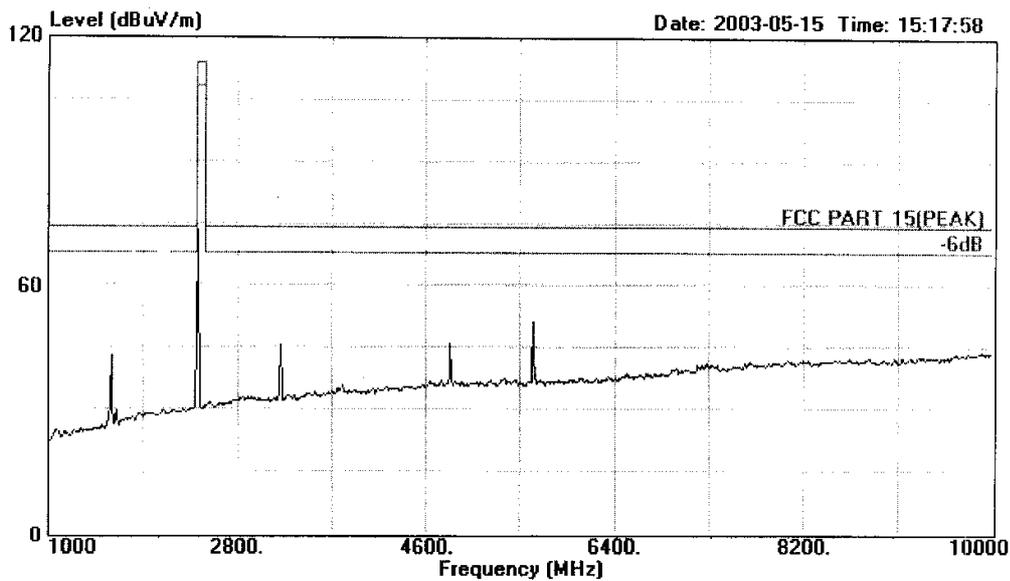

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Base ch40




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
 Shenzhen Science & Industry Park  
 Nantou, Shenzhen, Guangdong, China  
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 121 File#: C:\EMI TEST DATA\T\Telefield.EMI

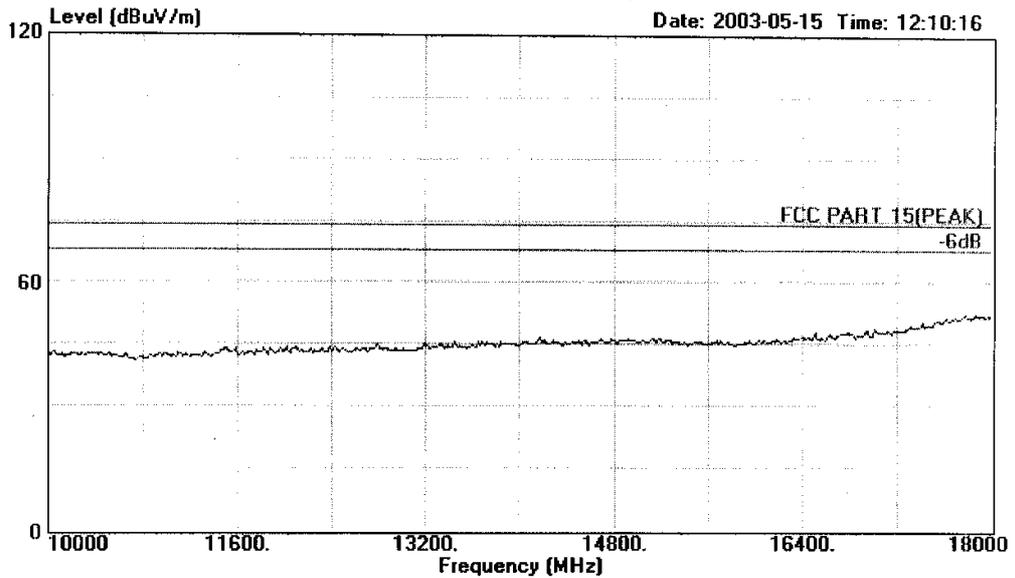

Site : 1# Chamber  
 Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
 EUT : 2.4G Clock Radio Cordless  
 M/N : GH3060  
 Power : DC 9V Adaptor 120V 60Hz  
 Test Engineer : Tomy  
 Memo : Base ch1




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
 Shenzhen Science & Industry Park  
 Mantou, Shenzhen, Guangdong, China  
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 120 File#: C:\EMI TEST DATA\T\Telefield.EMI

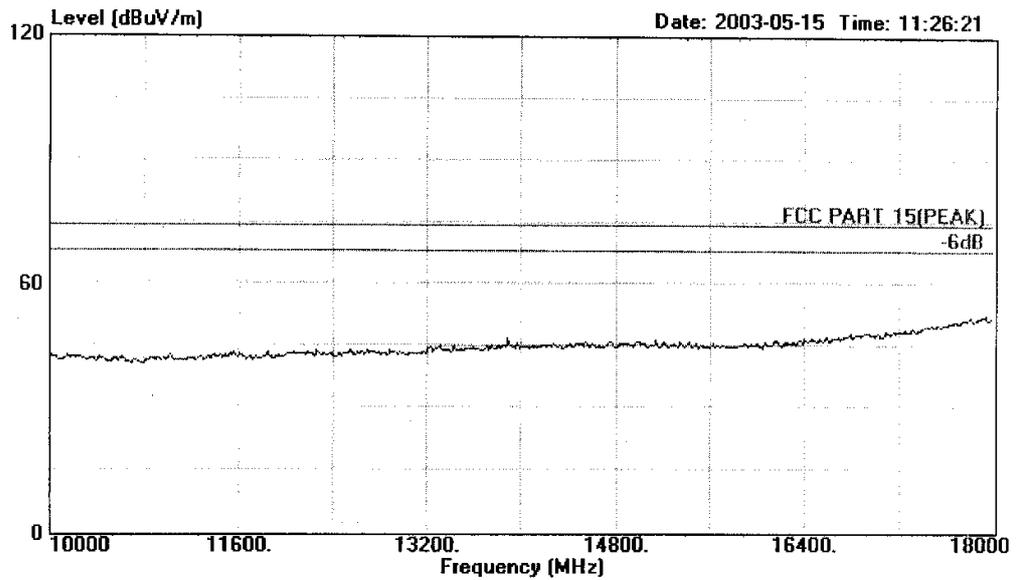

Site : 1# Chamber  
 Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL  
 EUT : 2.4G Clock Radio Cordless  
 M/N : GH3060  
 Power : DC 9V Adaptor 120V 60Hz  
 Test Engineer : Tomy  
 Memo : Base ch1




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 126 File#: C:\EMI TEST DATA\T\Telefield.EMI

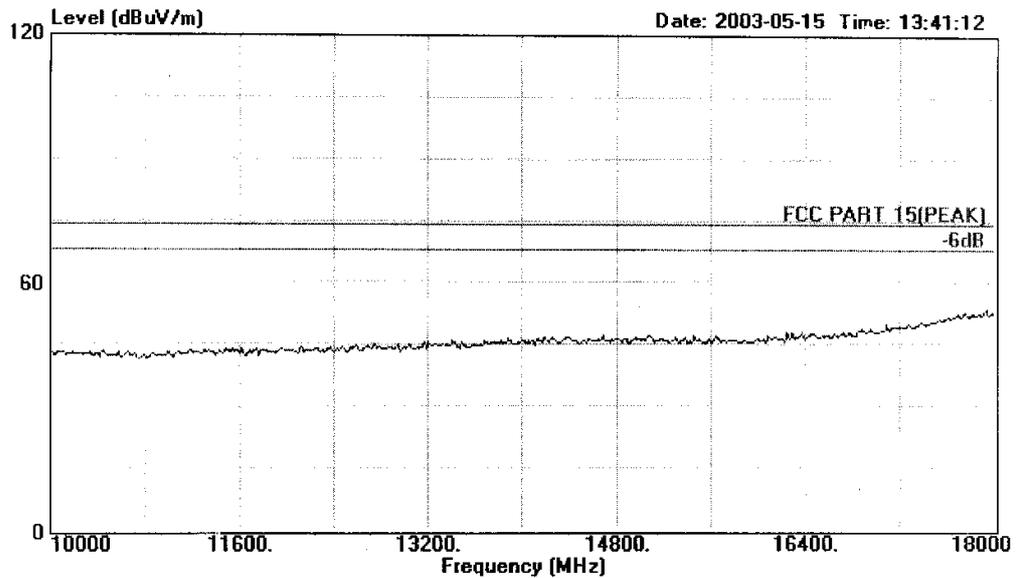

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Base ch20




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 130 File#: C:\EMI TEST DATA\T\Telefield.EMI

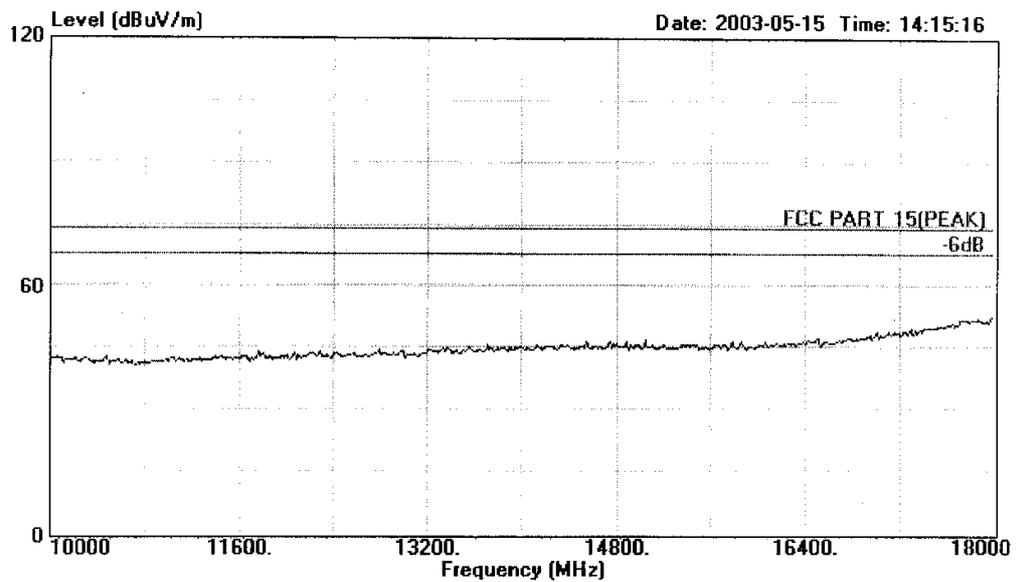

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Base ch20




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
 Shenzhen Science & Industry Park  
 Nantou, Shenzhen, Guangdong, China  
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 137 File#: C:\EMI TEST DATA\T\Telefield.EMI

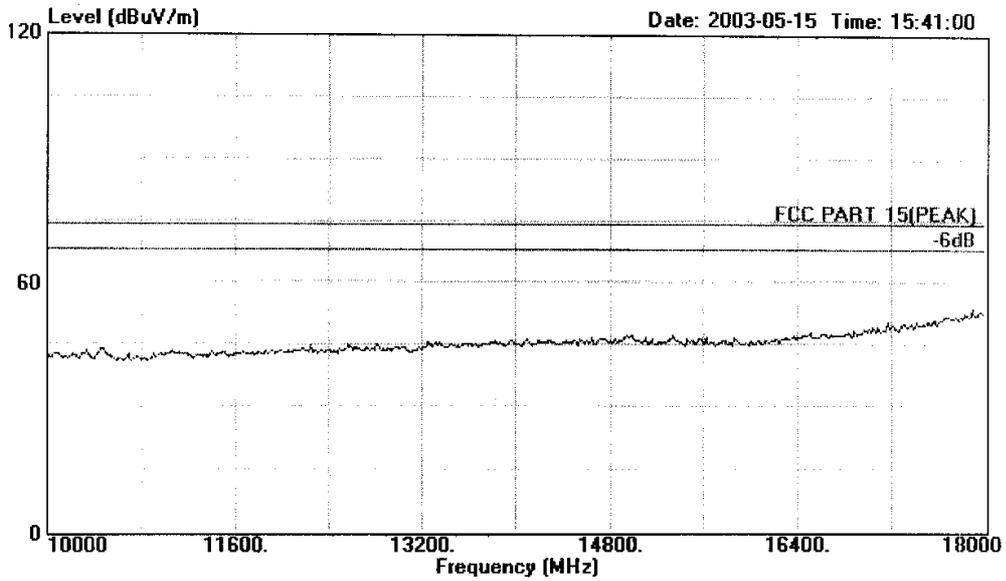

Site : 1# Chamber  
 Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
 EUT : 2.4G Clock Radio Cordless  
 M/N : GH3060  
 Power : DC 9V Adaptor 120V 60Hz  
 Test Engineer : Tomy  
 Memo : Base ch40




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
 Shenzhen Science & Industry Park  
 Nantou, Shenzhen, Guangdong, China  
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 136 File#: C:\EMI TEST DATA\T\Telefield.EMI

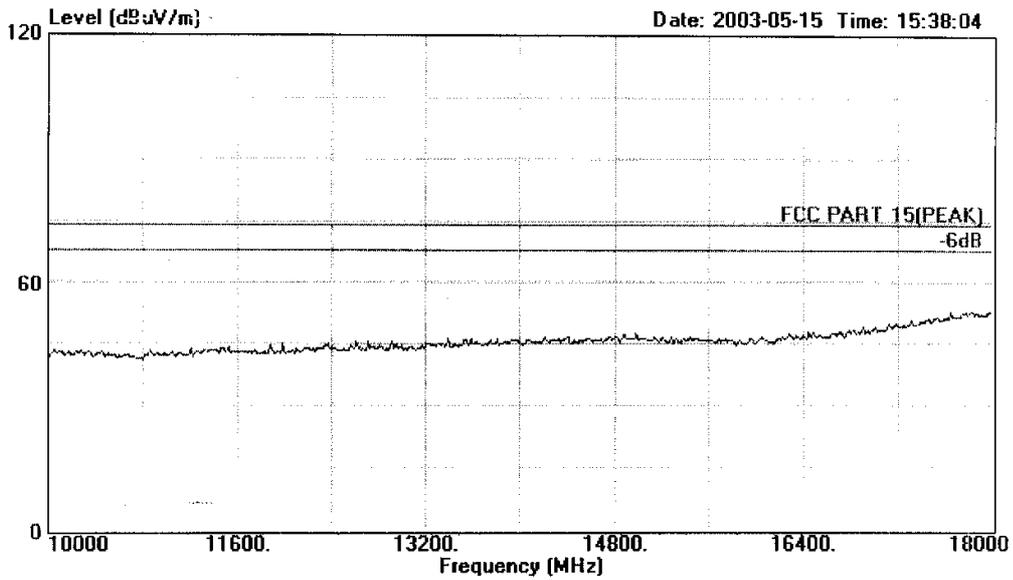

Site : 1# Chamber  
 Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL  
 EUT : 2.4G Clock Radio Cordless  
 M/N : GH3060  
 Power : DC 9V Adaptor 120V 60Hz  
 Test Engineer : Tomy  
 Memo : Base ch40




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 183 File#: C:\EMI TEST DATA\T\Telefield.EMI

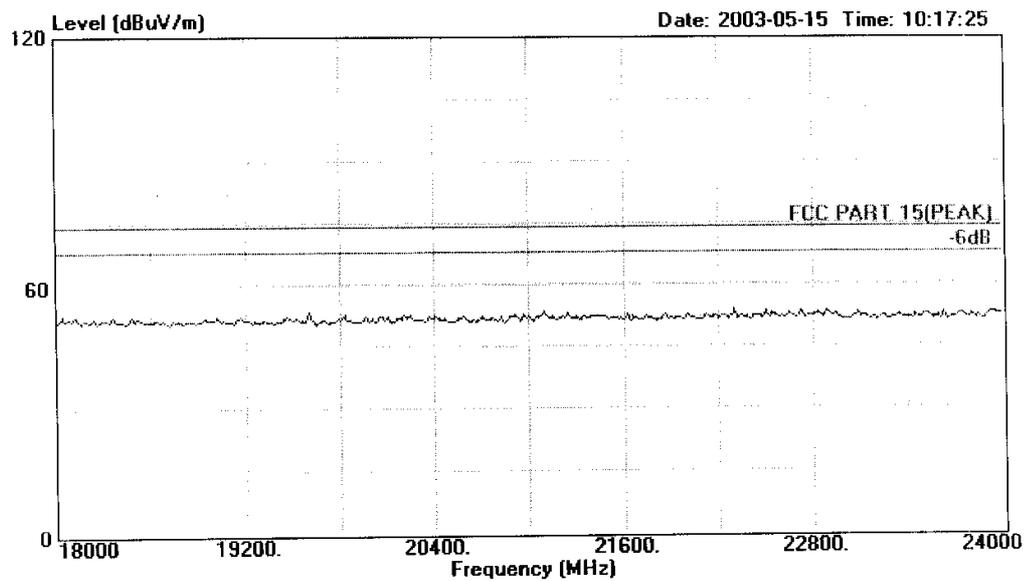

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
' : with CID&Speakerphone  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Base CH1




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
 Shenzhen Science & Industry Park  
 Nantou, Shenzhen, Guangdong, China  
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 184 File#: C:\EMI TEST DATA\T\Telefield.EMI

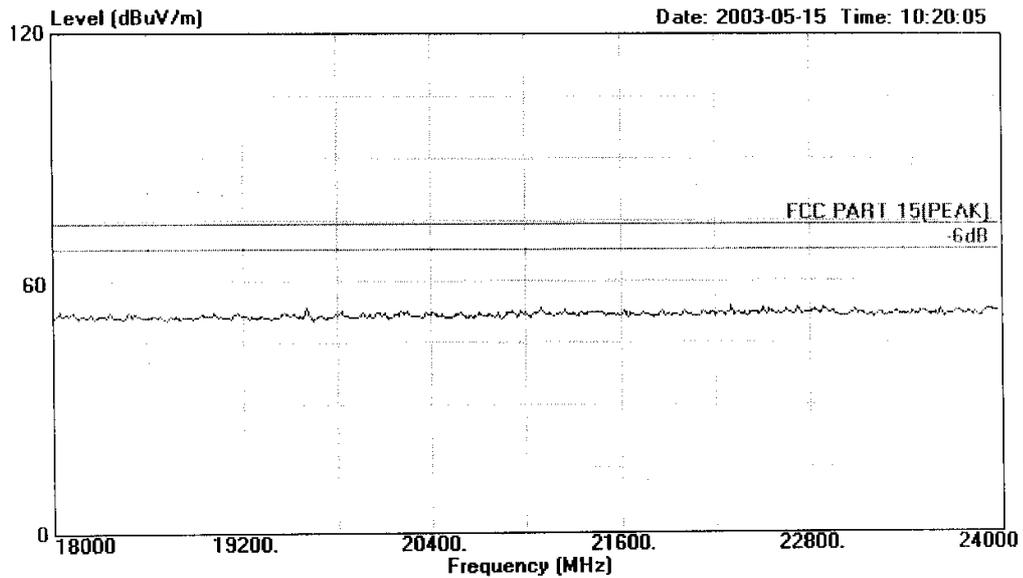

Site : 1# Chamber  
 Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL  
 EUT : 2.4G Clock Radio Cordless  
 : with CID&Speakerphone  
 M/N : GH3060  
 Power : DC 9V Adaptor 120V 60Hz  
 Test Engineer : Tomy  
 Memo : Base CH1




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 182 File#: C:\EMI TEST DATA\T\Telefield.EMI

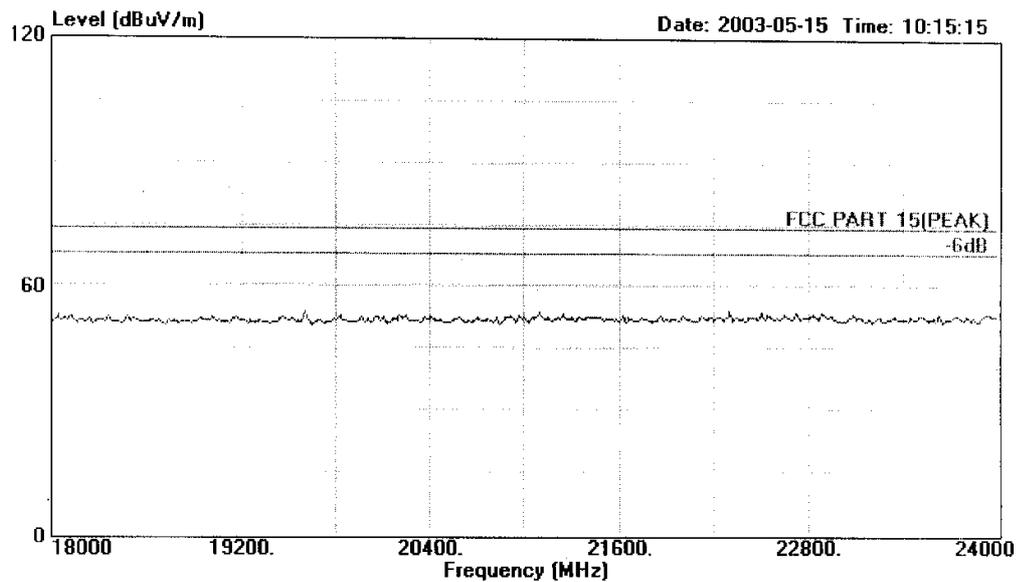

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
' : with CID&Speakerphone  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Base CH20




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 181 File#: C:\EMI TEST DATA\T\Telefield.EMI

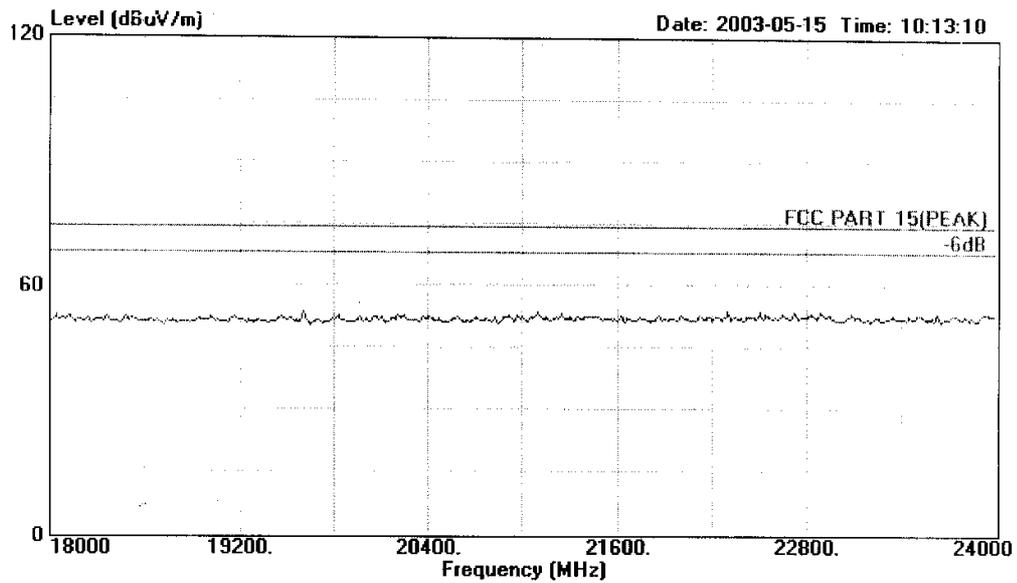

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL  
EUT : 2.4G Clock Radio Cordless  
 : with CID&Speakerphone  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Base CH20




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Mantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 179 File#: C:\EMI TEST DATA\T\Telefield.EMI

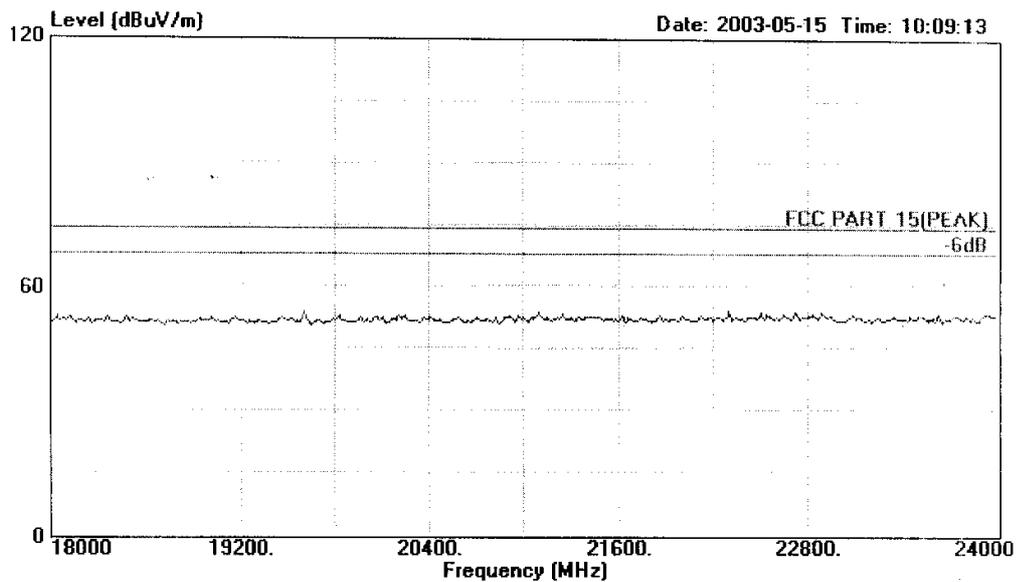

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
 : with CID&Speakerphone  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Base CH40




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 180 File#: C:\EMI TEST DATA\T\Telefield.EMI

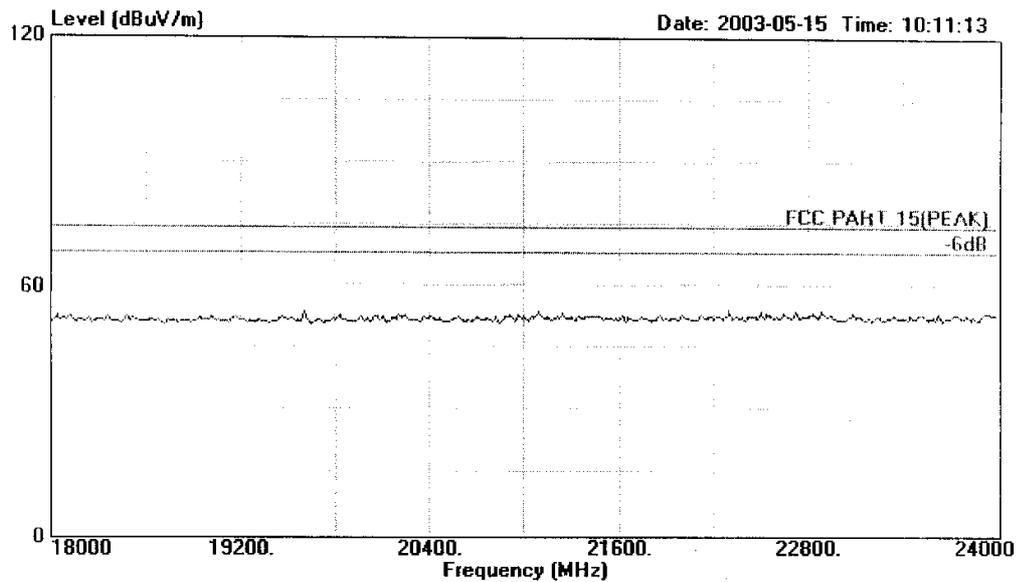


Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL  
EUT : 2.4G Clock Radio Cordless  
' : with CID&Speakerphone  
M/N : GH3060  
Power : DC 9V Adaptor 120V 60Hz  
Test Engineer : Tomy  
Memo : Base CH40



Shenzhen Science & Ind. Park  
 Tel: 0755-26639495~7  
 Fax: 0755-26632877

Data#: 318 File#: TELEFIELD LIMITED.FMT Date: 2003-05-19 Time: 09:02:03

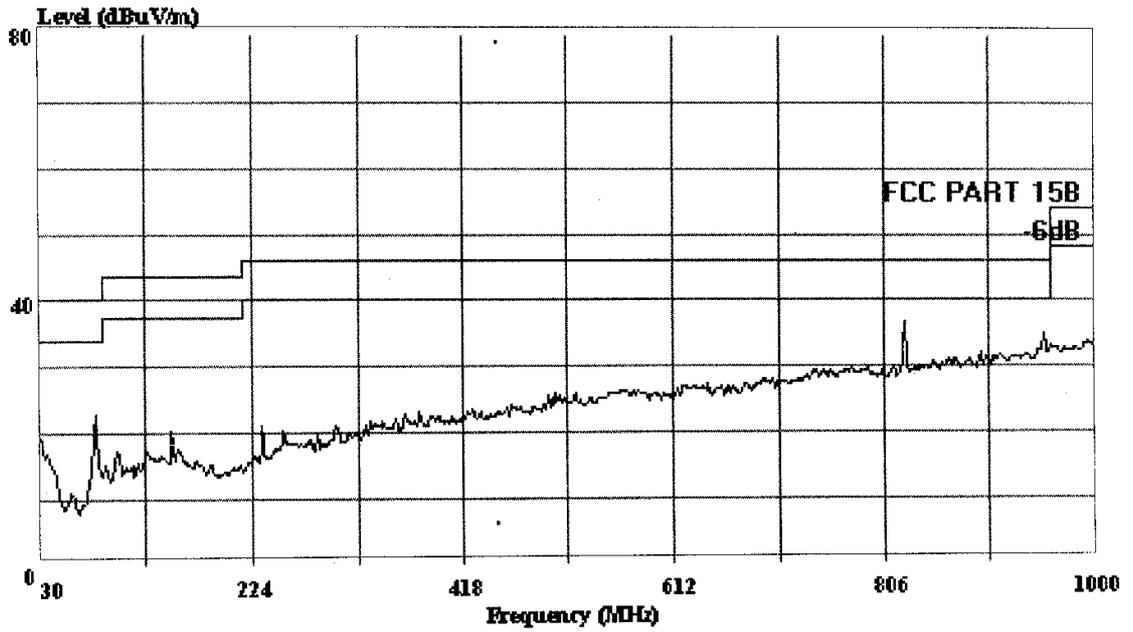

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL  
 EUT: : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 3.6V  
 Test Engineer: Tomv  
 MEMO: : Handset CH1




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park  
 Tel: 0755-26639495~7  
 Fax: 0755-26632877

Data#: 319 File#: TELEFIELD LIMITED.EMI

Date: 2003-05-19 Time: 09:03:27

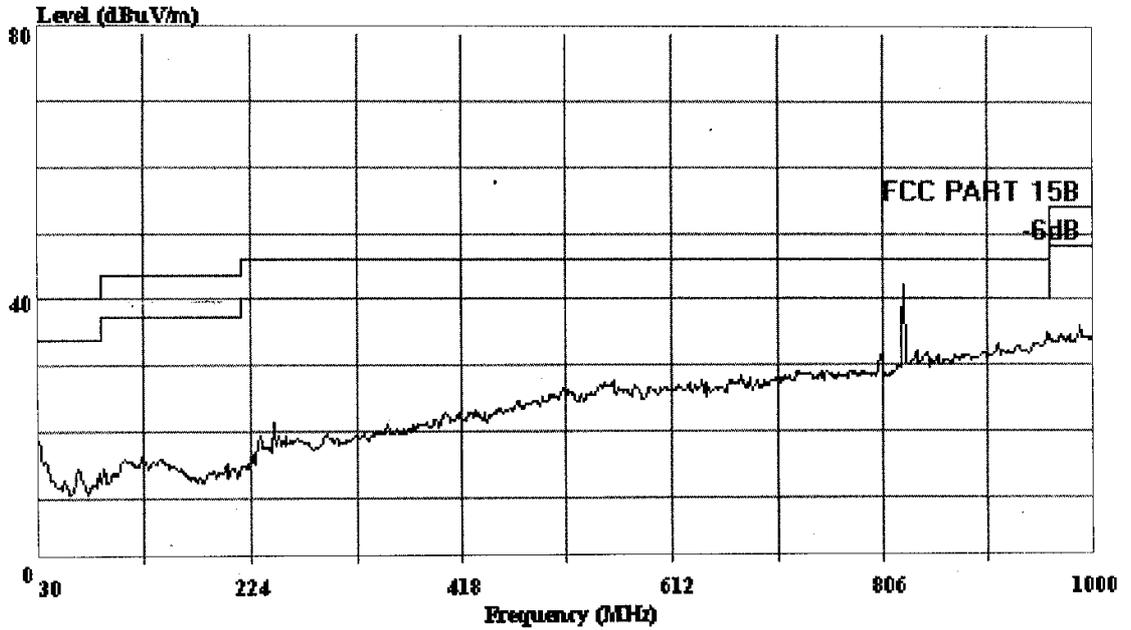

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL  
 EUT: : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 3.6V  
 Test Engineer: Tomv  
 MEMO: : Handset CH1




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park  
 Tel: 0755-26639495~7  
 Fax: 0755-26632877

Data#: 321 File#: TELEFIELD LIMITED.FMT

Date: 2003-05-19 Time: 09:06:38

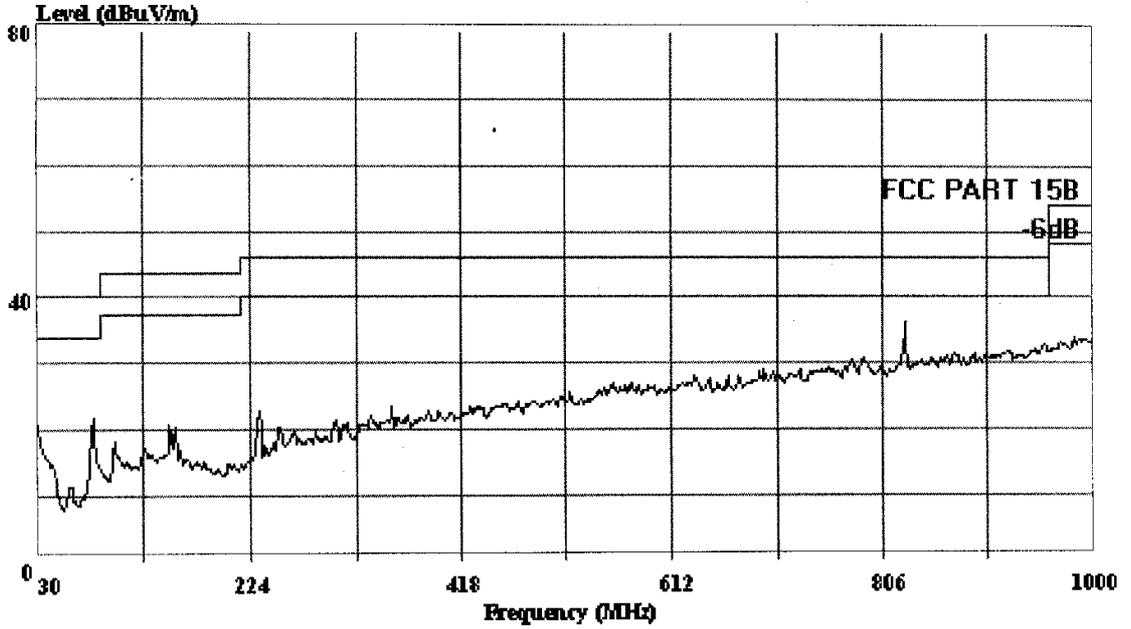

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL  
 RUT: : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 3.6V  
 Test Engineer: Tomv  
 MEMO: : Handset CH20




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park  
 Tel: 0755-26639495~7  
 Fax: 0755-26632877

Data#: 320 File#: TELEFIELD LIMITED.EMI

Date: 2003-05-19 Time: 09:05:15

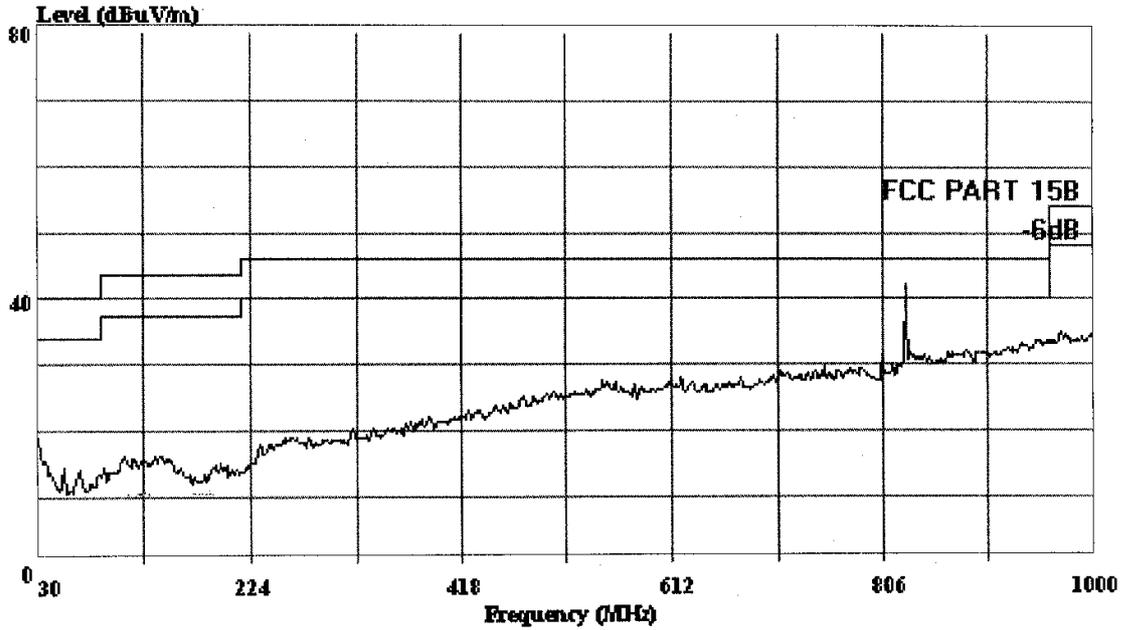

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL  
 EUT: : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 3.6V  
 Test Engineer: Tomv  
 MEMO: : Handset CH20




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park  
Tel: 0755-26639495~7  
Fax: 0755-26632877

Data#: 322 File#: TELEFIELD LIMITED.EMI

Date: 2003-05-19 Time: 09:08:28

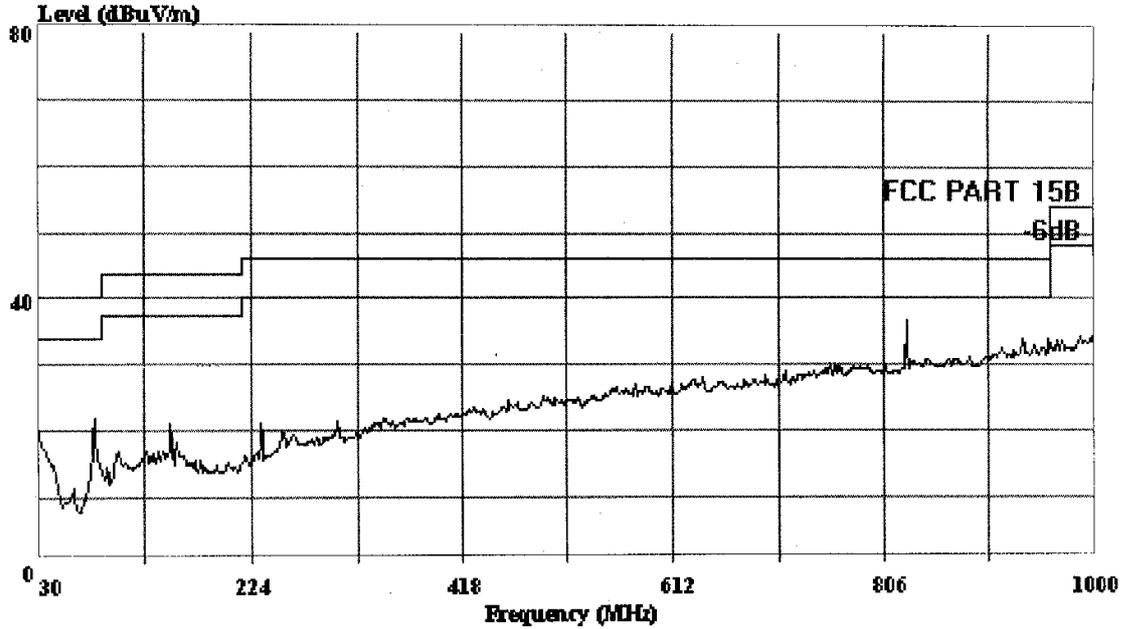

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL  
RUT: : 2.4GHz Clock Radio Cordless Phone  
: with CID&Speakerphone  
M/N: : GH3060  
Power: : DC 3.6V  
Test Engineer: Tomv  
MEMO: : Handset CH40




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park  
Tel: 0755-26639495~7  
Fax: 0755-26632877

Data#: 323 File#: TELEFIELD LIMITED.FMT

Date: 2003-05-19 Time: 09:09:39

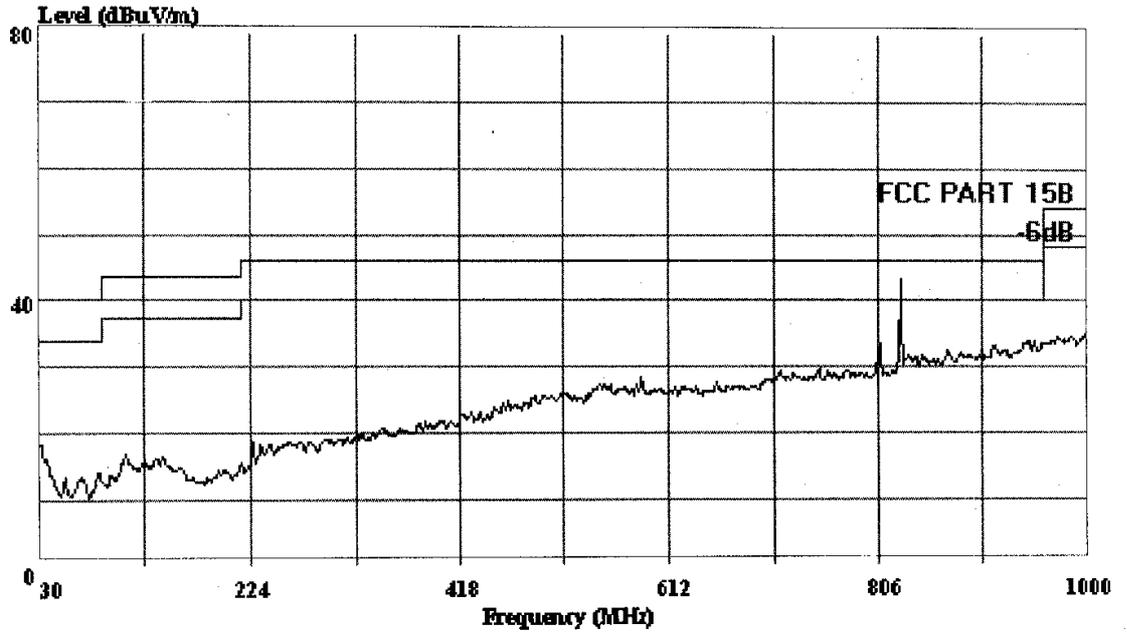

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL.  
 EUT: : 2.4GHz Clock Radio Cordless Phone  
 : with CID&Speakerphone  
 M/N: : GH3060  
 Power: : DC 3.6V  
 Test Engineer: Tomv  
 MEMO: : Handset CH40




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
 Shenzhen Science & Industry Park  
 Nantou, Shenzhen, Guangdong, China  
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 148 File#: C:\EMI TEST DATA\T\Telefield.EMI

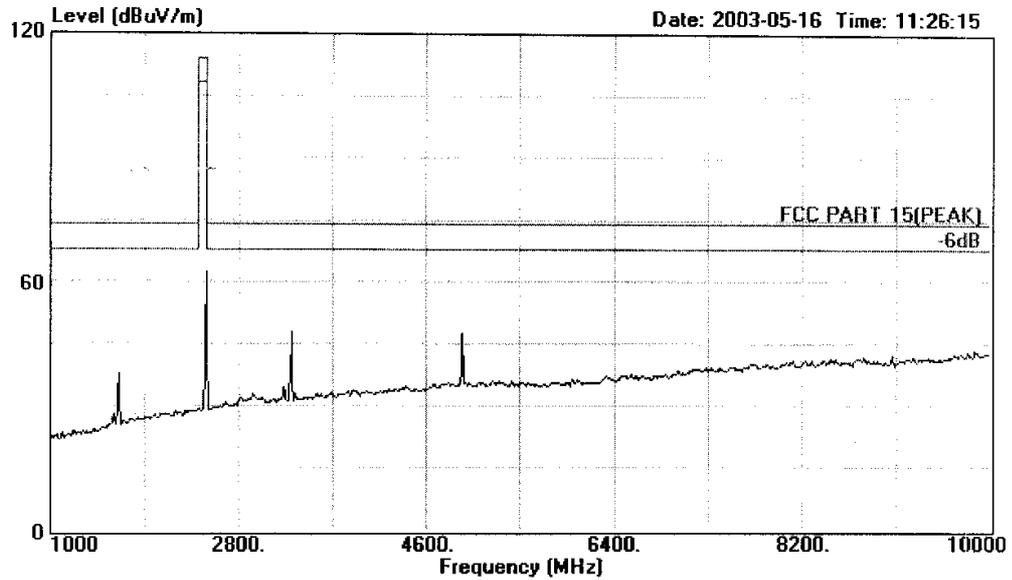

Site : 1# Chamber  
 Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
 EUT : 2.4G Clock Radio Cordless  
 M/N : GH3060  
 Power : DC 3.6V  
 Test Engineer : Tomy  
 Memo : Handset CH1




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 143 File#: C:\EMI TEST DATA\T\Telefield.EMI

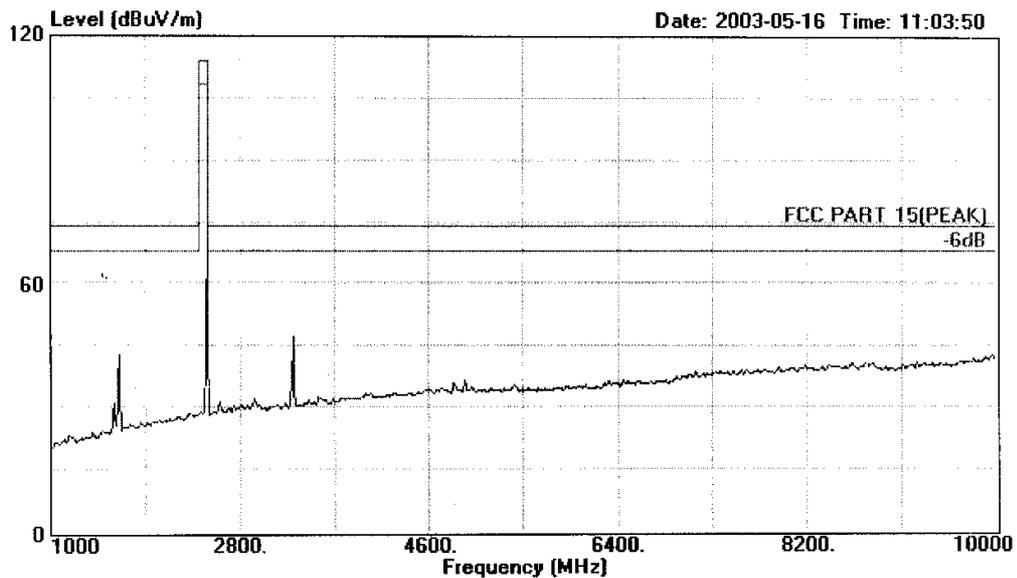

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 3.6V  
Test Engineer : Tomy  
Memo : Handset CH1




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 151 File#: C:\EMI TEST DATA\T\Telefield.EMI

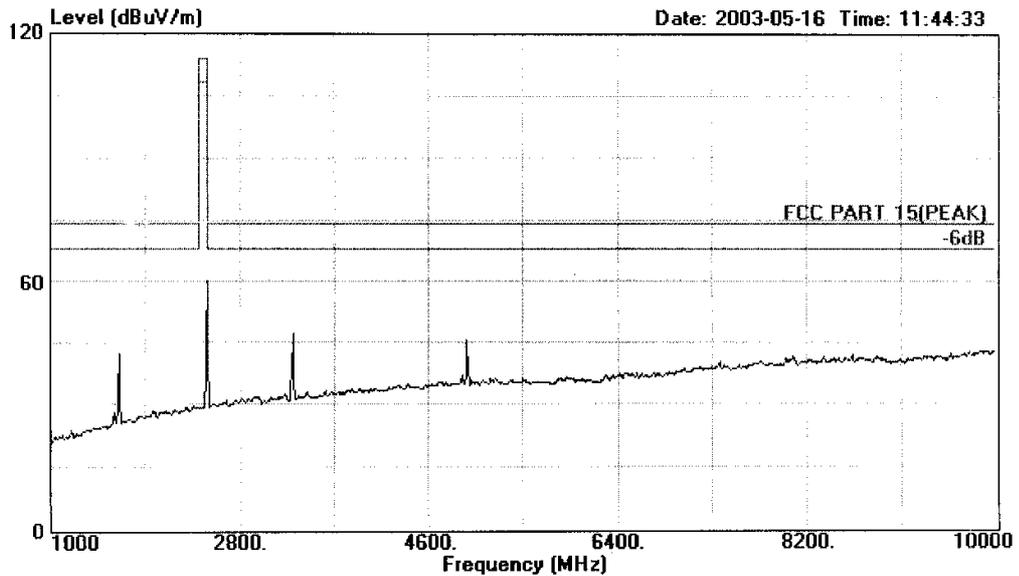

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 3.6V  
Test Engineer : Tomy  
Memo : Handset CH20




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
 Shenzhen Science & Industry Park  
 Nantou, Shenzhen, Guangdong, China  
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 156 File#: C:\EMI TEST DATA\T\Telefield.EMI

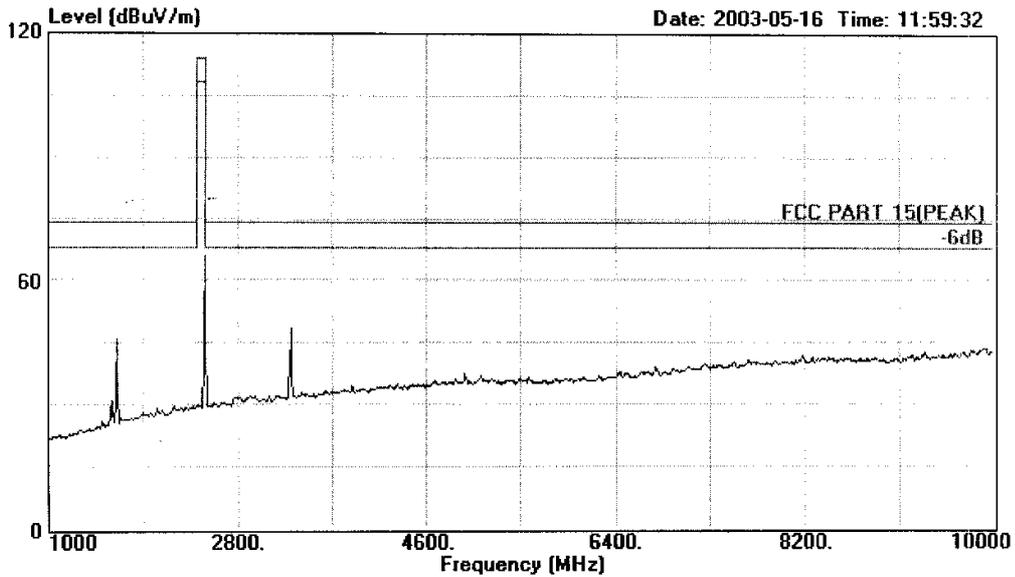

Site : 1# Chamber  
 Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL  
 EUT : 2.4G Clock Radio Cordless  
 M/N : GH3060  
 Power : DC 3.6V  
 Test Engineer : Tomy  
 Memo : Handset CH20




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 164 File#: C:\EMI TEST DATA\T\Telefield.EMI

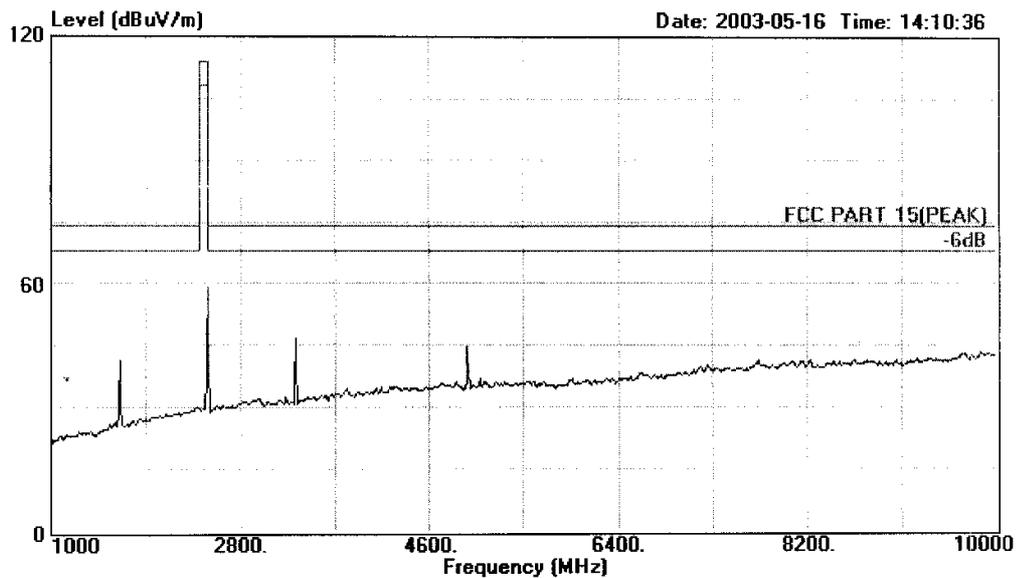

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 3.6V  
Test Engineer : Tomy  
Memo : Handset CH40




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 159 File#: C:\EMI TEST DATA\T\Telefield.EMI

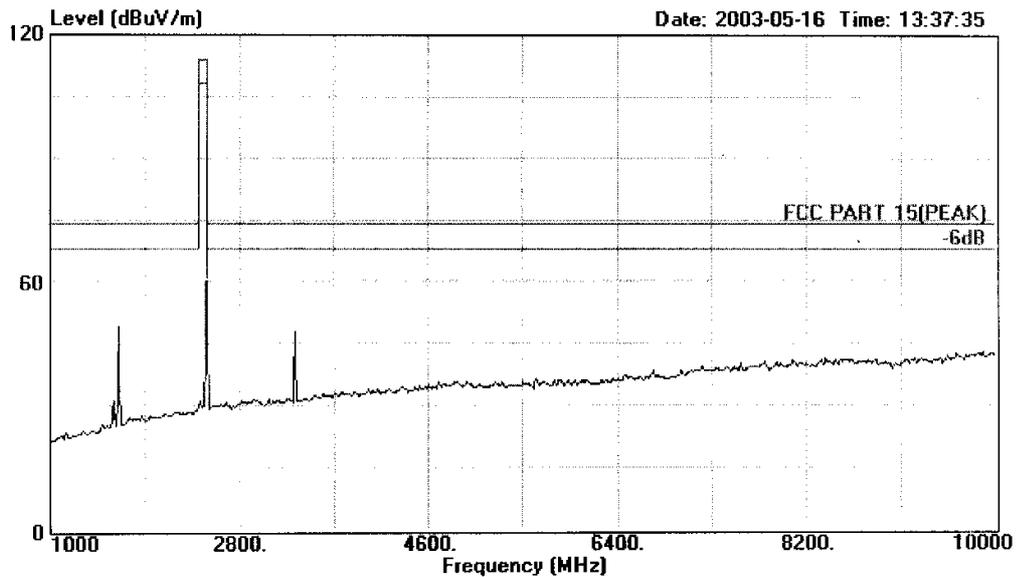

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 3.6V  
Test Engineer : Tomy  
Memo : Handset CH40




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
 Shenzhen Science & Industry Park  
 Nantou, Shenzhen, Guangdong, China  
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 147 File#: C:\EMI TEST DATA\T\Telefield.EMI

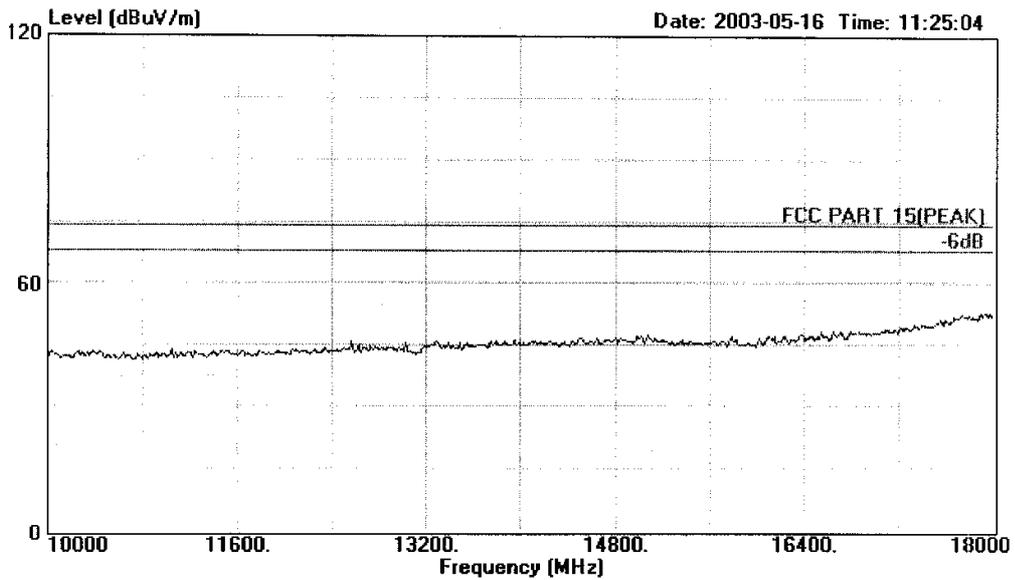

Site : 1# Chamber  
 Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
 EUT : 2.4G Clock Radio Cordless  
 M/N : GH3060  
 Power : DC 3.6V  
 Test Engineer : Tomy  
 Memo : Handset CH1




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
 Shenzhen Science & Industry Park  
 Nantou, Shenzhen, Guangdong, China  
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 146 File#: C:\EMI TEST DATA\T\Telefield.EMI

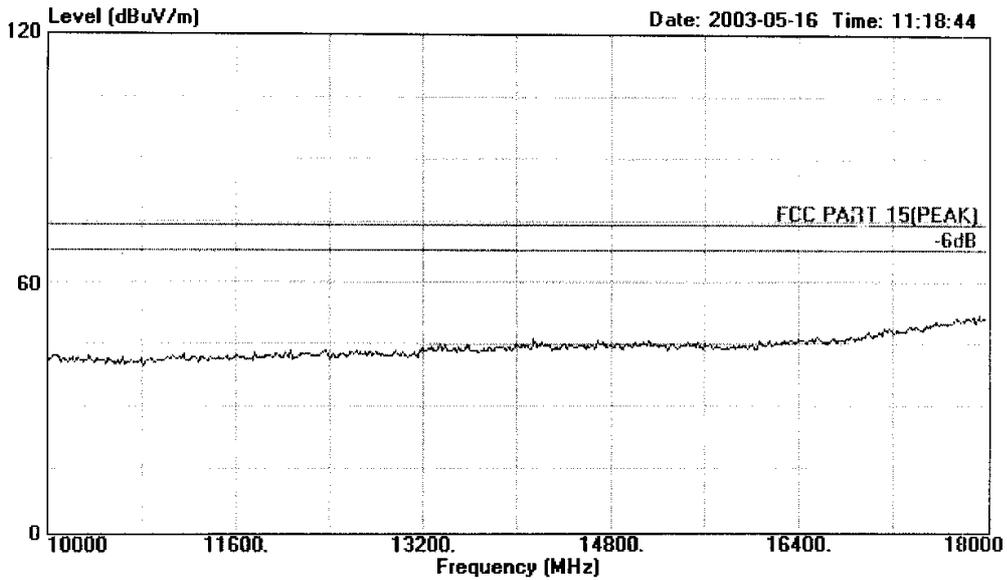

Site : 1# Chamber  
 Condition : FCC PART 15 (PEAK) 3m 3115FACTOR VERTICAL  
 EUT : 2.4G Clock Radio Cordless  
 M/N : GH3060  
 Power : DC 3.6V  
 Test Engineer : Tomy  
 Memo : Handset CH1




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
 Shenzhen Science & Industry Park  
 Nantou, Shenzhen, Guangdong, China  
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 154 File#: C:\EMI TEST DATA\T\Telefield.EMI

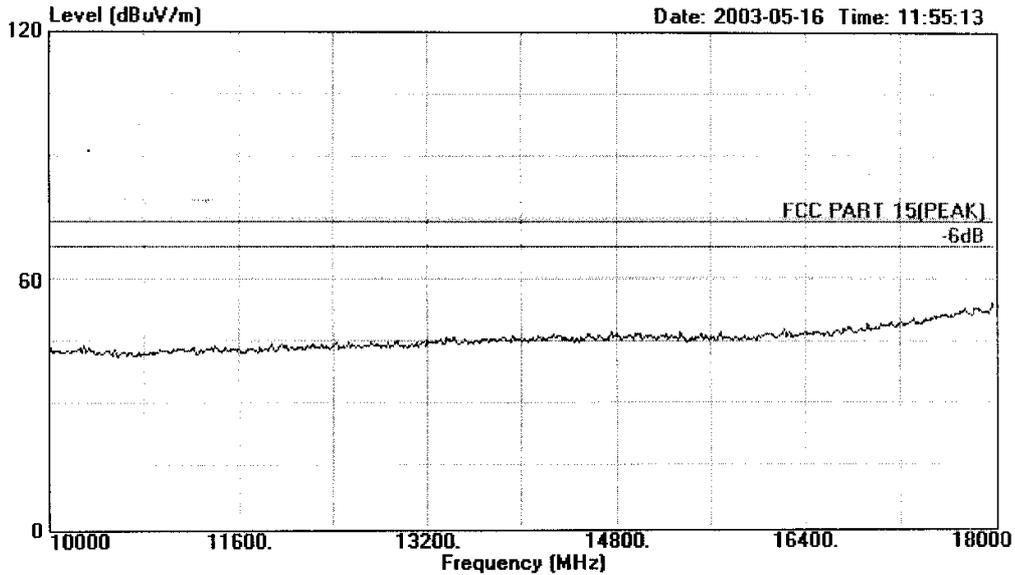


Site : 1# Chamber  
 Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
 EUT : 2.4G Clock Radio Cordless  
 M/N : GH3060  
 Power : DC 3.6V  
 Test Engineer : Tomy  
 Memo : Handset CH20



信華科技(深圳)有限公司  
 AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
 Shenzhen Science & Industry Park  
 Nantou, Shenzhen, Guangdong, China  
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 155 File#: C:\EMI TEST DATA\T\Telefield.EMI

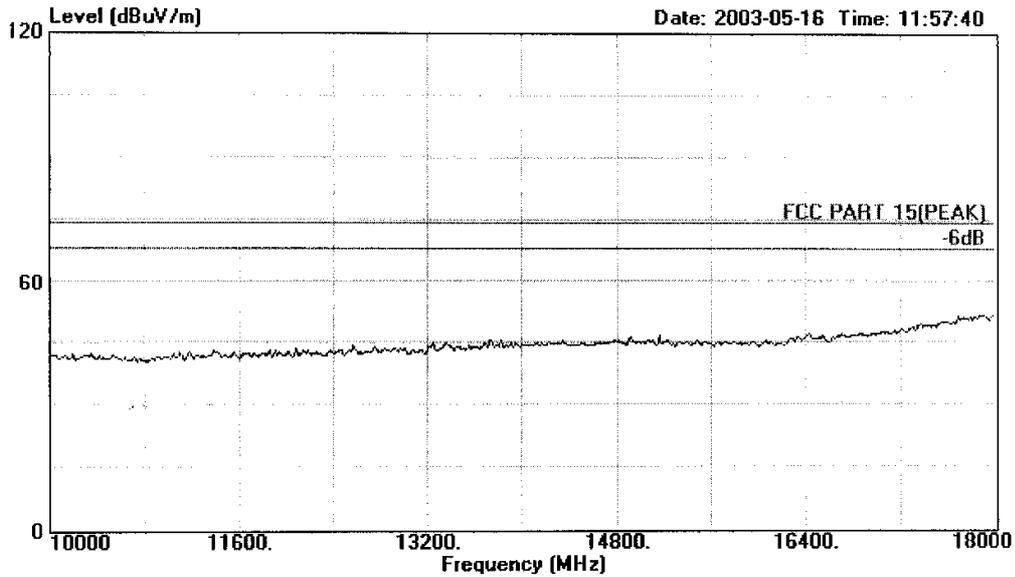

Site : 1# Chamber  
 Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL  
 EUT : 2.4G Clock Radio Cordless  
 M/N : GH3060  
 Power : DC 3.6V  
 Test Engineer : Tomy  
 Memo : Handset CH20




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
 Shenzhen Science & Industry Park  
 Nantou, Shenzhen, Guangdong, China  
 Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 163 File#: C:\EMI TEST DATA\T\Telefield.EMI

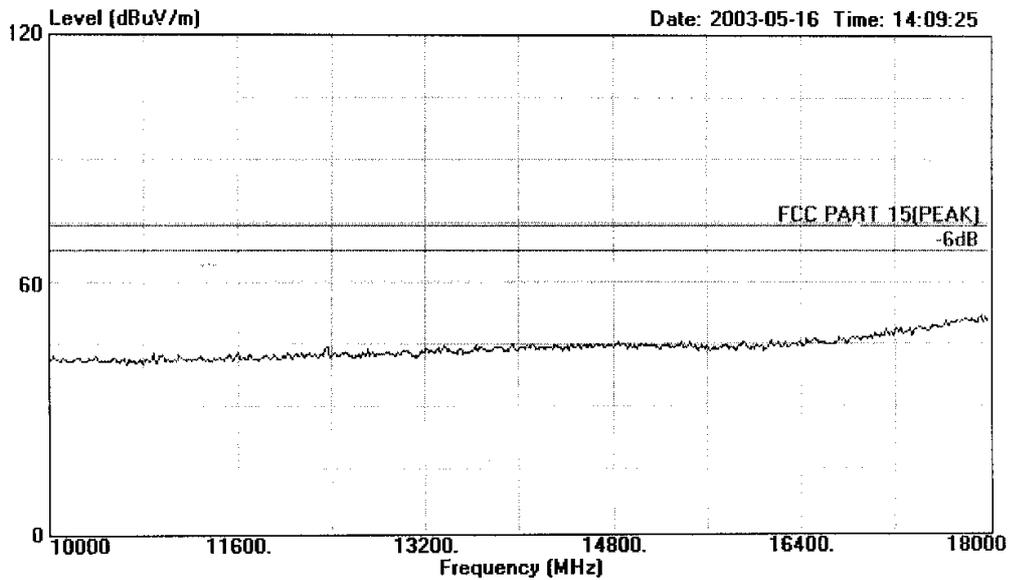

Site : 1# Chamber  
 Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
 EUT : 2.4G Clock Radio Cordless  
 M/N : GH3060  
 Power : DC 3.6V  
 Test Engineer : Tomy  
 Memo : Handset CH40




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 162 File#: C:\EMI TEST DATA\T\Telefield.EMI

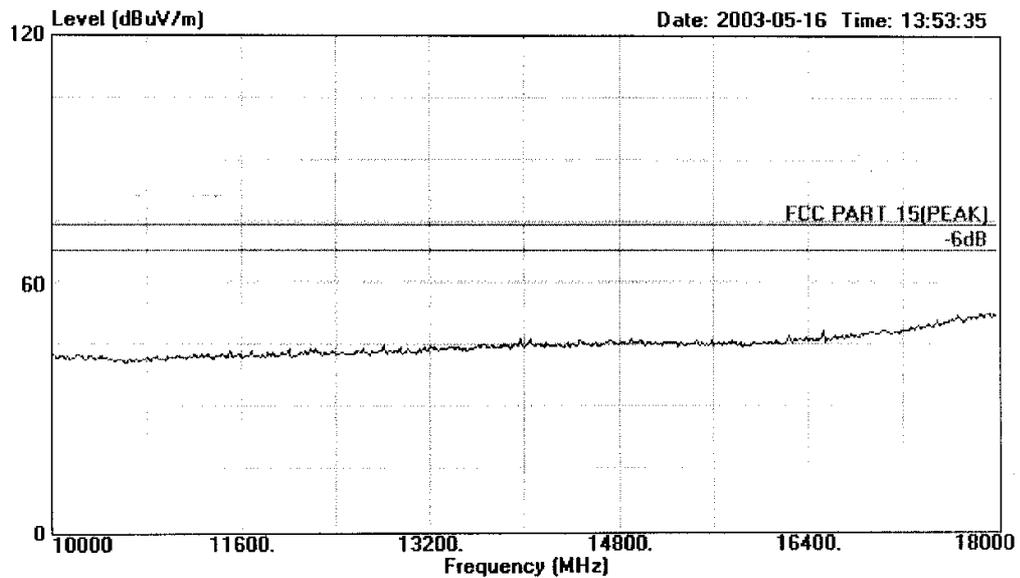

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL  
EUT : 2.4G Clock Radio Cordless  
M/N : GH3060  
Power : DC 3.6V  
Test Engineer : Tomy  
Memo : Handset CH40




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 178 File#: C:\EMI TEST DATA\T\Telefield.EMI

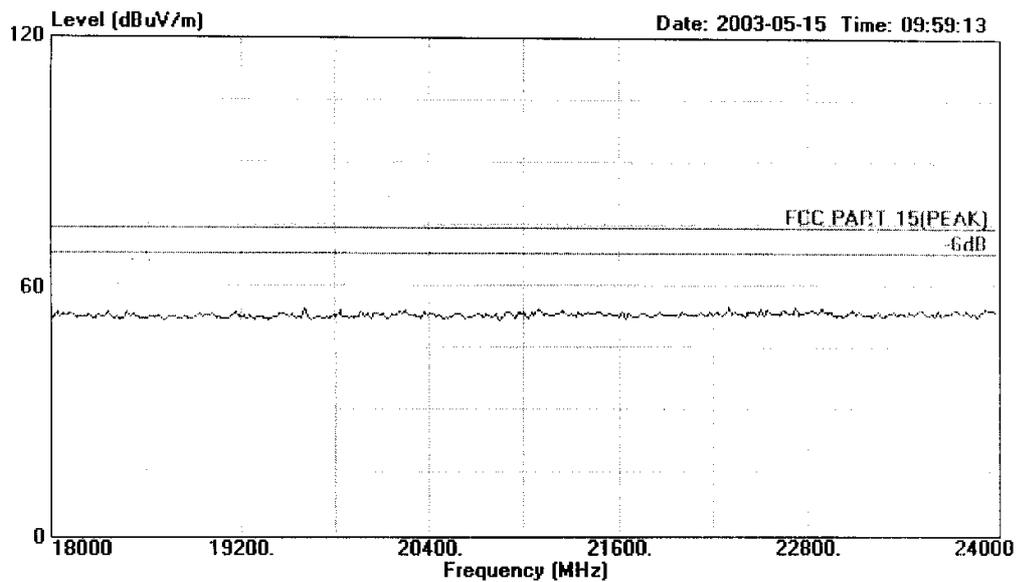

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
 : with CID&Speakerphone  
M/N : GH3060  
Power : DC 3.6V  
Test Engineer : Tomy  
Memo : Handset CH1




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 177 File#: C:\EMI TEST DATA\T\Telefield.EMI

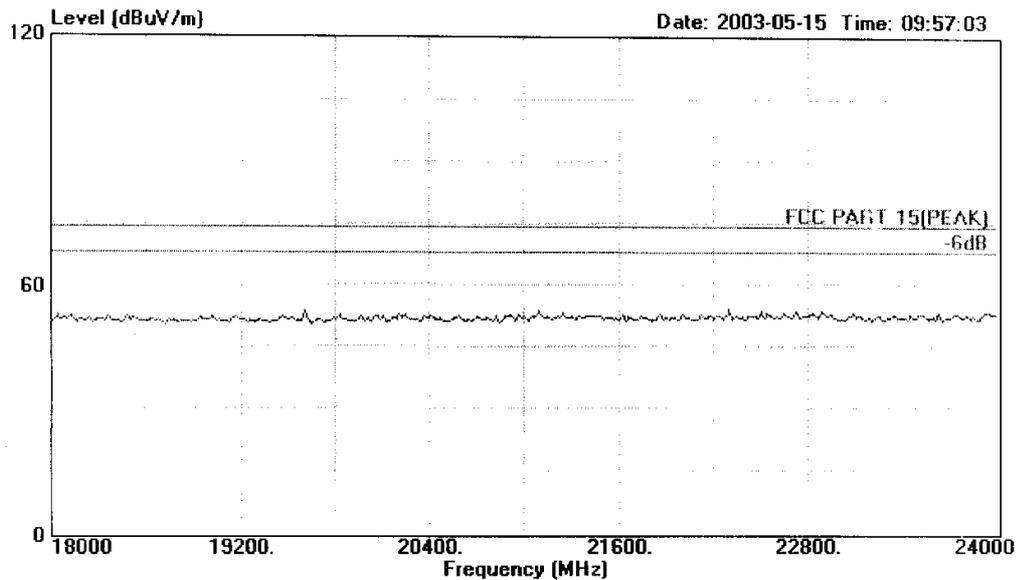

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL  
EUT : 2.4G Clock Radio Cordless  
' : with CID&Speakerphone  
M/N : GH3060  
Power : DC 3.6V  
Test Engineer : Tomy  
Memo : Handset CH1




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 175 File#: C:\EMI TEST DATA\T\Telefield.EMI

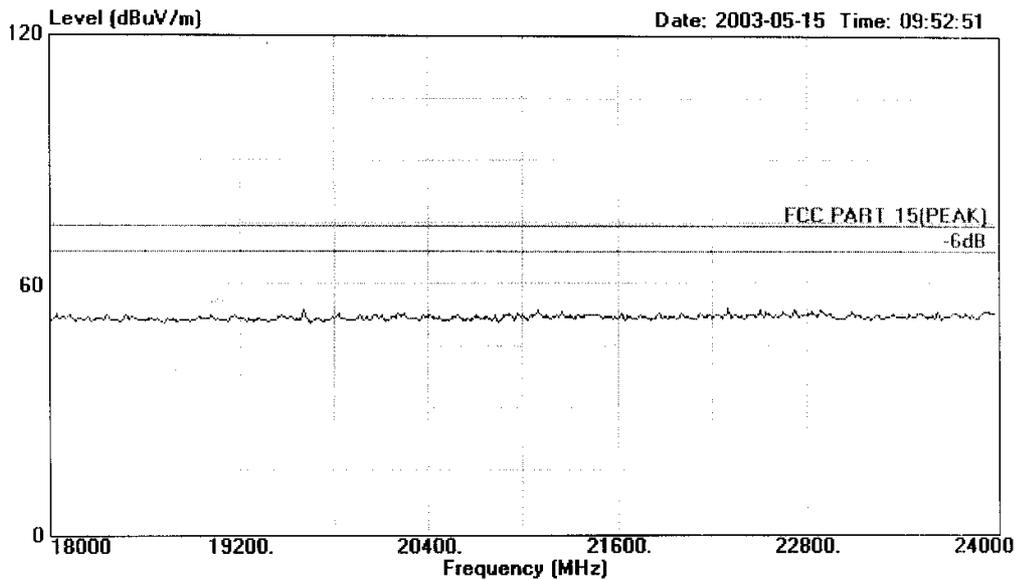

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
 : with CID&Speakerphone  
M/N : GH3060  
Power : DC 3.6V  
Test Engineer : Tomy  
Memo : Handset CH20




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 176 File#: C:\EMI TEST DATA\T\Telefield.EMI

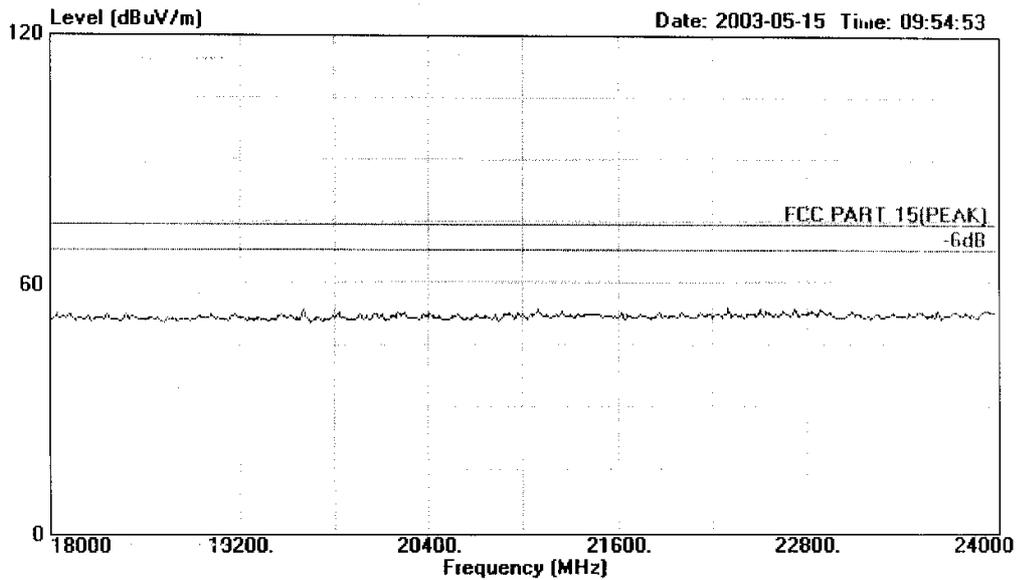

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL  
EUT : 2.4G Clock Radio Cordless  
' : with CID&Speakerphone  
M/N : GH3060  
Power : DC 3.6V  
Test Engineer : Tomy  
Memo : Handset CH20




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 174 File#: C:\EMI TEST DATA\T\Telefield.EMI

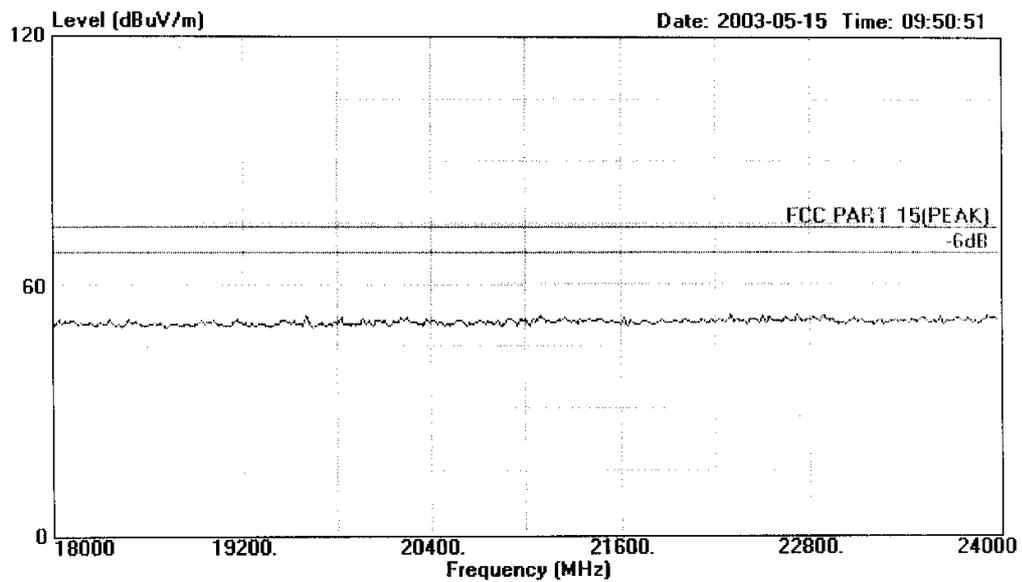

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL  
EUT : 2.4G Clock Radio Cordless  
' : with CID&Speakerphone  
M/N : GH3060  
Power : DC 3.6V  
Test Engineer : Tomy  
Memo : Handset CH40




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co.,Ltd.

No. 6, Ke Feng Road, Block 52,  
Shenzhen Science & Industry Park  
Nantou, Shenzhen, Guangdong, China  
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 173 File#: C:\EMI TEST DATA\T\Telefield.EMI

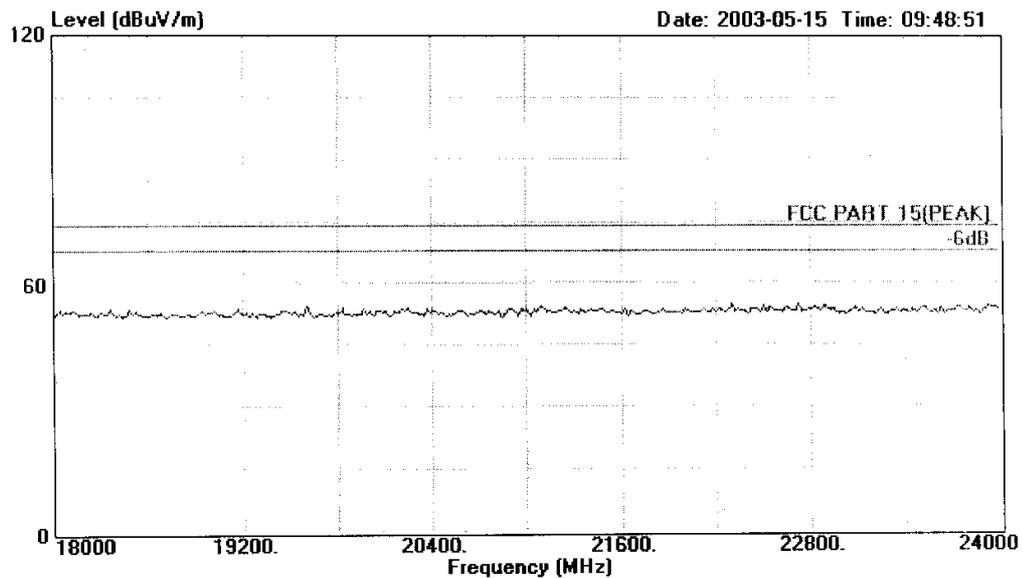

Site : 1# Chamber  
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL  
EUT : 2.4G Clock Radio Cordless  
' : with CID&Speakerphone  
M/N : GH3060  
Power : DC 3.6V  
Test Engineer : Tomy  
Memo : Handset CH40