



TellCard
SYSTEMS
Stand Alone Offline Locks

TABLE OF CONTENTS



EGT SERIES STAND ALONE CYLINDRICAL LOCKSET PAGE 3

EMR SERIES STAND ALONE MORTISE LOCKSET PAGE 7

HIGH SECURITY CYLINDERS PAGE 13

PARTS PAGE 14

E629 SERIES STAND ALONE EXIT DEVICE TRIM PAGE 15

EGT SERIES

Stand-Alone (offline) Cylindrical Locksets



- Designed for Heavy Duty Grade 1 high use and abuse applications
- Non-volatile memory. Lock programming is retained in the event of a prolonged power outage



FEATURES

- » Built around PDC's World Class GT Series Cylindrical Lock Chassis
- » Backlit Stainless Steel keypad buttons standard
- » Full Outdoor Standard
- » Color LED's illuminate a visual que
- » Simple installation and programming
- » Mechanical Key override
- » 3 Hour UL Fire Listed
- » Hardwire inputs for 12 or 24V AC or DC standard
- » Operates on 4 AA Alkaline Batteries (Not supplied)
- » Up to 130,000 cycles on one set of batteries



SPECIFICATIONS

<p>ELECTRONICALLY SELECTABLE FUNCTIONS:</p> <p>RELOCK MODE: With any valid credential the lock will unlock for a configurable number of seconds then re-lock.</p> <p>PASSAGE MODE: With any valid credential the lock will unlock and remain unlocked until a valid credential is entered to re-lock the device.</p> <p>EMERGENCY LOCKOUT MODE: Only the master credential will unlock the door for the configured number of seconds then relock. All other codes are disabled.</p> <p>USERS: 100 Users + 1 Master Code</p> <p>HARDWIRE INPUT: 12-24 VAC/VDC 200mA max current</p> <p>BATTERY LIFE: Up to 130,000 cycles on a set of (4) AA alkaline batteries (not included).</p> <p>PROGRAMMING: Keypad basic (Option K) models require programming at the lock.</p> <p>WEATHER RESISTANCE: Full outdoor standard - both sides can be exposed to weather.</p> <p>OPERATING TEMPERATURE: 0° F to 130° F - both sides</p> <p>FOR DOORS: 1-3/4" standard, 2-1/4" available Specify when ordering</p> <p>DOOR PREP: Standard ANSI A156.115 (161) for Cylindrical Locks, modified with additional mounting holes.</p> <p>BACKSET: 2-3/4"</p> <p>CHASSIS: Heavy duty zinc diecast, investment cast and stainless steel mechanism.</p> <p>ESCUTCHEON: Heavy Duty cast alloy</p> <p>STRIKE: 4-7/8" x 1-1/4" (ASA) is standard. Other options available are the 'T' or 'FL', specify when ordering. All strikes are non-handed and have a base material of stainless steel or brass.</p>	<p>LATCHBOLT: 9/16" throw with dead latch standard. 2-1/4" x 1-1/8" Stainless Steel or Brass front; Beveled 1/8" on 2" door.</p> <p>HAND: Handed – field reversible Specify when ordering</p> <p>LEVERS: PHL, BSN or MIA levers are solid zinc diecast. 41° lever rotation.</p> <p>KEYS: 2 keys per lock</p> <p>KEYWAYS: Available in keyways of most major manufacturers</p> <p>INTERCHANGEABLE CORE: Best compatible SFIC 6 and 7 pin or Schlage compatible LFIC</p> <p>KEYING: Can be MK, CMK, GMK. Available Zero Bitted (K0), Keyed Different (KD), Keyed Alike (KA). Can be keyed into existing masterkey systems of other manufacturers.</p> <p>FINISHES: 605 (US3) Bright Brass 606 (US4) Satin Brass 613 (US10B) Oil Rubbed Bronze, 626 (US26D) Satin Chrome, 626 (US26D) Satin Chrome</p> <p>CERTIFICATIONS, LISTINGS, COMPLIANCES:</p> <ul style="list-style-type: none"> • UL 10C listed for "Fire Exit Hardware" labeled for to 3 hrs, single swing doors 4'0" x 8'0" • FCC part 15 • PCB RoHS compliant <p>WARRANTY: 24 months from date of manufacture</p> <p>COUNTRY OF ORIGIN: Proudly assembled in the USA. This product meets the requirements of the Buy American Act.</p>
---	--



EGT SERIES



HOW TO ORDER — EGT SERIES

SERIES	MODEL	FINISH	BACKSET	HANDING	CYLINDER OR HOUSING	KEYING
EGT Series	B – Basic	605 (US3) 606 (US4) 613 (US10B) 626 (US26D)	234 – 2-3/4"	RH – Right Hand LH – Left Hand	D – Default L – Less Cylinder SF6 – SFIC w/Core, 6 Pin SF7 – SFIC w/Core, 7 Pin LF – Schalgé® Compatible LFIC w/Core SFL – SFIC Housing less core LFL – Schalgé® Compatible LFIC Housing less core	KD KA
EGT K	B PHL	626 AM	234 ASA	RH 134	D SCC	KD –
K – Keypad Only	PHL - Philadelphia BSN - Boston MIA - Miami	AM – Anti-microbial	ASA – Curved Lip	134 – 1-3/4" [45mm] 214 – 2-1/4" [57mm]	SCC	AM – Antimicrobial Coating
INTERFACE	LEVER	SPECIALTY FINISH COATING	STRIKE	DOOR THICKNESS	KEYWAY	OPTIONS

Ordering Example: EGT K B PHL 626 234 ASA RH 134 D SCC KD


Notes: 1 - Door thickness - 1-3/4" and 2-1/4" 2 - For other door thickness applications, contact PDQ Customer Service 3 - Most common cylinders, housings, keyway and keying options shown. For additional options, contact PDQ Customer Service. 4 - Other finishes available. Contact PDQ Customer Service.

CYLINDERS & KEYING SYSTEMS

TellCard KEYWAY	COMPATIBLE WITH
ARA CO6 / CO59A1 CL4 RUD/RUD981 SCE SCC SCC-K SAL RA-RC YA8 GA FAL KW TA NON	Arrow / AR1 Corbin / 60/59A1 Corbin / L4 Russwin / D1 Schlage / E Schlage / SCC Schlage / C-K Sargent / LA Sargent / RA-RC Yale / E1R Yale / GA Falcon / E-R Kwikset TellCard / TA (Restricted) Less Cylinder
KEYING SYSTEMS/CONVENTIONAL CYLINDERS	
0-Bitted with 2 blank keys (For quality control purposes, TellCard "0" bit cylinders are actually keyed to a 1 bit and a 1 bit key is sent to open cylinders.) Keyed Alike / 4 or less Cylinders (KA4) Keyed Alike / 5 or more Cylinders (KA) Master Keying with Bitting List (MK) (GMK) Construction Keying (CK) (in addition to other keying charges) Keyed to existing numbers Extra Cut Change, Master, or Control Keys Extra Cut Large Bow Keys - SCC / SCE Extra Cut Large Bow Keys - SCC / SCE when furnished with lock Bitting List for Factory Master Key Production	
VISUAL KEY CONTROL	
Cylinder Marking AA1, AA2, Etc. (Per Cylinder) Key Marking AA1, AA2, Etc. (Per Key) Key Marking other than Keyset (Per Key)	

NOTES:

- Designate finish for cylinders ordered separately: 606 or 626
- Kwikset cylinder available in 5 pin only
- Specify KD, KA4, or 1 bitted
- Specify KD, KA or "0" Bit (TellCard "0" bit is keyed to a 1 bit and a 1 bit key is supplied)
- 6 pin cylinders are keyed to 5 pins



Combination Cylinder


EGT SERIES

CORES


DESCRIPTION	TellCard NO.
UNCOMBINED CORES	
6 Pin Cores	I5206 + KEYWAY
7 Pin Cores	I5207 + KEYWAY
COMBINED CORES	
6 Pin Cores	I5206-1 + KEYWAY
7 Pin Cores	I5207-1 + KEYWAY
BEST KEYWAYS AVAILABLE: A, B, C, D, E, F, G, H, J, K, L, M, Q, WA, WB, WC, WD, WG, WH, TB, TD, TE, & R	
TELLCARD1, TELLCARD2, TELLCARD3 (RESTRICTED) BEST A2, A3 & A4 SYSTEMS AVAILABLE	
CONSTRUCTION CORES	
Construction Core 6-pin only	
Dummy Construction Core Plastic	
IC Tailpiece	
Construction cores are invoiced at shipment and credited upon return. Subject to 50% discount.	
CONVENTIONAL LARGE FORMAT CORE	
Schlage® LFIC C Keyway	
VISUAL KEY CONTROL	
Cylinder Marking AA1, AA2, Etc. (Per Cylinder)	
Key Marking AA1, AA2, Etc. (Per Key)	
Key Marking other than Keyset (Per Key)	

NOTES:

- IC Cores are available Combined or Uncombined
- Uncombined cores do not include springs & pins
- Combined cores include masterkeying (SFIC only)
- Designate finish for IC Cores ordered separately: 606 or 626
- Control keys must be ordered separately



IC Core



LFIC Core

EGT SERIES




LEVER DESIGNS

PHL - PHILADELPHIA		BSN - BOSTON	
MIA - MIAMI			


STRIKES

All EGT strikes are reversible and shipped with screws. Specify strike when ordering. Unless otherwise specified an ASA strike is provided.


“ASA” Strike*

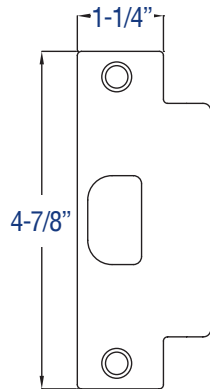

“T” Strike Square Corners*




“Full Lip” Strike*



*Not to scale

DIMENSIONS

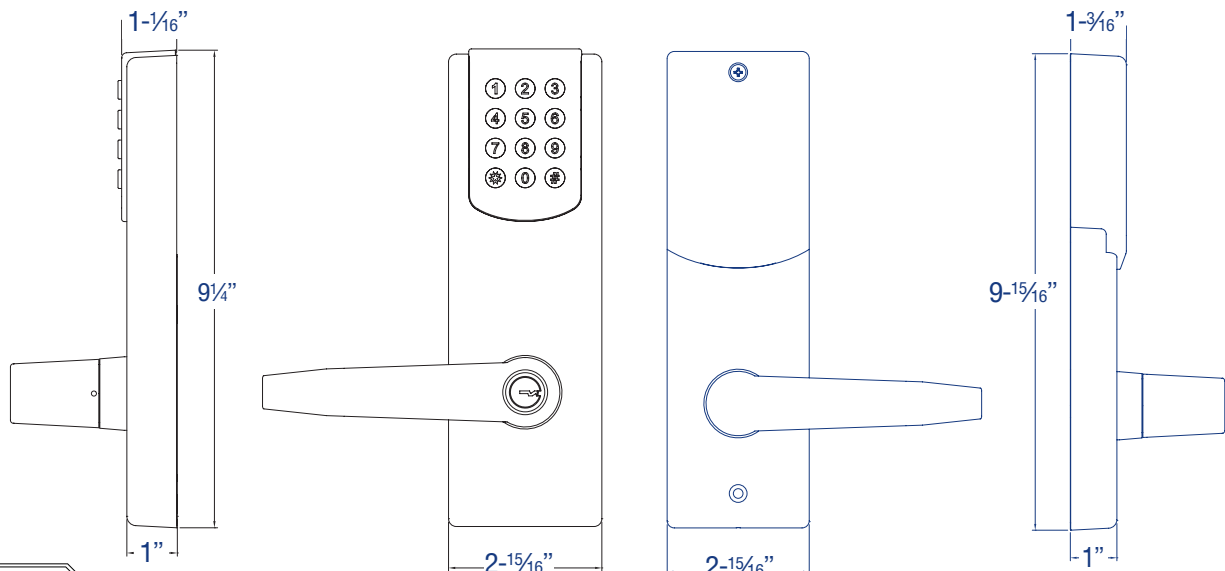

EMR SERIES

Stand-Alone (offline) Mortise Locksets



- Designed for Heavy Duty Grade 1 high use and abuse applications
- Non-volatile memory. Lock programming is retained in the event of a prolonged power outage



FEATURES

- » Backlit Stainless Steel keypad buttons standard
- » Full Outdoor Standard
- » Color LED's illuminate a visual cue when the correct code is entered and low battery life
- » Simple installation and programming
- » Mechanical Key override
- » 3 Hour UL Fire Listed
- » Hardwire inputs for 12 or 24V AC or DC are standard
- » Operates on 4 AA Alkaline Batteries (Not supplied)
- » Up to 100,000 Cycles on one set of batteries
- » Standard Rim Cylinder



SPECIFICATIONS





- USERS:** 100 Users + 1 Master Code
- HARDWIRE INPUT:** 12-24 VAC/VDC 200mA max current
- LOCKING MECHANISM:** ANSI/BHMA Grade 1 chassis.
- BATTERY LIFE:** 100,000 cycles on a set of (4) AA alkaline batteries (not included).
- PROGRAMMING:** Keypad basic (Option K) models require programming at the lock.
- WEATHER RESISTANCE:** Full outdoor standard - both sides can be exposed to weather.
- OPERATING TEMPERATURE:** 0° F to 130° F - both sides
- FOR DOORS:** 1-3/4" standard, 2-1/4" available Specify when ordering
- DOOR PREP:** Standard ANSI A156.115 for Mortise Locks, modified with additional mounting holes depending on locking function (see template).
- BACKSET:** 2-3/4"
- CHASSIS:** Heavy duty zinc diecast, investment cast and stainless steel mechanism.
- ESCUTCHEON:** Heavy duty cast alloy
- STRIKE:** 4-7/8" x 1-1/4" (ASA) is standard.
- LATCHBOLT:** 3/4" throw with dead latch standard. 2-1/4" x 1-1/8" Stainless Steel or Brass front; Beveled 1/8" on 2" door.
- HAND:** Handed – field reversible Specify when ordering
- LEVERS:** PHL, BSN or MIA levers are solid zinc diecast. 41° lever rotation.
- KEYS:** Mechanical key bypass standard, 2 keys per lock
- KEYWAYS:** Available in keyways of most major manufacturers
- INTERCHANGEABLE CORE:** Best compatible SFIC type 6 and 7 pin or Schlage compatible LFIC
- KEYING:** Can be MK, CMK, GMK. Available Zero Bitted (K0), Keyed Different (KD), Keyed Alike (KA). Can be keyed into existing masterkey systems of other manufacturers.
- FINISHES:** 605 (US3) Bright Brass 606 (US4) Satin Brass 613 (US10B) Oil Rubbed Bronze, 626 (US26D) Satin Chrome
- CERTIFICATIONS, LISTINGS, COMPLIANCES:**
- UL 10C listed for "Fire Exit Hardware" labeled for to 3 hrs, single swing doors 4'0" x 8'0"
 - FCC part 15
 - PCB RoHS compliant
- WARRANTY:** 24 months from date of manufacture
- COUNTRY OF ORIGIN:** Proudly assembled in the USA. This product meets the requirements of the Buy American Act.



EMR SERIES








FUNCTIONS

LOCK	FUNCTION
	<p>AP - APARTMENT</p> <p>AP - RE-LOCK</p> <ul style="list-style-type: none"> • With any valid credential the lock will unlock for a configurable number of seconds, then re-lock. • Deadbolt may be extended for additional security but does not lockout any valid user credential • Door is normally secure
	<p>SC – STOREROOM/CLASSROOM</p> <p>SC – STOREROOM</p> <ul style="list-style-type: none"> • With any valid credential the lock will unlock for a configurable number of seconds, then re-lock. • Door is normally secure <p>SC – CLASSROOM</p> <ul style="list-style-type: none"> • Valid credential locks door • Valid credential unlocks door
	<p>OF - OFFICE</p> <ul style="list-style-type: none"> • With any valid credential the lock will unlock for a configurable number of seconds, then re-lock. • Thumbturn on inside puts lock into extended passage mode (unlocks) until thumbturn is returned to locked position • Door is normally secure
	<p>PR - PRIVACY</p> <p>PR – FACULTY</p> <ul style="list-style-type: none"> • With any valid credential the lock will unlock for a configurable number of seconds, then re-lock. • Thumbturn on inside locks out all user codes but master • Exiting/Closing door returns lockset to normal state allowing all users access • Door is normally secure <p>PR – SERVICE STATION</p> <ul style="list-style-type: none"> • Occupied room secured by thumbturn on inside and locks out all user codes but master • Exiting/Closing door unlocks lockset • Valid credential locks door • Valid credential unlocks door

EMR SERIES

FUNCTIONS

STEP 1: CHOOSE INTERFACE	STEP 2: CHOOSE MODEL	STEP 3: CHOOSE LOCK
 <p>K - Keypad Only</p>	<p>B - BASIC — Lock is programmed by keypad or master card. No external connections to lock.</p>	 <p>AP - APARTMENT</p>
		 <p>SC - STOREROOM/ CLASSROOM</p>
		 <p>OF - OFFICE</p>
		 <p>PR - PRIVACY</p>

EMR SERIES



HOW TO ORDER — EGT SERIES

SERIES	MODEL	LEVER	SPECIALTY FINISH COATING	HANDING	CYLINDER OR HOUSING	KEYING
EMR Series	B – Basic	PHL - Philadelphia BSN - Boston MIA - Miami	AM – Anti-microbial	RH – Right Hand LH – Left Hand	D – Default L – Less Cylinder SF6 – SFIC w/Core, 6 Pin SF7 – SFIC w/Core, 7 Pin LF – Schalgé® Compatible LFIC w/Core SFL – SFIC Housing less core LFL – Schalgé® Compatible LFIC Housing less core	KD KA
EMR K	B AP	PHL 626	AM ASA	RH 134	D SCC	KD –
K – Keypad Only	AP - Apartment SC - Storeroom/ Classroom OF - Office PR - Privacy	605 (US3) 606 (US4) 613 (US10B) 626 (US26D)	ASA – Curved Lip	134 – 1-3/4" [45mm] 214 – 2-1/4" [57mm]	SCC	AM – Antimicrobial Coating
INTERFACE	FUNCTION	FINISH	STRIKE	DOOR THICKNESS	KEYWAY	OPTIONS

Ordering Example: EMR K B AP PHL 626 234 ASA RH 134 D SCC KD


Notes: 1 - Door thickness - 1-3/4" and 2-1/4" 2 - For other door thickness applications, contact PDQ Customer Service 3 - Most common cylinders, housings, keyway and keying options shown. For additional options, contact PDQ Customer Service. 4 - Other finishes available. Contact PDQ Customer Service.

CYLINDERS & KEYING SYSTEMS


TellCard KEYWAY	COMPATIBLE WITH
ARA CO6 / CO59A1 CL4 RUD/RUD981 SCE SCC SCC-K SAL RA-RC YA8 GA FAL TA NON	Arrow / AR1 Corbin / 60/59A1 Corbin / L4 Russwin / D1 Schlage / E Schlage / SCC Schlage / C-K Sargent / LA Sargent / RA-RC Yale / E1R Yale / GA Falcon / E-R TellCard / TA (Restricted) Less Cylinder
KEYING SYSTEMS/CONVENTIONAL CYLINDERS	
0-Bitted with 2 blank keys (For quality control purposes, TellCard "0" bit cylinders are actually keyed to a 1 bit and a 1 bit key is sent to open cylinders.) Keyed Alike / 4 or less Cylinders (KA4) Keyed Alike / 5 or more Cylinders (KA) Master Keying with Bitting List (MK) (GMK) Construction Keying (in addition to other keying charges) Keyed to existing numbers Extra Cut Change, Master, or Control Keys Extra Cut Large Bow Keys - SCC / SCE Extra Cut Large Bow Keys - SCC / SCE when furnished with deadbolt Bitting List for Factory Master Key Production	
VISUAL KEY CONTROL	
Cylinder Marking AA1, AA2, Etc. (Per Cylinder) Key Marking AA1, AA2, Etc. (Per Key) Key Marking other than Keyset (Per Key)	

NOTES:

- Designate desired finish for Rim Cylinders if ordered separately: 605, 606, 612, 613, 625 or 626
- Other finishes consult Customer Service



Rim Cylinder with Adapter



7-pin Housing with Adapter


EMR SERIES

CORES


DESCRIPTION	TellCard NO.
UNCOMBINATED CORES	
6 Pin Cores	I5206 + KEYWAY (I5206-A)
7 Pin Cores	I5207 + KEYWAY (I5207-B)
COMBINATED CORES	
6 Pin Cores	I5206-1 + KEYWAY (I5206-1A)
7 Pin Cores	I5207-1 + KEYWAY (I5207-1B)
BEST KEYWAYS AVAILABLE: A, B, C, D, E, F, G, H, J, K, L, M, Q, WA, WB, WC, WD, WG, WH, TB, TD, TE, & R	
TELLCARD1, TELLCARD2, TELLCARD3 (RESTRICTED) BEST A2, A3 & A4 SYSTEMS AVAILABLE	
CONSTRUCTION CORES	
Construction Core 6-pin only Dummy Construction Core Plastic	
Construction cores are invoiced at shipment and credited upon return. Subject to 50% discount.	
CONVENTIONAL LARGE FORMAT CORE	
Schlage® LFIC C Keyway	
HIGH SECURITY IC CORES	
SEE PAGE 15 for SFIC and LARGE FORMAT (SCHLAGE®) HIGH SECURITY IC CORES	
VISUAL KEY CONTROL	
Cylinder Marking AA1, AA2, Etc. (Per Cylinder) Key Marking AA1, AA2, Etc. (Per Key) Key Marking other than Keyset (Per Key)	

NOTES:

- IC Cores are available Combined or Uncombined
- Uncombined cores do not include springs & pins
- Combined cores include masterkeying
- Designate finish for IC Cores ordered separately: 606 or 626



IC Core



7-pin Housing with Adapter

SMALL FORMAT RIM CYLINDER HOUSINGS - LESS CORES

DESCRIPTION	TellCard NO.
IC Rim Cylinder Housing (for both 6-pin/7-pin cores)	I5308-

EMR SERIES




LEVER DESIGNS

<p>PHL - PHILADELPHIA</p>	<p>BSN - BOSTON</p>
<p>MIA - MIAMI</p>	


STRIKES

All EMR strikes ship with screws and are handed. Specify handing when ordering.

*Not to scale—Right Hand/Left Hand Reverse shown

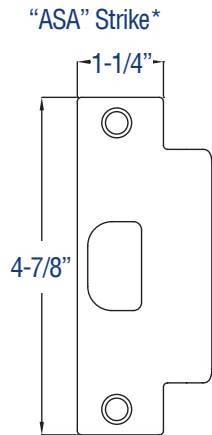

DIMENSIONS

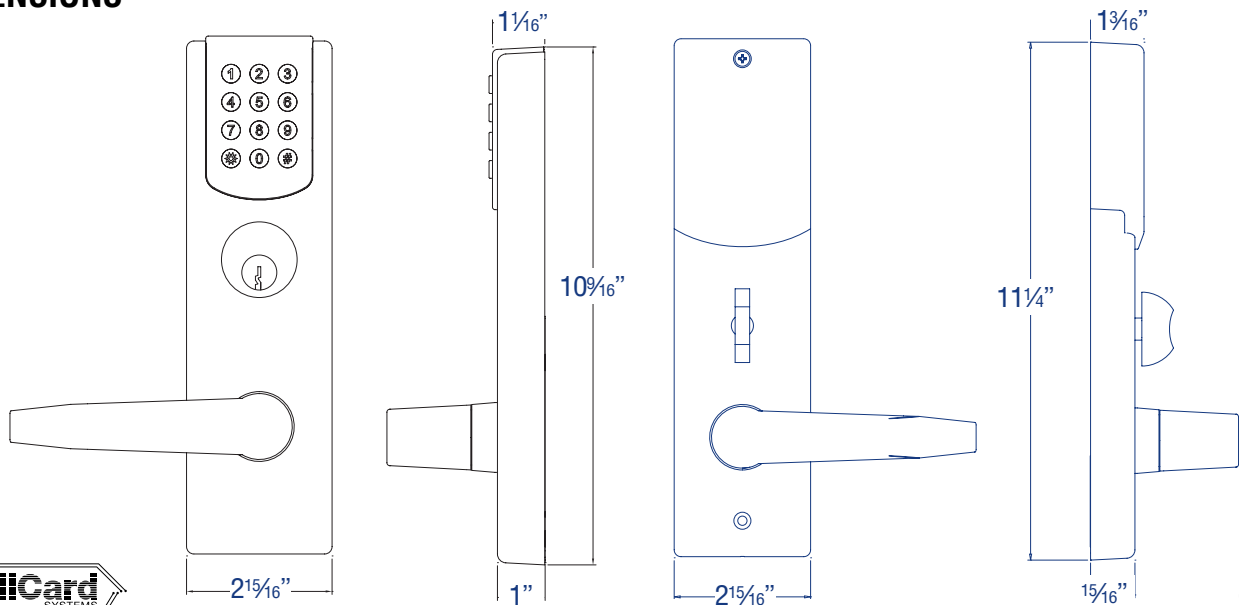

HIGH SECURITY




HIGH SECURITY CYLINDERS

DESCRIPTION	TellCard NO.
6 Pin Combination Cylinder KD/KA Mortise/Rim Combo Cylinder 1-1/8" 6 Pin KD/KA	HSC125 HSC020
UL 437 6 Pin Combination Cylinder KD/KA UL 437 Mortise Rim Combo Cylinder 1-1/8" KD/KA	HSC425 HSC320


NOTES:
 · LF IC Cores are available
 · Designate finish when ordering IC Housing & Cores

HIGH SECURITY LARGE FORMAT INTERCHANGEABLE CORES

DESCRIPTION	TellCard NO.
SFIC Cylinder, 6 Pin SFIC Cylinder, 7 Pin	HSC806 HSC807
LFIC Cylinder "Schlage®", 6 Pin LFIC TellCard TA Core 6 Pin	HSC906 HSC907



Combination Cylinder




Rim Cylinder with Adapter

HIGH SECURITY LARGE FORMAT SCHLAGE IC HOUSINGS

DESCRIPTION	TellCard NO.
LFIC Rim Housing Less Core "Schlage®"	I5303-X

High Security Cylinders cannot be sold "0" bitted and as a result blank keys are not available and will not be sold.



IC Core

PARTS




KEY BLANKS (50 PIECE MINIMUM ORDER)

TellCard KEYWAY	COMPATIBLE WITH
ARA	Arrow / AR1
CO6 / CO59A1	Corbin / 60/59A1
CL4	Corbin / L4
RUD	Russwin / D1
SCC	Schlage / SCC
SCE	Schlage / E
SAL	Sargent / LA
SAS	Sargent / SAS
RA-RC	Sargent / RA-RC
YA8	Yale / E11
GA	Yale / GA
FAL	Falcon / E-R
KW	Kwikset / KW
Segal	Segal
TA	TellCard / TA (Restricted)
Large Bow Key	SCC
Large Bow Key	SCE


INTERCHANGEABLE CORE KEY BLANKS
A, B, C, D, E, F, G, H, J, K, L, M, Q, WA, WB, WC, WD, WG, WH, TB, TD, TE, & R

NOTES:

- Designate finish when ordering miscellaneous parts
- Kwikset cylinder available in 5 pin only



6 Pin Key Blank



5 Pin Key Blank

MISCELLANEOUS PARTS

DESCRIPTION	TellCard NO.
1-1/4" x 4-7/8" ANSI Dust Box (Specified with Lock)	Y025-SBX
1-1/4" x 4-7/8" ANSI Dust Box	Y025-SBX
T-Strike Dust Box (Specified with Lock)	I0251
T-Strike Dust Box	I0251
FL-Strike Dust Box (Specified with Lock)	I0251R
FL-Strike Dust Box	I0251R
1-1/8" x 2-3/4" Deadbolt Dust Box	I4701
1-1/8" Latch Front Filler Plate (Minimum of 100 pieces)	I099-100

E629 SERIES

Stand-Alone (offline) Lockset for Exit Devices



- Designed for Heavy Duty Grade 1 high use and abuse applications
- Non-volatile memory. Lock programming is retained in the event of a prolonged power outage
- Heavy duty cast alloy escutcheon thru-bolts directly into the exit device chassis.

FEATURES

- » Designed for use with PDQ 6200 Series RIM and Surface Vertical Rod Exit Devices
- » Backlit Stainless Steel keypad buttons standard
- » Full Outdoor Standard
- » Color LED's illuminate a visual cue when the correct code is entered and low battery life
- » Simple installation and programming
- » Mechanical Key override
- » 3 Hour UL Fire Listed
- » Hardwire inputs for 12 or 24V AC or DC are standard
- » Operates on 4 AA Alkaline Batteries (Not supplied)
- » Up to 100,000 Cycles on one set of batteries
- » Standard Mortise Cylinder



SPECIFICATIONS

ELECTRONICALLY SELECTABLE FUNCTIONS:	Relock Mode: With any valid credential the lock will unlock for a configurable number of seconds then re-lock. Passage Mode: unlock and remain unlocked until a valid credential is entered to re-lock the device. Emergency Lockout Mode: Only the master credential will unlock the door for the configured number of seconds then relock. All other codes are disabled.
USERS:	100 Users + 1 Master Code
INPUT:	12-24 VAC/VDC 200mA max current
BATTERY LIFE:	100,000 cycles on a set of (4) AA alkaline batteries (not included).
PROGRAMMING:	Keypad basic (Option K) models require programming at the lock.
WEATHER RESISTANCE:	Full outdoor standard - both sides can be exposed to weather.
FOR DOORS:	1-3/4" standard. For other door thickness, contact PDQ Customer Service
KEY OVERRIDE:	Standard (09 Storeroom)
KEYS:	2 Keys Per Lock.
KEYWAYS:	Available in the keyways of most major manufacturers.

INTERCHANGEABLE CORE:	Best type 6 and 7 pin or Schlage LFIC
KEYING:	Can be MK, CMK, GMK. Available Zero Bitted (K0), Keyed Different (KD), Keyed Alike (KA). Can be keyed into existing masterkey systems of other manufacturers.
FINISHES:	613 (US10B) Oil Rubbed Bronze, 626 (US26D) Satin Chrome
CERTIFICATIONS, LISTINGS, COMPLIANCES:	<ul style="list-style-type: none"> • UL 10C listed for "Fire Exit Hardware" labeled for up to 3 hrs, single swing doors 4'0" x 8'0" • FCC part 15 • PCB RoHS compliant • PDQ exit devices certified to ANSI/BHMA 156.3-2001, Grade 1
WARRANTY:	24 months Limited Warranty
COUNTRY OF ORIGIN:	Proudly Designed and Assembled by PDQ in the USA.



E629 SERIES



MODEL TYPE: KEYPAD - BASIC

ANSI FUNCTION	DESCRIPTION	TRIM TYPE
09	Storeroom w/ Lever	E6 29 (1 or 2) K, B, (BSN, MIA or PHL) (RHR or LHR) 626

LEVER DESIGNS



BSN - BOSTON



PHL - PHILADELPHIA



MIA - MIAMI

E629 SERIES

HOW TO ORDER — E629 SERIES

TYPE		COMPANION EXIT DEVICE		MODEL		FINISH ⁴		SPECIAL FINISH COATING		CYLINDER OR HOUSING ⁵		KEYING ³	
29 — Electrified Escutcheon, Wide Stile		1 — RIM 2 — SVR		B — Basic		626 — Satin Chrome		AM — Anti-microbial		D — Default L — Less Cylinder SF6 — SFIC w/Core, 6 Pin SF7 — SFIC w/Core, 7 Pin LF — Schalge® Compatible LFIC w/Core SF6L — SFIC 6 Pin Housing less core SF7L — SFIC 7 Pin Housing less core LFL — Schalge® Compatible LFIC Housing less core		KD	
E6	29	1	K	B	PHL	RHR	626			D	SCC	KD	—
E6		K — Keypad		BSN — Boston MIA — Miami PHL — Philadelphia		RHR LHR				SCC		AM — Antimicrobial Coating	
SERIES		INTERFACE		LEVER SHAPES		HANDING		DOOR THICKNESS ^{1,2,3}		KEYWAY ³		OPTIONS	

HOW TO ORDER — E629 SERIES


■ - Denotes factory default

Notes:


- 1 - Door thickness - 1-3/4" - 2"
- 2 - For other door thickness applications, contact PDQ Customer Service
- 3 - Most common cylinders, housings, keyway and keying options shown. For additional options, contact PDQ Customer Service.
- 4 - Other finishes available. Contact PDQ Customer Service.
- 5 - 6EW Trim ordered less cylinder includes collar and spring washer for cylinder lengths from 1-1/8" to 1-1/4". For other cylinder lengths, contact PDQ Technical Service.

TRIM CYLINDER REFERENCE GUIDE

ANSI FUNCTION	DESCRIPTION	29 – ELECTRIFIED ESCUTCHEON WIDE STILE
09	Storeroom w/Lever	Mortise



MORTISE CYLINDER



LENGTH INCLUDES CAM


MODEL FEATURES

BASIC — Users Individually Managed at Each Opening

USB1 — Tablet Based - Pull Down Audit Record

HANDING

Out Swing Door

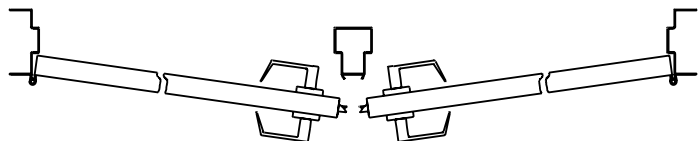

LEFT HAND REVERSE (LHR)

RIGHT HAND REVERSE (RHR)


OUTSIDE

TYPE	LENGTH	PDQ CAM NUMBER
Cylinder, Conventional	1-1/4"	I127-4204
SFIC Housing, 6 Pin	1-1/4"	I54031
SFIC Housing, 7 Pin	1-3/8"	I54031
LFIC Housing	1-1/2"	I54231




E629 SERIES

RIM

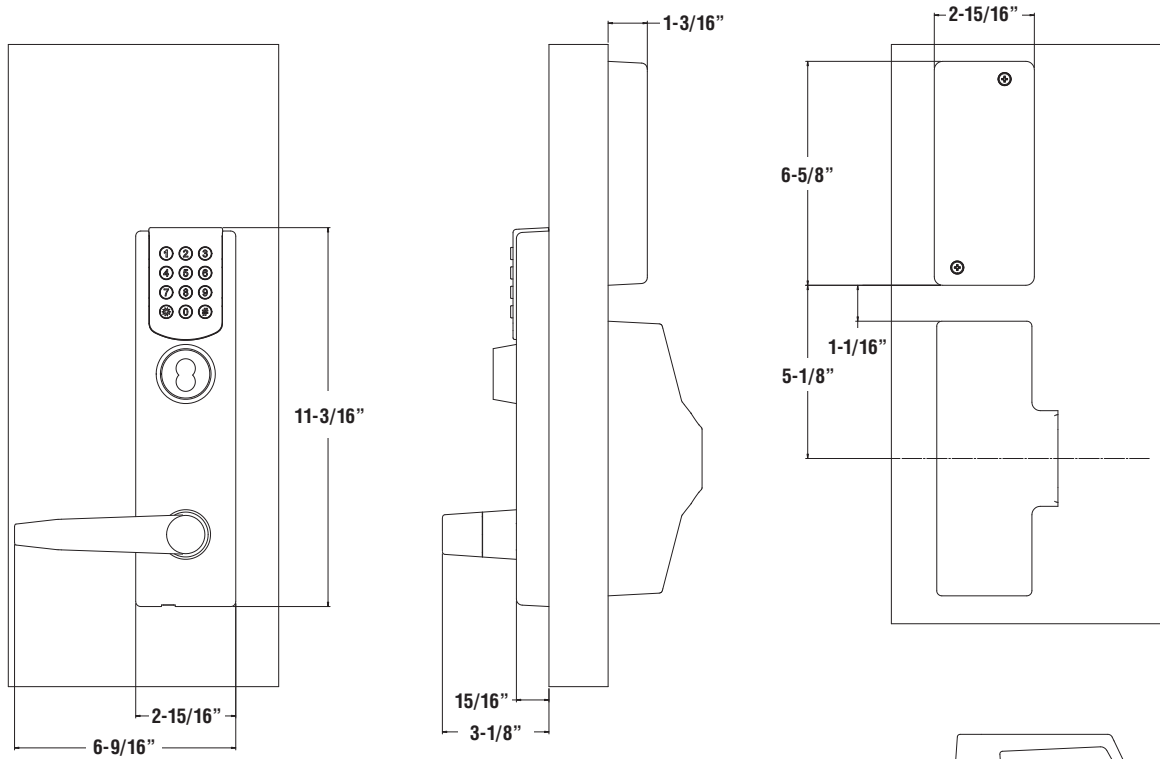

SURFACE VERTICAL ROD

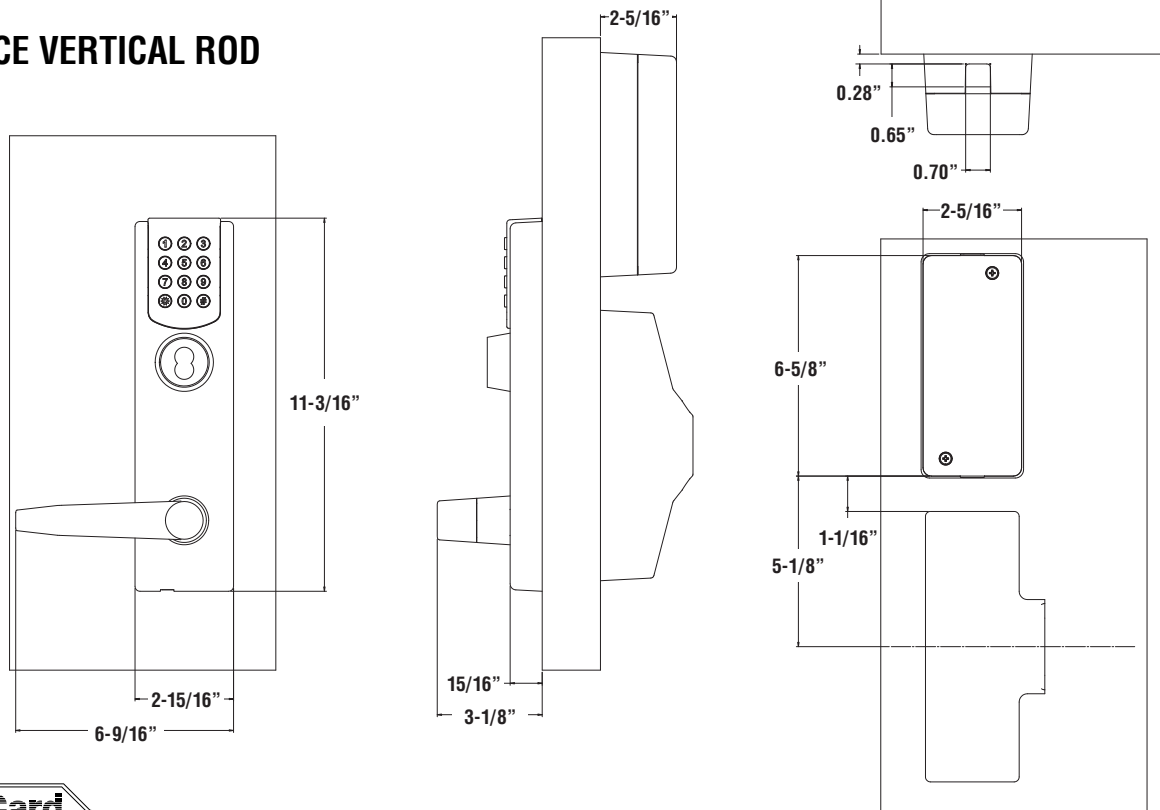

FINISHES

ARCHITECTURAL FINISHES



605 (US3)
Bright Brass, Clear Coated



606 (US4)
Satin Brass, Clear Coated




613 (US10B)
Oil Rubbed Bronze,
Oxidized Satin Bronze,
Oil Rubbed, No Coating




626 (US26D)
Satin Chromium Plated,
No Coating

HANDING

In Swing Door

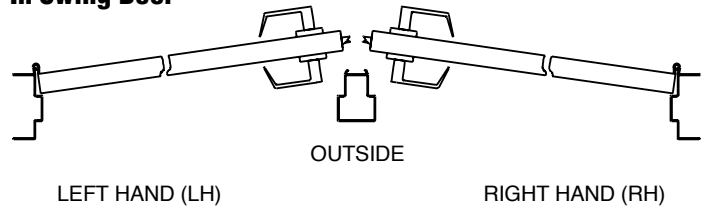

Out Swing Door

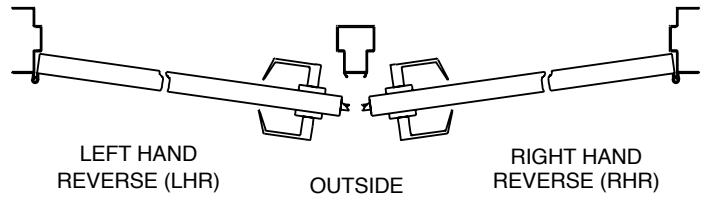



Phone: 800.441.9692

Tech Support: 833.2.PDQTEC (833.273.7832)

FAX: 717.656.6892 | Email: help@pdqlocks.com

Headquarters: 2230 Embassy Drive, Lancaster, PA 17603

Regional Distribution Centers:

Lancaster, PA | Kansas City, MO | Henderson, NV | Auburn, WA

Design Office: Milan, Italy

www.pdqlocks.com