



Hikvision Commercial Displays

Product Quick Guide

Canada 2023

HIKVISION[®]

Table of Contents

| | | |
|-------------------------|-----|----|
| Hikvision | ... | 3 |
| Interactive Flat Panels | ... | 4 |
| Digital Signage | ... | 11 |
| LCD Video Walls | ... | 16 |
| LED Poster Displays | ... | 18 |

Interactive Flat Panels

Advanced Industrial Design

Optical Bonding Screen

For touchscreen accuracy

Pen Slot

Convenient pen holder attached

Matte Powder Coating

Matches the colour of the whole device



Elegant Design

150 mesh ultra-fine sandblasting (comparable to a laptop's texture)

Wide Colour Spectrum

≥ 90% colour gamut for outstanding display effect

Newly Designed Pen

TPU nib material for fluent writing and better grip

Pick-up Detection

Show prompts when the pen is picked up

Bracket Upgrade

Beautiful and elegant, easy to install, and cost-effective

Key Functions

► Built-in Whiteboard

- Max. 45-point IR touch supports multiple pens writing simultaneously
- Supports screenshots to save details
- Mohs level 7 hardness glass, scratch and fingerprint resistant



◀ Flexible Annotation

- Users can readily annotate on any interface with a single click
- Annotation supports colour and thickness adjustments as well as stroke optimization
- 1 mm writing accuracy

► Wireless Projection

- Projection via Wi-Fi: The Interactive Flat Panel can be set up as an AP hotspot, or all devices can connect to the same Wi-Fi
- Supports simultaneous split screen projection on up to 4 devices
- Supports both projection and reverse-projection (controlling devices such as laptops, PCs and smartphones from the Interactive Flat Panel)
- Supports Text and Shape Recognition




◀ Remote Video Conference

- Hold remote video conferences with another Interactive Flat Panel, or PC/mobile phones
- Abundant accessories available: USB camera (1080p or 4K), omnidirectional microphone, and OPS for Windows Operating System
- Support Video Conference Software – Teams, Webex and Zoom



UI 2.0

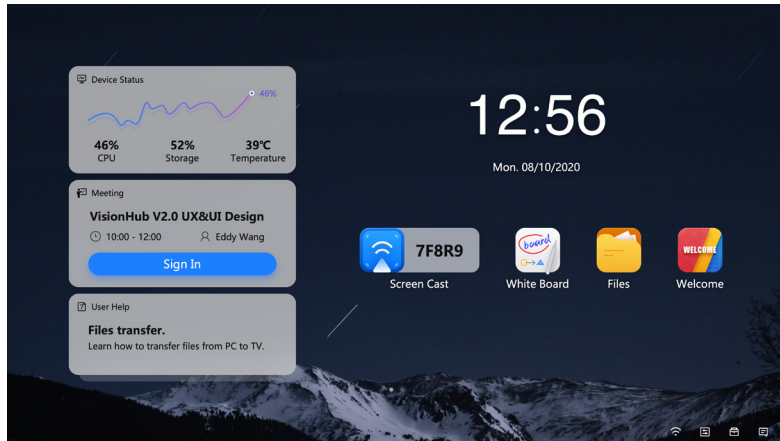


▲ Efficient Content Display

- Show widgets on negative screen
- Multi-screen sliding to show more apps



▲ Easy 2-Step Projection

- Step 1:** Download Wondercast software/app
- Step 2:** Input projection code for wireless projection

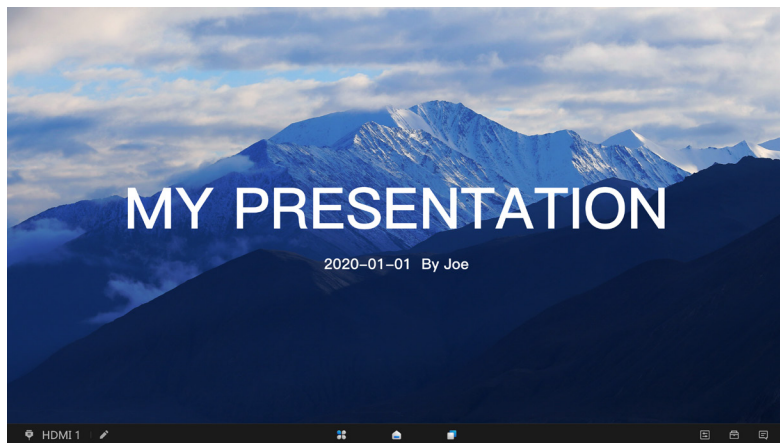

▲ Simple Console Bar

- Auto-adjust the content of the console bar according to different applications

Interactive Flat Panels






Taking Collaboration to the Next Level




All Hikvision Interactive Flat Panels feature:

- Backlight DLED technology with Pixel Pitch of 0.124(H) x 0.372(V) millimeters
- Vivid 4K Resolution (3840 x 2160) at 60Hz
- Brightness of 350 nits, making it effective for most viewing scenarios
- Viewing Angle of 178°(H)/178°(V), providing wide-angle viewing from various angles
- 10 bit Colour Depth delivers rich and accurate colour
- Contrast Ratio is 1,200:1, ensuring that the image will be clear and vibrant
- Response Time of 6 ms, which is quick enough for most applications
- Colour Gamut is 90% NTSC (CIE1931) (Typ.), providing a good balance between colour accuracy and saturation
- D versions come with a built-in microphone and camera module

Interactive Flat Panels



| Model | | DS-D5B75RB/C | DS-D5B86RB/C | DS-D5B65RB/C |
|---------------------|-----------------------------|--|--|---|
| Image | |  |  |  |
| Interface | Input Interface | HDMI IN × 2, MAX 4K @30 Hz, LINE IN × 1 | HDMI IN × 2, MAX 4K @30 Hz, LINE IN × 1 | HDMI IN × 2, MAX 4K @30 Hz, LINE IN × 1 |
| | Output Interface | HDMI OUT (HDMI 2.0) × 1, MAX 4K @60 Hz, LINE OUT × 1 | HDMI OUT (HDMI 2.0) × 1, MAX 4K @60 Hz, LINE OUT × 1 | HDMI OUT (HDMI 2.0) × 1, MAX 4K @60 Hz, LINE OUT × 1 |
| | Control Interface | RS-232 × 1 | RS-232 × 1 | RS-232 × 1 |
| Power | Power Consumption | ≤ 370 W (full load) | ≤ 490 W (full load) | ≤ 320 W (full load) |
| | Power Requirement | 0.5 W | 0.5 W | 0.5 W |
| Working Environment | Operating Temperature | 0 °C~40 °C | 0 °C~40 °C | 0 °C~40 °C |
| | Operating Humidity | 10% to 90% RH | 10% to 90% RH | 10% to 90% RH |
| General | Dimension (W×H×D) | 1718 × 1046 × 87.5 mm | 1963 × 1159 × 87.5 mm | 1507 × 930 × 86 mm |
| Built-in System | Operation System | Android 11.0 | | |
| | Storage | 4GB RAM + 64GB ROM | | |
| | CPU | 6 Cores: A72*2 + A53*4, 1.8 GHz | | |
| Touch Point | Touch Point | 45 points | | |
| Interface | Data Transmission Interface | USB 3.0 × 2 on the front panel USB 3.0 × 2 on the rear panel Full-function Type-C × 1 on the front panel: 65W charging power, projection, data transmission Touch-USB × 1 on the rear panel | | |
| Projection | Wi-Fi Projection | WonderCast: for Windows/Mac/Android/iOS 4K@30Hz; No sound when the signal source is Android device; Max. 4 projection signal sources projecting simultaneously; | | |
| | AirPlay Projection | 1,080P@30Hz | | |
| | Cable Projection | HDMI and Type-C 4K@60Hz | | |
| | Grouped Display | No | | |
| | Reverse Projection | Support | | |
| | Expansion Mode | Support | | |

Interactive Flat Panels

| Model | | DS-D5B65RB/D | DS-D5B75RB/D | DS-D5B86RB/D |
|---------------------|-----------------------------|--|--|---|
| Image | |  |  |  |
| Interface | Input Interface | HDMI IN × 2, MAX 4 K @ 60 Hz, LINE IN × 1 | HDMI IN × 2, MAX 4K @30 Hz, LINE IN × 1 | HDMI IN × 2, MAX 4K @30 Hz, LINE IN × 1 |
| | Output Interface | HDMI OUT (HDMI 2.0) × 1, MAX 4K @60 Hz, LINE OUT × 1 | HDMI OUT (HDMI 2.0) × 1, MAX 4K @60 Hz, LINE OUT × 1 | HDMI OUT (HDMI 2.0) × 1, MAX 4K @60 Hz, LINE OUT × 1 |
| | Control Interface | RS-232 × 1 | RS-232 × 1 | RS-232 × 1 |
| Power | Power Consumption | ≤ 320 W (full load) | ≤ 370 W (full load) | ≤ 490 W (full load) |
| | Power Requirement | 0.5 W | 0.5 W | 0.5 W |
| Working Environment | Operating Temperature | 0 °C~40 °C | 0 °C~40 °C | 0 °C~40 °C |
| | Operating Humidity | 10% to 90% RH | 10% to 90% RH | 10% to 90% RH |
| General | Dimension (W×H×D) | 1507 × 930 × 86 mm | 1718 × 1046 × 87.5 mm | 1963 × 1159 × 87.5 mm |
| Built-in System | Operation System | Android 11.0 | | |
| | Storage | 4GB RAM + 64GB ROM | | |
| | CPU | 6 Cores: A72*2 + A53*4, 1.8 GHz | | |
| Touch Point | Touch Point | 45 points | | |
| Interface | Data Transmission Interface | USB 3.0 × 2 on the front panel USB 3.0 × 2 on the rear panel Full-function Type-C × 1 on the front panel: 65W charging power, projection, data transmission Touch-USB × 1 on the rear panel | | |
| Projection | Wi-Fi Projection | WonderCast: for Windows/Mac/Android/iOS 4K@30Hz; No sound when the signal source is Android device; Max. 4 projection signal sources projecting simultaneously; | | |
| | AirPlay Projection | 1,080P@30Hz | | |
| | Cable Projection | HDMI and Type-C 4K@60Hz | | |
| | Grouped Display | No | | |
| | Reverse Projection | Support | | |
| | Expansion Mode | Support | | |

OPS & Brackets

| | | |
|----------------------------|------------------------------------|---|
| Model | | DS-D5AC11T5-8S2 |
| Image | |  |
| Processor | | Intel® 11th Gen Core i5 11320H |
| CPU Clock Speed | | 3.2GHz |
| PCH | | Intel® Tiger Lake |
| Graphics | | Intel® Iris® Xe Graphics |
| Memory | | 8GB |
| Storage | | 256G |
| NIC | | Integrated 1-/100/1000M Adaption |
| Cooling System | | Single Brass & Single fan |
| Interface | Network Interface | RJ45x1 |
| | Data Transmission Interface | Bluetooth 4.2 |
| | Antenna | 2 |
| | Video Output | HDMIx1, DPx1 |
| Power | Input Voltage | 12V - 19DC |
| | Max. Consumption | 95W |
| | Standby Consumption | 0.5W |
| Working Environment | Storage Temperature | -20°C - 60°C |
| | Storage Humidity | 10°C - 90°C |
| | Working Temperature | -0°C - 40°C |
| | Working Humidity | -10°C - 90°C |
| General | Operation System | Built-in Windows 10 |
| | Product Dimensions | W180 × H195 × D30mm |
| | Net Weight | About 1.2kg |

| | | | |
|---------------------------|--------------------------|---|---|
| Model | | DS-D5ABKY2-S | DS-D5ABKY2-B |
| Image | |  |  |
| Default Parameters | Colour | Silver gray | |
| | Material | SPCC high quality steel plate | |
| | Surface Treatment | Sheet metal spraying | |
| General | Net Weight | 20 kg | 27.3 kg |
| | Gross Weight | 22.5 kg | 31 kg |
| | Available Size | 55"/65"/75" | 86" |
| Bracket | Capacity | 85 kg | 135 kg |
| | Shelf Size | 1,160 × 688 × 1,560 mm | 1,610 × 749 × 1,710 mm |
| | Package Size | 1,520 × 760 × 140 mm | 1,720 × 820 × 160 mm |

Digital Signage

Smart Advertising, Eye-catching Displays

- 4K Display
- External signal inputs
- Flexible and efficient advisement display and management
- Ready-to-go design templates
- Cross-network management
- Environmentally-friendly “green” advertising
- Multiple applications to suit various business scenarios



Hikvision's Digital Signage Solution


 **Design content**
Content designing

 **Marketing Manager**
Manage content release schedule


 **System Operator**
Central device management



 **Rich Product Forms**
3 types of device forms to suit different application scenarios.

 **Attractive Content**
Rich material, flexible arrangement, and creative design modes to attract customers and capture attention.

 **Fast Content Design**
Built-in templates for various verticals to help users design content quickly.

 **Flexible Release Schedule**
Flexibility to program the content release schedule for precise marketing.

Digital Signage

| Model | | DS-D60C-B | DS-D6043UN-B | DS-D6055UN-B |
|-----------------|---|---|---|---|
| Image | |  |  |  |
| Display | Screen Size | - | 43 inch | 55 inch |
| | Screen Active Zone | - | 941.184 (H) mm x 529.416 (V) mm | 1209.6 (H) mm x 680.4 (V) mm |
| | Backlight | - | D-LED | D-LED |
| | Pixel Pitch | - | 0.2451 (H) mm x 0.2451 (W) mm | 0.315 (H) mm x 0.315 (V) mm |
| | Resolution | 1920 x 1080p @ 30 Hz, 1920 x 1080p @ 50 Hz, 1920 x 1080p @ 60 Hz, 1280 x 720p @ 30 Hz, 1280 x 720p @ 50 Hz, 1280 x 720p @ 60 Hz, 3840 x 2160p @ 30 Hz, 3840 x 2160p @ 50 Hz, 3840 x 2160p @ 60 Hz (YCbCr4:2:0), 3840 x 2160p @ 60 Hz, 3840 x 2160p @ 50 Hz (YCbCr4:2:0) | 3840 x 2160 | 3840 x 2160 |
| | Brightness | - | 500 cd/m ² | 500 cd/m ² |
| | Visual Angle | - | Horizontal: 178°, Vertical: 178° | Horizontal: 178°, Vertical: 178° |
| | Colour Depth | - | 10 bit (8bit+FRC) | 10 bit, 1.07B |
| | Contrast | - | 1200:1 | 4000:01:00 |
| | Response Time | - | 8 ms | 8 ms |
| Refresh Rate | - | 60 Hz | 60 Hz | |
| Colour Gamut | - | 72% NTSC | 72% NTSC | |
| Built-in System | CPU | 4-core Cortex-A17 | Cortex-A17, 4-core, 1.6 GHz | Cortex-A17, 4-core, 1.6 GHz |
| | Memory | 2 GB | 2 GB | 2 GB Micro SD |
| | Built-in Storage | 8 GB EMMC, 32 GB Micro SD Card | 16 GB EMMC | 16 GB EMMC, TF 32 GB |
| Interface | Video & Audio Output | 1 x AUDIO 1 x HDMI | LINE OUT x 1 | AUDIO OUT x 1, 5W Speaker x 2 |
| | Network Interface | 1 x LAN | 1 x LAN, Wi-Fi | 1 x LAN, Wi-Fi |
| | Data Transmission Interface | 2 x USB 2.0 interface | USB2.0 x 2, BT x 1 | USB 2.0 x 2, Micro SD Card x 1, BT 4.0 x 1 |
| General | Power | 12 VAC, 2 A | 100 to 240 VAC, 50 or 60 Hz | 100 to 240 VAC, 50 or 60 Hz |
| | Power Consumption | ≤ 20 W | ≤ 110 W | ≤ 200 W |
| | Standby Consumption | ≤ 1 W | ≤ 0.5 W | ≤ 0.5 W |
| | Working Temperature | 0 °C to 50 °C (32 °F to 122 °F) | 0 °C to 40 °C (32 °F to 104 °F) | 0 °C to 40 °C (32 °F to 104 °F) |
| | Working Humidity | 10% to 90% | 10% to 80% RH (Condensation) | 10% to 80% RH |
| | Product Dimensions | 145 x 145 x 31.89 mm | 967.18 mm x 555.42 mm x 72.44 mm | 1237.2 mm x 708 mm x 83.44 mm |
| | Packing Dimensions | 188 x 176 x 101 mm | 1172 mm x 703 mm x 192 mm | 1403 mm x 856 mm x 217 mm |
| Weight | Net weight: 0.6 kg (1.3 lb.) Rough weight: 0.65 kg (1.4 lb.) | Net weight: 11.39 kg (25.11 lb.) Gross weight: 14.75 kg (35.52 lb.) | Net weight: 19.2 kg (42.33 lb.) Gross weight: 24.53 kg (54.08 lb.) | |

| Model | | DS-D6043UL-B/S | DS-D6055UL-B/S |
|-----------------|--|---|---|
| Image | |  |  |
| Display | Screen Size | 43 inch | 55 inch |
| | Screen Active Zone | 1209.6(H) x 680.4(V) mm | 941.184(H)mm x 529.416(V)mm |
| | Backlight | D-LED | DLED |
| | Pixel Pitch | 0.315(H) x 0.315(V)mm | 0.2451(H) mm x 0.2451(V)mm |
| | Resolution | 3840 x 2160 | 3840 x 2160 |
| | Brightness | 500 cd/m ² | 500 cd/m ² |
| | Visual Angle | Horizontal: 178°, Vertical: 178° | Horizontal: 178°, Vertical: 178° |
| | Colour Depth | 8bit+FRC | 1.07G(8 Bits+FRC) |
| | Contrast | 5700:1 | 5000:1 |
| | Response Time | 6.5 ms | 6.5 ms |
| Refresh Rate | 60 Hz | 60 Hz | |
| Colour Gamut | 72% NTSC | 72% NTSC | |
| Built-in System | CPU | Cortex-A17, 4-core, 1.6 GHz | Cortex-A17, 4-core, main frequency 1.6 GHz |
| | Memory | 2 GB | 2 GB |
| | Built-in Storage | 16 GB EMMC | 16 GB EMMC |
| Interface | Video & Audio Output | AUDIO OUT x 1, 5W Speaker x 2 | AUDIO OUT x 1, 5W Speaker x 2 |
| | Network Interface | LAN x 1, Wi-Fi | 1 x LAN, Wi-Fi, BT 4.2 |
| | Data Transmission Interface | 2 x USB, 1 x Micro SD Card, BT 4.2 | USB 2.0 x 2, BT 4.2 x 1, Micro SD Card x 1 |
| General | Power | 100 to 240VAC, 50/60 Hz | 100 to 240 VAC, 50/60 Hz |
| | Power Consumption | ≤ 150 W | ≤ 150W |
| | Standby Consumption | <0.5W | ≤ 0.5 W |
| | Working Temperature | 0 °C to 40 °C (32 °F to 104 °F) | 0 °C to 40 °C (32 °F to 104 °F) |
| | Working Humidity | 0% to 90% | 10%-80% RH |
| | Product Dimensions | 1962.7 (H) x 738 (V) x 450 (D) mm | 585.14 mm x 1705.79 mm x 55 mm |
| | Packing Dimensions | 2100 (H) x 916 (V) x 303 (D) mm | 1935 mm x 765 mm x 303 mm |
| Weight | Net weight: 66.190 kg (145.92 lb.) Gross weight: 81.190 kg (178.99 lb.) | Net weight: 48.46 kg (106.84 lb.) Gross weight: 63.46 kg (139.91 lb.) | |

LCD Video Wall

Captivating Views from Every Angle

- > Ultra narrow (3.5 mm), extreme narrow (1.8 mm) and razor narrow (0.88) bezel widths
- > Industrial-grade panel and structure design
- > Precise in-factory colour calibration
- > Various modes for multiple scenarios
- > Advanced UHD (4K) Splicing
- > Anti-static/Radiation protection



Mirror Series LCD

Self-splicing: Max 30 pcs splicing

Backplane HDMI in/out hand-in-hand connection



3 Display Modes



Monitoring Mode

Enhanced image restoration, frame rate and grayscale.



Movie Mode

Improved colour saturation, and image contrast.



Presentation Mode

Better display consistency, text clarity and smoother text edge.

Precise Colour Calibration Process




Took test pictures with industrial cameras before LCD leaves the factory.




Used a unique image analysis system to analyze each pixel of the picture



Compared it with standard display data to generate the unique calibration algorithm.



Embedded the calibration algorithm into the image processing chip of the LCD.




After each pixel of the LCD is being calibrated point by point, the image has consistent colour and brightness.

LCD Video Wall







LCD

| Model | | DS-D2055LU-Y | DS-D2055HU-Y | DS-D2055LE-G | DS-D2055HE-G | DS-D2055LR-G | DS-D2055HR-G |
|--------------------------|---|---|---|---|---|---|---|
| Image | |  |  |  |  |  |  |
| Display | Diagonal Size (inch) | 55" | 55" | 55" | 55" | 55" | 55" |
| | Backlight | LED Backlight (Direct type) | LED Backlight (Direct type) | LED Backlight (Direct type) | LED Backlight (Direct type) | LED Backlight (Direct type) | LED Backlight (Direct type) |
| | Panel | IPS | IPS | IPS | IPS | IPS | IPS |
| | Resolution | 1920 x 1080 | 1920 x 1080 | 1920 x 1080 | 1920 x 1080 | 1920 x 1080 | 1920 x 1080 |
| | Color | 16.7M | 16.7M | 1.07 Billion | 1.07 Billion | 1.07 Billion | 1.07 Billion |
| | Visual Angle | Horizontal: 178°, Vertical: 178° | Horizontal: 178°, Vertical: 178° | Horizontal: 178°, Vertical: 178° | Horizontal: 178°, Vertical: 178° | Horizontal: 178°, Vertical: 178° | Horizontal: 178°, Vertical: 178° |
| | Response Time | 8 ms (G to G) | 8 ms (G to G) | 8 ms (G to G) | 8 ms (G to G) | 8 ms (G to G) | 8 ms (G to G) |
| | Contrast | 1200:1 | 1200:1 | 1000:1 | 1000:1 | 1200:1 | 1100:1 |
| | Brightness | 500 cd/m ² | 700 cd/m ² | 500 cd/m ² | 700 cd/m ² | 500 cd/m ² | 700 cd/m ² |
| | Dot Pitch (H×V) | 0.63 mm × 0.63 mm (0.025" × 0.025") | 0.63 mm × 0.63 mm (0.025" × 0.025") | 0.63 mm × 0.63 mm (0.025" × 0.025") | 0.63 mm × 0.63 mm (0.025" × 0.025") | 0.63 mm × 0.63 mm (0.025" × 0.025") | 0.63 mm × 0.63 mm (0.025" × 0.025") |
| | Color Saturation | 72% | 72% | 72% | 72% | 72% | 72% |
| Screen Moving Area (H×V) | 1209.63 mm × 680.34 mm (47.62" × 26.78") | 1209.63 mm × 680.34 mm (47.62" × 26.78") | 1209.63 mm × 680.34 mm (47.62" × 26.78") | 1209.63 mm × 680.34 mm (47.62" × 26.78") | 1209.63 mm × 680.34 mm (47.62" × 26.78") | 1209.63 mm × 680.34 mm (47.62" × 26.78") | |
| Side Frame Size | Physical Seam | 3.5 mm (0.14") | 3.5 mm (0.14") | 1.8 mm (0.070") | 1.8 mm (0.070") | 0.88 mm (0.034") | 0.88 mm (0.034") |
| Interface | Input Interface | VGA × 1, HDMI × 1, DVI × 1, DP × 1, USB × 1 | VGA × 1, HDMI × 1, DVI × 1, DP × 1, USB × 1 | VGA × 1, HDMI × 1, DVI × 1, DP × 1, USB × 1 | VGA × 1, HDMI × 1, DVI × 1, DP × 1, USB × 1 | VGA × 1, HDMI × 1, DVI × 1, DP × 1, USB × 1 | VGA × 1, HDMI × 1, DVI × 1, DP × 1, USB × 1 |
| | Output Interface | HDMI × 1 | HDMI × 1 | HDMI × 1 | HDMI × 1 | HDMI × 1 | HDMI × 1 |
| | Control Interface | RS232 IN × 1, RS232 OUT × 1 | RS232 IN × 1, RS232 OUT × 1 | RS232 IN × 1, RS232 OUT × 1 | RS232 IN × 1, RS232 OUT × 1 | RS232 IN × 1, RS232 OUT × 1 | RS232 IN × 1, RS232 OUT × 1 |
| Power | Power Consumption | 187 W | 235 W | 192 W | 230 W | 192 W | 230 W |
| | Power Requirement | 100 to 240 VAC, 50 or 60 Hz | 100 to 240 VAC, 50 or 60 Hz | 100 to 240 VAC, 50 or 60 Hz | 100 to 240 VAC, 50 or 60 Hz | 100 to 240 VAC, 50 or 60 Hz | 100 to 240 VAC, 50 or 60 Hz |
| | Operating Temperature | 0 °C to 40 °C (32 °F to 104 °F) | 0 °C to 40 °C (32 °F to 104 °F) | 0 °C to 40 °C (32 °F to 104 °F) | 0 °C to 40 °C (32 °F to 104 °F) | 0 °C to 40 °C (32 °F to 104 °F) | 0 °C to 40 °C (32 °F to 104 °F) |
| Working Environment | Operating Humidity | 10% to 80% (No Condensation) | 10% to 80% (No Condensation) | 10% to 90% (No Condensation) | 10% to 90% (No Condensation) | 10% to 90% (No Condensation) | 10% to 90% (No Condensation) |
| | Working Life | ≥ 60,000 Hours | ≥ 60,000 Hours | ≥ 60,000 Hours | ≥ 60,000 Hours | ≥ 60,000 Hours | ≥ 60,000 Hours |
| Physical Features | Dimension (W×H×D) | 1213.5 mm × 684.3 mm × 71.74 mm (47.78" × 26.94" × 2.82") | 1213.5 mm × 684.3 mm × 71.74 mm (47.78" × 26.94" × 2.82") | 1,211.54 × 682.34 × 68.9 mm (47.69" × 26.86" × 2.71") | 1,211.54 × 682.34 × 68.9 mm (47.69" × 26.86" × 2.71") | 1210.81 mm × 681.76 mm × 68.9 mm (47.67" × 26.84" × 2.71") | 1210.81 mm × 681.76 mm × 68.9 mm (47.67" × 26.84" × 2.71") |
| | Frame Width | 2.3 mm (top/left) 1.2 mm (bottom/right) | 2.3 mm (top/left) 1.2 mm (bottom/right) | 0.9 mm (top/left) 0.9 mm (bottom/right) | 0.9 mm (top/left) 0.9 mm (bottom/right) | 0.44 mm (top/left) 0.44 mm (bottom/right) | 0.4 mm (top/left) 0.44 mm (bottom/right) |

LCD Wall-Mounted Brackets

| | |
|-------------------------------|---|
| Model | DS-DN4655W/U |
| Image |  |
| Colour | Hikvision Black |
| Material | Cold-rolled Steel Plate (SPCC) |
| Dimensions (W × H × D) | 762 × 473 × 85 mm (Single Bracket) |
| Weight | 3.8 kg (8.38 lbs) (Single Bracket) |

LCD Modular Brackets

| Model | DS-DN55F3M/F | DS-DN55F3M/B | DS-DN55B3M/F | DS-DN55B3M/B | DS-DN55E4M/F | DS-DN55B3M/B |
|-------------------------------|---|---|---|---|--|---|
| Image |  |  |  |  |  |  |
| Appearance | Hikvision Black | | | | | |
| Material | Cold-rolled Steel Plate (SPCC) | | | | | |
| Dimensions (W × H × D) | 846.5 × 682 × 200 mm | 1,211 × 800 × 830 mm (47.68 × 31.5 × 32.68 inch) | 848 × 682.5 × 200 mm | 1,213.5 × 800 × 834 mm (main body 334 mm) | 846.5 × 682.5 × 200 mm (33.33 × 26.87 × 7.87") | 1212 × 800 × 830 mm (47.72 × 31.5 × 32.68") |
| Weight | 23.8 ± 0.5 kg (52.47 ± 1.1 lbs) | 69.8 ± 0.5 kg (153.88 ± 1.1 lbs) | 20.8 ± 0.5 kg (45.86 ± 1.1 lbs) | 75 kg (165.35 lbs) | 20.8 ± 0.5 Kg (45.86 ± 1.1 lb) | 65.1 ± 0.5 Kg (143.52 ± 1.1 lb) |
| Applicable Models | DS-D2055LU-Y DS-D2055HU-Y | DS-D2055LU-Y DS-D2055HU-Y | DS-D2055LR-G DS-D2055HR-G | DS-D2055LR-G DS-D2055HR-G | DS-D2055LE-G DS-D2055HE-G | DS-D2055LE-G DS-D2055HE-G |

LED Poster Display

CONVENIENT ADVERTISING

Manage content with HikCentral FocSign software; for scheduled releases, multiple templates, etc.

FLEXIBLE DEPLOYMENT

Support a max. of 10 pieces of self-splicing with HDMI cables



Easy seamless splicing to form a large screen

Superior image/video quality & eye-catching brightness

Super thin at 2.68 in.
Super light at 29-32 kg.

Supports flexible mounting solutions




*Floor stands sold separately



ALL-IN-ONE DESIGN

- Built-in Digital Signage player and storage allows remote management with Focsign software
- Built-in LED controller
- Ultra fine Pixel Pitch at P1.2, P1.5, and P1.8
- Hikvision GOB (Glue On Board) Craft Surface Colloid Layer for better protection (waterproof, moisture proof, anti-corrosion, dust-proof, anti-static, anti-oxidation)

LED Poster Display

| Model | | DS-D4212MI-070H(B) P1.2 Ultra Slim LED poster | DS-D4215MI-070H(B) P1.5 Ultra Slim LED poster | DS-D4218MI-070H(B) P1.8 Ultra Slim LED poster |
|--------------------|---|---|--|---|
| Image | |  |  |  |
| Cabinet | Pixel Configuration | SMD Triad LED | SMD Triad LED | SMD Triad LED |
| | Pixel Pitch Category | P1.2 | P1.5 | P1.8 |
| | Pixel Pitch | 1.25 mm | 1.5625 mm | 1.875 mm |
| | Modules Component | Cabinet x 5, single cabinet (2 x 4) | Cabinet x 5, single cabinet (2 x 4) | Cabinet x 5, single cabinet (2 x 4) |
| | Dimensions (W x H x D) | 613 x 1695.5 x 68.1 mm (24.1 x 66.8 x 2.7 inch) | 613 x 1695.5 x 68.1 mm (24.1 x 66.8 x 2.7 inch) | 613 x 1695.5 x 68.1 mm (24.1 x 66.8 x 2.7 inch) |
| | Resolution | 480 x 1350 | 384 x 1080 | 320 x 900 |
| | Area | 1.0125 m ² | 1.0125 m ² | 1.0125 m ² |
| | Weight | 32.5 kg (71.65 lb.) | 29 kg (64.0 lb.) | 29 kg (64.0 lb.) |
| | Pixel Density | 640000 dots/m ² | 409600 dots/m ² | 284444 dots/m ² |
| | Lamp Board Housing | Without housing, glue potting | Without housing, glue potting | Without housing, glue potting |
| | Cabinet Material | Aluminum alloy | Aluminum alloy | Aluminum alloy |
| Maintenance Method | Front maintenance for cabinet, and rear maintenance for system backpack | Front maintenance for cabinet, and rear maintenance for system backpack | Front maintenance for cabinet, and rear maintenance for system backpack | |
| Display | White Balance Brightness | 600 cd/m ² | 600 cd/m ² | 600 cd/m ² |
| | Colour Temperature | 3000 to 10000 K adjustable | 3000 to 10000 K adjustable | 3000 to 10000 K adjustable |
| | Viewing Angle | Horizontal 160°, vertical 160° | Horizontal 160°, vertical 160° | Horizontal 160°, vertical 160° |
| | Contrast Ratio | ≥ 3000:1 | ≥ 3000:1 | ≥ 3000:1 |
| | Colour Uniformity | ± 0.003 Cx, Cy | ± 0.003 Cx, Cy | ± 0.003 Cx, Cy |
| | Brightness Uniformity | ≥ 97% | ≥ 97% | ≥ 97% |





Hikvision Commercial Displays

Product Quick Guide

Canada 2023

©2023 Hikvision Canada Inc. All rights reserved. Hikvision is a registered trademark of Hikvision Digital Technology Co., Ltd. in Canada and other countries. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners. Product specifications and availability are subject to change without notice. 22_006

Connect with us:      | www.hikvision.ca