



AAEON NANOCOM-APL-B10-0004 Intel Atom x5-E3940 COM Express Type 10 CPU Module

Key Features:

- Onboard LPDDR4, up to 8GB
- Onboard eMMC, up to 64GB (Optional)
- LVDS x 1, DDI x 1
- USB 2.0 x 8, USB 3.2 Gen 1 x 2
- PCIe [x1] x 4
- Intel I226-IT 2.5GbE x 1
- COM Express Type 10, 3.31" x 2.17" (84mm x 55mm)


Description

The NANOCOM-APL-B10-0004 COM Express Type 10 CPU Module is powered by Intel Atom x7-E3950 processor. The NANOCOM-APL-B10-0004 provides up to 4GB memory alongside supporting 1x LAN port and 10x USB ports.

NanoCOM-APL-B10

COM Express Type 10 CPU Module with Onboard Intel® Atom®/Celeron®/Pentium® Processor

COM Express CPU Modules

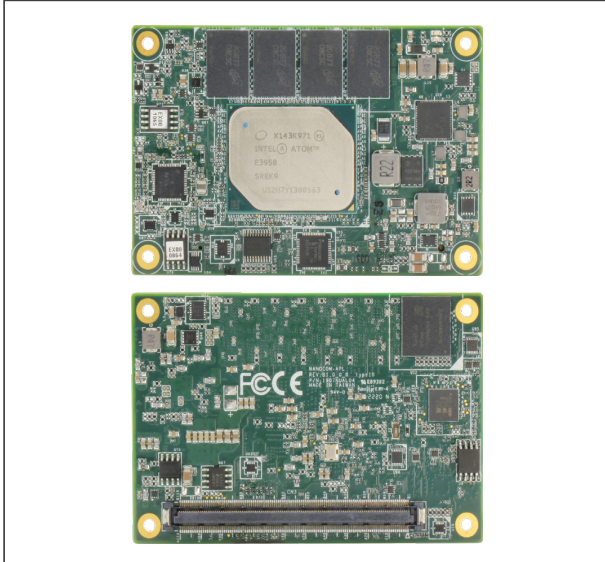

Features

- Onboard LPDDR4, up to 8GB
- Onboard eMMC, up to 64GB (Optional)
- LVDS x 1, DDI x 1
- USB 2.0 x 8, USB 3.2 Gen 1 x 2
- PCIe [x1] x 4
- Intel® I226-IT 2.5GbE x 1
- COM Express Type 10, 3.31" x 2.17" (84mm x 55mm)



Specifications

System	
Form Factor	COM Express Mini Size, Type 10
CPU	Intel Atom® Processor X Series: Intel Atom® x7-E3950 (4C/4T, 1.60 GHz, 12W) Intel Atom® x5-E3940 (4C/4T, 1.60 GHz, 9.5W) Intel Atom® x5-E3930 (2C/2T, 1.30 GHz, 6.5W) Intel® Celeron® Processor N Series: Intel® Celeron® Processor N3350 (2C/2T, 1.10 GHz, 6W) Intel® Pentium® Processor N Series: Intel® Pentium® Processor N4200 (4C/4T, 1.10 GHz, 6W)
Chipset	Integrated with Intel® SoC
Memory	Onboard LPDDR4 1866MHz, up to 8GB
Onboard Storage	eMMC, up to 64GB (Optional)
BIOS	AMI UEFI
Wake on LAN	Yes
Watchdog Timer	255 Levels
Dimension	3.31" x 2.17" (84mm x 55mm)
Security	fTPM
Power	
Power Requirement	+12V and +5VSB for ATX, +12V for AT
Power Type	AT/ATX
Power Consumption (Typical)	Intel® Pentium® Processor N4200, 0.6A @+12V
Display	
Graphics Controller	Intel® HD Graphics 500 Intel® HD Graphics 505
Video Output	Dual Display: DDI x 1, up to 3840 x 2160 18/24-bit Single-Channel LVDS/eDP x 1, up to 1920 x 1080
I/O	
Ethernet	Intel® I226-IT 2.5GbE x 1
Audio	High Definition Audio Interface

USB Port	USB 2.0 x 8, USB 3.2 Gen 1 x 2
Serial Port	2-Wire UART x 2 (Tx/Rx)
HDD Interface	SATA III x 2
Expansion	PCIe 3.0 [x1] x 4 LPC x 1
GPIO	8-bit
SMBus/I2C	I2C x 1, SMBus x 1
Environment	
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Storage Temperature	-40°F ~ 185°F (-40°C ~ 85°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
EMC	CE/FCC Class A
OS Support	Windows® 10 (64-bit) Linux Ubuntu 20.04.3/Kernel 5.13.0
Weight	0.15 lb. (0.07Kg)

Packing List

- NANOCOM-APL-B10

Optional Accessories


Part Number	Description
ECB-920A-A11-0001	COMe Type 6/10 Carrier Board. ATX. 2.5GbE. 8USB. 2COM. 4SATA. PCIe. AT/ATX. Rev. A1.1
NanoCOM-APL-E-HSP01	Heat Spreader. 84 x 55 x 11 mm. Black. NanoCOM-APL For E39xx CPU only
NanoCOM-APL-N-HSP01	Heat Spreader. 84 x 55 x 11 mm. Black. NanoCOM-APL For Nxxx CPU only
NANOCOM-APL-E-FAN01	Cooler. 84 x 55 x 18mm. 4pin. NanoCOM-APL E39XX Series

NanoCOM-APL-B10


04

COM Express CPU Modules

Block Diagram Unit: mm

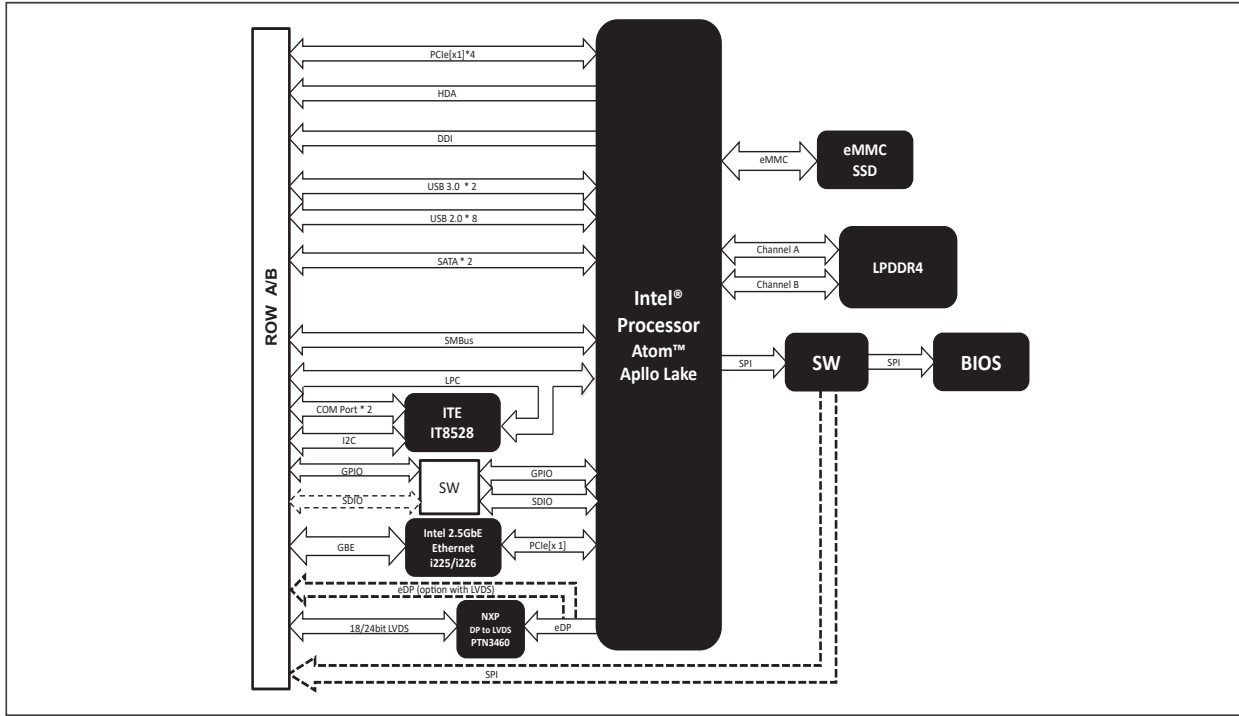



Dimension Unit: mm

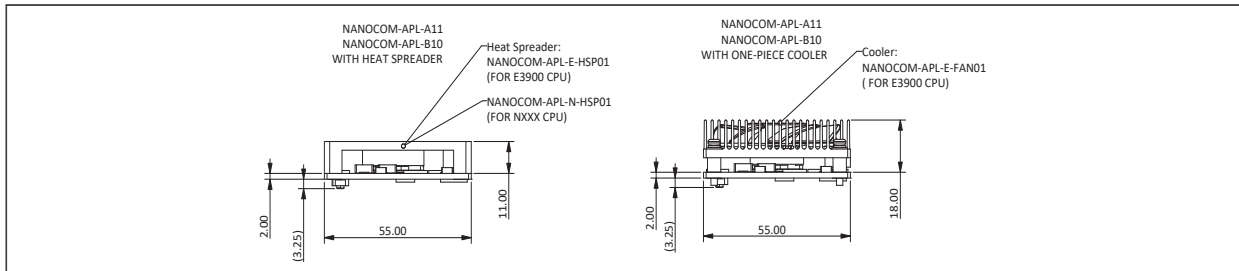

Ordering Information

Part Number	COM Express Type	CPU	Memory	ECC support	Display	Storage	LAN	USB	UART	Expansion	Power	Temperature	Others
NANOCOM-APL-B10-0001	Type 10	Intel® Pentium® Processor N4200	8GB Onboard LPDDR4	—	LVDS x 1, DDI x 1	SATA III x 2, 64GB eMMC	Intel® I226-IT x 1	USB 3.2 Gen 1 x 2 USB 2.0 x 8	2-Wire UART x 2 (Tx/Rx)	PCIe [x1] x 4	12V	0°C ~ 60°C	LPC, GPIO 8-bit, I2C, SMBus
NANOCOM-APL-B10-0002	Type 10	Intel® Celeron® Processor N3350	4GB Onboard LPDDR4	—	LVDS x 1, DDI x 1	SATA III x 2, 64GB eMMC	Intel® I226-IT x 1	USB 3.2 Gen 1 x 2 USB 2.0 x 8	2-Wire UART x 2 (Tx/Rx)	PCIe [x1] x 4	12V	0°C ~ 60°C	LPC, GPIO 8-bit, I2C, SMBus
NANOCOM-APL-B10-0003	Type 10	Intel Atom® x7-E3950	8GB Onboard LPDDR4	—	LVDS x 1, DDI x 1	SATA III x 2, 64GB eMMC	Intel® I226-IT x 1	USB 3.2 Gen 1 x 2 USB 2.0 x 8	2-Wire UART x 2 (Tx/Rx)	PCIe [x1] x 4	12V	0°C ~ 60°C	LPC, GPIO 8-bit, I2C, SMBus
NANOCOM-APL-B10-0004	Type 10	Intel Atom® x5-E3940	4GB Onboard LPDDR4	—	LVDS x 1, DDI x 1	SATA III x 2, 32GB eMMC	Intel® I226-IT x 1	USB 3.2 Gen 1 x 2 USB 2.0 x 8	2-Wire UART x 2 (Tx/Rx)	PCIe [x1] x 4	12V	0°C ~ 60°C	LPC, GPIO 8-bit, I2C, SMBus
NANOCOM-APL-B10-0005	Type 10	Intel Atom® x5-E3930	4GB Onboard LPDDR4	—	LVDS x 1, DDI x 1	SATA III x 2, 16GB eMMC	Intel® I226-IT x 1	USB 3.2 Gen 1 x 2 USB 2.0 x 8	2-Wire UART x 2 (Tx/Rx)	PCIe [x1] x 4	12V	0°C ~ 60°C	LPC, GPIO 8-bit, I2C, SMBus

Images

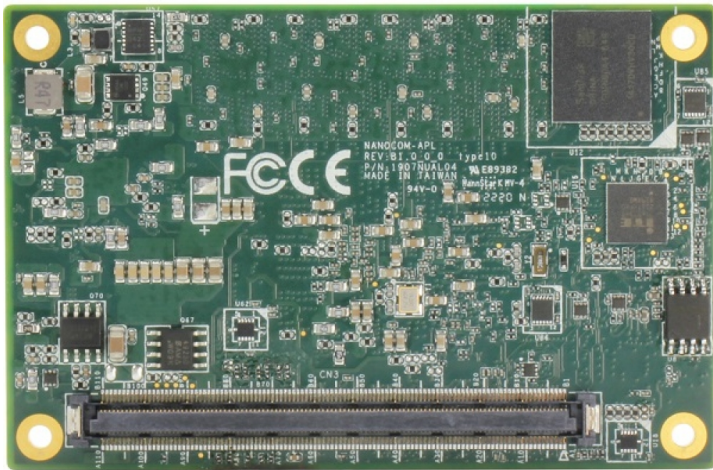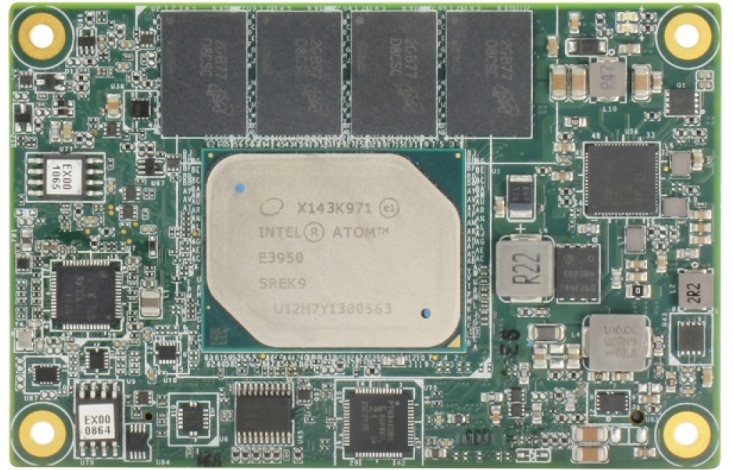

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660