

# UC-B160-Z

## Crestron Flex Wall Mount UC Video Conference System for Zoom Rooms™ Software



- *Front-of-room video conferencing solution for Zoom Rooms™ software*
- *Present, call, conference, and collaborate — all through a single smart soundbar and 10.1 in. tabletop touch screen*
- *Native Zoom Rooms touch screen UI — provides a consistent user experience with simple operation and one-touch meeting joins*
- *A complete kit solution — just add displays and mounts*
- *Easy to specify and install — no custom design, programming, or software installation required*
- *Easy to provision and manage through Crestron XiO Cloud™ service*
- *Connects and communicates securely over any enterprise or SMB network*
- *Supports single or dual display configuration*
- *High-powered 2-way stereo speaker smart soundbar with 180° far-field adaptive beamforming microphone array, advanced AEC & DSP technology, integrated high-definition USB camera with lossless digital autozoom and HDMI® input for laptop and other AV content sources*
- *10.1 in. (257 mm) tabletop color touch screen with onscreen calendaring and meeting management and optional control of room lighting, shades, thermostats, and other equipment<sup>1</sup>*
- *Enterprise-grade security*
- *Complete kit contains the Crestron® smart soundbar, touch screen, UC Engine assembly, cables, power supplies, and 1-year Crestron XiO Cloud Premium subscription<sup>2</sup>*

The Crestron Flex UC-B160-Z system provides a complete video conference room solution for use with Zoom Rooms software. It supports single or dual video displays, and features the Crestron UC Video Conference Smart Soundbar & Camera (UC-SB1-CAM-FLEX), which comprises a high-performance, full-duplex conferencing speakerphone and camera in one wall mountable device. Control of the complete system is provided by a high-definition 10.1 in. tabletop touch screen.

### Native Zoom Rooms™ Software Experience

The UC-B160-Z system features Zoom Rooms conferencing software that enables audio and video connectivity for easy collaboration and content sharing.

### Crestron® Smart Soundbar & Camera

An incredible front-of-room device, the [UC-SB1-CAM-FLEX](#) eliminates the need to install additional cameras, microphones or speakers. Mounted on the wall or placed on a credenza beneath the display(s), the smart soundbar looks great and sounds even better. Its high-powered stereo speakers, adaptive beamforming microphone, and advanced digital signal processing deliver exceptional full-duplex speakerphone performance with highly intelligible, echo-free voice clarity. Its compact design reduces clutter on the conference table, and even accommodates rooms with no table at all.

When mounting on a wall, installation is a breeze using the integral hinged mounting bracket, which attaches easily to the wall and allows the soundbar to be tipped forward for full access to the rear panel connections.

The soundbar's integrated 180° far-field microphone array faithfully captures voices throughout the room using adaptive beamforming technology to focus in on whoever is speaking. Its high-powered, two-way stereo speakers produce full, rich and real sounding audio for both voice and program material. High-performance AEC technology achieves transparent full-duplex performance free of distracting echo or noise. Wideband audio codec support allows for full-spectrum, bidirectional voice communication.

# UC-B160-Z

## Crestron Flex Wall Mount UC Video Conference System for Zoom Rooms™ Software

The integrated Huddly IQ™ camera features an ultra wide-angle 150° diagonal field of view to capture an entire conference room in Full HD 1080p video resolution. High precision aspherical optics, 12 MP CMOS sensor, and advanced video processing ensure an immersive, crystal clear video image free from light or noise artifacts or optical aberrations. Genius Framing digital autozoom intelligently detects the people in the room and frames them perfectly for an optimal view. With Genius Framing, there's no need to control the camera manually or rely on stored presets.

The smart soundbar features a multicolor LED status bar, which displays the volume setting and changes color to indicate operation and mute status.

### 10.1 in. Touch Screen

With its clean, contemporary design highlighted by edge-to-edge glass and stunning color graphics, the Crestron TSW-1060 series touch screen makes an elegant statement on any tabletop. PoE (Power over Ethernet) connectivity and a range of mounting options make installation simple for both new and retrofit applications.

### Tabletop Kit for TSW-1060

The TSW-1060-TTK provides a stylish and convenient tabletop enclosure for a TSW-1060 Touch Screen. The touch screen is angled when installed in the enclosure. The complete assembly may be placed on any flat, level surface. Wiring may be passed out the rear of the enclosure through a grommet and strain relief, or routed through the bottom for a very clean, cordless appearance.

### UC-ENGINE Assembly

All the capabilities of a complete Zoom Rooms video conferencing and content sharing solution are empowered by the UC Engine. For ultimate performance, Crestron employs a powerful Intel® NUC Mini PC running Zoom Rooms software with built-in Crestron XiO Cloud provisioning. The UC Engine forms the core of the UC-B160-Z system, providing extreme processing performance, Gigabit Ethernet, and complete connectivity for one or two HD displays and the smart soundbar.

Presenting and sharing content from a laptop PC is facilitated through a single HDMI input, supporting full-motion HD video and audio via the included HDMI to USB converter. The converter and UC Engine are mounted together on a bracket, which comes fully pre-assembled and ready to install behind the display device(s). All required cables are included for a complete and simple installation. Just add your choice of HD displays, display mounts, two LAN connections, and AC power.

### Network Management and Security

Crestron Flex is an enterprise-grade solution, engineered to integrate seamlessly into any Zoom Rooms deployment. Crestron Flex is ideally equipped for mass deployment throughout any-sized corporate, university, medical, military, or government facility.

IoT cloud based provisioning enables complete network configuration in advance of hardware delivery, with touchless updates following installation. Crestron Fusion® or Crestron XiO Cloud management enables monitoring and logging of room and equipment usage, as well as centralized help desk support. Advanced security features ensure privacy, reliability, and compliance with your organization's IT policies.

### Crestron XiO Cloud™ Provisioning and Management Service

The UC-B160-Z is compatible with the Crestron XiO Cloud™ service, which is an IoT (Internet of Things) based platform for remotely provisioning, monitoring, and managing Crestron devices across an enterprise or an entire client base. The service enables installers and IT managers to deploy and manage thousands of devices in the amount of time it would ordinarily take to manage just one. For more information, visit [www.crestron.com/xiocloud](http://www.crestron.com/xiocloud).

# UC-B160-Z

## Crestron Flex Wall Mount UC Video Conference System for Zoom Rooms™ Software

### Specifications

#### Included Components

**UC-SB1-CAM-FLEX:** UC video conference smart soundbar & camera

**TSW-1060-B-S:** 10.1 in. touch screen, black

**TSW-1060-TTK-B-S:** Tabletop kit for touch screen, black

**UC-BRKT-100-Z-ASSY:** UC Engine Assembly, comprised of:

UC-ENGINE-Z: UC Engine for Zoom Rooms video;

HD-CONV-USB-200: HDMI to USB 3.0 Converter for content ingest;

UC-CONN-HD: EDID emulator for UC Engine display output;

CBL-MDP-HD-0.5: Mini DisplayPort™ to HDMI converter  
Mounting bracket

**CBL-USBC-HD-9:** USB-C® to HDMI converter cable, USB Type-C® male to HDMI Type A male, 9 ft (2.7 m)

**CBL-HD-DVI-20:** Crestron Certified HDMI to DVI Interface Cable, 20 ft

**CBL-HD-THIN-HS-6:** Thin HDMI cable for connecting display device, Type A male-to-male, 6 ft (1.8 m)

**CBL-CAT5E-7:** (2) Ethernet LAN cables for UC Engine, RJ45-to-RJ45, black, 7 ft (2.1 m)

**DM-CBL-ULTRA-PC-50:** Ethernet LAN cable for touch screen, CAT6a, RJ45-to-RJ45, blue, 50 ft (15 m)

**PWE-4803RU:** PoE injector for touch screen

**CCS-UCA-KB-USB:** Wireless keyboard w/touchpad for setup

#### Smart Soundbar & Camera

**Speakers:** Stereo 2-way, 20 watts per channel, 3 in. (76 mm) woofers, 3 x 4-3/8 in. (76 x 112 mm) passive radiators, 1 in. (25 mm) dome tweeters, 80 Hz to 20 kHz (±3 dB) frequency response, 91 dB SPL @ 1 m output level (both channels driven at full power)

**Microphone:** Linear quad-element far-field adaptive beamforming microphone array, 23 ft (7 m) pickup range, 180° horizontal pickup angle, 20 Hz to 8 kHz frequency response

**Audio DSP:** Acoustic echo cancellation, dereverberation, automatic gain control, dynamic noise suppression, adaptive beamforming, speaker volume control; full-duplex IEEE 1329 Type 1 compliant

**Camera Optics:** 12 Megapixel Sony® IMX477 Type 1/2.3 CMOS sensor, ultra wide angle six element aspherical glass lens, f/2.8 aperture

**Camera Field of View:** 150° diagonal, 120° horizontal, 90° vertical

**Camera Processing:** Intel Movidius® Myriad® X VPU with Neural Compute Engine hardware accelerator, dynamic light optimization, auto white balance, autozoom

**Camera Autozoom:** Genius Framing automatic lossless digital zoom intelligently frames people in the room

**Camera Noise Reduction:** 3D noise reduction, bias compensating spatio-temporal filtering, wide area chroma filtering, flicker elimination

**Camera Scaling:** Real-time scaling, dewarping, and perspective correction

**Camera Resolution:** HD 1080p @ 30 fps

**Camera Color Space:** YCbCr 4:2:0, YCbCr 4:2:2, MJPEG

**USB:** USB 3.0 Type-B port; UAC 1.0, UVC 1.1, & HID; 2-channel stereo far-end/content signal input, 2-channel mono microphone signal output, camera output; for audio, video, and communications interface to UC Engine

**Analog Audio Input:** 2-Channel stereo via 3.5 mm TRS mini-phone jack, fixed level (bypasses DSP), 1 Vrms maximum per channel for full rated output, for in-room amplification of an external audio source

**Analog Audio Output:** 2-Channel stereo via 3.5 mm TRS mini-phone jack, fixed level, 1 Vrms maximum, feeds amplified audio content to an assistive listening system

**Status Bar:** (1) Multi-segment RGBY LED zero-center mutually diverging linear bargraph; Indicates the speaker volume, microphone mute, and speaker mute in red and green LEDs

**Main Power:** IEC 60320 C14 main power inlet (power cord included), 500 mA maximum @ 100-240 VAC, 50/60 Hz

**Enclosure:** Lightly textured gunmetal black finish, plastic housing, perforated stainless steel grilles, die-cast aluminum rear cover, steel hinged mounting bracket

**Mounting:** Freestanding or surface wall mount at ear/face level

#### Dimensions:

**Height:** 4.57 in. (117 mm)

**Width:** 43.60 in. (1108 mm)

**Depth:** 3.90 in. (100 mm)

**Weight:** Approximately 15 lb (6.8 kg)

Refer to the [UC-SB1-CAM-FLEX](#) spec sheet for additional specifications and compliances.

# UC-B160-Z

## Crestron Flex Wall Mount UC Video Conference System for Zoom Rooms™ Software

### Tabletop Touch Screen

**Touch Screen:** 10.1 in. (257 mm) diagonal capacitive multi-touch TFT active matrix color LCD, 1280 x 800 pixels, displays Zoom Rooms UI plus optional Crestron Smart Graphics® room control UI<sup>1</sup>

**Ethernet:** 10/100 Mbps; enterprise grade security and management including IEEE 802.1X, Active Directory® authentication, SSL, TLS, SSH, SFTP (SSH File Transfer Protocol), digest access authentication, password login, HTTPS secure provisioning, Crestron XiO Cloud client, IEEE 802.3at compliant

**Power over Ethernet:** IEEE 802.3at compliant PoE or PoE+ PD (Powered Device);

- Requests 15 Watts from an 802.3at Type 2 PSE with LLDP advanced power management;
- Requests 30 Watts (PoE+ Class 4) from an 802.3at Type 2 PSE without LLDP;
- Requests 15.4 Watts (PoE Class 0) from an 802.3af (or 802.3at Type 1) PSE

**PoE Injector:** A PoE injector is included to power the touch screen if network PoE is not available

**Construction:** Plastic tabletop housing, smooth black finish, edge-to-edge glass with black surround

#### Dimensions:

**Height:** 5.42 in. (138 mm)

**Width:** 10.23 in. (260 mm)

**Depth:** 5.69 in. (145 mm)

**Weight:** 41.2 oz (1166 g)

Refer to the [TSW-1060-B-S](#), [TSW-1060-TTK-B-S](#), and [PWE-4803RU](#) spec sheets for additional specifications and compliances. One additional TSW-1060 series touch screen may be added.

### UC Engine Assembly

**Mini PC:** Intel NUC Kit NUC6i7KYK

**Processor:** 6th generation Intel Core® i7-6770HQ processor with Intel Iris® Pro Graphics 580, 8 GB RAM, 128 GB SSD, Intel I219-LM 10/100/1000 Mbps Ethernet, Windows® 10 IOT Edition OS

**UC Client:** Zoom Rooms

**Management Client:** Crestron XiO Cloud Service

**USB:** USB 3.0

**Content Ingest:** HDMI input via HDMI to USB 3.0 converter (model HD-CONV-USB-200, included)

**Display Output:** Single or dual display support, native Mini DisplayPort (primary) and USB Type-C (secondary) outputs, HDMI outputs enabled via converter cables (included)

**Camera Input Resolution:** HD 1080p @ 30 fps

**Content Input Resolution:** HD 1080p @ 60 fps

**Display Output Resolution:** HD 1080p @ 60 fps

**Power:** 19 VDC via external 100-240 VAC, 50/60 Hz adapter (included)

**Construction:** Metal mounting bracket, black, preassembled with UC Engine and USB to HDMI converter

**Mounting:** Surface wall mount behind the display device, or attach to the rear of the display device via the bolts attaching the display to a VESA® compliant display mount; the Crestron bracket includes mounting holes on both side edges, spaced 100, 200, and 300 mm vertically, to allow for attachment to either side of the display mounting plate

#### Dimensions:

**Height:** 16.00 in. (407 mm)

**Width:** 14.00 in. (356 mm)

**Depth:** 1.62 in. (41 mm)

Refer to the [UC-ENGINE-Z](#), [HD-CONV-USB-200](#), and [UC-BRKT-100-Z-ASSY](#) spec sheets for additional specifications and compliances.

## Models & Accessories

### Model

#### UC-B160-Z

Crestron Flex Wall Mount UC Video Conference System for Zoom Rooms™ Software

### Included Accessories

#### CBL-CAT5E-7

(2) CAT5e Cable, RJ45-to-RJ45, Black, 7 ft (2.1 m)

#### CBL-HD-DVI-20

HDMI to DVI Interface Cable, 20 ft (6.1 m)

#### CBL-USB-HD-9

USB 3.0 to HDMI Converter Cable, USB Type-C Male to HDMI Type A Male, 9 ft (2.7 m)

#### CCS-UCA-KB-USB

Wireless Keyboard w/Touchpad

#### DM-CBL-ULTRA-PC-50

DigitalMedia™ Ultra Patch Cable, 50 ft (15 m)

#### PWE-4803RU

PoE Injector

#### TSW-1060-B-S

10.1 in. Touch Screen, Black Smooth

#### TSW-1060-TTK-B-S

Tabletop Kit for TSW-1060, Black Smooth

# UC-B160-Z

## Crestron Flex Wall Mount UC Video Conference System for Zoom Rooms™ Software

### UC-BRKT-100-Z-ASSY

UC Engine Assembly with UC-ENGINE-Z, HD-CONV-USB-200, & UC-CONN-HD

### UC-SB1-CAM-FLEX

UC Video Conference Smart Soundbar

### Available Accessories

---

#### SW-XIOC-S-1

Crestron XiO Cloud Standard Provisioning and Management Service for one device, 1 year subscription

#### SW-XIOC-S-2

Crestron XiO Cloud Standard Provisioning and Management Service for one device, 2 year subscription

#### SW-XIOC-S-3

Crestron XiO Cloud Standard Provisioning and Management Service for one device, 3 year subscription

#### SW-XIOC-P-1

Crestron XiO Cloud Premium Provisioning and Management Service for one device, 1 year subscription

#### SW-XIOC-P-2

Crestron XiO Cloud Premium Provisioning and Management Service for one device, 2 year subscription

#### SW-XIOC-P-3

Crestron XiO Cloud Premium Provisioning and Management Service for one device, 3 year subscription

### TSW-560/760/1060-SMK

Swivel Mount Kit for TSW-x60-TTK Series

### Notes:

1. Room control capability (lighting, shades, thermostats, etc.) requires additional equipment and commissioning to be provided by a Crestron authorized integrator and/or programmer. Additional costs may apply.
2. Complimentary Crestron XiO Cloud subscriptions are subject to the terms of the Crestron Cloudware License Agreement at <https://www.crestron.com/cloudwarelicensepdf>, as well as additional terms of the Crestron Cloudware License Agreement Addendum at <https://www.crestron.com/cloudwarelicenseaddendumpdf>, which control in any conflict with the Agreement. Complimentary subscriptions may be applied to new accounts only. New UC-P110-T phones may be added to existing Crestron XiO Cloud subscription accounts at a discounted rate. An additional purchase toward the existing subscription account term may be required. For more information, please contact [license@crestron.com](mailto:license@crestron.com).

This product may be purchased from an authorized Crestron dealer. To find a dealer, please contact the Crestron sales representative for your area. A list of sales representatives is available online at [www.crestron.com/How-To-Buy/Find-a-Representative](http://www.crestron.com/How-To-Buy/Find-a-Representative) or by calling 855-263-8754.

The specific patents that cover Crestron products are listed online at [www.crestron.com/legal/patents](http://www.crestron.com/legal/patents).

Certain Crestron products contain open source software. For specific information, visit [www.crestron.com/opensource](http://www.crestron.com/opensource).


Crestron, the Crestron logo, Crestron Fusion, DigitalMedia, Smart Graphics, and Crestron XiO Cloud are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. HDMI is either a trademark or registered trademark of HDMI Licensing LLC in the United States and/or other countries. Huddly IQ is either a trademark or registered trademark of Huddly AS in the United States and/or other countries. Intel, Intel Core, and Intel Iris are either trademarks or registered trademarks of Intel Corporation in the United States and/or other countries. Movidius and Myriad are either trademarks or registered trademarks of Movidius Ltd in the United States and/or other countries. Sony is either a trademark or registered trademark of Sony Corporation in the United States and/or other countries. USB Type-C and USB-C are either trademarks or registered trademarks of USB Implementers Forum, Inc. in the United States and/or other countries. DisplayPort and VESA are either trademarks or registered trademarks of Video Electronics Standards Association in the United States and/or other countries. Zoom Rooms is either a trademark or registered trademark of Zoom Video Communications, Inc. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography. Specifications are subject to change without notice. ©2019 Crestron Electronics, Inc.

Specifications are subject to change without notice.

©2019 Crestron Electronics, Inc.

# UC-B160-Z





Crestron Flex Wall Mount UC Video Conference System for Zoom Rooms™ Software

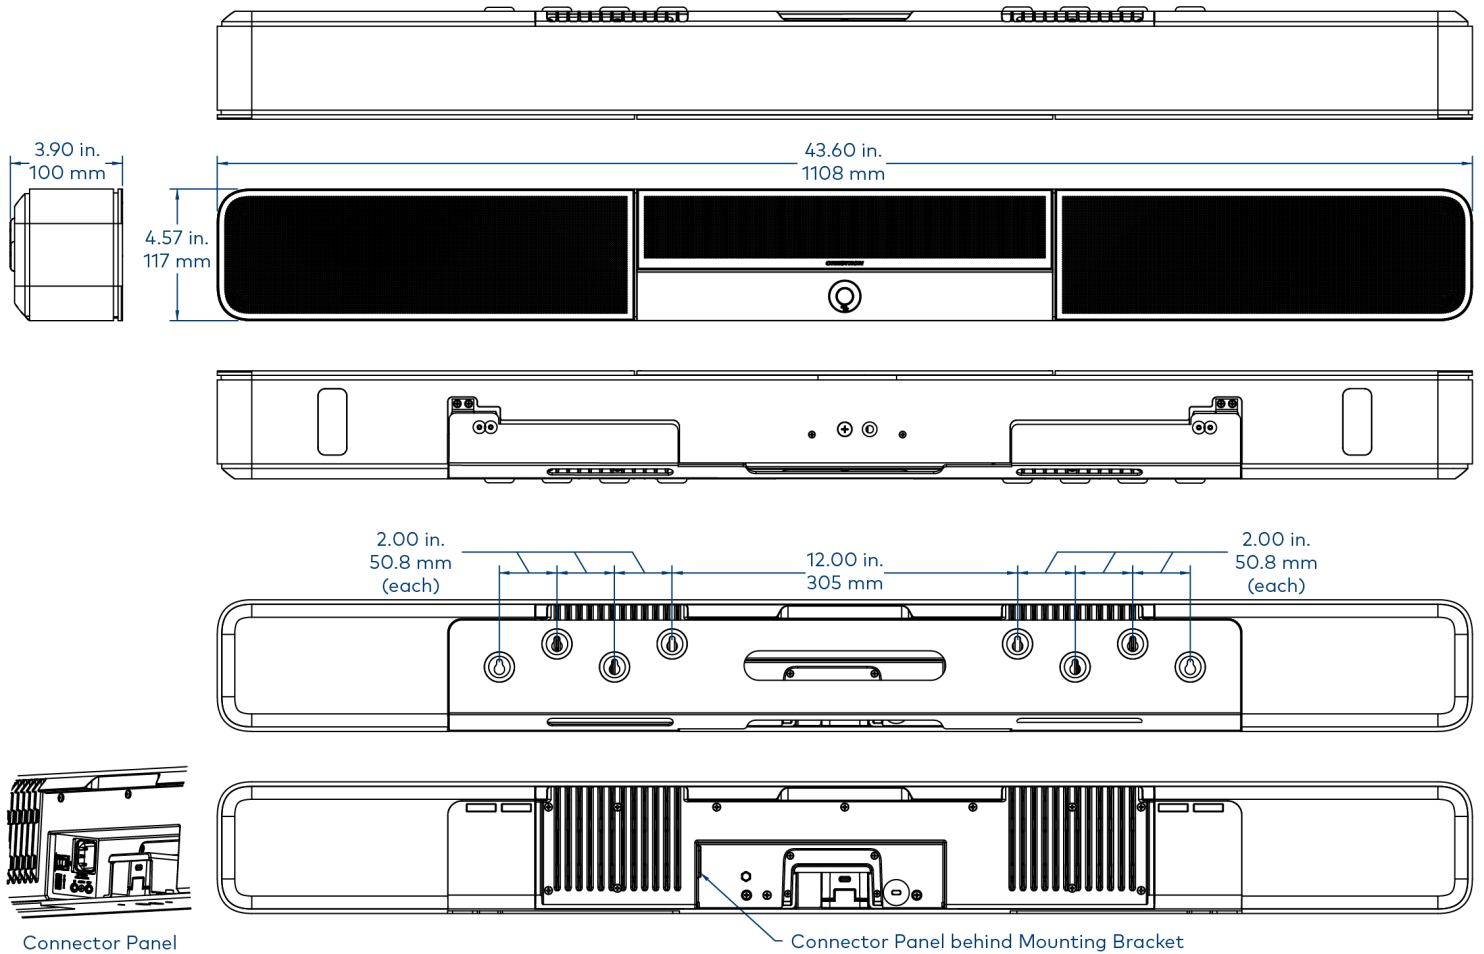

UC-SB1-CAM-FLEX

# UC-B160-Z


Crestron Flex Wall Mount UC Video Conference System for Zoom Rooms™ Software

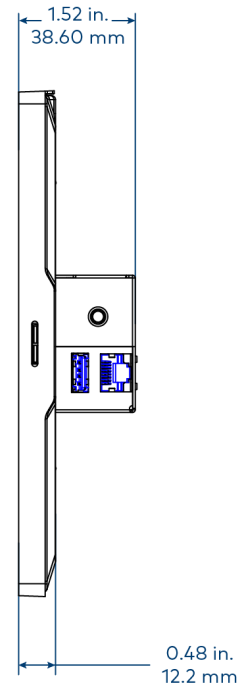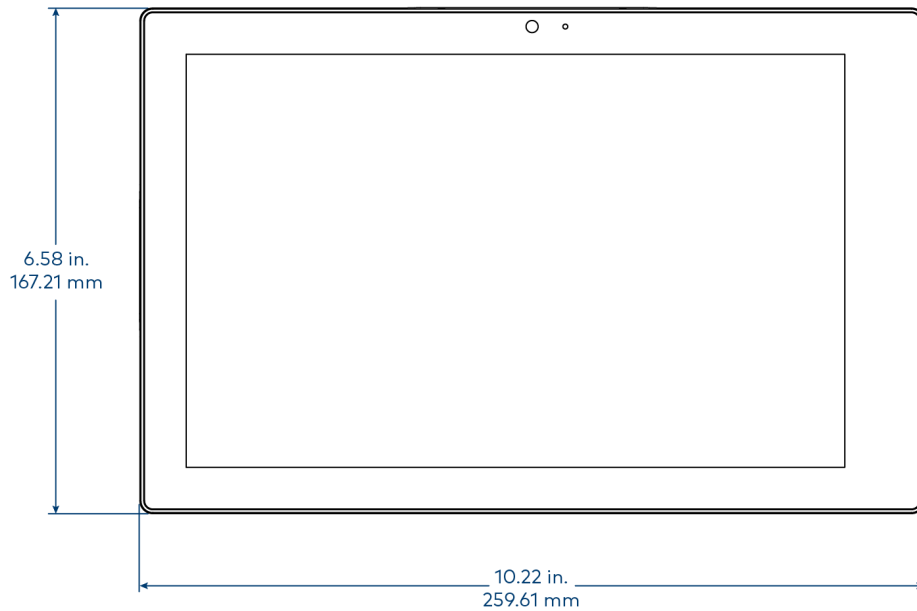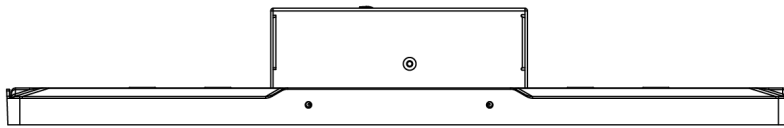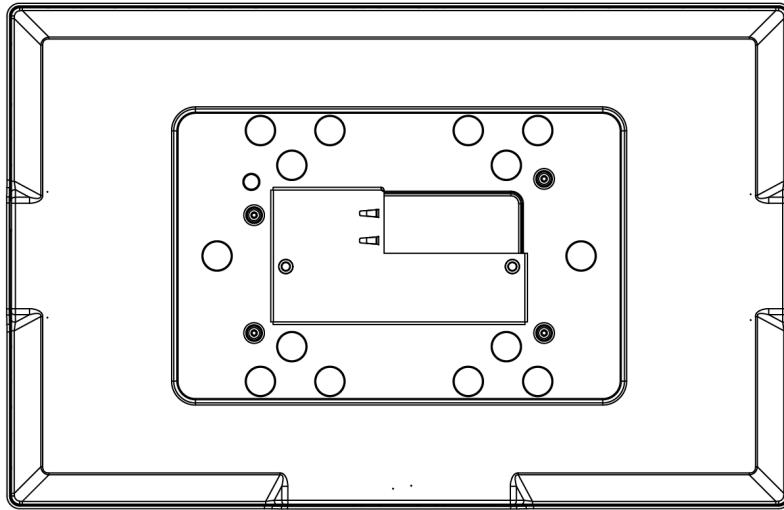

TSW-1060-B-S

# UC-B160-Z

Crestron Flex Wall Mount UC Video Conference System for Zoom Rooms™ Software

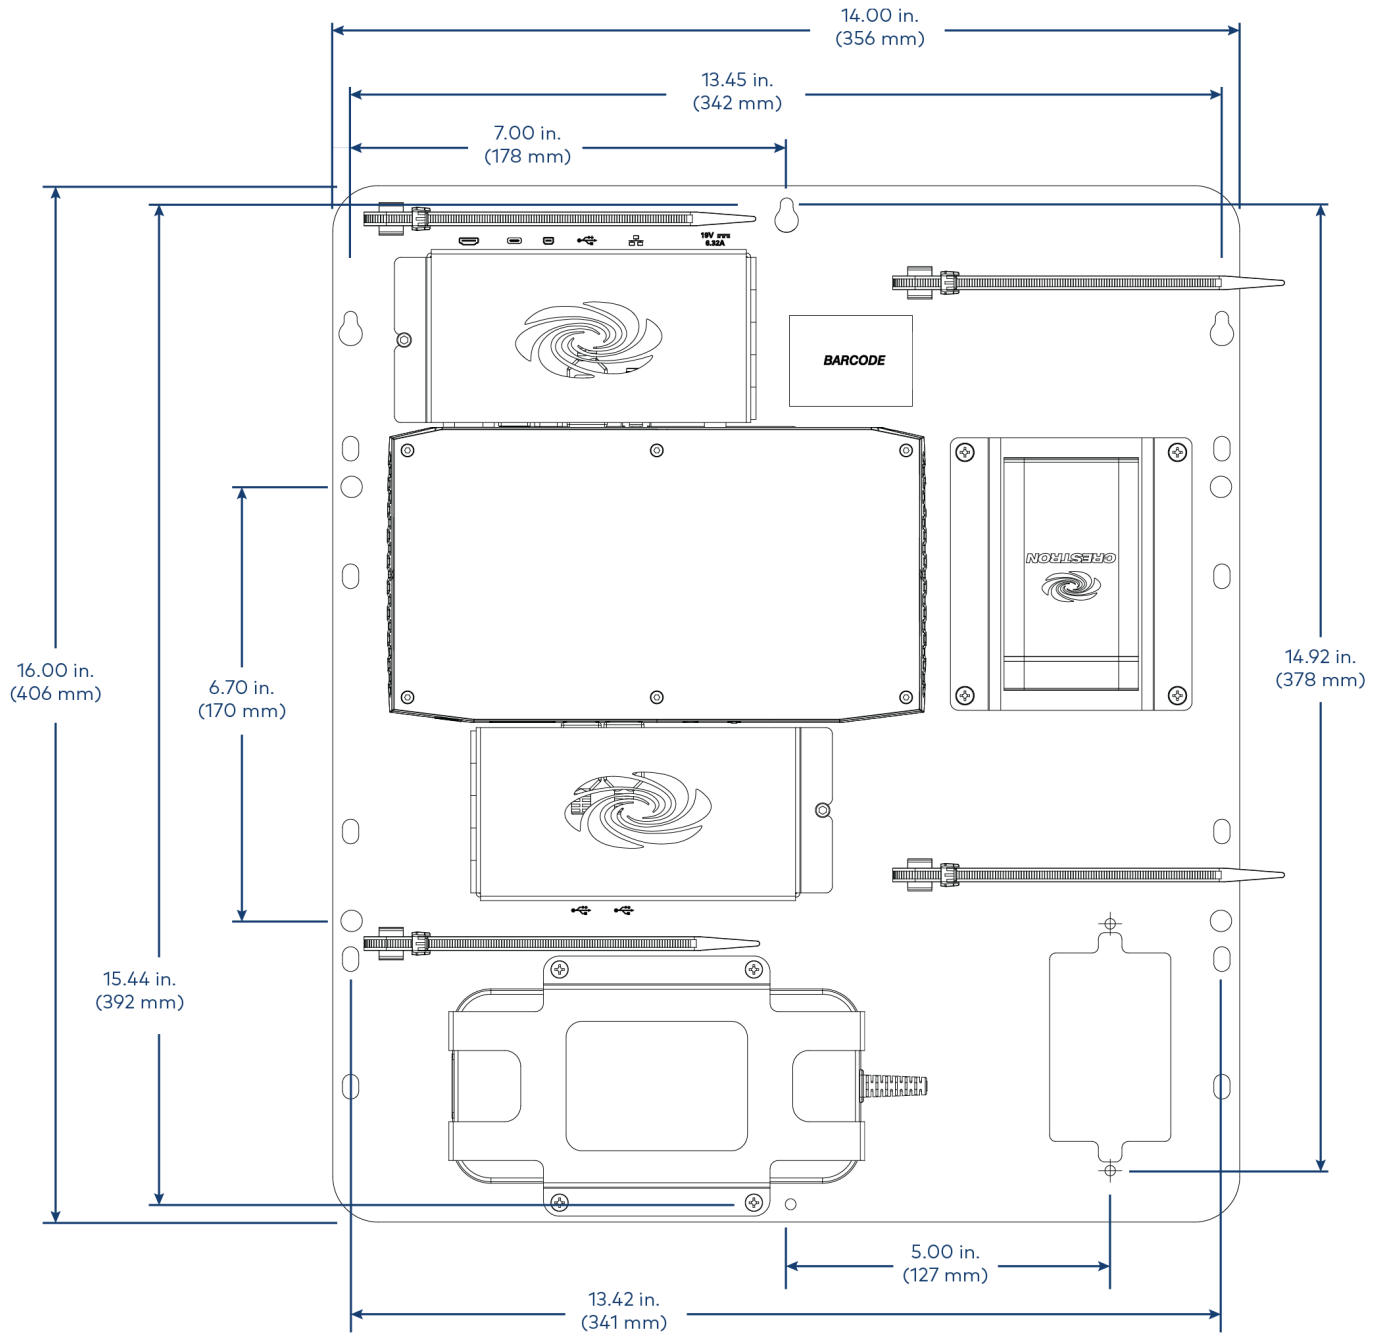

UC-BRKT-100-Z-ASSY