# WORKTOP REFRIGERATOR

### Model: SW60N-FB


Natural Refrigerant R-290 Model

# 60" Worktop Refrigerator with Solid Doors - Front Breathing



ENERGY STAR® Qualified Commercial Refrigerator

Stainless steel front, top and end panels, aluminum back and interior.



# Continental

# **Options and Accessories**

(upcharge and lead times may apply)

Stainless steel interior	Stainless steel shelves
Stainless steel back	Door locks
Drawers in lieu of doors (consult factory)**	Special electrical requirements (consult factory)
Additional epoxy coated steel shelves	Expansion valve system
Overshelves (single or double)	

Consult factory for other model configurations, options and accessories.

## **Standard Model Features**

#### **REFRIGERATION SYSTEM**

Performance rated refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

#### **CABINET ARCHITECTURE**

2" non-CFC polyurethane foam insulation

Smooth, polished chrome door handles

Spring loaded, self closing doors

Magnetic snap in Santoprene™ door gaskets

Heavy duty, epoxy coated steel shelves

Completely enclosed, vented and removable case back

3 3/4" casters

#### **MODEL FEATURES**

Electronic controller with digital display  $\&\ \mbox{hi/low}$  alarm

Off-cycle defrost

Field rehingeable doors

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

Front breathers are a unique, field assembled, bottom mounted ventilation system designed to allow cabinets to be flush against a wall or built into a counter to conserve space.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

<sup>\*\*</sup>Two Tier: (1) 12 x 20 x 6 pan per drawer

# **Model Specifications**

DIMENSIONAL DATA	
Net Capacity (cubic feet)	17.0 (481 cu I)
Width, Overall (inches)	60 (1524 mm)
Depth, Overall (inches) (including handles & bumpers)	32 <sup>3</sup> ⁄16 (818 mm)
Height, Overall (inches) (including 3 3/4" casters)	34 (864 mm)
Shelf Area (square feet)	8.1 (0.8 sq m)
Number of Shelves	2
Number of Doors	2
Interior Depth (inches)	See Drawing
Interior Height (inches)	26 ½ (667 mm)
Interior Width (inches)	56 (1422 mm)

#### **REFRIGERANT DATA**

Condensing Unit Size (H.P.)	1/5	
Capacity (BTU per hour)*	1625	

#### **ELECTRICAL DATA**

Voltage (International)	115/60/1 (220/50/1)
Total Amps (International)	2.5 (2.2)
10 ft. Cord/Plug [attached] (International)	Yes (No)

#### **SHIPPING DATA**

Weight (pounds)	284 (129 kg)
Height - Crated (inches)	42 (1067 mm)
Width - Crated (inches)	68 (1727 mm)
Depth - Crated (inches)	37 ½ (946 mm)

\* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

# **Model Plan Views**

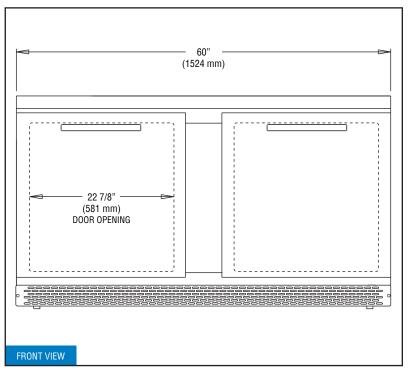

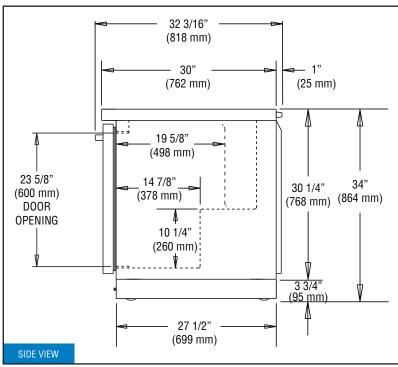

 $\underline{\textbf{NOTE}}\text{: For proper operation, the area under and in front of the cabinet }\underline{\textbf{must}}\text{ not be obstructed in any way.}$