

**Exhibit 5**

**Test Data of Original**

FCC TEST REPORT

FCC ID : A3KM079  
 REPORT NO.: EM198-001  
 TEST DATE : JAN./01/1998  
 TEST ENGI.: C.C.WU

TEST PERFORMED BY  
 PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.  
 CONSUMER ELECTRONICS DIVISION (PEI-CD)  
 EMI-LAB  
 P.O.BOX 123  
 CHUNGLI, TAoyUAN, TAIWAN, R.O.C.  
 TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PEI-BE  
 TESTED SYSTEM:

1. EUT : 15C2320W COLOR MONITOR S/N.: NO.78  
 FCC ID. : A3KM079
2. COMPUTER: HP D5250A S/N.: US72455810  
 FCC ID. : FCC LOGO
3. PRINTER : HP 2225C S/N.: 3145502419  
 FCC ID. : DS16XU2225
4. MODEM : HAYES 07-00038 S/N.: A29900153966  
 FCC ID. : BFJ9D907-00038
5. MOUSE : HP M-S34 S/N.: LCA54625637  
 FCC ID. : DZL210472
6. KEYBOARD: HP 5182-5521 S/N.: E03633HLUS-C  
 FCC ID. : CIGE03633
7. VIDEO CARD : BUILT-IN S/N.: --

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE  
 ANSI C63.4-1992 "AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF  
 RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC  
 EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz"

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.  
 60.0KHz MODE(1024X768/75Hz) WAS TESTED.  
 INTERFACE CABLE WITH THREE FERRITE CORES(ONE INSIDE) WAS TESTED.  
 UNSHIELDED MAINS CORD WAS USED DURING TEST.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
37.91	29.28	36.88	40
47.13	28.28	30.98	40
70.68	30.38	33.38	40
109.93	25.9	31.6	43.5

133.51	30.74	29.34	43.5
157.08	28.45	29.25	43.5
172.78	33.89	31.99	43.5
180.65	33.79	31.49	43.5
196.35	34.26	31.06	46
235.62	39	AMBIENT	46
251.32	38.65	37.65	46
259.17	35.55	33.95	46
314.15	34.056	34.256	46
329.86	32.02	29.92	46
337.71	31.712	31.212	46
353.43	31.7	31.8	46
361.28	30.6	30.8	46
369.13	33	31.3	46
376.98	31.772	30.172	46
392.68	32.948	31.748	46
408.38	32.096	31.396	46
416.25	33.792	32.292	46
471.24	33.204	32.504	46

# ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.  
SPECTRUM ANALYZER SETTINGS:

RBW : 100KHz

VBW : 100KHz

# QUASI-PEAK READINGS ARE TAKEN WITH ROHDE & SCHWARZ EMI TEST RECEIVER  
20 - 1000MHz ESUS 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
54.98	34.05	32.45	40
62.83	33.69	34.79	40
212.05	33.26	AMBIENT	43.5
219.91	AMBIENT	35.4	46

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS ARE RECORDED.  
TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

# SAMPLE CALCULATION :  
FINAL VALUE (dBuv/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dBuv/m)

# THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF THE LABORATORY

# THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT BY NULAP OR ANY AGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS PASS FCC CLASS B LIMIT.

CHECKED BY: K. J. H  
J. J. HSU, NULAP SIGNATORY


TESTED BY: [Signature]  
C. C. WU

RFI EMISSION LEVEL dBuV/m

JAN./01/1998

REPORT NO: EM198-001  
MODEL NO: 15C2320M

FCC CLASS B

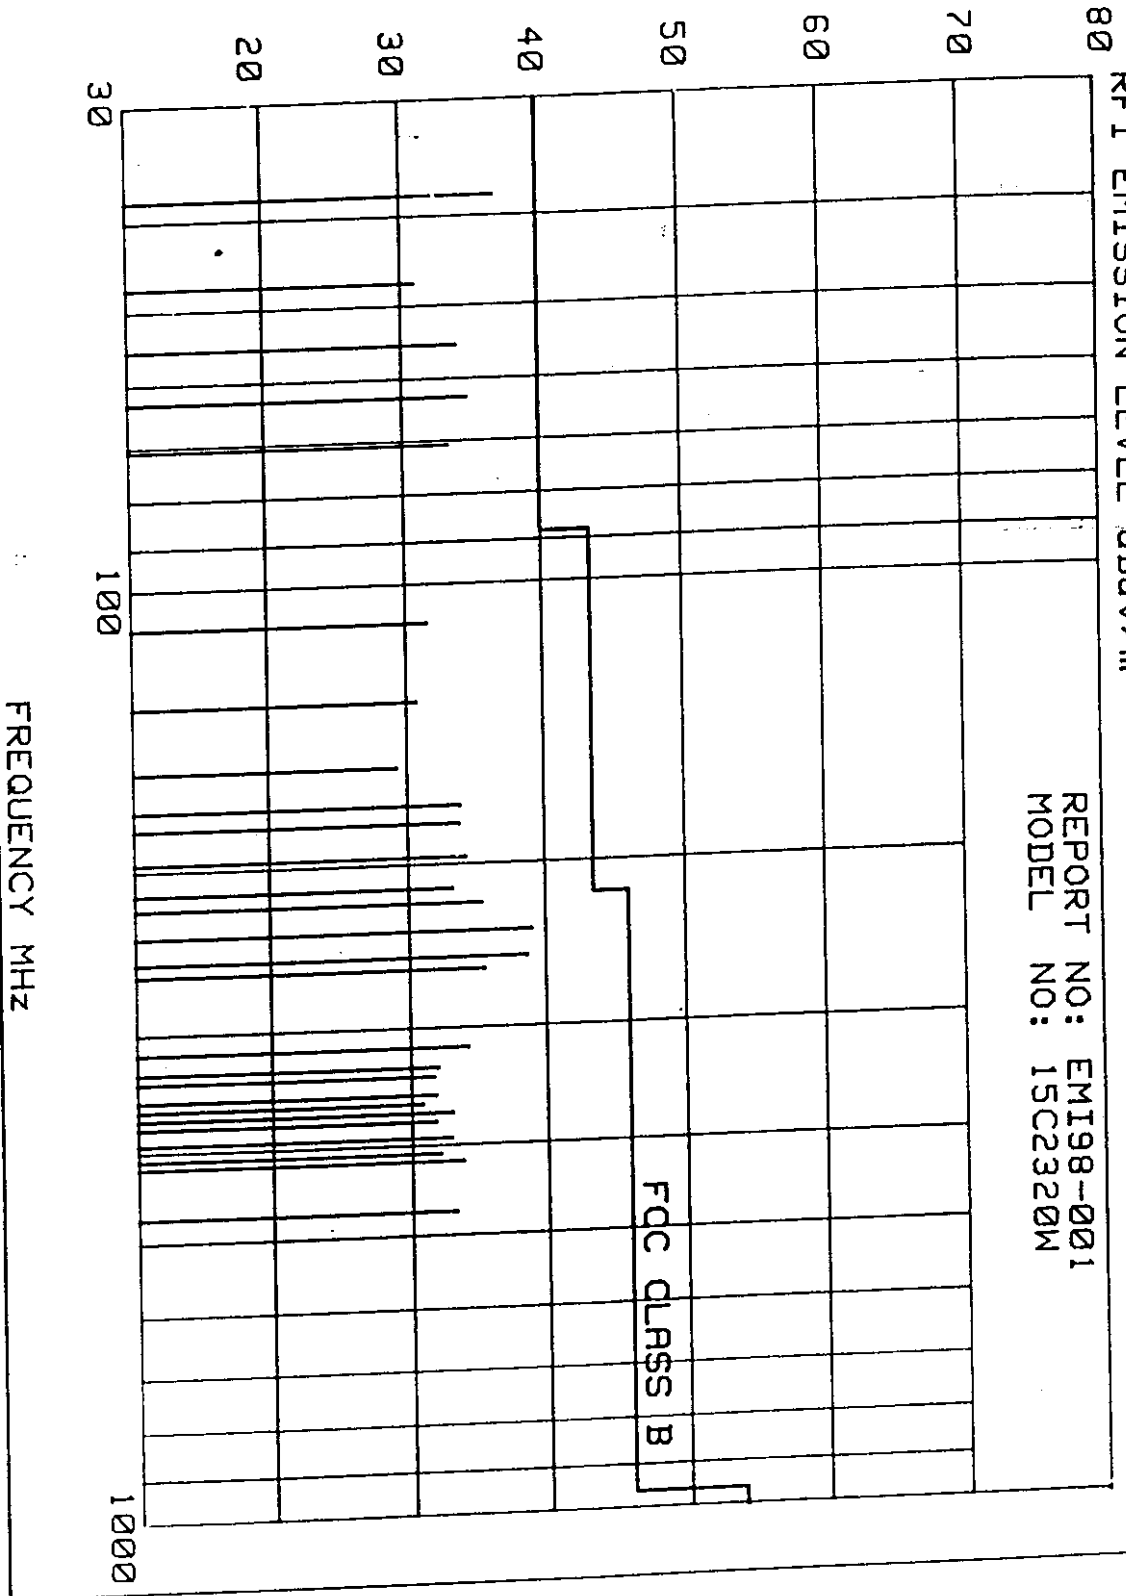

FREQUENCY MHZ




A3KM079 RUN 1024X768/75HZ 60KHZ MODE AC220V MKR 1.40 MHZ  
REF 107.0 DBµV ATTEN 10 DB 42.30 DBµV

HP

10 DB/

DL  
48.0  
dBµV

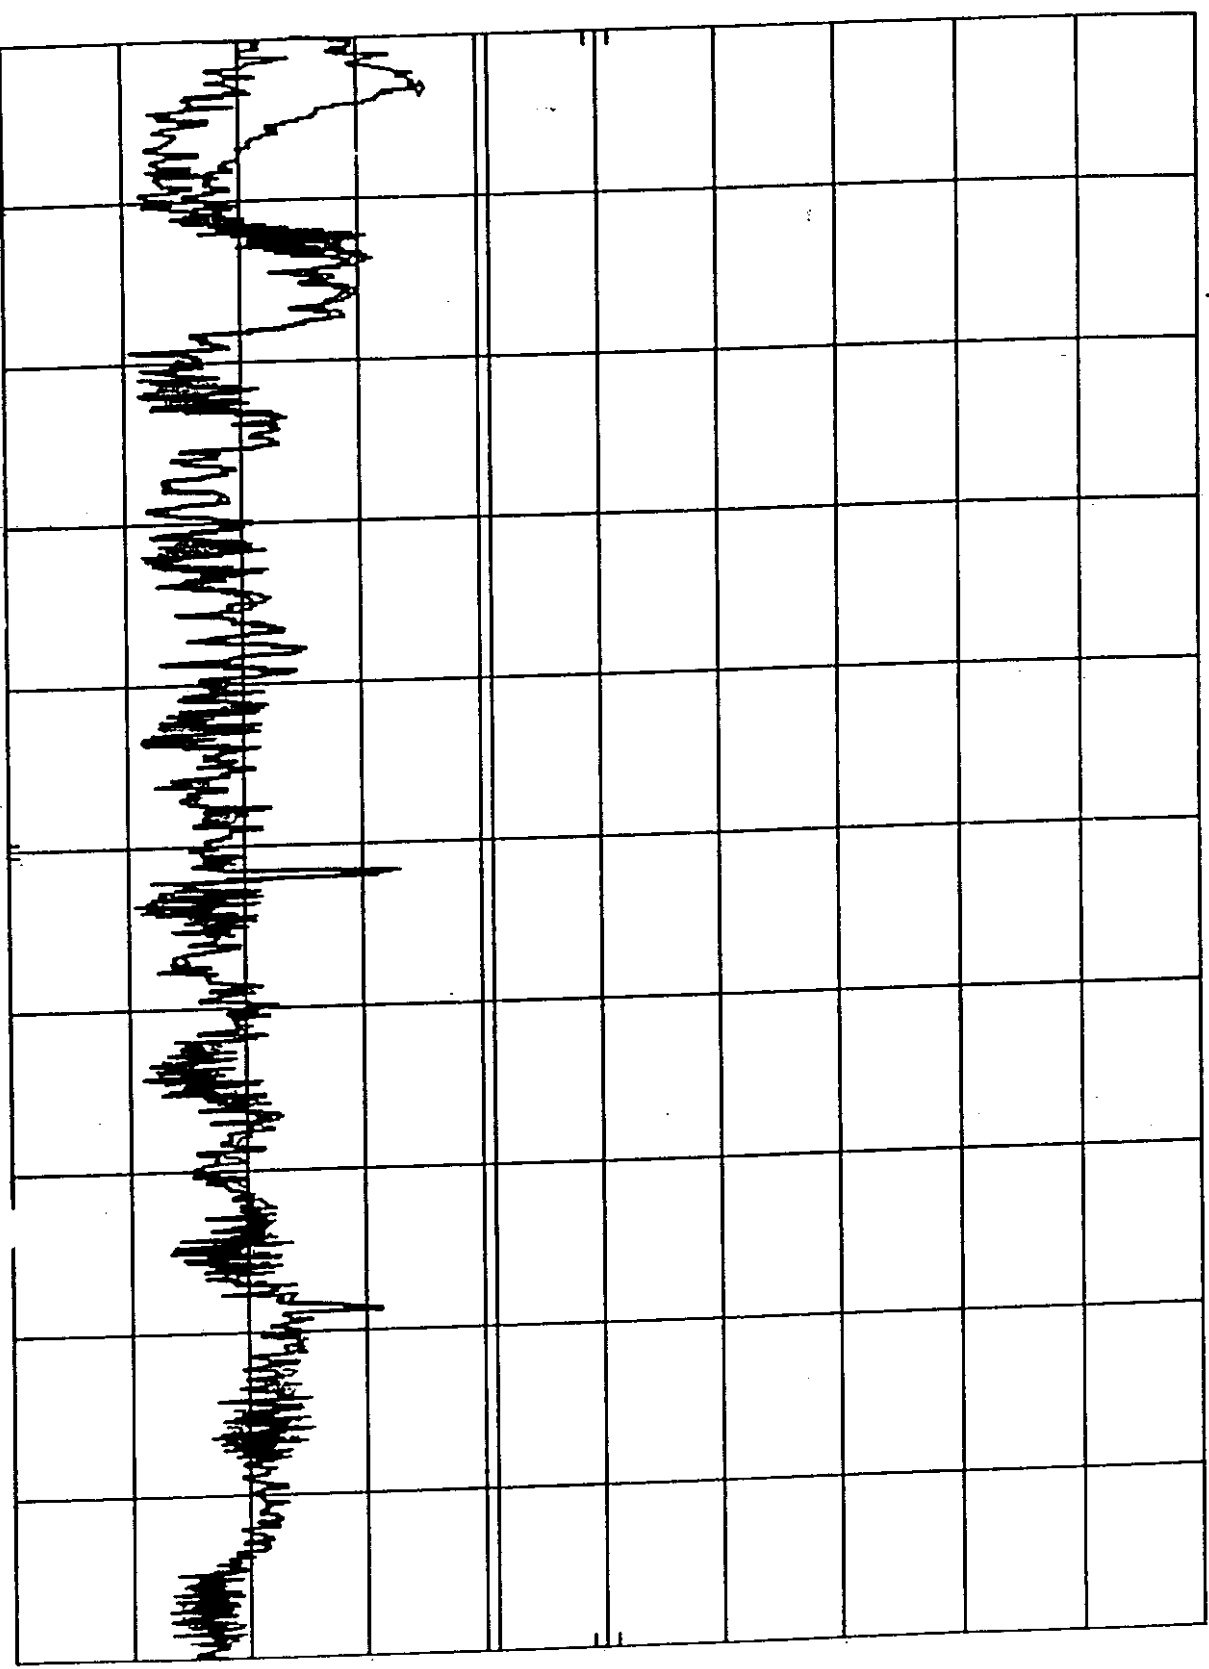

START 450 KHZ

STOP 30.00 MHZ

FCC TEST REPORT

FCC ID : A3KM079  
 REPORT NO.: EMI98-001A  
 TEST DATE : JAN./02/1998  
 TEST ENGI.: C.C.WU

TEST PERFORMED BY  
 PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.  
 CONSUMER ELECTRONICS DIVISION (PEI-CE)  
 EMI-LAB  
 P.O.BOX 123  
 CHUNGLI, TAoyUAN, TAIWAN, R.O.C.  
 TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PEI-BE  
 TESTED SYSTEM:

1. EUT : 15C2320W COLOR MONITOR S/N.: NO.78  
 FCC ID. : A3KM079
2. COMPUTER: HP D5250A S/N.: US72455810  
 FCC ID. : FCC LOGO
3. PRINTER : HP 2225C S/N.: 3145502419  
 FCC ID. : DS16XU2225
4. MODEM : HAYES 07-00038 S/N.: A29900153966  
 FCC ID. : BFJ9D907-00038
5. MOUSE : HP M-S34 S/N.: LCA54625637  
 FCC ID. : DZL210472
6. KEYBOARD: HP 5182-5521 S/N.: E03633HLUS-C  
 FCC ID. : C16E03633
7. VIDEO CARD : BUILT-IN S/N.: --

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE  
 ANSI C63.4-1992 "AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF  
 RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC  
 EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz"

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.  
 53.7KHz MODE(800X600/85Hz) WAS TESTED.  
 INTERFACE CABLE WITH THREE FERRITE CORES(ONE INSIDE) WAS TESTED.  
 UNSHIELDED MAINS CORD WAS USED DURING TEST.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
39.29	29.14	34.24	40
50.5	26.21	30.31	40
56.12	26.76	32.06	40
72.97	33.84	AMBIENT	40

117.87	28.68	29.98	43.5
123.48	26.99	29.79	43.5
157.14	29.15	30.45	43.5
168.36	30.24	29.64	43.5
185.21	30.85	30.55	43.5
213.27	33.44	30.84	43.5
235.71	35.4	35	46
241.32	36.04	36.74	46
392.84	31.748	31.548	46
432.11	32.268	31.468	46

# ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.  
 SPECTRUM ANALYZER SETTINGS:

RBW : 100KHz  
 VBW : 100KHz

# QUASI-PEAK READINGS ARE TAKEN WITH ROHDE & SCHWARZ EMI TEST RECEIVER  
 20 - 1000MHz ESUS 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
44.9	33.7	32.4	40
59.99	26.9	32.5	40
61.75	28.46	32.86	40
67.36	33.61	34.51	40

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS ARE RECORDED.  
 TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.


# SAMPLE CALCULATION :  
 FINAL VALUE (dBuv/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dBuv/m)

# THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF THE LABORATORY

# THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT BY NVLAP OR ANY AGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS PASS FCC CLASS B LIMIT.

CHECKED BY: K. J. Hsu

TESTED BY: 

K.J.HSU, NVLAP SIGNATORY


C.C.WU



RFI EMISSION LEVEL DBuV/m

JRN./02/1998

REPORT NO: EMI98-001A  
MODEL NO: 15C2320W

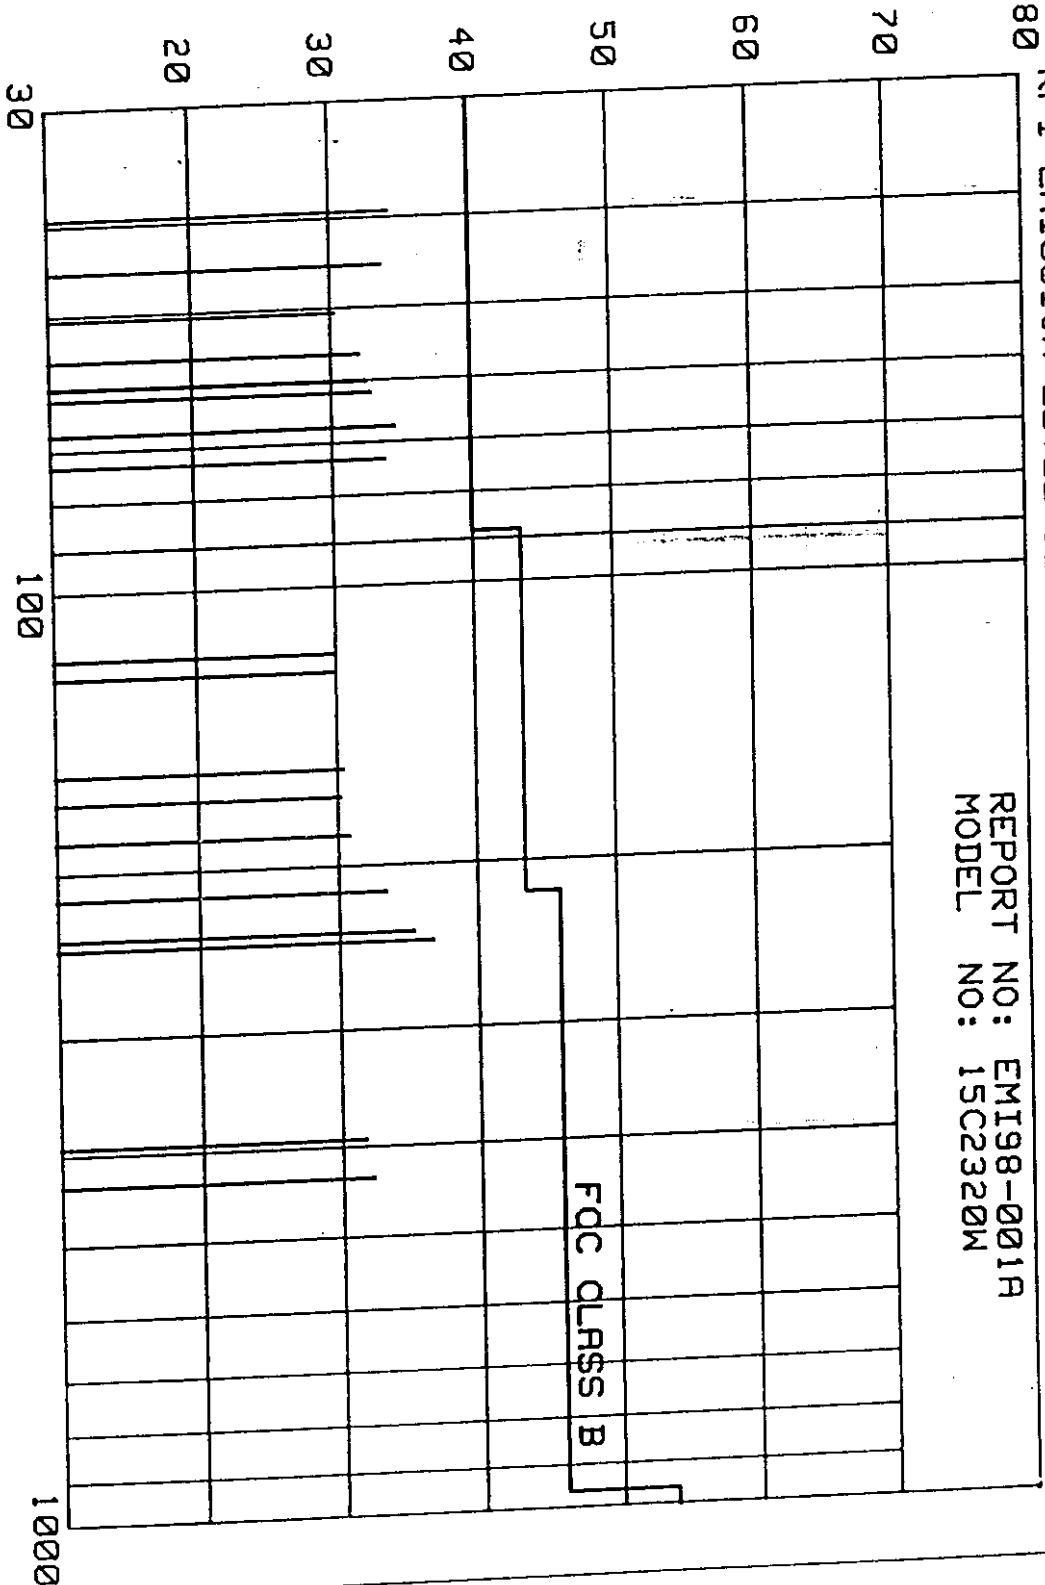


FREQUENCY MHZ

hpa  
A3KM079 RUN 800X600/85HZ 53.6KHZ MODE AC110V MKR 1.37 MHZ  
REF 107.0 DBμV ATTEN 10 DB 39.80 DBμV

10 DB/

DL  
48.0  
DBμV

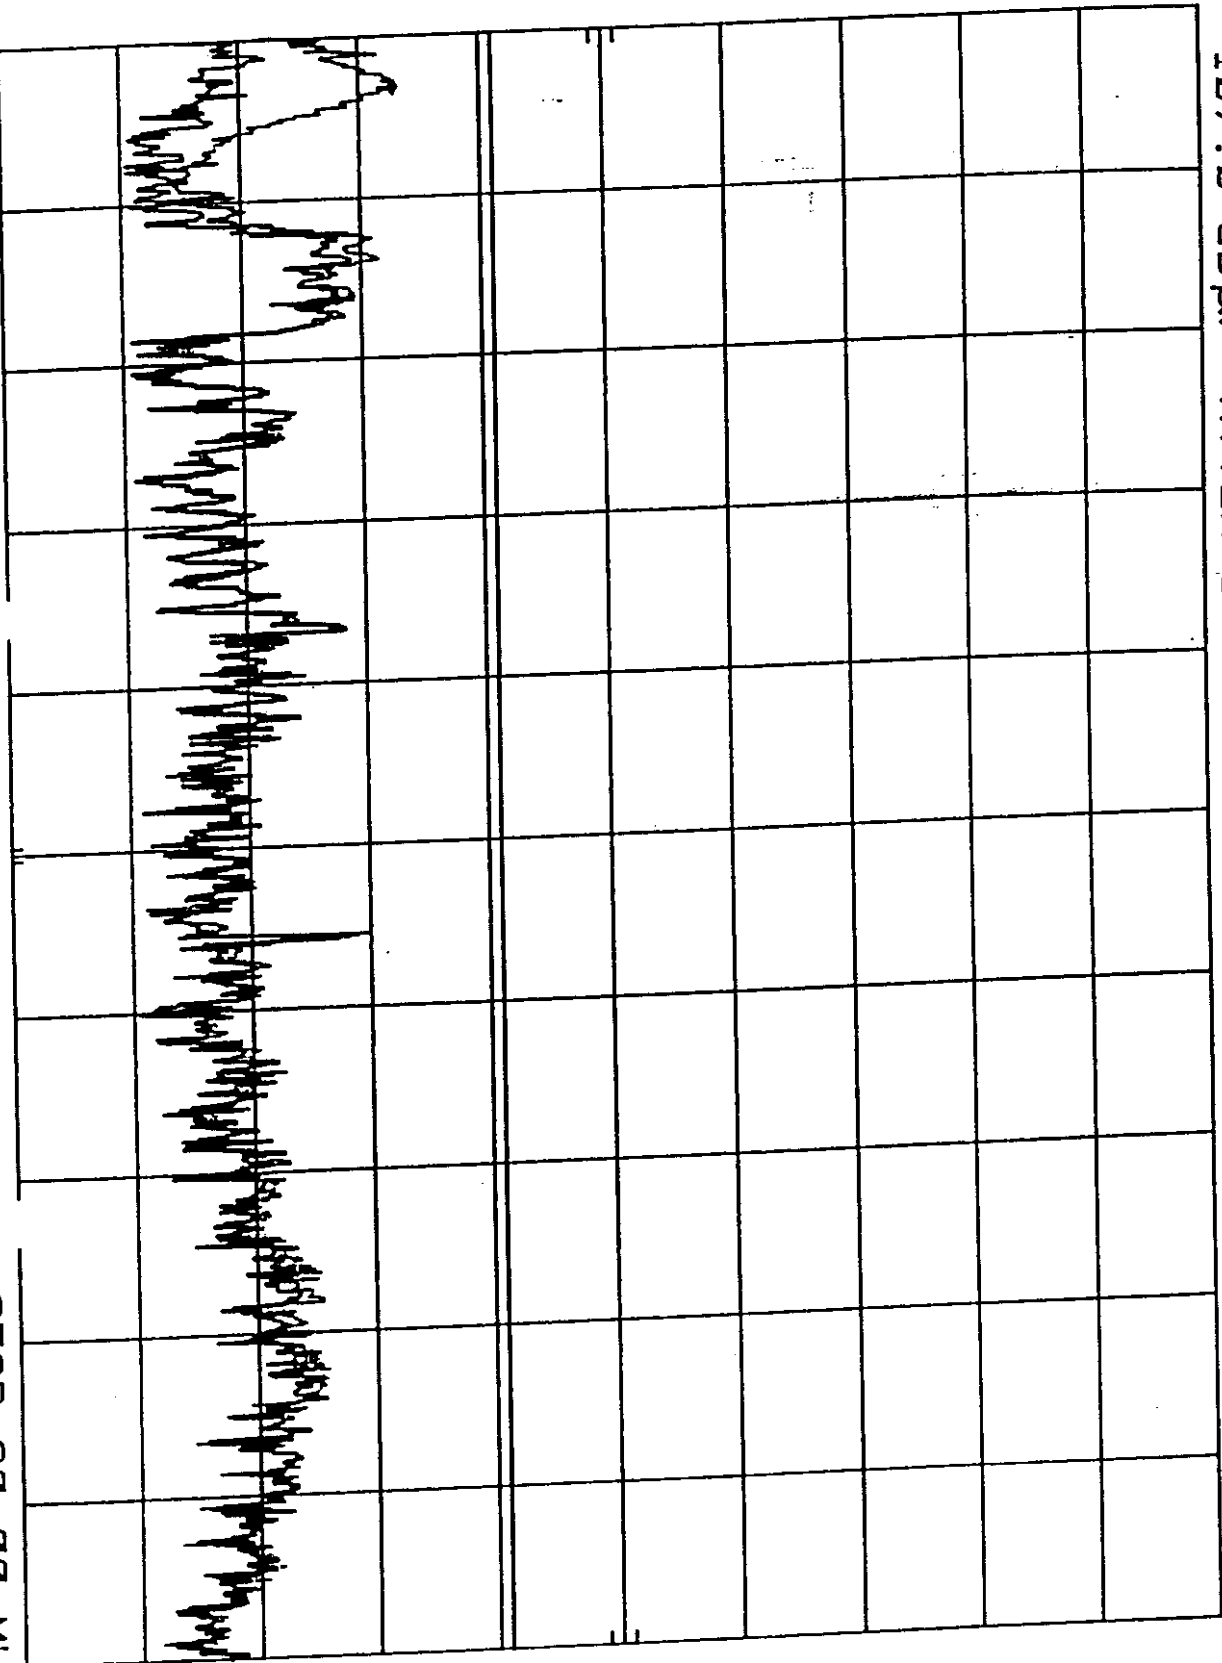

START 450 KHZ


YBW 42

STOP 30.00 MHZ

A3KM079 RUN 800X600/85HZ 53.6KHZ MODE AC220V MKR 1.40 MHZ  
REF 107.0 DBμV ATTEN 10 DB 42.00 DBμV

10 DB/

DL  
48.0  
DBμV

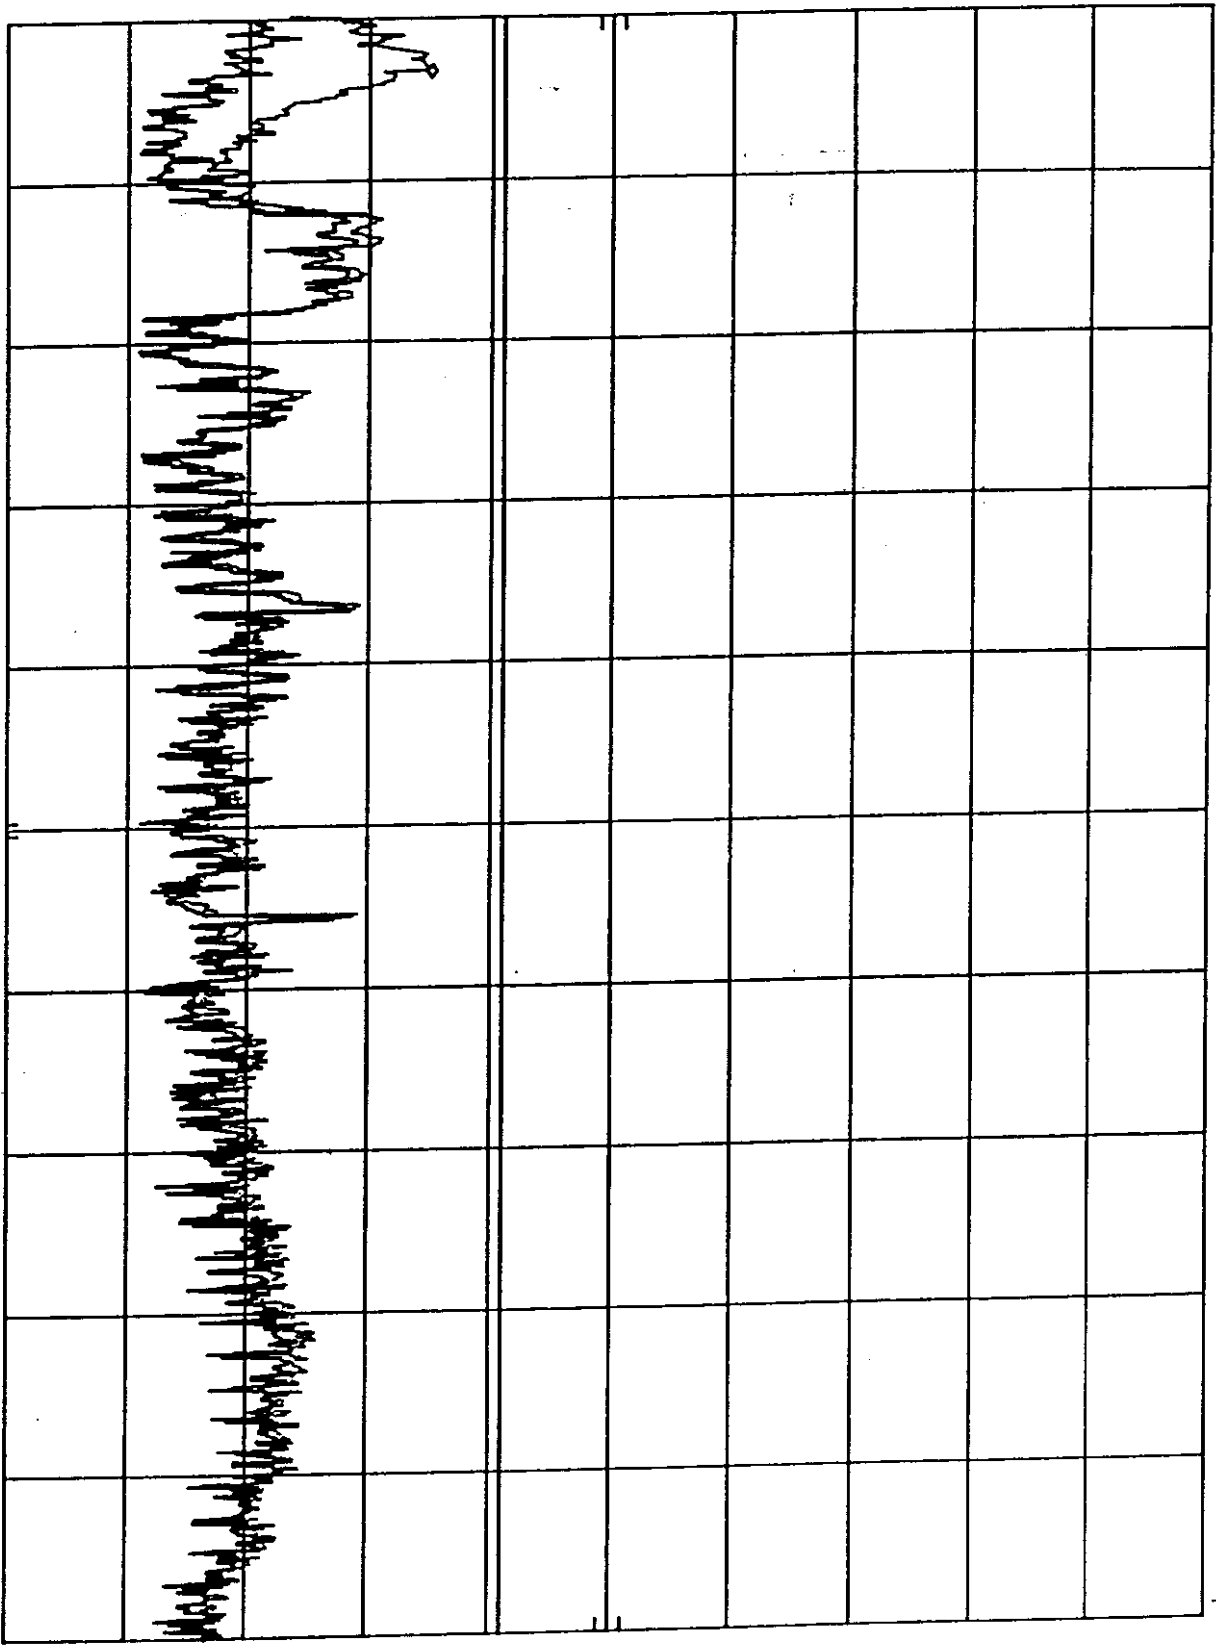

START 450 KHZ

RES BW 10 KHZ

VBW 10 KHZ

STOP 30.00 MHZ

BES BW 10 KHZ

VBW 10 KHZ

SWP 750 msec

**Exhibit 6**

**Statement of Data Measured  
and  
Test Data of Modified**

## STATEMENT OF DATA MEASURED

### 1. General Information of EUT

The EUT, 15" supper VGA color monitor

Model No. : D2826  
 FCC ID : A3KM079  
 Brand : HP

The monitor automatically scans horizontal frequencies between 30KHz and 54KHz, and vertical frequencies between 55Hz and 120Hz. This color monitor displays sharp and brilliant images of text and graphics with a maximum resolution up to 1024X768 pixels. With microprocessor based digital controlled circuit and software control, the monitor can automatically adjust itself to the video card's scanning frequency and displays an image with the precise parameters you desire.

The monitor has 6 factory-preset modes as indicated in the following table:

	Resolution	H-Frequency	V-Frequency	Remark
M01	720 X 400	31.5KHz	70Hz	Non-interlaced
M02	640 X 480	31.5KHZ	60Hz	Non-interlaced
M03	640 X 480	37.9KHz	72Hz	Non-interlaced
M04	640 X 480	37.5KHz	75Hz	Non-interlaced
M05	640 X 480	43.3KHz	85Hz	Non-interlaced
M06	800 X 600	46.9KHz	75Hz	Non-interlaced
M07	800 X 600	53.7KHz	85Hz	Non-interlaced
M08	1024 X 768	48.4KHz	60Hz	Non-interlaced

### 2. Test Equipment and Procedure

Test was performed by:

PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.  
 CONSUMER ELECTRONICS DIVISION  
 EMI - LAB

5, Tze Chiang 1 Road, Chungli Industrial Park  
 P.O. Box 123, Chungli, Taoyuan, Taiwan  
 R. O. C.

Tel : 886-3-4549862      Fax : 886-3-4549887  
 E-mail: ronnie.yang@tw.cmail.philips.com

The test was performed in accordance with ANSI C63.4-1992, "AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz"

Test equipment used for line Conducted and Radiated emissions as following. All equipment were calibrated according to ANSI C63.4-1992 and ISO-9000 requirement unless otherwise specified.

Test Equipment	Model No.	Serial No.	Calibrated Date
Spectrum	HP8568B	2415A00346	7/21/1998
RF Preselector	HP85685A	2901A00946	7/21/1998
QP Adapter	HP85650A	2043A00366	7/21/1998
EMI Receiver	HP85460A	3441A00199	8/27/1998
RFI Filter Section	HP85460A	3330A00177	8/27/1998
EMI Receiver	R & S ESVS30	8419977/066	8/21/1998
Biconical Antenna	EMCO 3110B	2863	3/10/1998
Biconical Antenna	EMCO 3110B	2864	3/10/1998
Log-Periodic Antenna	EMCO 3146A	1377	3/10/1998
Log-Periodic Antenna	EMCO 3146A	1378	3/10/1998
LISN	EMCO 3825/2	9311-2153	3/23/1998
LISN	EMCO 3825/2	9311-2154	3/23/1998
Turn Table	EMCO 1060	1068	4/16/1998
Antenna Tower	EMCO 1050	1113	4/16/1998
RF Cable	M17/75-RG214-NE	N/A	4/16/1998
Computer	HP9000/300	2614A78610	N/A
Printer	HP2225A	2728S02586	N/A
Plotter	HP7440A	2539A40856	N/A

Traceability to R.O.C. and international standards is assured by using calibrated all equipment.

For system measurement, the EUT "D2826" was connected to:

Item	Model No.	Serial No.	FCC ID
1. Computer	HP D5727A	FR81533292	FCC Logo
2. Keyboard	HP 5182-5521	E03633HLUS-C	CIGE03633
3. Mouse	HP M-S34	LCA54625637	DZL210472
4. Printer	HP 2225C	3123S97227	DSI6XU2225
5. Modem	USRobotics 268	2680559278575	CJE-0318
6. Vide Card	Built-in	--	--

The system was configured for testing in a typical fashion ( as a customer would normally use it ) according to ANSI C63.4-1992, please see the photographs for detail.

Both conducted and radiated testing were performed according to the procedure in ANSI C63.4-1992. Conducted testing was performed in screen room and radiated testing was performed in open site at an antenna to EUT distance of 3-meter on horizontal and vertical polarization.

First, pre-scan all modes in screen room then select 2 higher modes (worst case) were tested and reported.

The line conductive interference was tested with 110VAC and 220VAC receptively. Unshielded power cord was used during test.

Tested and reported modes as following:

Report No.	Resolution	Frequencies
EMI98-083	800 X 600	53.7KHz/85Hz
EMI98-083A	1024 X 768	48.4KHz/60Hz

### 3. Test Program and Test Results

Set up the EUT and all peripherals as chapter 6 of ANSI C63.4-1992 for AC power line conducted emissions testing and radiated emissions testing.

Turn on the power of EUT and all peripherals, select an appropriate displaying mode using the "setup" software. Then run an EMI test program "HTEST.EMI" as a basic software to execute the EUT operating under test.

- Step 1 : Run the "HTEST.EMI" on personal computer then sends "H" character to monitor continuously until full screen.
- Step 2 : Personal computer sends a complete line of continuously repeating "H" to HP 2225C printer.
- Step 3 : Personal computer sends a file of "H" pattern to floppy disk then read a file of "H" pattern from floppy disk.
- Step 4 : Personal computer sends a file of "H" pattern to hard disk then read a file of "H" pattern from hard disk.
- Step 5 : Personal computer sends a file of "H" patter to USRobotics 268 modem.
- Step 6 : Return to step 1

All data in this report are "PEAK" value within 15dB margin unless otherwise noted. The radiated (open site) data has included antenna and cable factors, sample calculation:

Final Value (dB $\mu$ v/m) = Reading (dB $\mu$ v) + Antenna Factor (dB) + Cable Loss (dB)

The measured data of radiated RF interference at open site and line conducted interference as attached.

**The subject device is in compliance with the limits for a class B digital device, pursuant to part 15, subpart B of the FCC rules.**



---

Ronnie Yang - Manager, Safety/Dev. PEI-CED  
NVLAP Signatory



FCC TEST REPORT

FCC ID : A3KM079  
REPORT NO. : EMI98-083  
TEST DATE : NOV/14/1998  
TEST ENGI. : C.C.Wu

TEST PERFORMED BY  
PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.  
CONSUMER ELECTRONICS DIVISION (PEI-CEC)  
EMI-LAB  
P.O.BOX 123  
CHUNGLI, TAoyUAN, TAIWAN, R.O.C.  
TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PHILIPS  
TESTED SYSTEM:

1. EUT : HP D2826 COLOR MONITOR S/N.: TY9841083  
FCC ID. : A3KM079
2. COMPUTER: HP D5727A S/N.: FR81533292  
FCC ID. : FCC L060
3. PRINTER : HP 2225C S/N.: 3145S02419  
FCC ID. : DS16XU2225
4. MODEM : USRobotics 268 S/N.: 0002680559278575  
FCC ID. : CJE-0318
5. MOUSE : HP M-S34 S/N.: LCA54625637  
FCC ID. : DZL210472
6. KEYBOARD: HP 5182-5521 S/N.: E03633HLUS-C  
FCC ID. : CIG603633
7. VIDEO CARD : BULIT IN S/N.: --  
FCC ID. : N/A

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE  
ANSI C63.4-1992 'AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF  
RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC  
EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz'

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.  
53.7KHz MODE(800X600/85Hz) WAS TESTED.  
INTERFACE CABLE WITH ONE FERRITE CORE WAS TESTED.  
UNSHIELDED MAINS CORD WAS USED DURING TEST.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
56.23	25.76	29.36	40
62.85	27.59	29.99	40
66.17	28.18	30.08	40
69.48	25.97	29.67	40

72.76	27.74	29.14	40
115.8	25.56	27.66	43.5
119.11	27.94	30.34	43.5
122.43	28.56	32.56	43.5
125.73	27.38	29.18	43.5
129.05	27.87	29.97	43.5
158.83	26.95	28.05	43.5
162.14	28.26	28.46	43.5
168.75	27.87	27.47	43.5
301.55	31.608	29.608	46
308.19	29.732	29.332	46
314.83	30.06	29.66	46
334.75	30.74	30.14	46
363.89	31.8	32.4	46
373.88	30.8	31.8	46

# ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.  
 SPECTRUM ANALYZER SETTINGS:

RBW : 100KHz

VBW : 100KHz

# QUASI-PEAK READINGS ARE TAKEN WITH ROHDE & SCHWARZ EMI TEST RECEIVER  
 20 - 1000MHz ESUS 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
33.08	27.78	33.38	40
42.97	28.02	33.52	40

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS  
 ARE RECORDED.

TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

# SAMPLE CALCULATION :

FINAL VALUE (dBuv/m) = ANTENNA FACTOR (dB) + CABLE (dB) + READING (dBuv/m)

# THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN  
 APPROVAL OF THE LABORATORY

# THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT  
 BY NULAP OR ANY AGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS PASS FCC CLASS B LIMIT.

CHECKED BY:

*K. J. Hsu*

TESTED BY:

*C.C. Wu*


K.J.HSU, NULAP SIGNATORY

C.C.Wu

NOV/14/1998

REPORT NO: EMI98-083  
MODEL NO: HP D2826

RFI EMISSION LEVEL dBuV/m

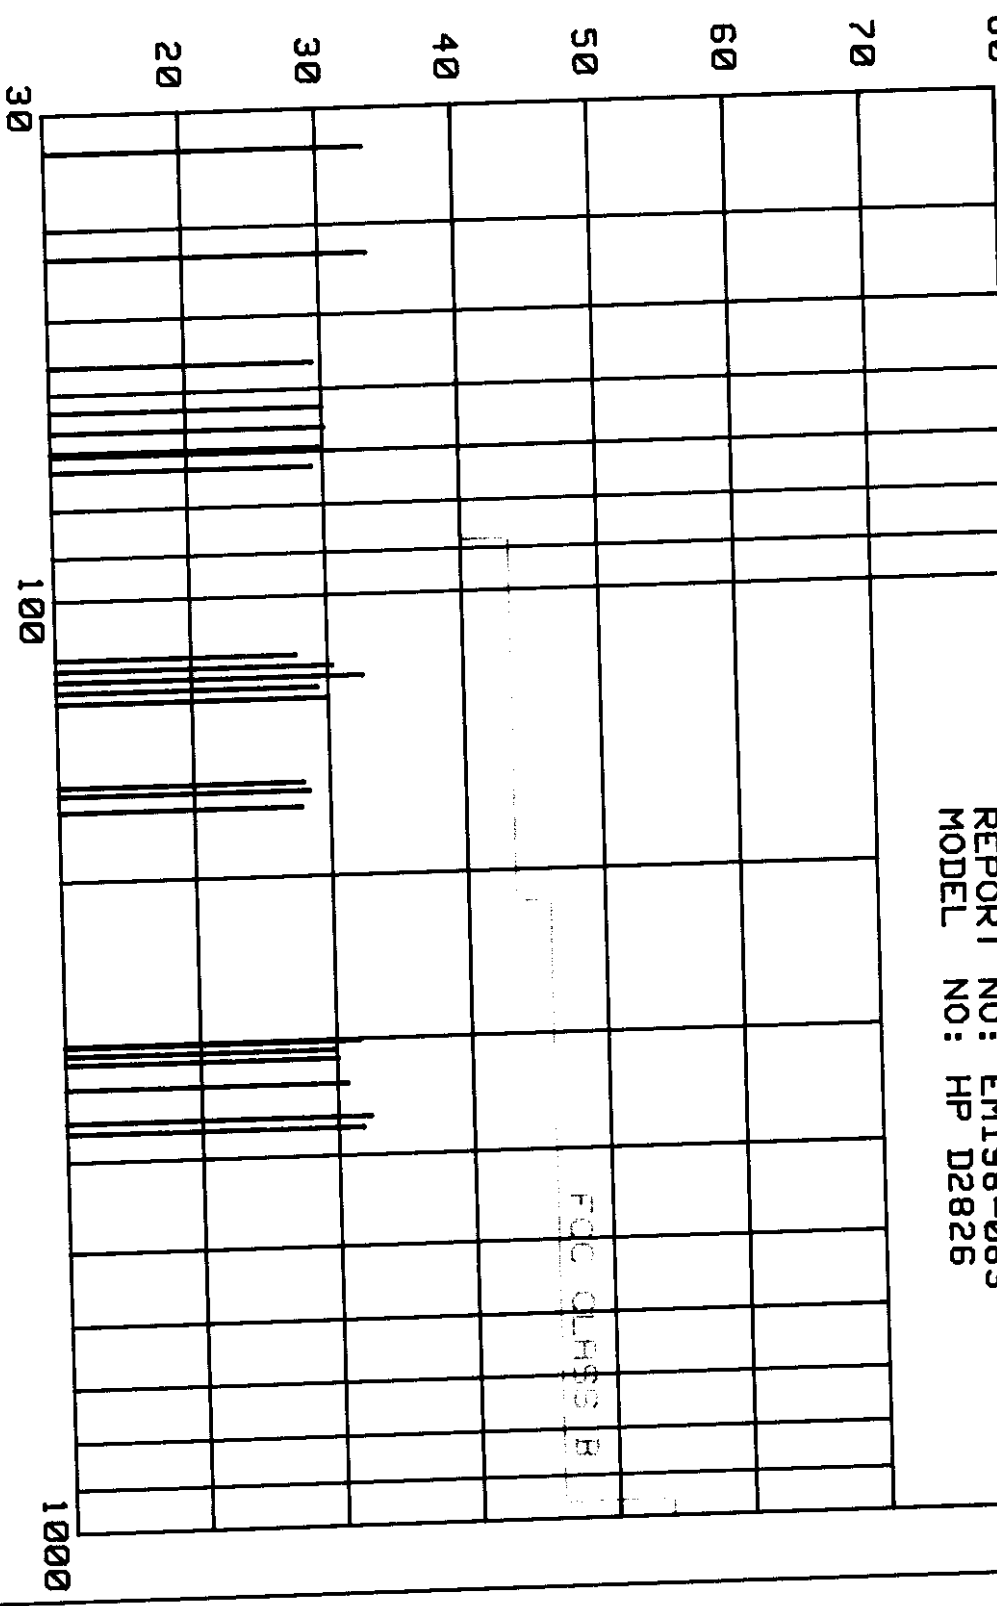

FREQUENCY MHZ


FOC CLASS B

hp

10 DB/

DL  
48.0  
DBμV

A3KM079 RUN 800X600/85HZ 53.7KHZ MODE AC220V MKR 3.08 MHZ  
REF 107.0 DBμV ATTEN 10 DB 44.40 DBμV

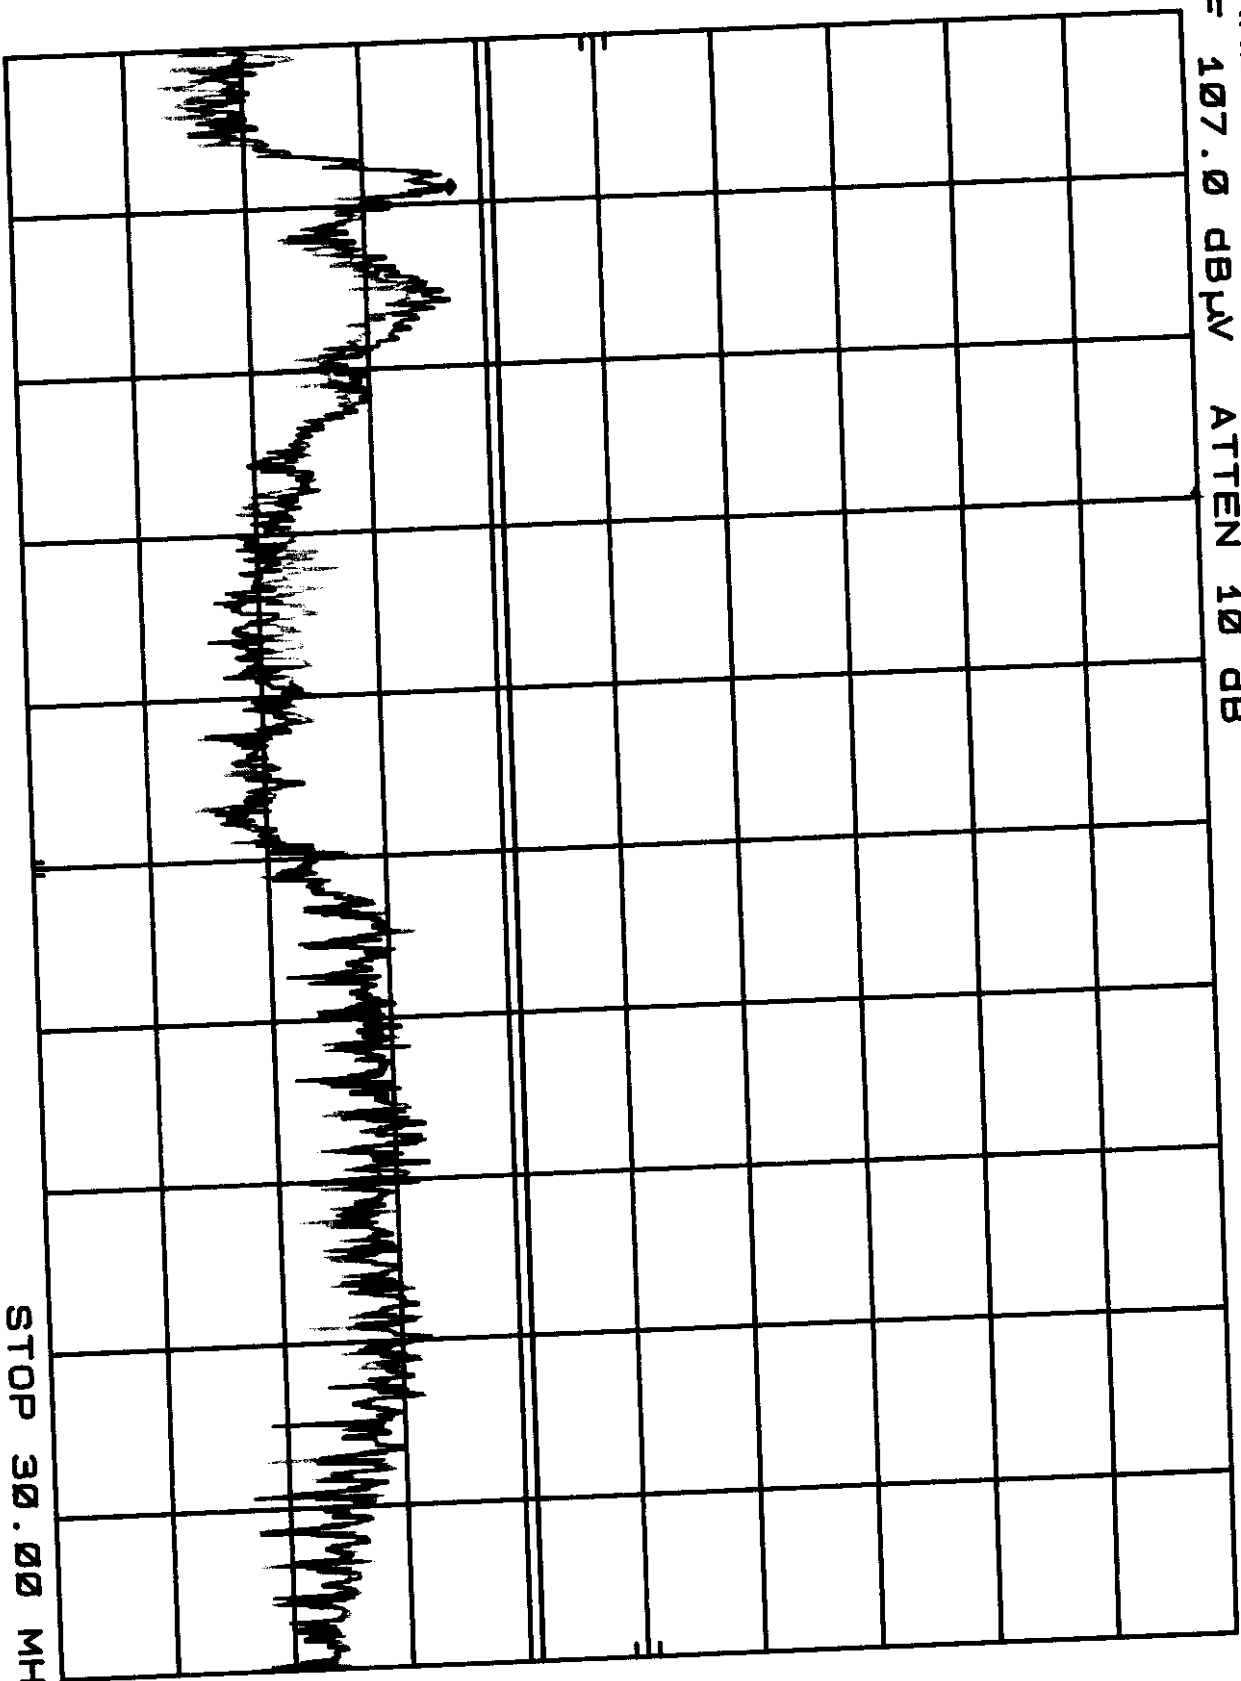

START 450 KHZ  
RES BW 10 KHZ

VBW 10 KHZ


STOP 30.00 MHZ  
SWP 750 msec

hp

10 DB/

DL  
48.0  
DBμV

A3KM079 RUN 800X600/85HZ 53.7KHZ MODE AC110V MKR 5.15 MHZ  
REF 107.0 DBμV ATTEN 10 DB 46.10 DBμV

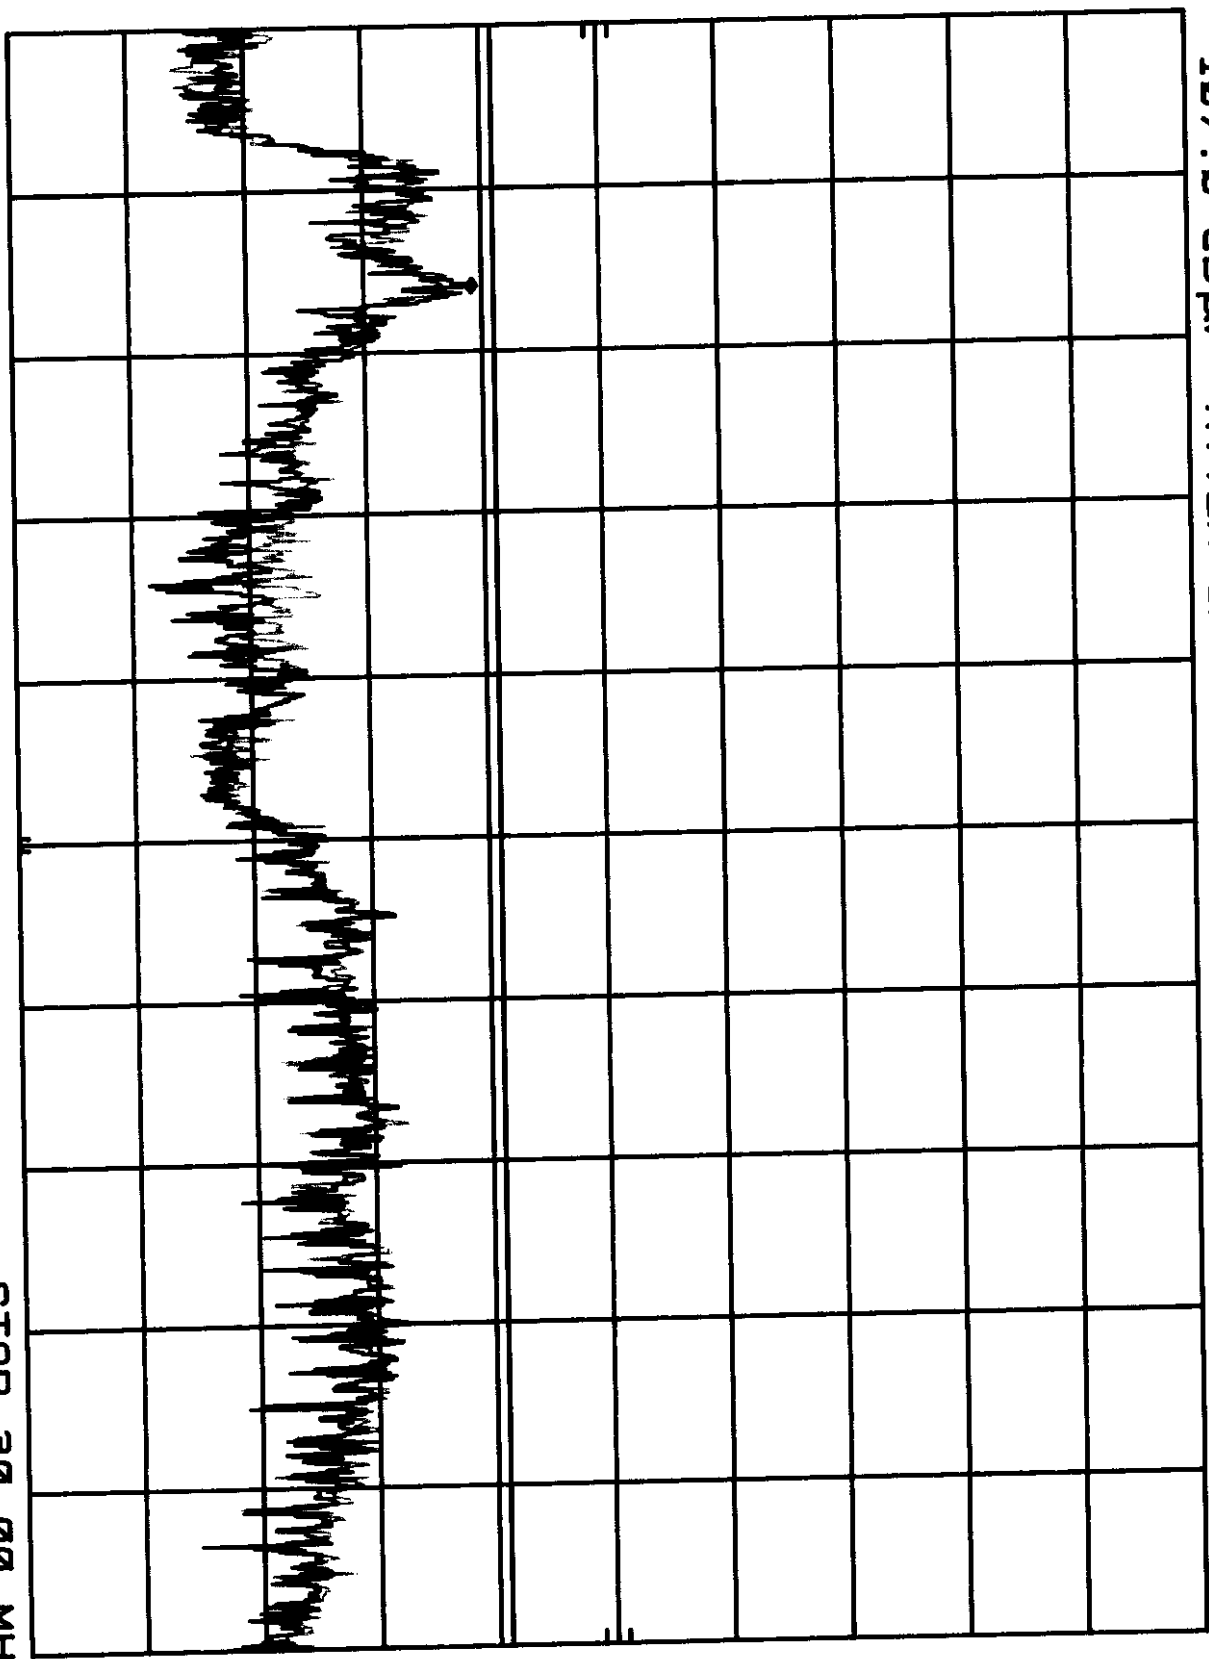

START 450 KHZ RES BW 10 KHZ VBW 10 KHZ STOP 30.00 MHZ  
SWP 750 msec

FCC TEST REPORT

FCC ID : A3KM079  
 REPORT NO.: EMI98-083A  
 TEST DATE : NOV/15/1998  
 TEST ENGI.: C.C.Wu

TEST PERFORMED BY  
 PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.  
 CONSUMER ELECTRONICS DIVISION (PEI-CED)  
 EMI-LAB  
 P.O.BOX 123  
 CHUNGLI, TAOYUAN, TAIWAN, R.O.C.  
 TEL: 886-3-4549862 FAX: 886-3-4549887

MANUFACTURER : PHILIPS  
 TESTED SYSTEM:

1. EUT : HP D2826 COLOR MONITOR S/N.: TY9841083  
 FCC ID. : A3KM079
2. COMPUTER: HP D5727A S/N.: FR81533292  
 FCC ID. : FCC L060
3. PRINTER : HP 2225C S/N.: 3145S02419  
 FCC ID. : DSI6XU2225
4. MODEM : USRobotics 268 S/N.: 0002680559278575  
 FCC ID. : CJE-0318
5. MOUSE : HP M-934 S/N.: LCA54625637  
 FCC ID. : DZL210472
6. KEYBOARD: HP 5182-5521 S/N.: E03633HLUS-C  
 FCC ID. : CIG603633
7. VIDEO CARD : BULIT IN S/N.: --  
 FCC ID. : N/A

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE ANSI C63.4-1992 'AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz'

MONITOR WAS CONNECTED TO FLOOR MOUNTED AC OUTLET.  
 48.4KHz MODE(1024X768/60Hz) WAS TESTED.  
 INTERFACE CABLE WITH ONE FERRITE CORE WAS TESTED.  
 UNSHIELDED MAINS CORD WAS USED DURING TEST.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

DEVIATION: NONE

RADIATED RF LEVEL - PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
54.13	28.04	29.64	40
61.33	26.83	28.73	40
68.56	25.87	30.97	40
75.79	30.48	30.08	40

83.02	28.95	27.75	40
111.92	28.82	28.92	43.5
119.13	28.54	32.04	43.5
126.37	27.68	26.98	43.5
140.82	28.21	AMBIENT	43.5
169.68	27.4	29.1	43.5
205.78	32	AMBIENT	43.5
212.98	34.34	AMBIENT	43.5
278.02	34.92	34.62	46
314.17	30.156	29.556	46
372.02	31.3	30.6	46
408.18	31.896	32.596	46

# ABOVE READINGS ARE PEAK READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED.  
 SPECTRUM ANALYZER SETTINGS:

RBW : 100KHz  
 VBW : 100KHz

# QUASI-PEAK READINGS ARE TAKEN WITH ROHDE & SCHWARZ EMI TEST RECEIVER  
 20 - 1000MHz ESUS 30 :

RADIATED RF LEVEL - QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBuv/m)	VERTICAL (dBuv/m)	FCC CLASS B LIMIT (dBuv/m)
32.73	28.88	34.18	40

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS ARE RECORDED.

TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

# SAMPLE CALCULATION :

$$\text{FINAL VALUE (dBuv/m)} = \text{ANTENNA FACTOR (dB)} + \text{CABLE (dB)} + \text{READING (dBuv/m)}$$

# THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF THE LABORATORY

# THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT BY NULAP OR ANY AGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS PASS FCC CLASS B LIMIT.

CHECKED BY:

*K. J. Hsu*

TESTED BY:

*C. C. Wu*

K.J.HSU, NULAP SIGNATORY


C.C.Wu

NOV/15/1998

RFI EMISSION LEVEL dBuV/m

REPORT NO: EM198-083R  
MODEL NO: HP D2826

FCC CLASS B

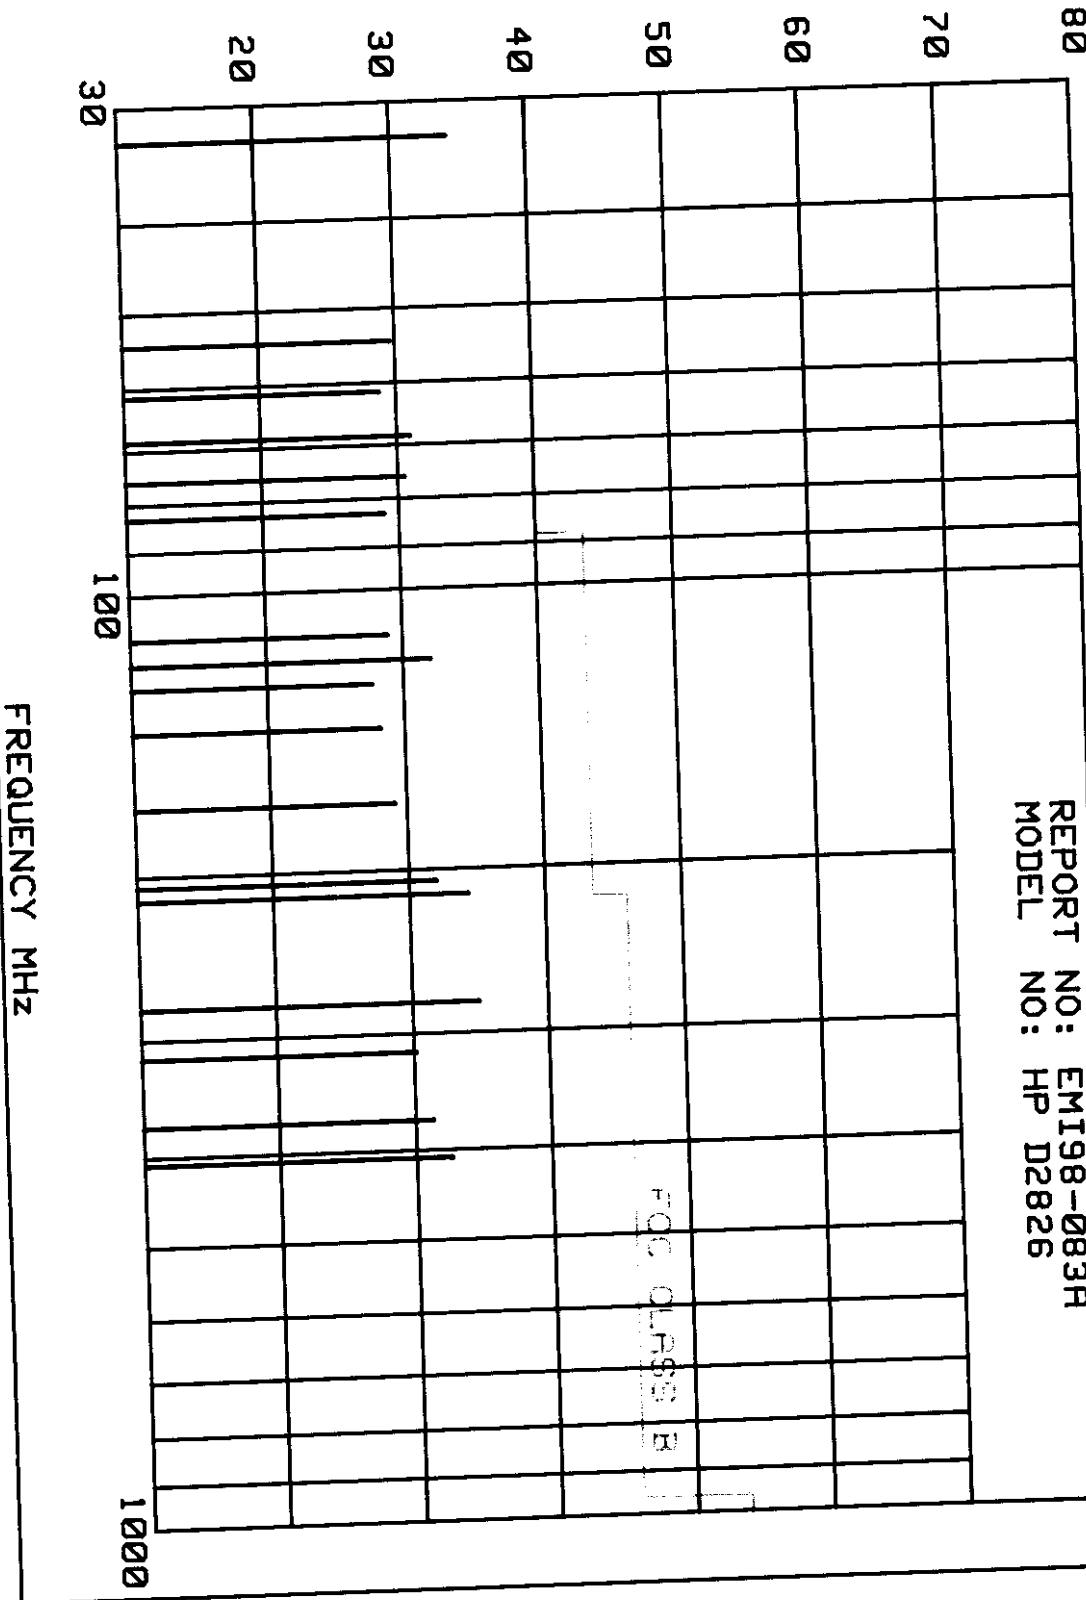

FREQUENCY MHZ




hp

A3KM079 RUN 1024X768/60HZ 48.3KHZ MODE AC110V MKR 5.27 MHZ  
REF 107.0 DBμV ATTEN 10 DB 45.30 DBμV

10 DB/

DL  
48.0  
DBμV

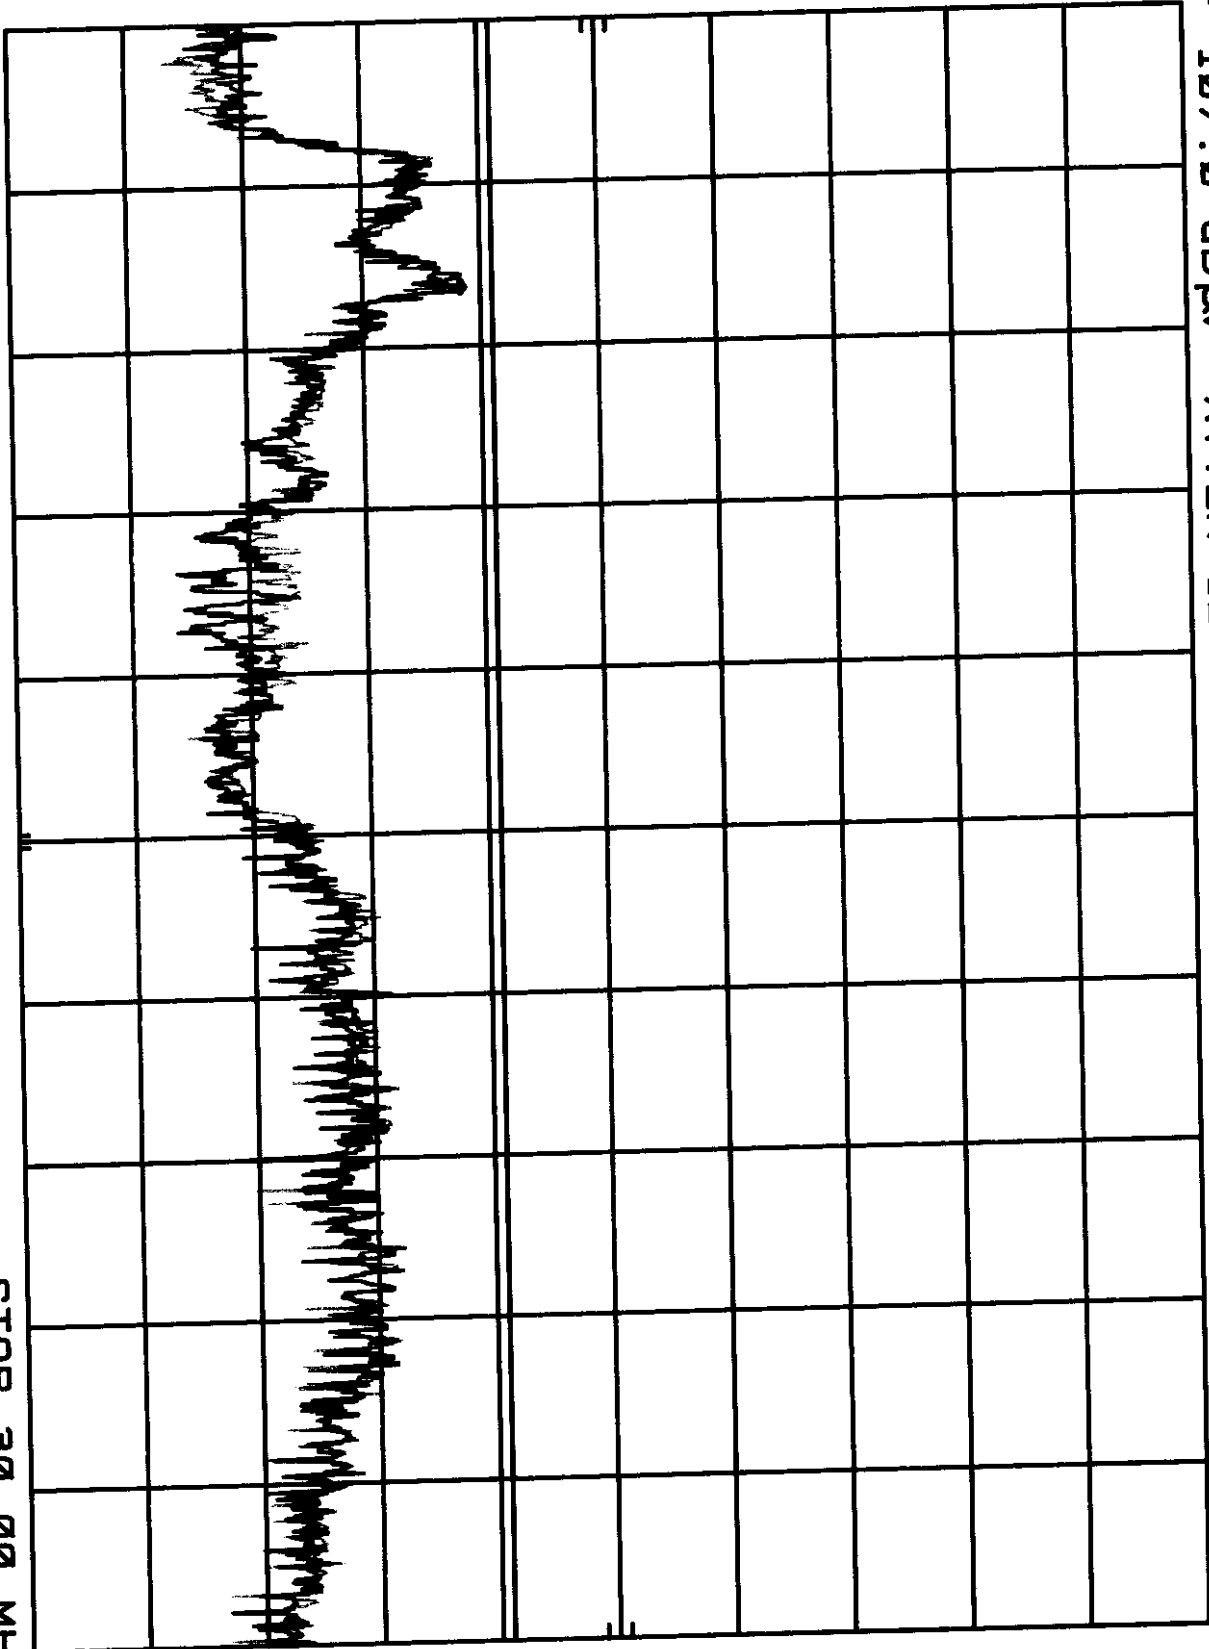

START 450 KHZ RES BW 10 KHZ VBW 10 KHZ STOP 30.00 MHZ  
SMP 750 msec

A3KM079 RUN 1024X768/60HZ 48.3KHZ MODE AC220V MKR 3.11 MHZ  
REF 107.0 DBμV ATTEN 10 DB 43.90 DBμV

10 DB/

DL  
48.0  
DBμV

START 450 KHZ RES BW 10 KHZ VBW 10 KHZ STOP 30.00 MHZ  
SMP 750 msec

