

TEST REPORT

of the accredited test laboratory

TÜV Nr.:INE-AT/FG-21/145**TÜV AUSTRIA
SERVICES GMBH****Office:**
Deutschstrasse 10
1230 Vienna/Austria
T: +43 5 0454-5100
F: +43 5 0454-6505
E: ticwien@tuv.at
W: www.tuv.at**Business Area**
Industry & Energy Austria

Technik

TÜV®

Applicant: StreamUnlimited Engineering GmbH
High Tech Campus Vienna
Gutheil-Schoder-Gasse 10
A-1100 Vienna

Tested Product: STREAM1955 Bluetooth / BLE / WIFI streaming module
Test report for BLE part only

FCC ID 2AJYB-ST1955

IC ID 20504-ST1955

Manufacturer: See applicant

Output power 4,27 mW cond. **power supply:** 12 VDC

Frequency range: 2402 - 2480 MHz **Channel separation:** 2 MHz

Accredited Standards: FCC: 47 CFR Part 15 (eCFR 28.06.2021)
RSS-247 Issue 2, February 2017
ANSI C63.10-2013

Testing Laboratory,
Inspection Body,
Certification Body,
Calibration Laboratory,
Verifizierungsstelle**Notified Body 0408****Non-executive
Board of Directors:**
KR DI Johann
Marihart**Management:**
DI Dr. Stefan Haas
Mag. Christoph
Wenninger**Registered Office:**
Deutschstrasse 10
1230 Vienna/Austria**Branch Offices:**
www.tuv.at/standorte**Company Register
Court / - Number:**
Vienna / FN 288476 f**Bank Details:**
IBAN
AT131200052949001066
BIC BKAUATWWVAT ATU63240488
DVR 3002476**TÜV AUSTRIA SERVICES GMBH**
Test laboratory for EMC

Wolfram Topka, BSc.

**examined by / Testing
Laboratory**
**TÜV AUSTRIA SERVICES
GMBH**

29.07.2021

Ing. Wilhelm Seier

**approved by / Testing
Laboratory**
**TÜV AUSTRIA SERVICES
GMBH**

A publication of this test report is only permitted literally.

Copying or reproduction of partial sections needs a written permission of
TÜV AUSTRIA SERVICES GMBH.

The results of this test report only refer to the provided equipment.

Contents

| | Designation | PAGE |
|----------|---|---------|
| 1. | Applicant | 3 |
| 2. | Description of EUT | 4 |
| 3. | Standards / Final result | 5 |
| 4. | Test results | |
| | List of measurements according to 47 CFR 15 and RSS-247 | |
| 4.1 | Test object data | 6 |
| 4.2 | Number of channels and channel spacing | 7 |
| 4.3 | 6 dB Bandwidth | 8 – 10 |
| 4.4 | 99% dB Bandwidth | 11 – 13 |
| 4.5 | Maximum Peak RF Power Output | 14 |
| 4.6 | Power Spectral Density | 15 – 17 |
| 4.7 | Out of Band Emission | 18 – 20 |
| 4.8 | Emissions in restricted bands | 21 – 25 |
| 4.9 | Conducted Limits | 26 |
| Appendix | Designation | PAGES |
| 1 | Test equipment used | 4 |
| 2 | Photodocumentation | 6 |

1. Applicant

Company: StreamUnlimited Engineering GmbH

Department: Director Systems

Address: High Tech Campus Vienna
Gutheil-Schoder-Gasse 10
A-1100 Vienna

Contact person: Mr. DI Christoph Apel

EUT received on: 29.04.2021

Tests were performed on: 04.05.2021 till 11.06.2021

2. Description of EUT

EUT: Bluetooth / BLE / WIFI module "STREAM1955"

Serial Number: Prototype mounted on evaluation board

Manufacturer: StreamUnlimited Engineering GmbH
High Tech Campus Vienna
Gutheil-Schoder-Gasse 10
A-1100 Vienna

Description: StreamUnlimited Engineering GmbH provided the following configuration for the measurements:

Prototype mounted on evaluation board with direct connection for conducted measurements and with antenna type of highest gain for radiated measurements

Operating mode: The measurements were carried out at the following running states:
test-firmware running, transmitting continuously

Technical data EUT: Rated voltage: 12VDC
Rated current: 450mA
Rated frequency: DC

Mains voltage during the tests: 12VDC

Climatic conditions in the emc laboratory: Relative humidity: 25%
Temperature: 25°C

3. Standards / Final result

| Name | Title | Deviation | Result |
|---|--|-----------|--------|
| FCC: 47 CFR Part 15 (eCFR 28.06.2021) | RADIO FREQUENCY DEVICES | none | OK |
| RSS-247 Issue 2, February 2017 | Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices | none | OK |
| ANSI C63.10-2013 | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices | none | OK |
| <p>Result: Opinions and interpretation of testing laboratory OK: EUT passed NOK: EUT failed</p> | | | |

4. TEST RESULTS

4.1. TEST OBJECT DATA

General EUT Description

This Bluetooth / BLE / WIFI module is using either 2.4 GHz frequencies or 5 GHz (WIFI only). This test report is only for the BLE part. See additional test reports:

INE-AT/FG-21/144 for Bluetooth

INE-AT/FG-21/146 for 2,4 GHz WIFI and

INE-AT/FG-21/147 for 5 GHz WIFI measurement results including photodocumentation.

2.1033 (c) Technical description

2.1033 (4) Type of emission: 1M04F1D – Channel spacing 2 MHz

2.1033 (5) Frequency range: 2402 to 2480 MHz (channel center frequencies).

2.1033 (6) Power range and Controls: The maximum peak output power is 4,27 mW and there is no power regulation.

2.1033 (7) Maximum output power rating: 4,27 mW.

2.1033 (8) DC Voltage and Current: 5V DC
maximum current consumption: 450 mA

RSS-135 This standard does not apply to:

- 1.1.(a) a receiver that scans radio frequencies for the purpose of enabling its associated transmitter to avoid transmitting in an occupied frequency but which does not have the capability of decoding the message (e.g. converting it to audio voice) contained in the radio signal

Antennas used for all radiated measurements: MOLEX '146153' 3,5 dBi

Worst case Spurious Emissions: 45,8 dBµV/m Average at 4GHz.

Tests were performed May 4th till July 29th 2021.

4.2. Number of channels and channel spacing

§ 2.1033

Conducted Measurement

Rated output power: 4,27 mW

There are 40 Channels used starting at 2402 till 2480 MHz each separated by 2 MHz channel spacing.


Test Equipment used: N/A

4.3. 6 dB Bandwidth

**§ 15.247(a)(2)
5.2.a)**

Conducted Measurement

Rated output power: 4,27 mW Channel 0 (2402 MHz center frequency)

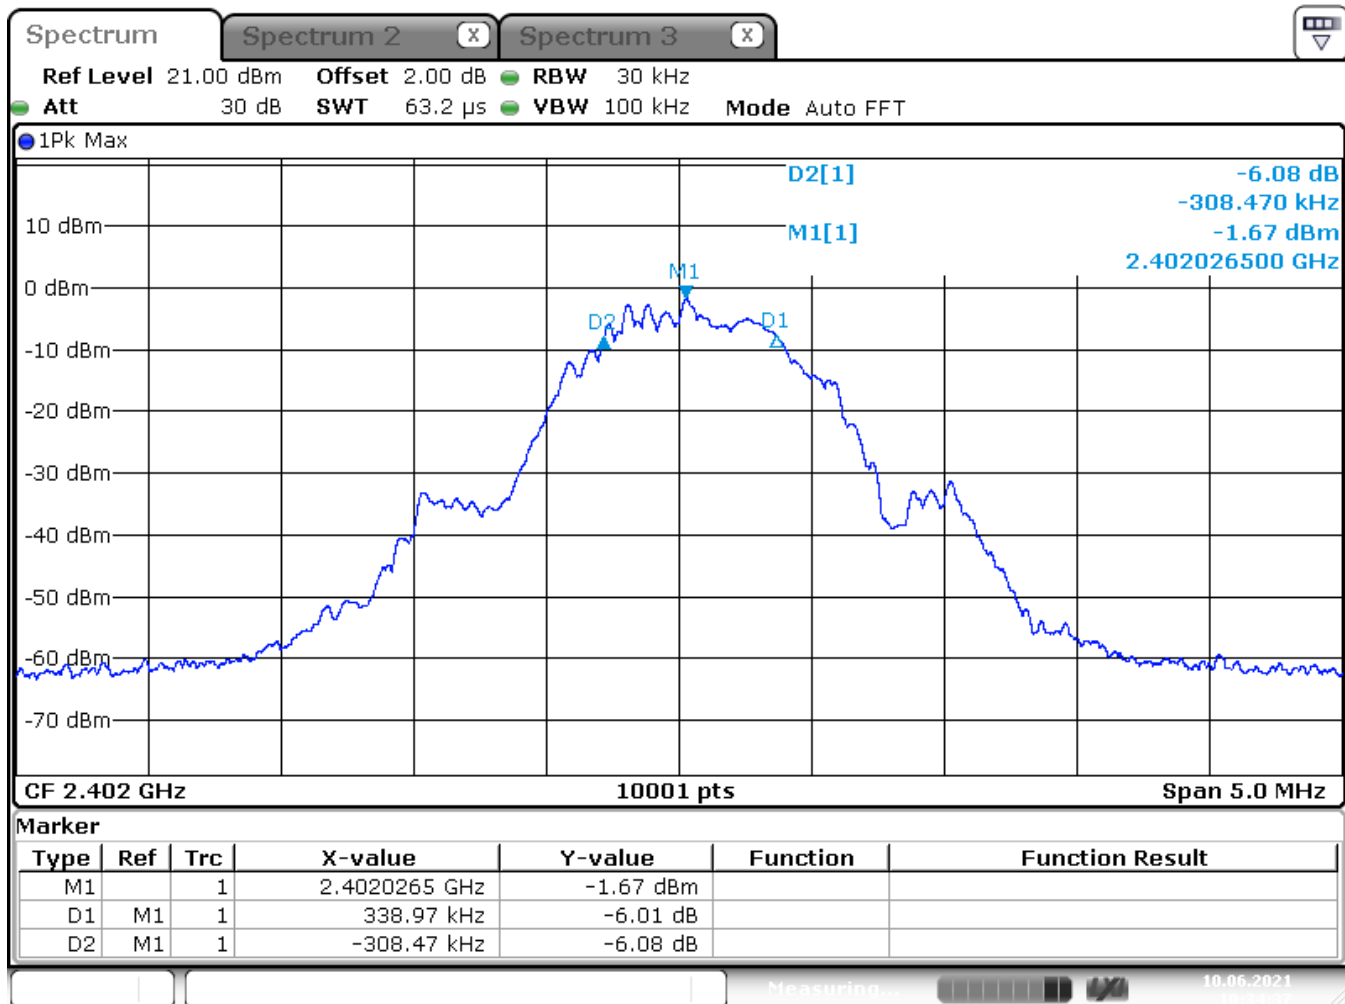

Date: 10 JUN 2021 10:34:37

6dB Bandwidth: 647,44 kHz

LIMIT SUBCLAUSE 15.247(e) – 5.2.a)

| | |
|-----------------------------|---------------------------------|
| Under normal test conditons | 6 dB Bandwidth at least 500 kHz |
|-----------------------------|---------------------------------|


Test Equipment used: EMV-205

6 dB Bandwidth

**§ 15.247(a)(2)
 5.2.a)**

Conducted Measurement

Rated output power: 4,27 mW Channel 19 (2440 MHz center frequency)

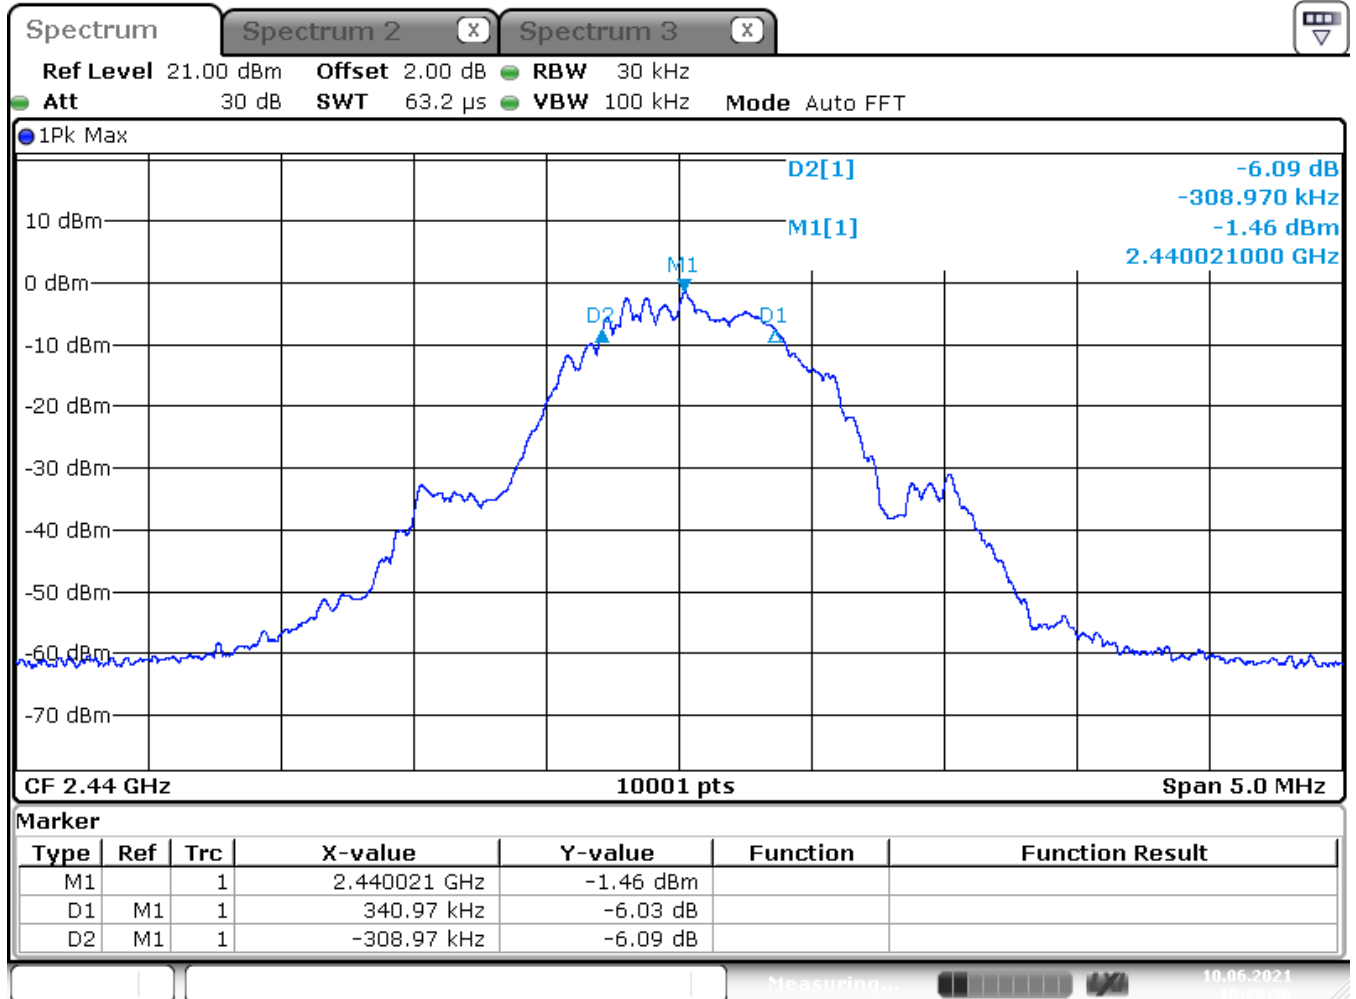

Date: 10 JUN 2021 10:28:36

6dB Bandwidth: 649,94 kHz

LIMIT SUBCLAUSE 15.247(e) – 5.2.a)

| | |
|-----------------------------|---------------------------------|
| Under normal test conditons | 6 dB Bandwidth at least 500 kHz |
|-----------------------------|---------------------------------|


Test Equipment used: EMV-205

6 dB Bandwidth

§ 15.247(a)(2)
5.2.a)

Conducted Measurement

Rated output power: 4,27 mW Channel 39 (2480 MHz center frequency)

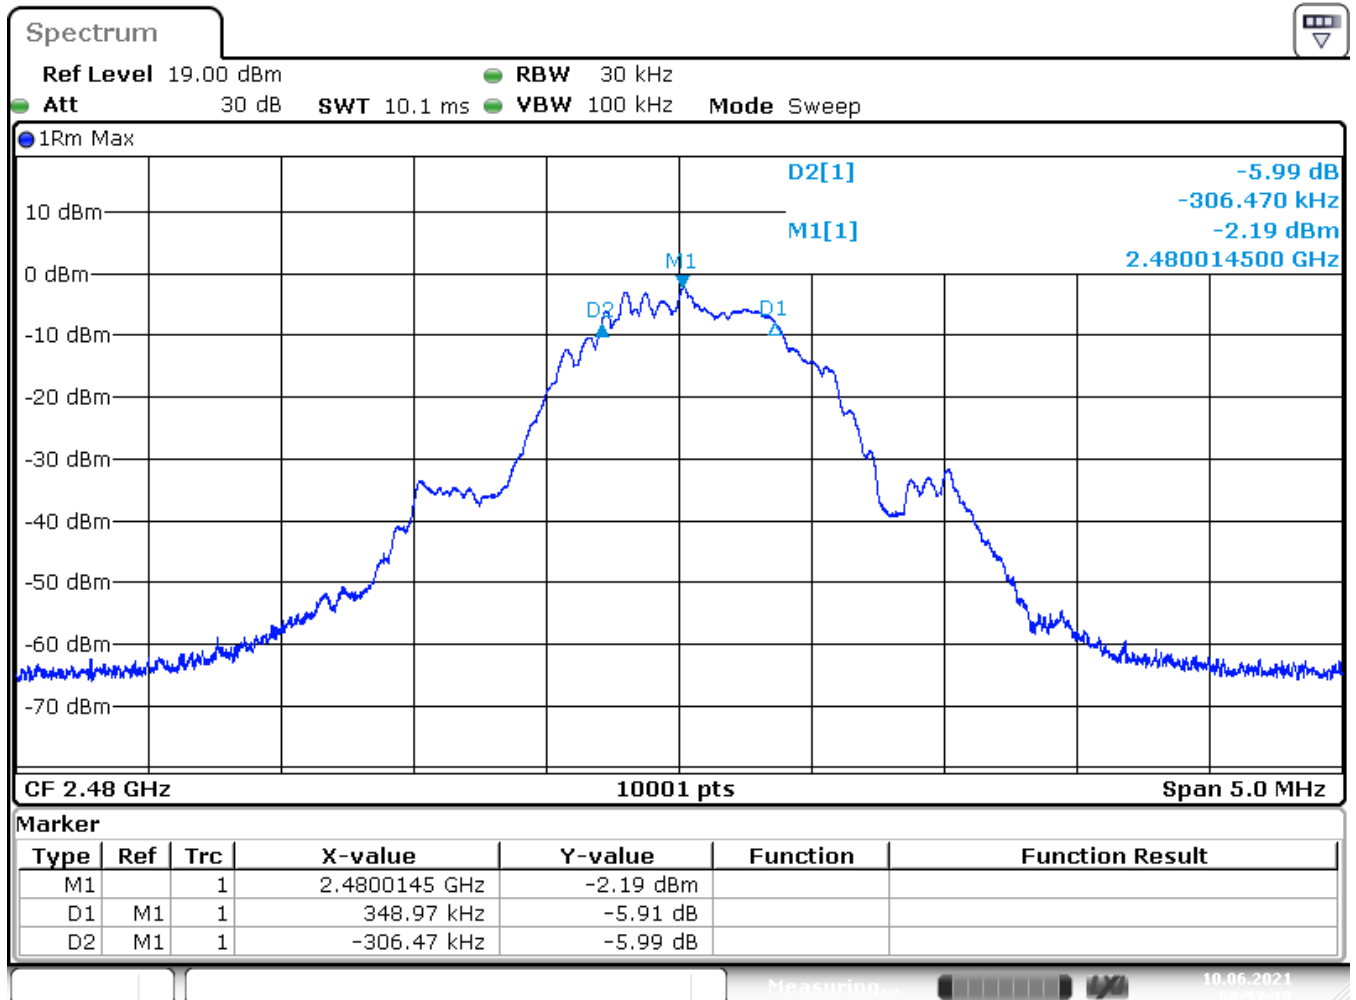

Date: 10 JUN 2021 08:57:19

6dB Bandwidth: 655,44 kHz

LIMIT SUBCLAUSE 15.247(e) – 5.2.a)

| | |
|-----------------------------|---------------------------------|
| Under normal test conditons | 6 dB Bandwidth at least 500 kHz |
|-----------------------------|---------------------------------|


Test Equipment used: EMV-205

4.4. 99% Bandwidth

RSS 247

Conducted Measurement

Rated output power: 4,27 mW Channel 0 (2402 MHz center frequency)

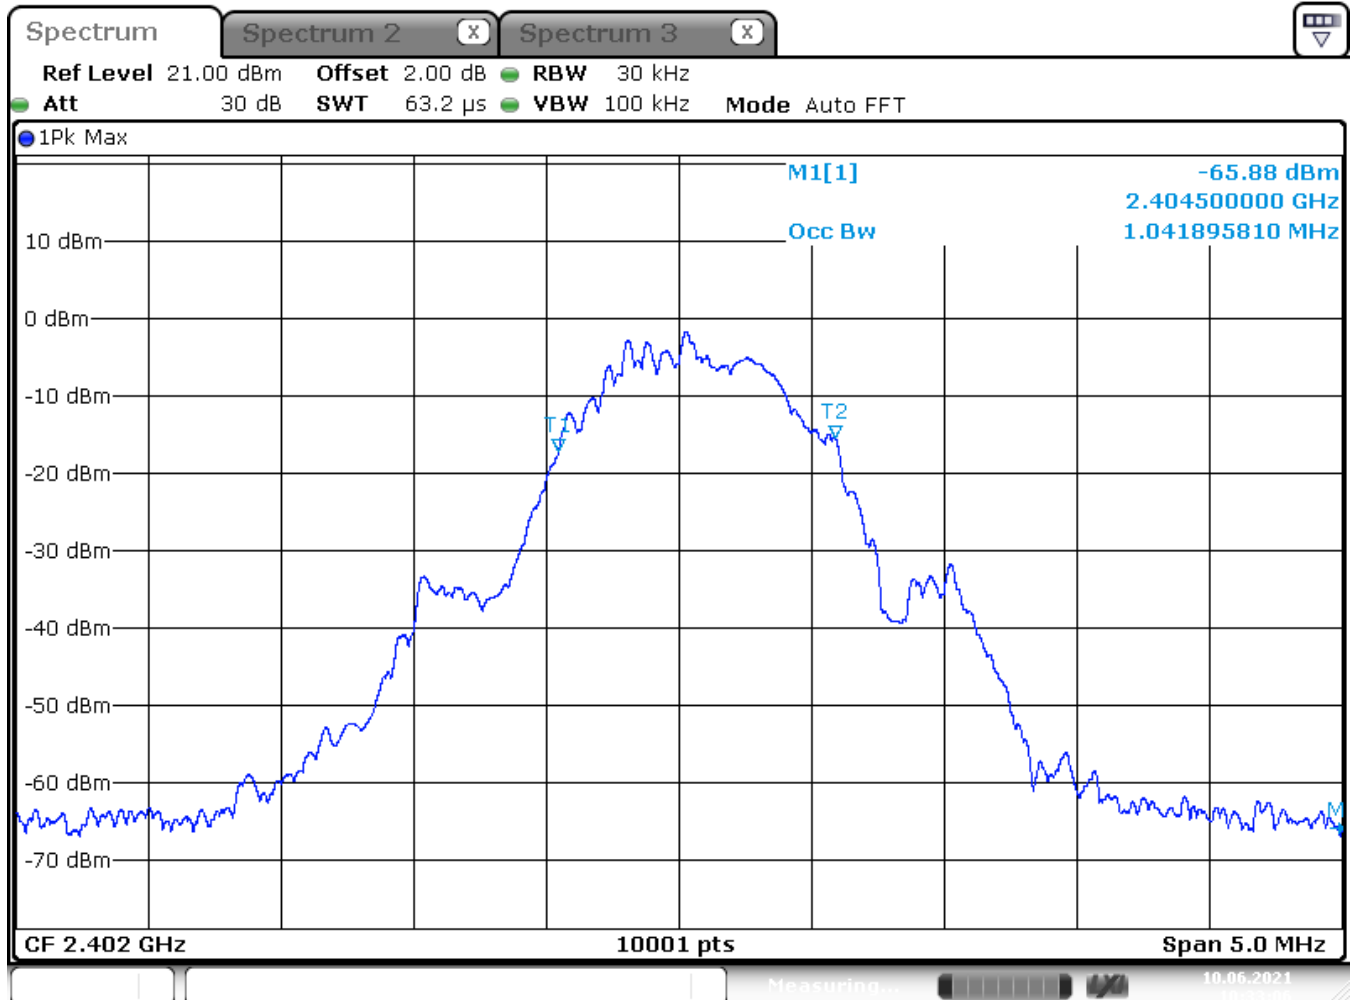

Date: 10 JUN 2021 10:33:06

99% Bandwidth: 1041,89581 kHz

LIMIT **RSS 247**

None; for IC reporting purposes only


Test Equipment used: EMV-205

99% Bandwidth

RSS 247

Conducted Measurement

Rated output power: 4,27 mW Channel 19 (2440 MHz center frequency)

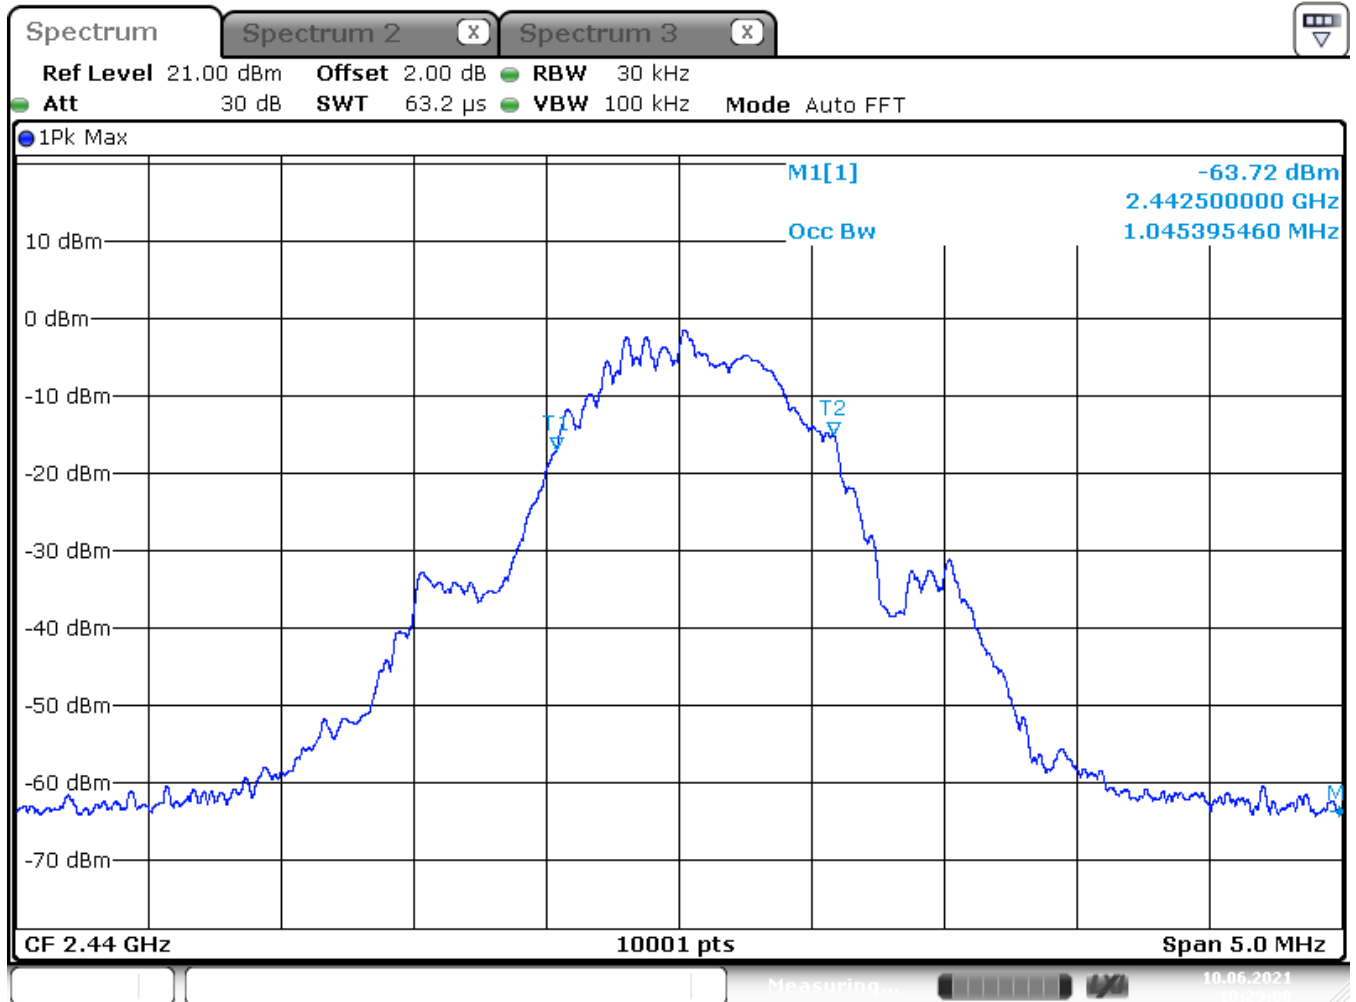

Date: 10 JUN 2021 10:29:01

99% Bandwidth: 1045,39546 kHz

LIMIT **RSS 247**

None; for IC reporting purposes only


Test Equipment used: EMV-205

99% Bandwidth

RSS 247

Conducted Measurement

Rated output power: 4,27 mW Channel 39 (2480 MHz center frequency)

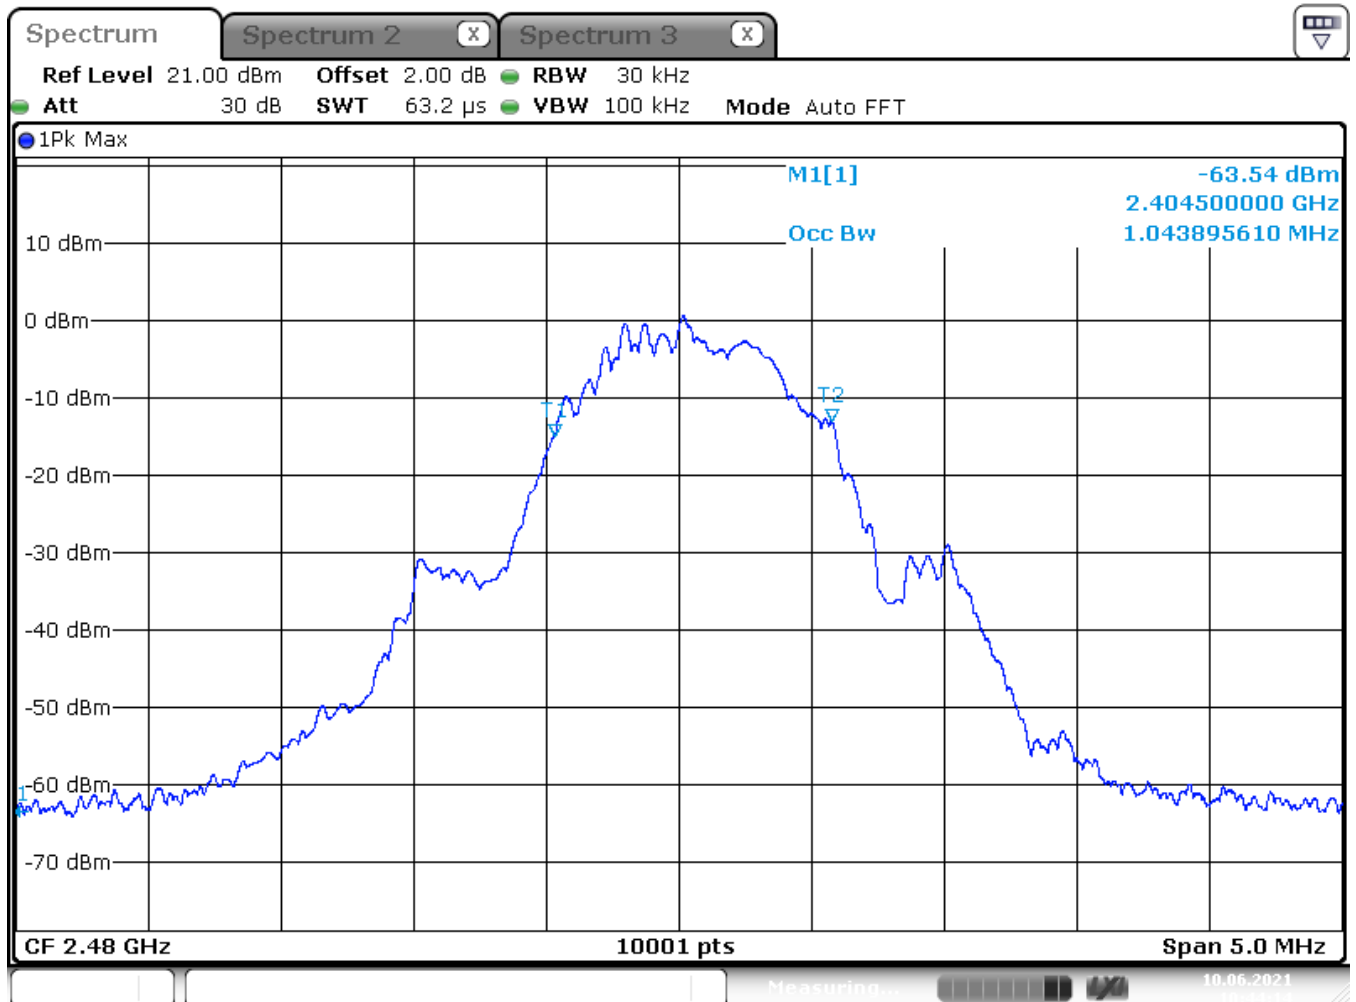

Date: 10 JUN 2021 10:44:14

99% Bandwidth: 1034,89561 kHz

LIMIT **RSS 247**

None; for IC reporting purposes only

Test Equipment used: EMV-205

4.5. Maximum Peak RF Power Output (conducted)

**§ 15.247(b)(3)
 5.4.4**

Conducted Measurement

Rated output power: 4,27 mW

| Test conditions | | Transmitter power (mW) | | |
|---|--------------------------|------------------------|----------|----------|
| | | 2402 MHz | 2440 MHz | 2480 MHz |
| T _{nom} (23)°C | V _{nom} (5) V | 4,17 | 4,27 | 3,80 |
| Maximum deviation from rated output power under normal test conditions (dB) | | -0,1 | 0 | -0,5 |
| Measurement uncertainty | | ± 0,75 dB | | |

LIMIT SUBCLAUSE 15.247(b)(3) – 5.4.4

| | |
|-----------------------------|------------------------|
| Under normal test conditons | 1W conducted (4W eirp) |
|-----------------------------|------------------------|


Test Equipment used: NT-204

4.6. Power spectral density (conducted)

**§ 15.247(e)
 5.2.2**

Conducted Measurement

Rated output power: 4,27 mW Channel 0 (2402 MHz center frequency)

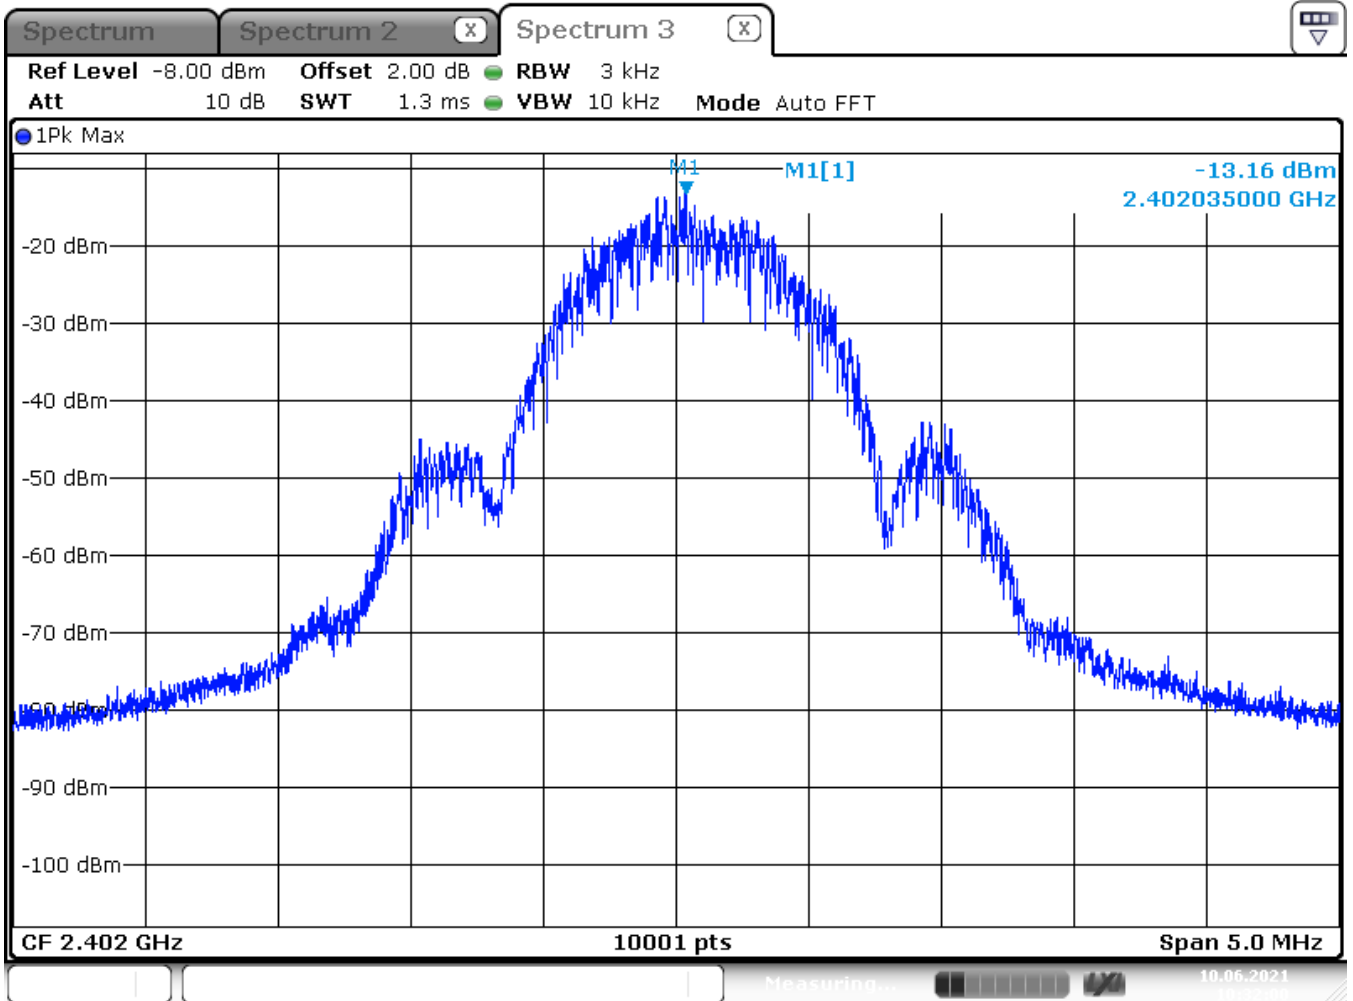

Date: 10 JUN 2021 10:32:00

Power Spectral density: -13,16 dBm @ 2402,035 MHz

LIMIT SUBCLAUSE 15.247(e) – 5.2 b)

| | |
|-----------------------------|-------------------------|
| Under normal test conditons | +8dBm in any 3 kHz band |
|-----------------------------|-------------------------|


Test Equipment used: EMV-205

Power spectral density (conducted)

**§ 15.247(e)
 5.2 b)**

Conducted Measurement

Rated output power: 4,27 mW Channel 19 (2440 MHz center frequency)

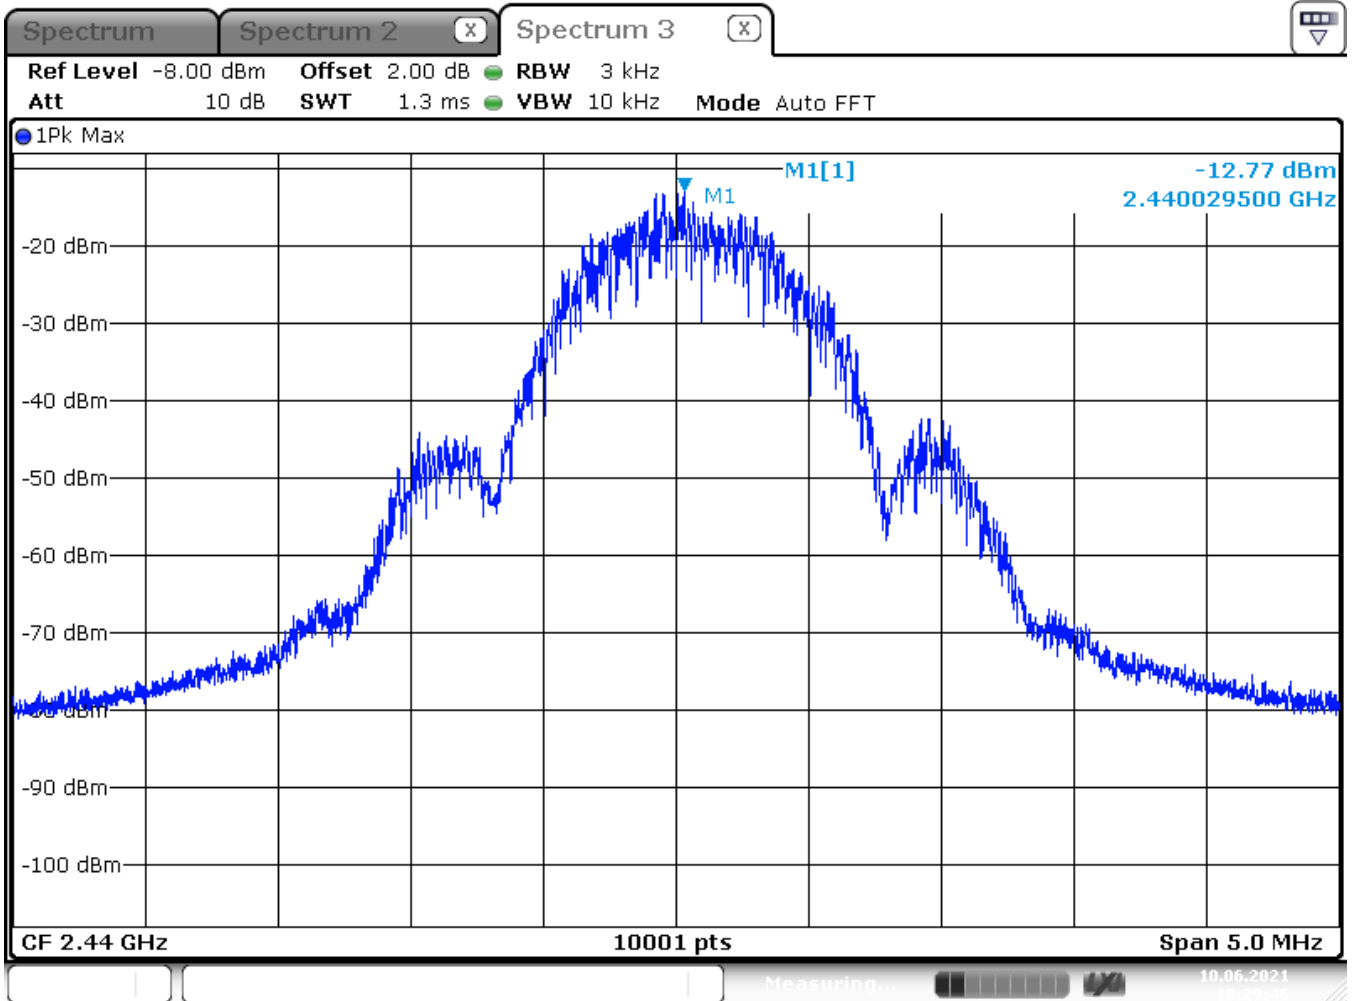

Date: 10 JUN 2021 10:29:46

Power Spectral density: -12,77 dBm @ 2440,0295 MHz

LIMIT SUBCLAUSE 15.247(e) – 5.2 b)

| | |
|-----------------------------|-------------------------|
| Under normal test conditons | +8dBm in any 3 kHz band |
|-----------------------------|-------------------------|


Test Equipment used: EMV-205

Power spectral density (conducted)

**§ 15.247(e)
 5.2 b)**

Conducted Measurement

Rated output power: 4,27 mW Channel 39 (2480 MHz center frequency)

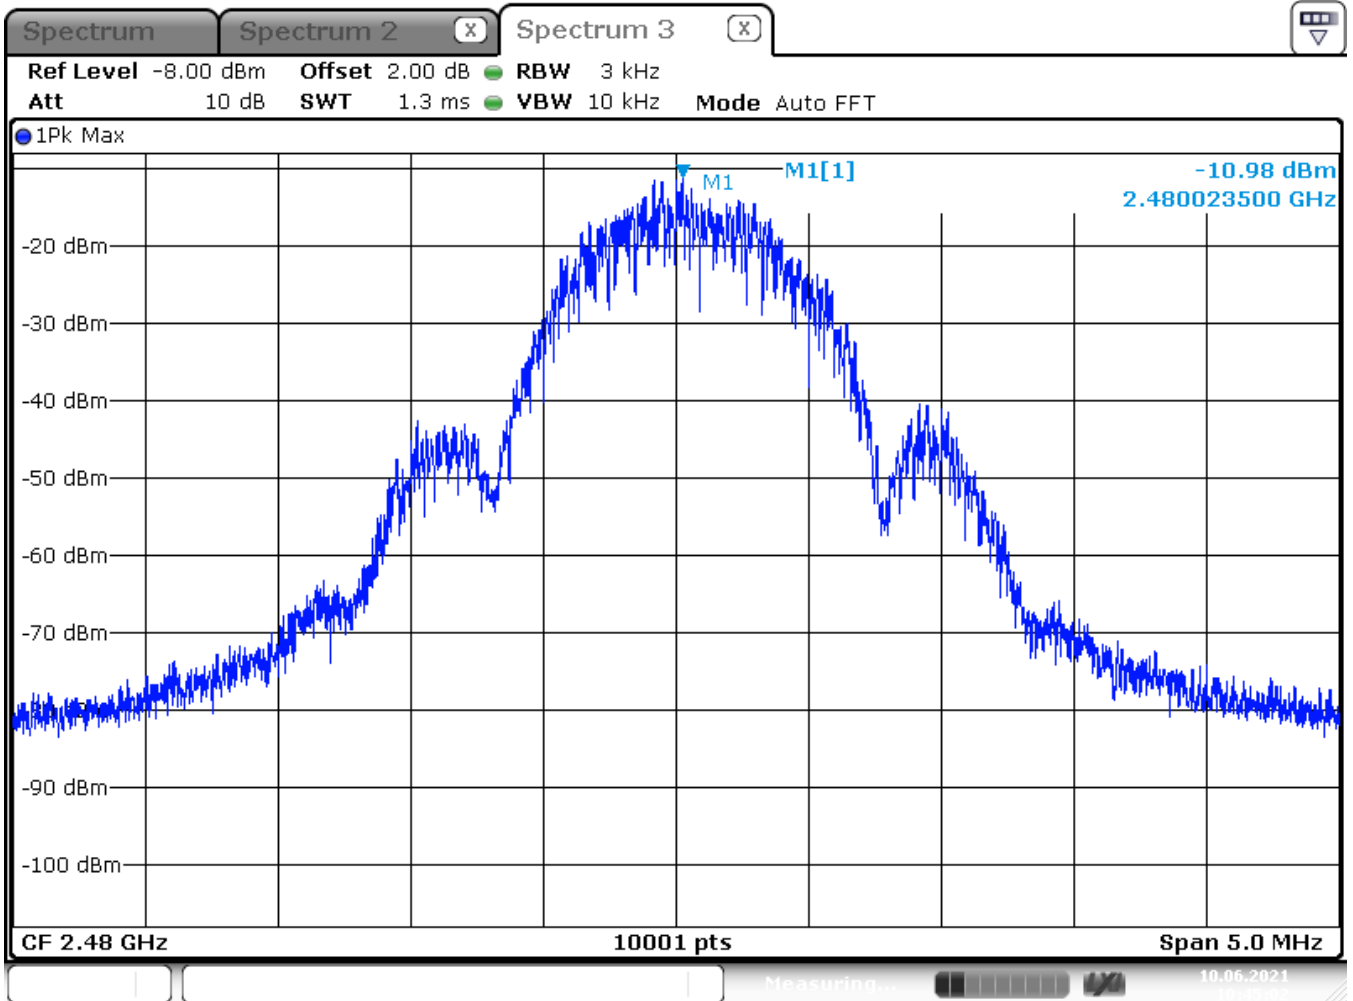

Date: 10 JUN 2021 10:45:03

Power Spectral density: -8,98 dBm @ 2480,0235 MHz

LIMIT SUBCLAUSE 15.247(e) – 5.2 b)

| | |
|-----------------------------|-------------------------|
| Under normal test conditons | +8dBm in any 3 kHz band |
|-----------------------------|-------------------------|


Test Equipment used: EMV-205

**4.7. Out-of-band Emission
 Unwanted Emissions**

**§ 15.247(d)
 5.5**

Conducted Measurement

Setup: CH 0: 2402 MHz

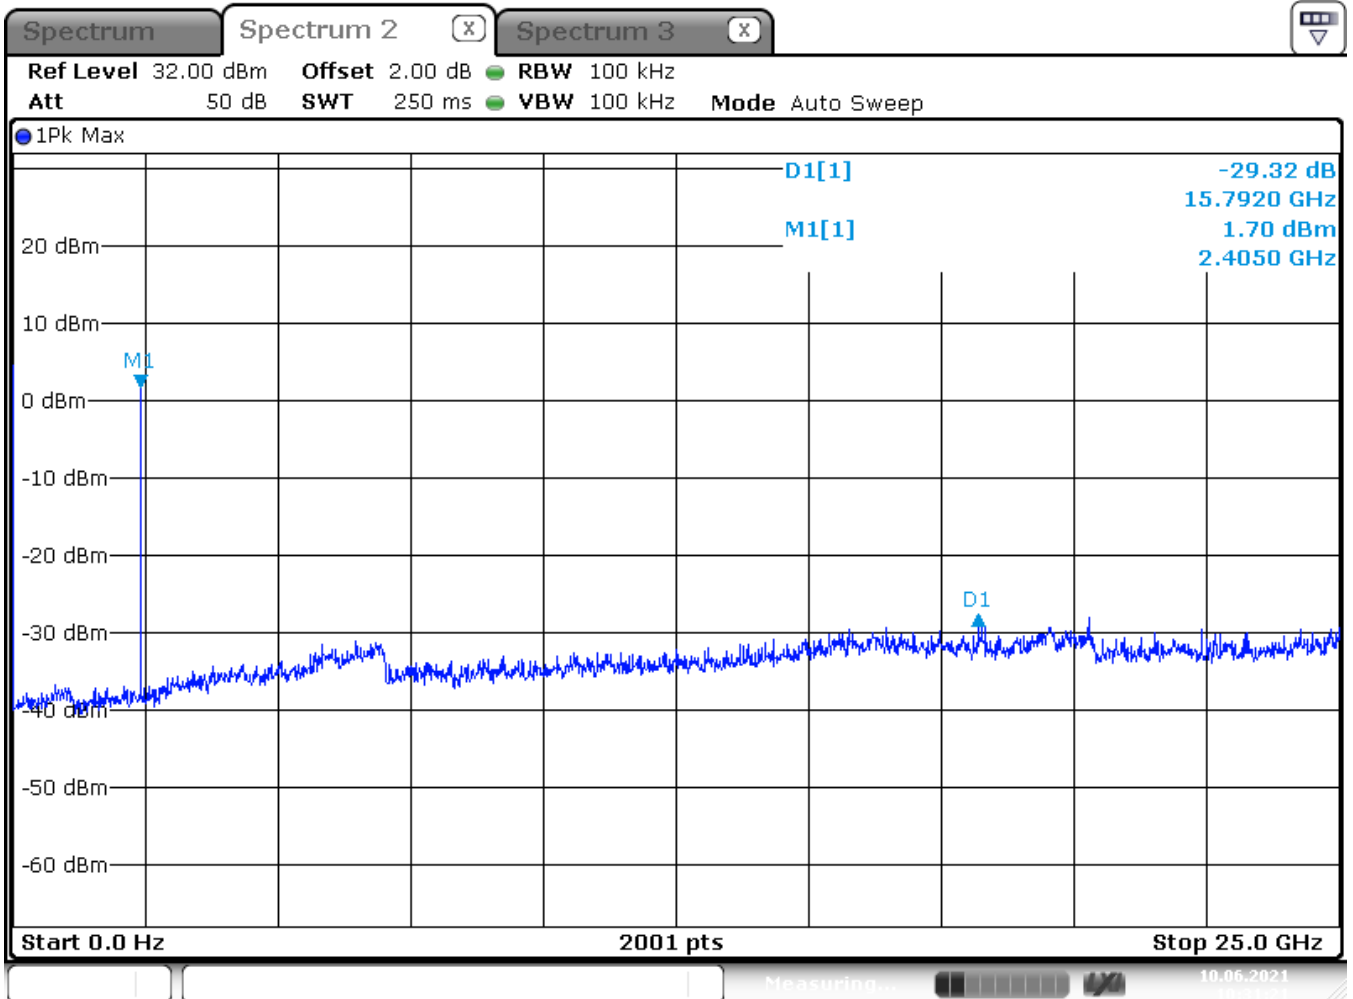

Date: 10 JUN 2021 10:31:22

LIMIT SUBCLAUSE 15.247(d) – 5.5

| | |
|--|---|
| <p>In any 100 kHz bandwidth outside the frequency band in which the radio device is operating.</p> | <p>At least 20dB below the power in the 100 kHz bandwidth within the band that contains the highest level of the desired power.</p> |
|--|---|


Test Equipment used: EMV-205

**Out-of-band Emission
 Unwanted Emissions**

**§ 15.247(d)
 5.5**

Conducted Measurement

Setup: CH 19: 2440 MHz

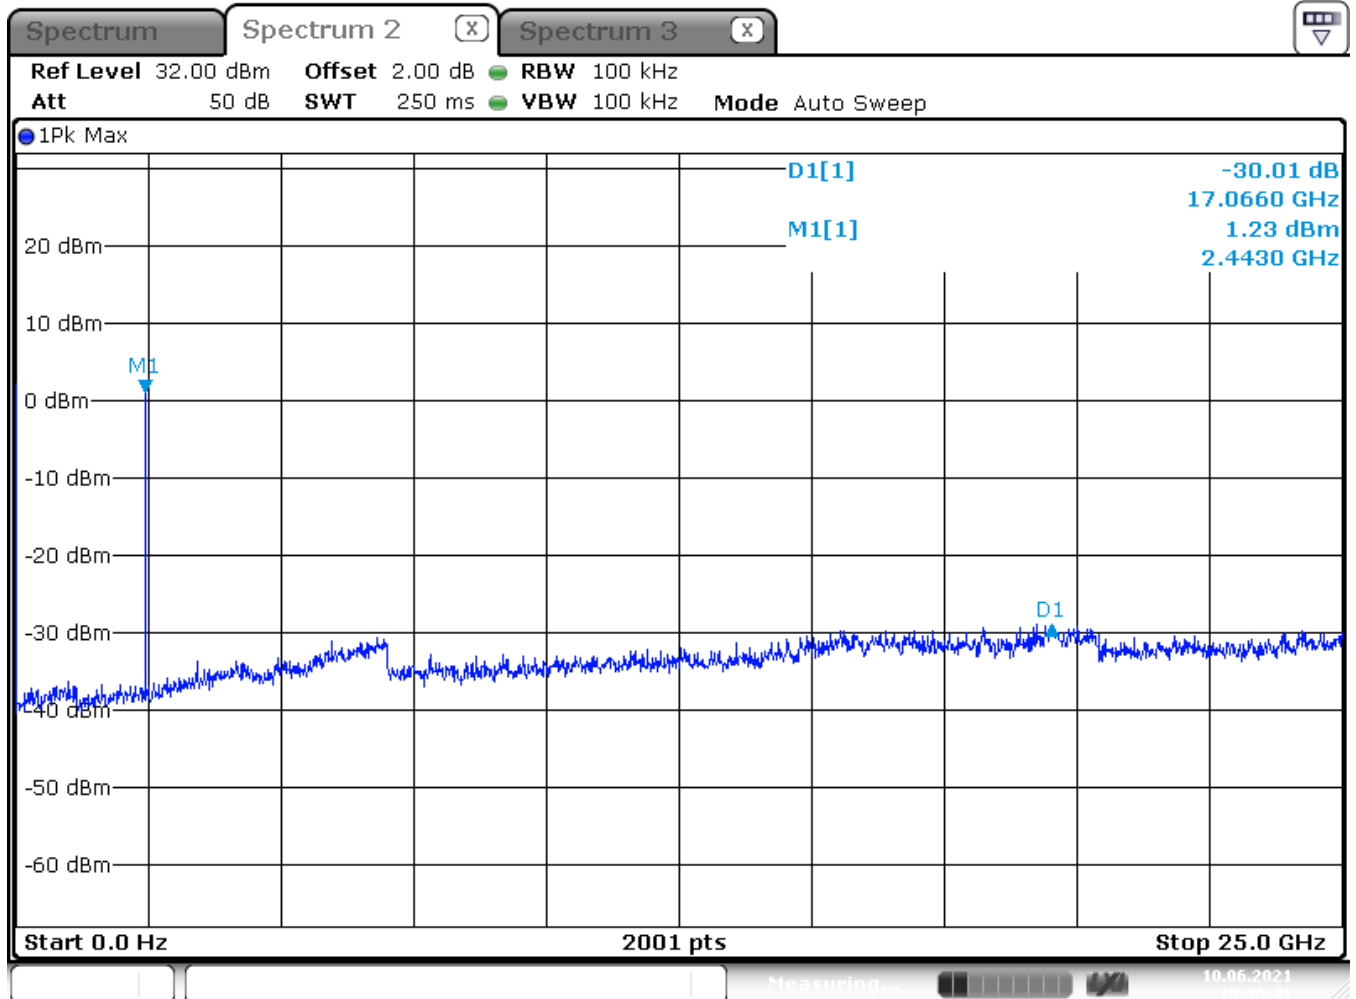

Date: 10 JUN 2021 10:30:42

LIMIT SUBCLAUSE 15.247(d) – 5.5

| | |
|--|---|
| <p>In any 100 kHz bandwidth outside the frequency band in which the radio device is operating.</p> | <p>At least 20dB below the power in the 100 kHz bandwidth within the band that contains the highest level of the desired power.</p> |
|--|---|


Test Equipment used: EMV-205

**Out-of-band Emission
 Unwanted Emissions**

**§ 15.247(d)
 5.5**

Conducted Measurement

Setup: CH 39: 2480 MHz

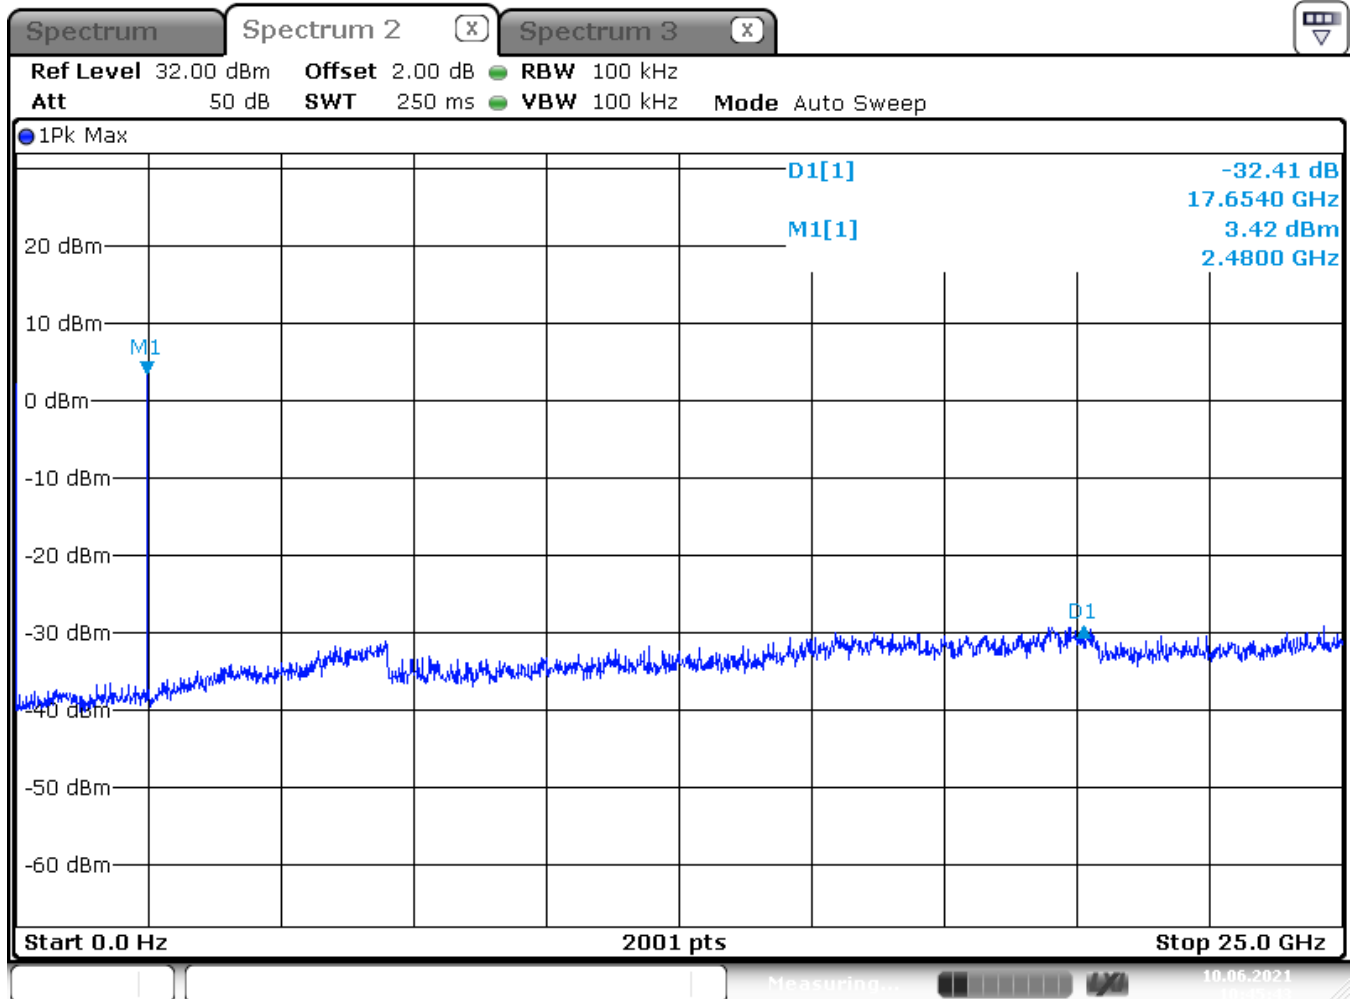

Date: 10 JUN 2021 10:45:43

LIMIT SUBCLAUSE 15.247(d) – 5.5

| | |
|--|---|
| <p>In any 100 kHz bandwidth outside the frequency band in which the radio device is operating.</p> | <p>At least 20dB below the power in the 100 kHz bandwidth within the band that contains the highest level of the desired power.</p> |
|--|---|


Test Equipment used: EMV-205

4.8. Emissions in restricted bands
Emissions falling within restricted frequency bands

§ 15.209(a)
RSS-Gen

Measurement with Peak-Detector (green line) and Average detector (magenta line):

Setup: CH 0: 2402 MHz

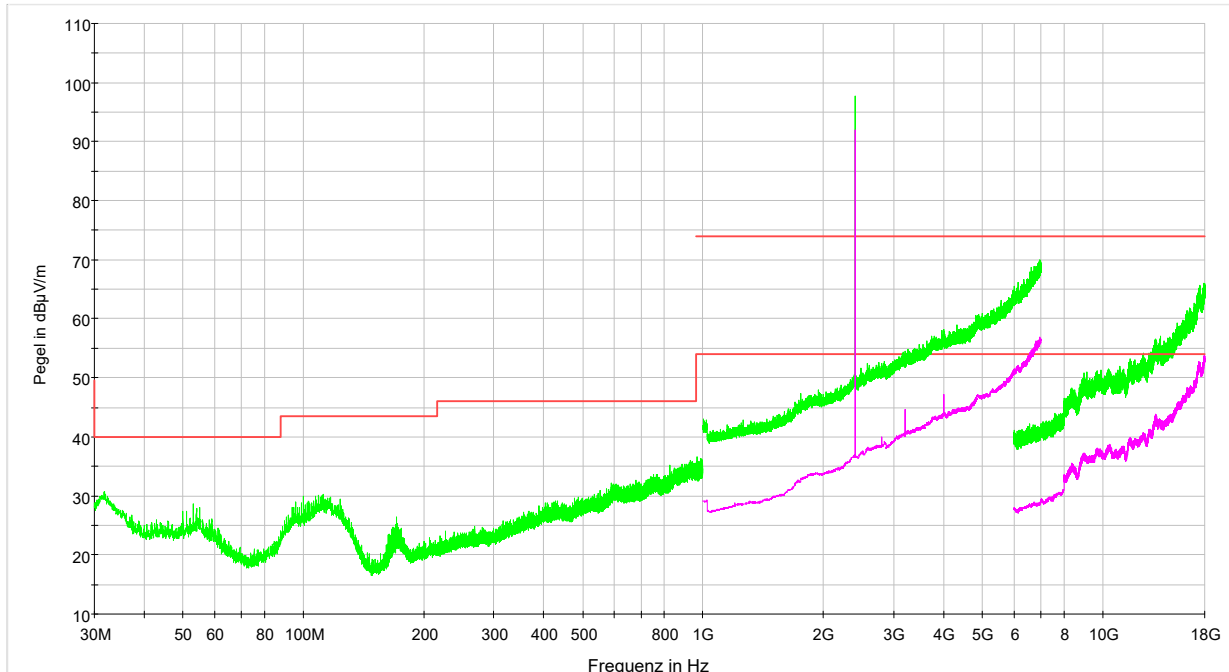

- PK+ _MAXH(1):BLE_CH0_F3 [BLE_CH0_F3.Result:2]
- PK+ _CLRWR [Ergebnistabelle.Result:1]
- FCC ClassB F QP [..EMI radiated]
- AVG _CLRWR [Ergebnistabelle.Result:3]
- FCC ClassB F PK [..EMI radiated]
- PK+ _MAXH(1) [BLE_CH1_F1.Result:2]
- AVG _MAXH(1):BLE_CH0_F3 [BLE_CH0_F3.Result:4]
- PK+ _MAXH [Ergebnistabelle.Result:2]
- PK+ _MAXH(1):BLE_CH0_F2 [BLE_CH0_F2.Result:2]
- AVG _MAXH [Ergebnistabelle.Result:4]
- AVG _MAXH(1):BLE_CH0_F2 [BLE_CH0_F2.Result:4]

Worst case emission: Average @ 4000,0 MHz: 45,6 dBµV/m

Remark: Although the measurement above ends at 18 GHz, all measurements were performed up to the tenth harmonics of the transmitter frequency.

LIMIT SUBCLAUSE 15.209(a) – RSS-Gen


| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100** | 3 |
| 88-216 | 150** | 3 |
| 216-960 | 200** | 3 |
| Above 960 | 500 | 3 |

Test Equipment used: EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-111; EMV-112;
 EMV-114; EMV-200; EMV-205; NT-122; NT-126; NT-416

Emissions in restricted bands § 15.209(a)
Emissions falling within restricted frequency bands RSS-Gen

Measurement with Peak-Detector (green line) and Average detector (magenta line): Band Edge requirement

Setup: CH 0: 2402 MHz

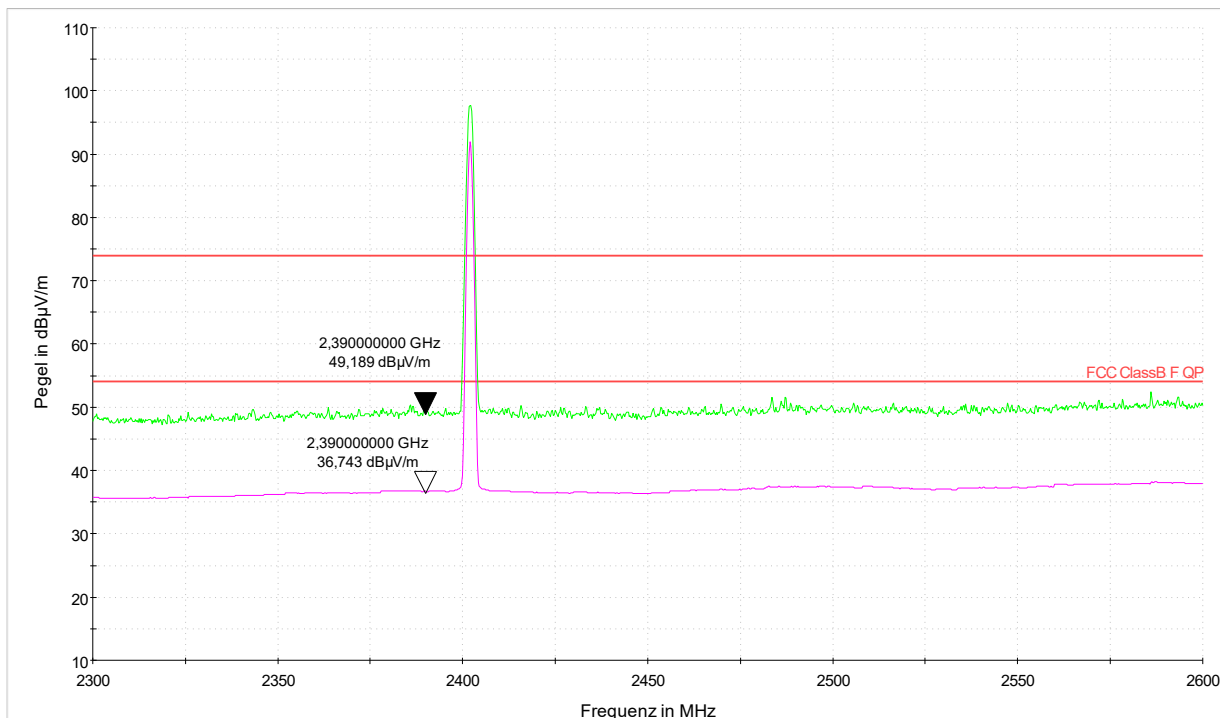

- FCC ClassB F QP [..EMI radiated]
- PK+ _MAXH [Ergebnistabelle.Result:2]
- AVG_CLRWR [Ergebnistabelle.Result:3]
- PK+ _MAXH(1)@fcc [BLE_CH0_F2.Result:2]
- FCC ClassB F PK [..EMI radiated]
- AVG_MAXH [Ergebnistabelle.Result:4]
- PK+ _CLRWR [Ergebnistabelle.Result:1]
- AVG_MAXH(1)@fcc [BLE_CH0_F2.Result:4]

LIMIT SUBCLAUSE 15.209(a) – RSS-Gen

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100** | 3 |
| 88-216 | 150** | 3 |
| 216-960 | 200** | 3 |
| Above 960 | 500 | 3 |

Band edges of the nearest restricted bands: 2390 MHz and 2483,5 MHz.


Test Equipment used: EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-200

Emissions in restricted bands
Emissions falling within restricted frequency bands

§ 15.209(a)
RSS-Gen

Measurement with Peak-Detector (green line) and Average detector (magenta line):

Setup: CH 19: 2440 MHz

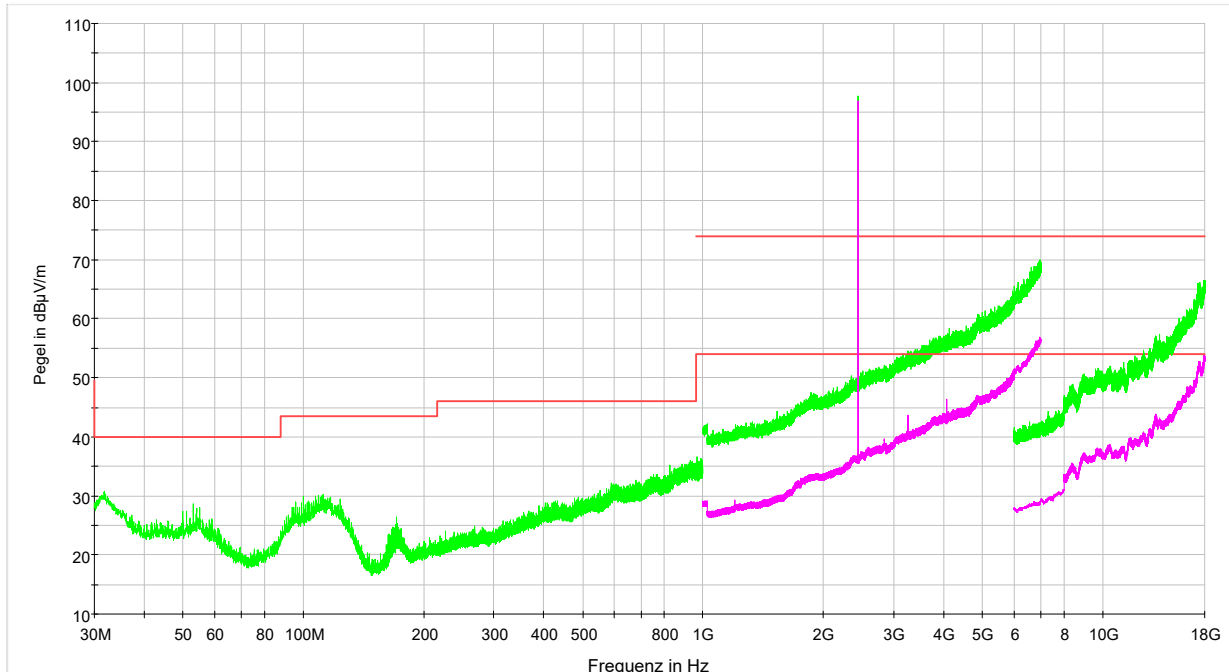

- FCC ClassB F PK [..\EMI radiated]
- PK+_CLRWR [Ergebnistabelle.Result:1]
- FCC ClassB F QP [..\EMI radiated]
- AVG_CLRWR [Ergebnistabelle.Result:3]
- PK+_MAXH(2) [BLE_CH19_F3.Result:2]
- PK+_MAXH(1) [BLE_CH1_F1.Result:2]
- PK+_MAXH(2);BLE_CH19_F2 [BLE_CH19_F2.Result:2]
- PK+_MAXH [Ergebnistabelle.Result:2]
- AVG_MAXH(1);BLE_CH19_F2 [BLE_CH19_F2.Result:4]
- AVG_MAXH [Ergebnistabelle.Result:4]
- AVG_MAXH(1) [BLE_CH19_F3.Result:4]

Worst case emission: Average @ 4000,0 MHz: 45,4 dBµV/m

Remark: Although the measurement above ends at 18 GHz, all measurements were performed up to the tenth harmonics of the transmitter frequency.

LIMIT SUBCLAUSE 15.209(a) – RSS-Gen

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100** | 3 |
| 88-216 | 150** | 3 |
| 216-960 | 200** | 3 |
| Above 960 | 500 | 3 |


Test Equipment used: EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-111; EMV-112;
 EMV-114; EMV-200; EMV-205; NT-122; NT-126; NT-416

Emissions in restricted bands
Emissions falling within restricted frequency bands

§ 15.209(a)
RSS-Gen

Measurement with Peak-Detector (green line) and Average detector (magenta line):

Setup: CH 39: 2480 MHz

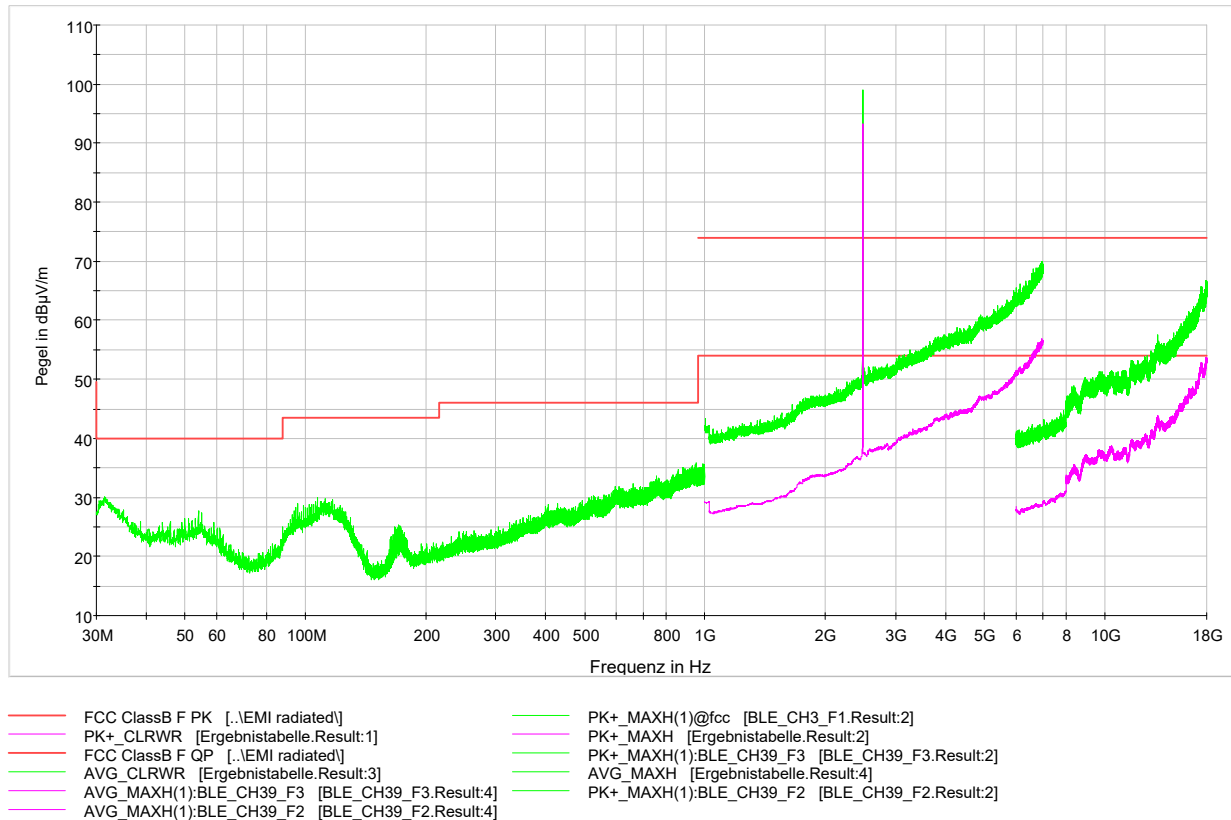

Worst case emission: Average @ 4000,0 MHz: 45,8 dBµV/m

Remark: Although the measurement above ends at 18 GHz, all measurements were performed up to the tenth harmonics of the transmitter frequency.

LIMIT SUBCLAUSE 15.209(a) – RSS-Gen

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100** | 3 |
| 88-216 | 150** | 3 |
| 216-960 | 200** | 3 |
| Above 960 | 500 | 3 |


Test Equipment used: EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-111; EMV-112;
 EMV-114; EMV-200; EMV-205; NT-122; NT-126; NT-416

Emissions in restricted bands
Emissions falling within restricted frequency bands

§ 15.209(a)
RSS-Gen

Measurement with Peak-Detector (green line) and Average detector (magenta line): Band Edge requirement

Setup: CH 39: 2480 MHz

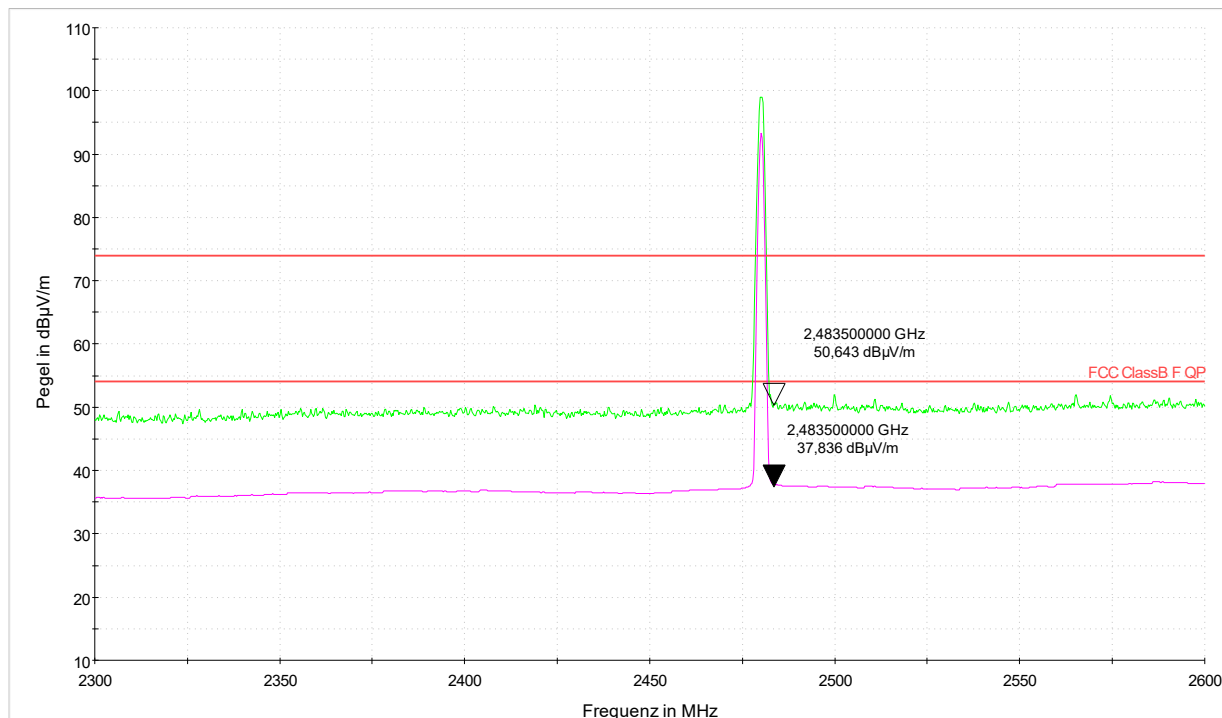

- FCC ClassB F QP [.\IEMI radiated]
- PK+ _MAXH(1)@fcc [BLE_CH39_F2.Result:2]
- PK+_CLRWR [Ergebnistabelle.Result:1]
- AVG_CLRWR [Ergebnistabelle.Result:3]
- FCC ClassB F PK [.\IEMI radiated]
- AVG_MAXH [Ergebnistabelle.Result:4]

LIMIT SUBCLAUSE 15.209(a) – RSS-Gen

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100** | 3 |
| 88-216 | 150** | 3 |
| 216-960 | 200** | 3 |
| Above 960 | 500 | 3 |

Band edges of the nearest restricted bands: 2390 MHz and 2483,5 MHz.


Test Equipment used: EMV-100; EMV-101; EMV-102; EMV-103; EMV-105; EMV-110; EMV-200

4.9. Conducted Limits

**§ 15.207
 RSS-Gen 8.8**

Measurement with Peak-Detector (green line) and Average detector (magenta line):

Setup: CH 0: 2402 MHz

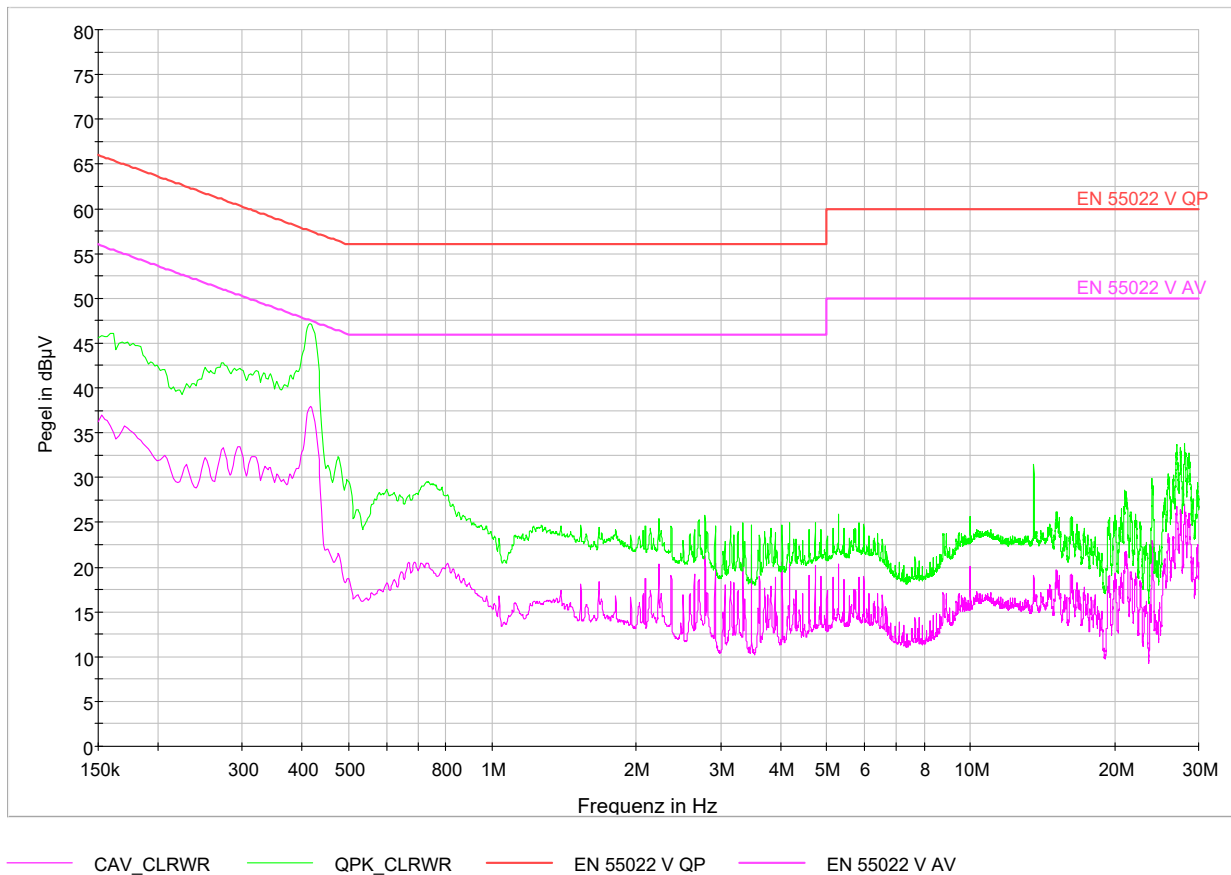

LIMIT SUBCLAUSE 15.207(a) – RSS-Gen 8.8

| Frequency of emission (MHz) | Conducted limit (dBµV) | |
|-----------------------------|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.

Test Equipment used: EMV-105; EMV-151; EMV-200; EMV-405

Appendix 1

Test equipment used

| | | | | | |
|--------------------------|--|----------|--------------------------|--|--------------------|
| <input type="checkbox"/> | Anechoic Chamber with 3m measurement distance | NT-100 | <input type="checkbox"/> | Power quality analyzer Fluke 1760 (complete set) | NT-160 - NT-173 |
| <input type="checkbox"/> | Stripline according to ISO 11452-5 | NT-108 | <input type="checkbox"/> | Spectrum analyzer – FSP7 9 kHz – 7 GHz | NT-200 |
| <input type="checkbox"/> | MA4000 - Antenna mast 1 - 4 m height | NT-110/1 | <input type="checkbox"/> | ESCI - Test receiver 9 kHz - 7 GHz | NT-203/1 |
| <input type="checkbox"/> | DS - Turntable 0 - 400 ° Azimuth | NT-111/1 | <input type="checkbox"/> | ESR – Test receiver 20 Hz – 26,5 GHz | NT-207/1 |
| <input type="checkbox"/> | CO3000 Controller Mast+Turntable | NT-112/1 | <input type="checkbox"/> | Digital Radio Tester CMW500 | NT-208/1 |
| <input type="checkbox"/> | HUF-Z3 - Log. Per. Antenna 200 - 1000 MHz | NT-121 | <input type="checkbox"/> | Noise-gen., ITU-R 559-2 20 Hz – 20 kHz | NT-209 |
| <input type="checkbox"/> | FMZB1513 - Loop Antenna 9 kHz - 30 MHz | NT-122/1 | <input type="checkbox"/> | CMTA - Radiocommunication analyzer ; 0,1 - 1000 MHz | NT-210 |
| <input type="checkbox"/> | HFH-Z6 - Rod Antenna 9 kHz - 30 MHz | NT-123 | <input type="checkbox"/> | 3271 - Spectrum analyzer 100 Hz - 26,5 GHz | NT-211 |
| <input type="checkbox"/> | 3121C - Dipole Antenna 28 - 1000 MHz | NT-124 | <input type="checkbox"/> | Digital Radio Tester Aeroflex 3920 | NT-212/1 |
| <input type="checkbox"/> | 3115 - Horn Antenna 1 - 18 GHz (immunity) | NT-125 | <input type="checkbox"/> | Mixer M28HW 26,5 GHz - 40 GHz | NT-214 |
| <input type="checkbox"/> | 3116 - Horn Antenna 18 - 40 GHz | NT-126 | <input type="checkbox"/> | RubiSource T&M Timing reference | NT-216 |
| <input type="checkbox"/> | SAS-200/543 - Bicon. Antenna 20 MHz - 300 MHz | NT-127 | <input type="checkbox"/> | Radiocommunication analyzer SWR 1180 MD | NT-217 |
| <input type="checkbox"/> | AT-1080 - Log. Per. Antenna 80 - 1000 MHz | NT-128 | <input type="checkbox"/> | Mixer M19HWD 40 GHz – 60 GHz | NT-218 |
| <input type="checkbox"/> | HK-116 - bicon. Antenna 20 MHz - 300 MHz | NT-129 | <input type="checkbox"/> | Mixer M12HWD 60 GHz – 90 GHz | NT-219 |
| <input type="checkbox"/> | HK-116 - bicon. Antenna 20 MHz - 300 MHz | NT-130 | <input type="checkbox"/> | DSO9104 Digital scope | NT-220/1 |
| <input type="checkbox"/> | 3146 - Log. Per. Antenna 200 – 1000 MHz | NT-131 | <input type="checkbox"/> | TPS 2014 Digital scope | NT-222 |
| <input type="checkbox"/> | VULB 9163 Trilog Antenna 30 – 3000 MHz | NT-131/1 | <input type="checkbox"/> | Artificial Ear according to IEC 60318 | NT-224 |
| <input type="checkbox"/> | Loop Antenna H-Field | NT-132 | <input type="checkbox"/> | 1 kHz Sound calibrator | NT-225 |
| <input type="checkbox"/> | Horn Antenna 500 MHz - 2900 MHz | NT-133 | <input type="checkbox"/> | B10 - Harmonics and flicker analyzer | NT-232 |
| <input type="checkbox"/> | Horn Antenna 500 MHz - 6000 MHz | NT-133/1 | <input type="checkbox"/> | SRM-3006 Spectrum analyzer | NT-233/1a |
| <input type="checkbox"/> | Log. per. Antenna 800 MHz - 2500 MHz | NT-134 | <input type="checkbox"/> | E-field probe SRM 75 MHz – 3 GHz | NT-234 |
| <input type="checkbox"/> | Log. per. Antenna 800 MHz - 2500 MHz | NT-135 | <input type="checkbox"/> | Field Meter NBM-500 incl. E- and H-Field probes | NT-240a-e |
| <input type="checkbox"/> | BiConiLog Antenna 26 MHz – 2000 MHz | NT-137 | <input type="checkbox"/> | Hall-Teslameter ETM-1 | NT-241 |
| <input type="checkbox"/> | Conical Dipol Antenna PCD8250 | NT-138 | <input type="checkbox"/> | EFA-3 H-field- / E-field probe | NT-243 |
| <input type="checkbox"/> | HF 906 - Horn Antenna 1 - 18 GHz (emission) | NT-139 | <input type="checkbox"/> | EHP-50F H-field- / E-field probe | NT-243/1 |
| <input type="checkbox"/> | HZ-1 Antenna tripod | NT-150 | <input type="checkbox"/> | Field Meter EMR-200 100 kHz – 3 GHz | NT-244 |
| <input type="checkbox"/> | BN 1500 Antenna tripod | NT-151 | <input type="checkbox"/> | E-field probe 100 kHz – 3 GHz | NT-245 |
| <input type="checkbox"/> | Ant. tripod for EN61000-4-3 Model TP1000A | NT-156 | <input type="checkbox"/> | H-field probe 300 kHz – 30 MHz | NT-246 |

Division:
Industry & Energy

Department: FG

Test report number:
INE-AT/FG-21/145

Page: 1 of 4

Date: 29.07.2021

Appendix 1 (continued)

Test equipment used

| | | | | | |
|--------------------------|---|-------------|--------------------------|--|----------|
| <input type="checkbox"/> | E-field probe 3 MHz – 18 GHz | NT-247 | <input type="checkbox"/> | 500W1000M7 - RF-Amplifier 80 - 1000 MHz / 500 W | NT-332 |
| <input type="checkbox"/> | H-field probe 27 MHz – 1 GHz | NT-248 | <input type="checkbox"/> | AS0102-65R - RF-Amplifier 1 GHz - 2 GHz | NT-333 |
| <input type="checkbox"/> | ELT-400 1 Hz – 400 kHz | NT-249 | <input type="checkbox"/> | APA01 – RF-Amplifier 0,5 GHz – 2,5 GHz | NT-334 |
| <input type="checkbox"/> | MDS 21 - Absorbing clamp 30 - 1000 MHz | NT-250 | <input type="checkbox"/> | Preamplifier 1 GHz - 4 GHz | NT-335 |
| <input type="checkbox"/> | FCC-203I EM Injection clamp | NT-251 | <input type="checkbox"/> | Preamplifier for GPS MKU 152 A | NT-336 |
| <input type="checkbox"/> | FCC-203I-DCN Ferrite decoupling network | NT-252 | <input type="checkbox"/> | Preamplifier 1 GHz – 18 GHz | NT-337/1 |
| <input type="checkbox"/> | PR50 Current Probe | NT-253 | <input type="checkbox"/> | DC Block 10 MHz – 18 GHz Model 8048 | NT-338 |
| <input type="checkbox"/> | i310s Current Probe | NT-254/1 | <input type="checkbox"/> | 2-97201 Electronic load | NT-341 |
| <input type="checkbox"/> | Fluke 87 V True RMS Multimeter | NT-260 | <input type="checkbox"/> | TSX3510P - Power supply 0-30 V / 0 - 10 A | NT-344 |
| <input type="checkbox"/> | Model 2000 Digital Multimeter | NT-261 | <input type="checkbox"/> | TSX3510P - Power supply 0-30 V / 0 - 10 A | NT-345 |
| <input type="checkbox"/> | Fluke 87 V Digital Multimeter | NT-262/1 | <input type="checkbox"/> | VDS 200 Mobil-impuls-generator | NT-350 |
| <input type="checkbox"/> | ESH2-Z5-U1 Artificial mains network 4x25A | NT-300 | <input type="checkbox"/> | LD 200 Mobil-impuls-generator | NT-351 |
| <input type="checkbox"/> | ESH3-Z5-U1 Artificial mains network 2x10A | NT-301 | <input type="checkbox"/> | MPG 200 Mobil-Impuls-Generators | NT-352 |
| <input type="checkbox"/> | ESH3-Z6-U1 Artificial mains network 1x100A | NT-302 | <input type="checkbox"/> | EFT 200 Mobil-impuls-generator | NT-353 |
| <input type="checkbox"/> | ESH3-Z6-U1 Artificial mains network 1x100A | NT-302a | <input type="checkbox"/> | AN 200 S1 Artificial Network | NT-354 |
| <input type="checkbox"/> | PHE 4500/B Power amplifier | NT-304 | <input type="checkbox"/> | FP-EFT 32M 3 ph. Coupling filter (Burst) | NT-400/1 |
| <input type="checkbox"/> | EZ10 T-Artificial Network | NT-305 | <input type="checkbox"/> | PHE 4500 - Mains impedance network | NT-401 |
| <input type="checkbox"/> | SMG - Signal generator 0,1 - 1000 MHz | NT-310 | <input type="checkbox"/> | IP 6.2 Coupling filter for data lines (Surge) | NT-403 |
| <input type="checkbox"/> | SMA100A - Signal generator 9 kHz - 6 GHz | NT-310/1 | <input type="checkbox"/> | TK 9421 High Power Volt. Probe 150 kHz - 30 MHz | NT-409 |
| <input type="checkbox"/> | RefRad Reference generator | NT-312 | <input type="checkbox"/> | ESH2-Z3 - Probe 9 kHz - 30 MHz | NT-410 |
| <input type="checkbox"/> | SMP 02 Signal generator 10 MHz - 20 GHz | NT-313 | <input type="checkbox"/> | IP 4 - Capacitive clamp (Burst) | NT-411 |
| <input type="checkbox"/> | 40 MHz Arbitrary Generator TGA1241 | NT-315 | <input type="checkbox"/> | Highpass-Filter 100 MHz – 3 GHz | NT-412 |
| <input type="checkbox"/> | Artificial mains network NSLK 8127-PLC | NT-316 | <input type="checkbox"/> | Highpass-Filter 600 MHz – 4 GHz | NT-413 |
| <input type="checkbox"/> | PSURGE 4.1 Surge generator | NT-324 | <input type="checkbox"/> | Highpass-Filter 1250 MHz – 4 GHz | NT-414 |
| <input type="checkbox"/> | IMU4000 Immunity test system | NT-325/1 | <input type="checkbox"/> | Highpass-Filter 1800 MHz – 16 GHz | NT-415 |
| <input type="checkbox"/> | VCS 500-M6 Surge-Generator | NT-326 | | | |
| <input type="checkbox"/> | Oscillatory Wave Simulator incl. Coupling networks | NT-328a+b+c | | | |
| <input type="checkbox"/> | BTA-250 - RF-Amplifier 9 kHz - 220 MHz / 250 W | NT-330 | | | |
| <input type="checkbox"/> | T82-50 RF-Amplifier 2 GHz – 8 GHz | NT-331 | | | |

Division:
Industry & Energy

Department: FG

Test report number:
INE-AT/FG-21/145

Page: 2 of 4

Date: 29.07.2021

Appendix 1 (continued)

Test equipment used

| | | | Division: Industry & Energy |
|--------------------------|---|----------|--------------------------------|
| <input type="checkbox"/> | Highpass-Filter 3500 MHz – 18 GHz | NT-416 | NT-461 |
| <input type="checkbox"/> | RF-Attenuator 10 dB DC – 18 GHz / 50 W | NT-417/1 | NT-462 |
| <input type="checkbox"/> | RF-Attenuator 6 dB DC – 18 GHz / 50 W | NT-418 | NT-463 |
| <input type="checkbox"/> | RF-Attenuator 3 dB DC – 18 GHz / 50 W | NT-419 | NT-464 |
| <input type="checkbox"/> | RF-Attenuator 20 dB DC - 1000 MHz / 25 W | NT-421 | NT-465/1 |
| <input type="checkbox"/> | RF-Attenuator 30 dB DC - 1000 MHz / 1 W | NT-423 | NT-468 |
| <input type="checkbox"/> | RF-Attenuator 30 dB | NT-424 | NT-471 |
| <input type="checkbox"/> | RF-Attenuator 6 dB DC - 1000 MHz / 1 W | NT-425 | NT-480 |
| <input type="checkbox"/> | RF-Attenuator 6 dB DC - 1000 MHz / 1 W | NT-426 | NT-481 - NT-483 |
| <input type="checkbox"/> | RF-Attenuator 6 dB | NT-428 | NT-484 |
| <input type="checkbox"/> | RF-Attenuator 0 dB - 81 dB | NT-429 | NT-511/1 |
| <input type="checkbox"/> | WRU 27 - Band blocking 27 MHz | NT-430 | NT-520 |
| <input type="checkbox"/> | WHJ450C9 AA - High pass 450 MHz | NT-431 | NT-520/1 |
| <input type="checkbox"/> | WHJ250C9 AA - High pass 250 MHz | NT-432 | NT-522 |
| <input type="checkbox"/> | RF-Load 150 W | NT-433 | NT-522/1 |
| <input type="checkbox"/> | Impedance transducer 1:4 ; 1:9 ; 1:16 | NT-435 | NT-525 |
| <input type="checkbox"/> | RF-Attenuator DC – 18 GHz 6 dB | NT-436 | NT-530 |
| <input type="checkbox"/> | RF-Attenuator DC – 18 GHz 6 dB | NT-437 | NT-531 |
| <input type="checkbox"/> | RF-Attenuator DC – 18 GHz 10 dB | NT-438 | NT-553 |
| <input type="checkbox"/> | RF-Attenuator DC – 18 GHz 20 dB | NT-439 | NT-554 |
| <input type="checkbox"/> | I+P 7780 Directional coupler 100 - 2000 MHz | NT-440 | NT-555 + NT-556 |
| <input type="checkbox"/> | ESH3-Z2 - Pulse limiter 9 kHz - 30 MHz | NT-441 | NT-559 |
| <input type="checkbox"/> | Power Divider 6 dB/1 W/50 Ohm | NT-443 | NT-580 |
| <input type="checkbox"/> | Directional coupler 0,1 MHz – 70 MHz | NT-444 | NT-581 |
| <input type="checkbox"/> | Directional coupler 0,1 MHz – 70 MHz | NT-445 | NT-584 |
| <input type="checkbox"/> | Tube imitations according to EN 55015 | NT-450 | NT-592 |
| <input type="checkbox"/> | FCC-801-M3-16A Coupling decoupling network | NT-458 | NT-600 |
| <input type="checkbox"/> | FCC-801-M2-50A Coupling decoupling network | NT-459 | M-1200 |
| <input type="checkbox"/> | FCC-801-M5-25 Coupling decoupling network | NT-460 | |
| <input type="checkbox"/> | FCC-801-AF10 Coupling decoupling network | | NT-461 |
| <input type="checkbox"/> | FCC-801-S25 Coupling decoupling network | | NT-462 |
| <input type="checkbox"/> | FCC-801-T4 Coupling decoupling network | | NT-463 |
| <input type="checkbox"/> | FCC-801-C1 Coupling decoupling network | | NT-464 |
| <input type="checkbox"/> | SW 9605 - Current probe 150 kHz – 30 MHz | | NT-465/1 |
| <input type="checkbox"/> | 95242-1 – Current probe 1 MHz – 400 MHz | | NT-468 |
| <input type="checkbox"/> | 94106-1L-1 – Current probe 100 kHz – 450 MHz | | NT-471 |
| <input type="checkbox"/> | GA 1240 Power amplifier according to EN 61000-4-16 | | NT-480 |
| <input type="checkbox"/> | Coupling networks according to EN 61000-4-16 | | NT-481 - NT-483 |
| <input type="checkbox"/> | Van der Hoofden Test Head | | NT-484 |
| <input type="checkbox"/> | EMC Video/Audiosystem | | NT-511/1 |
| <input type="checkbox"/> | ES-K1 Version 1.71 SP2 Test software | | NT-520 |
| <input type="checkbox"/> | EMC32 Version 10.60.20 Test software | | NT-520/1 |
| <input type="checkbox"/> | SRM-TS Version 1.3 software for SRM-3000 | | NT-522 |
| <input type="checkbox"/> | SRM-TS Version 1.3.1 software for SRM-3006 | | NT-522/1 |
| <input type="checkbox"/> | Spitzenberger und Spies Test software V4.1 | | NT-525 |
| <input type="checkbox"/> | Noise power test apparatus according to EN 55014 | | NT-530 |
| <input type="checkbox"/> | Vertical coupling plane (ESD) | | NT-531 |
| <input type="checkbox"/> | Test cable #4 for EN 61000-4-6 | | NT-553 |
| <input type="checkbox"/> | Test cable #3 for conducted emission | | NT-554 |
| <input type="checkbox"/> | Test cable #5+#6 ESD-cable (2x470k) | | NT-555 + NT-556 |
| <input type="checkbox"/> | Test cable #8 Sucoflex 104EA | | NT-559 |
| <input type="checkbox"/> | Test cable #9 (for outdoor measurements) | | NT-580 |
| <input type="checkbox"/> | Test cable #10 (for outdoor measurements) | | NT-581 |
| <input type="checkbox"/> | Test cable #13 Sucoflex 104PE | | NT-584 |
| <input type="checkbox"/> | Test cable #21 for SRM-3000 | | NT-592 |
| <input type="checkbox"/> | Shield chamber | | NT-600 |
| <input type="checkbox"/> | Climatic chamber | | M-1200 |

Appendix 1 (continued)

Test equipment used

| | | | | | |
|--------------------------|---|---------------------|--------------------------|---|-----------------|
| <input type="checkbox"/> | Anechoic Chamber 3 m / 5 m measuring distance | EMV-100 | <input type="checkbox"/> | Log.per Antenna 0,7 – 9 GHz STLP9149 | EMV-305 |
| <input type="checkbox"/> | Turntabel 6 m diameter | EMV-101 | <input type="checkbox"/> | HF- Amplifier 9 kHz-250 MHz BBA150 (low noise) | EMV-306 |
| <input type="checkbox"/> | Antenna mast + controller | EMV-102+ EMV-103 | <input type="checkbox"/> | ISO11451-2 TLS 10 kHz – 30 MHz | EMV-307 |
| <input type="checkbox"/> | EMC Video/Audiosystem | EMV-104 | <input type="checkbox"/> | Load Dump Generator LD 200N | EMV-350 |
| <input type="checkbox"/> | EMC Software EMC32 Version 10.60.20 | EMV-105 | <input type="checkbox"/> | Ultra Compact Symulator UCS 200N100 | EMV-351 |
| <input type="checkbox"/> | Hornantenna 1 – 18 GHz HF 907 | EMV-110 | <input type="checkbox"/> | Automotive Power fail module PFM 200N100.1 | EMV-352 |
| <input type="checkbox"/> | Antennapre.amp. 1 – 18 GHz ERZ-LNA0200-1800-30-2 | EMV-111 | <input type="checkbox"/> | Voltage Drop Symulator VDS 200Q100 | EMV-353 |
| <input type="checkbox"/> | Trilog Antenna 30-3000 MHz VULB9163 | EMV-112 | <input type="checkbox"/> | Arb. Generator AutoWave | EMV-354 |
| <input type="checkbox"/> | Monopol 9 kHz – 30 MHz VAMP 9243 | EMV-113 | <input type="checkbox"/> | Ultra Compact Symulator UCS 500N7 | EMV-355 |
| <input type="checkbox"/> | Antennapre.amp 18 – 40 GHz BBV 9721 | EMV-114 | <input type="checkbox"/> | Coupling decoupling network CNI 503B7 / 32 A | EMV-356 |
| <input type="checkbox"/> | Hornantenna 200 – 2000 MHz AH-220 | EMV-115 | <input type="checkbox"/> | Coupling decoupling network CNI 503B7 / 63 A | EMV-357 |
| <input type="checkbox"/> | DC Artificial Network PVDC 8300 | EMV-150 | <input type="checkbox"/> | Telecom Surge Generator TSurge 7 | EMV-358 |
| <input type="checkbox"/> | AC Artificial Network NNLK 8121 RC | EMV-151 | <input type="checkbox"/> | Coupling decoupling network CNI 508N2 | EMV-359 |
| <input type="checkbox"/> | EMI Receiver ESW44 | EMV-200/1 | <input type="checkbox"/> | Coupling decoupling network CNV 504N2.2 | EMV-360 |
| <input type="checkbox"/> | Signalgenerator 9 kHz – 40 GHz N5173B | EMV-201 | <input type="checkbox"/> | Immunity generator NSG4060/NSG4060-1 | EMV-361 |
| <input type="checkbox"/> | GPS Frequency normal B-88 | EMV-202 | <input type="checkbox"/> | Coupling network CDND M316-2 | EMV-362 |
| <input type="checkbox"/> | DC Power supply N5745A | EMV-203 | <input type="checkbox"/> | Coupling network CT419-5 | EMV-363 |
| <input type="checkbox"/> | Spektrum Analyzator FSV40 | EMV-205 | <input type="checkbox"/> | ESD Generator NSG 437 | EMV-364 |
| <input type="checkbox"/> | Thd Multimeter Model 2015 | EMV-206 | <input type="checkbox"/> | Pulse Limiter VTSD 9561-F BNC | EMV-405 |
| <input type="checkbox"/> | Poweramplifier PAS15000 | EMV- 207/abc | <input type="checkbox"/> | Transient emission BSM200N40+BS200N100 | EMV- 450+451 |
| <input type="checkbox"/> | Inrush Current Source | EMV- 208/abc | <input type="checkbox"/> | Cap. Coupling Clamp HFK | EMV-455 |
| <input type="checkbox"/> | Arb.-generator Sycore | EMV-209 | <input type="checkbox"/> | Mag. Field System MS100N+MC26100+MC2630 | EMV- 456-458 |
| <input type="checkbox"/> | Harmonics/Flicker analyzer ARS 16/3 | EMV-210 | <input type="checkbox"/> | Coupling network CDN M2-100A | EMV-459 |
| <input type="checkbox"/> | HF- Amplifier 9 kHz-250 MHz BBA150 | EMV-300 | <input type="checkbox"/> | Coupling network CDN M3-32A | EMV-460 |
| <input type="checkbox"/> | HF- Amplifier 80 -1000 MHz BBA150 | EMV-301 | <input type="checkbox"/> | Coupling network CDN M5-100A | EMV-461 |
| <input type="checkbox"/> | HF- Amplifier 0,8 - 6 GHz BBA150 | EMV-302 | <input type="checkbox"/> | Current Clamp CIP 9136A | EMV-462 |
| <input type="checkbox"/> | High Power Ant. 20-200 MHz HPBA-2510 | EMV-303/1 | <input type="checkbox"/> | DC Artificial Network HV-AN 150 | EMV- 464+465 |
| <input type="checkbox"/> | Log.per Antenna 80-2700 MHz STLP 9128 E special | EMV-304 | <input type="checkbox"/> | Coupling Clamp EM 101 | EMV-466 |
| | | | <input type="checkbox"/> | Decoupling Clamp FTC 101 | EMV-467 |
| | | | <input type="checkbox"/> | Power attenuator 10 dB / 250 Watt | EMV-469/2 |

Division:
Industry & Energy

Department: FG

Test report number:
INE-AT/FG-21/145

Page: 4 of 4

Date: 29.07.2021

Appendix 2 Photodocumentation

Description: Front view


Division:
Industry & Energy

Department: FG

Test report reference:
INE-AT/FG-21/145

Page: 1 of 6

Date: 29.07.2021

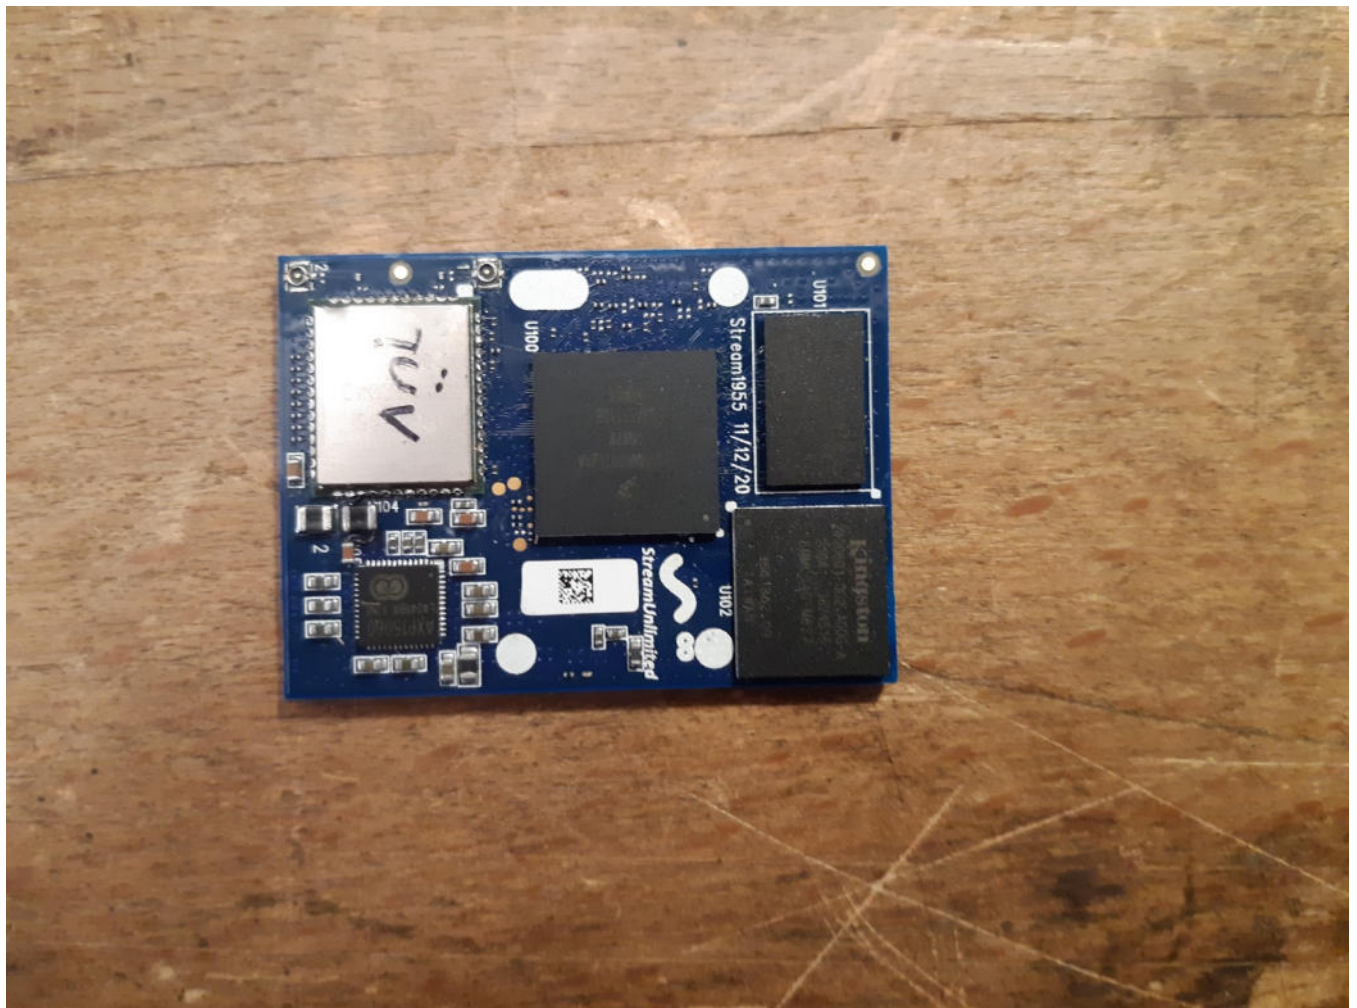

Appendix 2 Photodocumentation

Description: Backside view


Division:
Industry & Energy

Department: FG

Test report reference:
INE-AT/FG-21/145

Page: 2 of 6

Date: 29.07.2021

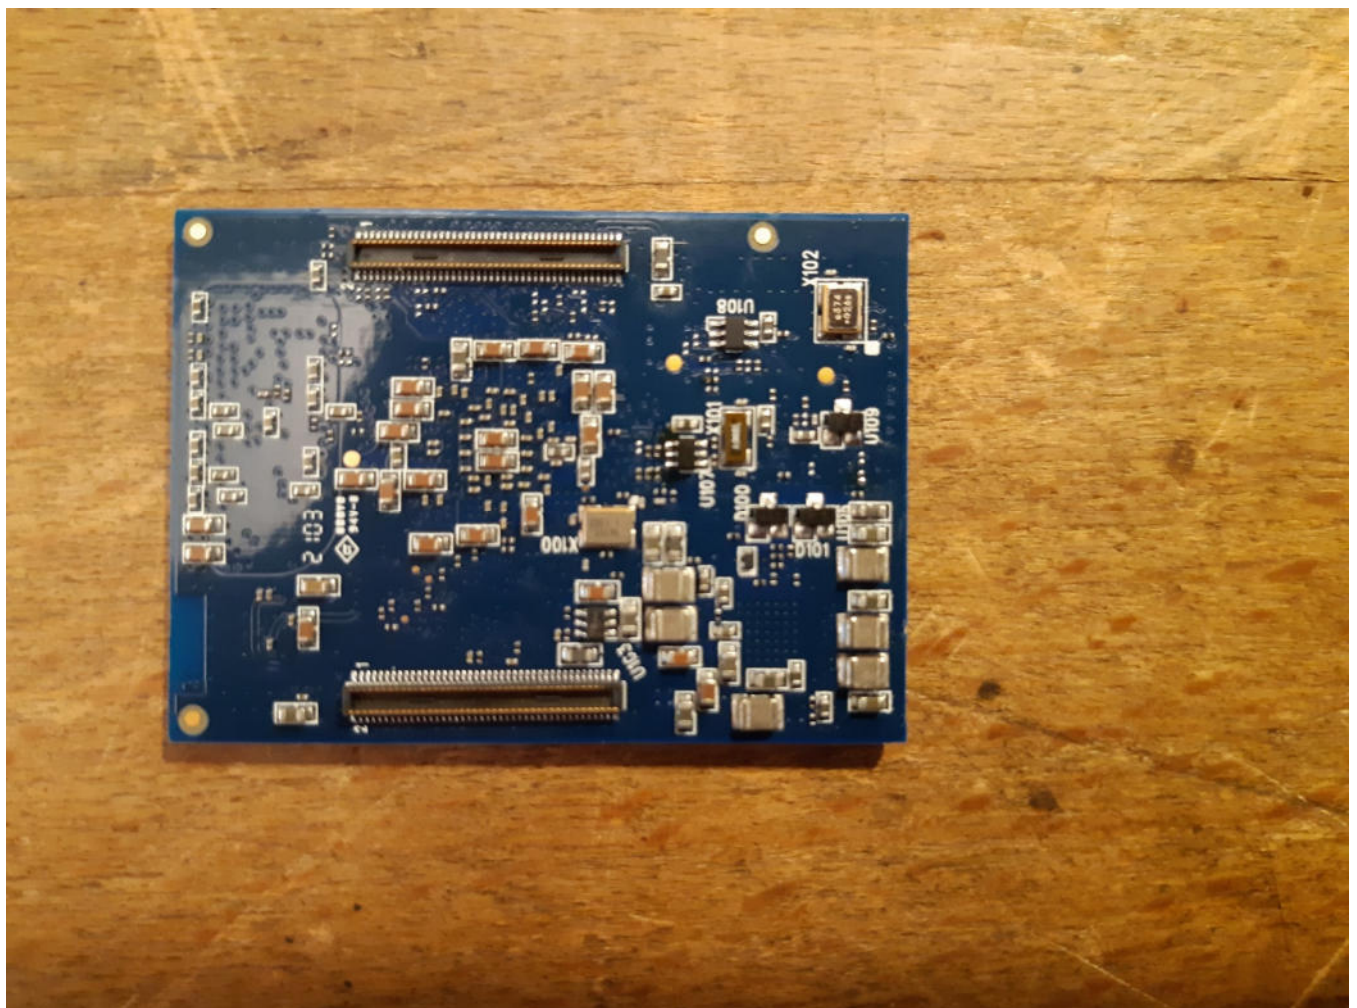

Appendix 2 Photodocumentation

Description: Evaluation Board front view

Division:
Industry & Energy

Department: FG

Test report reference:
INE-AT/FG-21/145

Page: 3 of 6

Date: 29.07.2021



Appendix 2 Photodocumentation

Description: Evaluation Board back view


Division:
Industry & Energy

Department: FG

Test report reference:
INE-AT/FG-21/145

Page: 4 of 6

Date: 29.07.2021

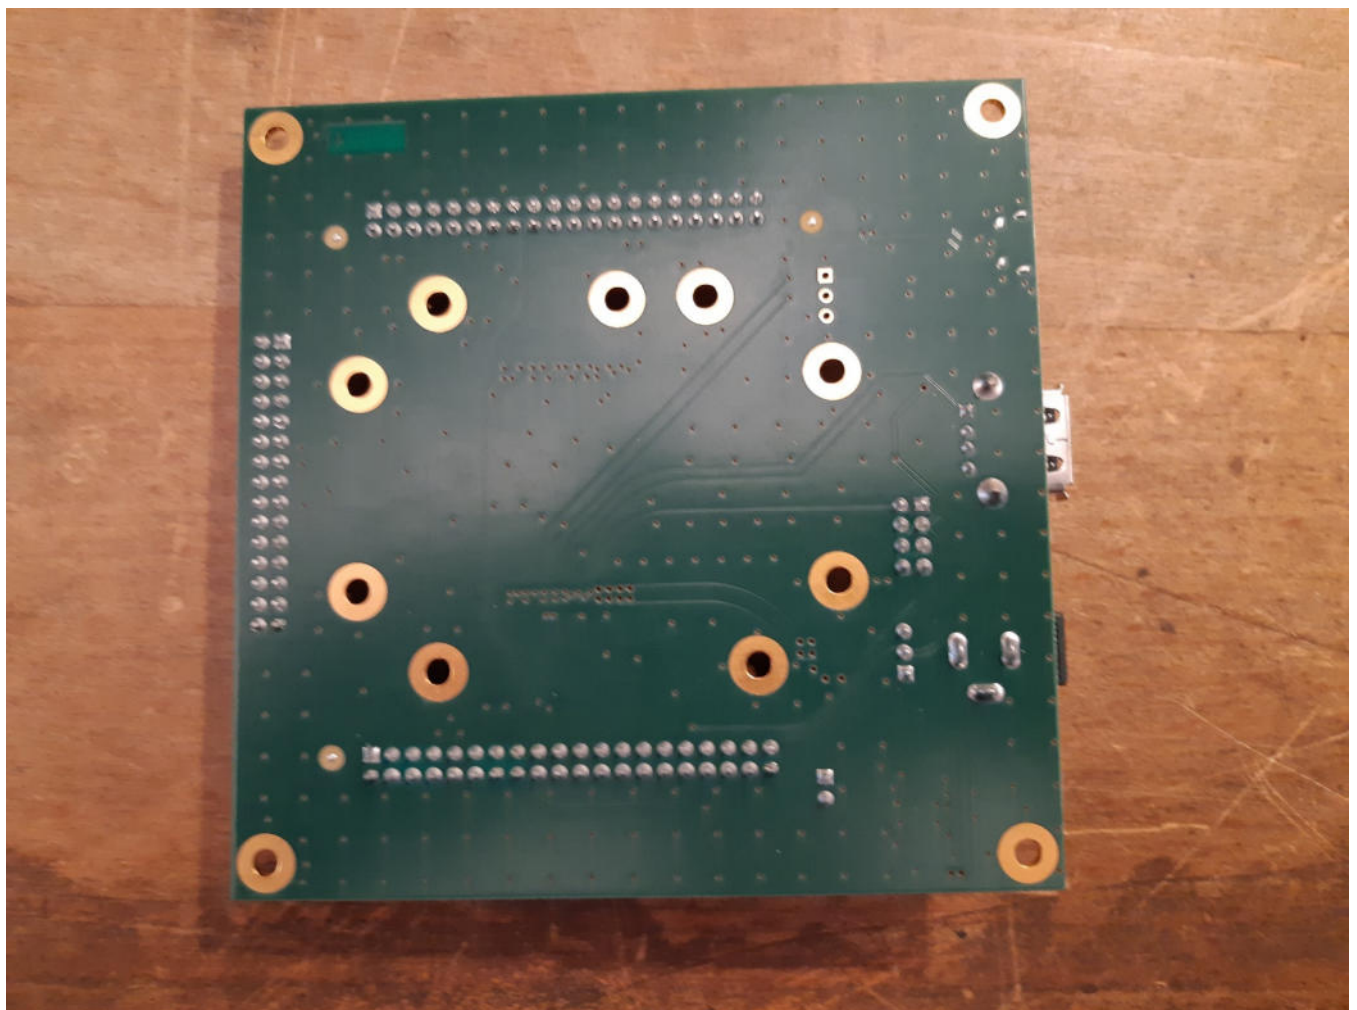

Appendix 2 Photodocumentation

Description: Test setup absorber chamber #1


Division:
Industry & Energy

Department: FG

Test report reference:
INE-AT/FG-21/145

Page: 5 of 6

Date: 29.07.2021

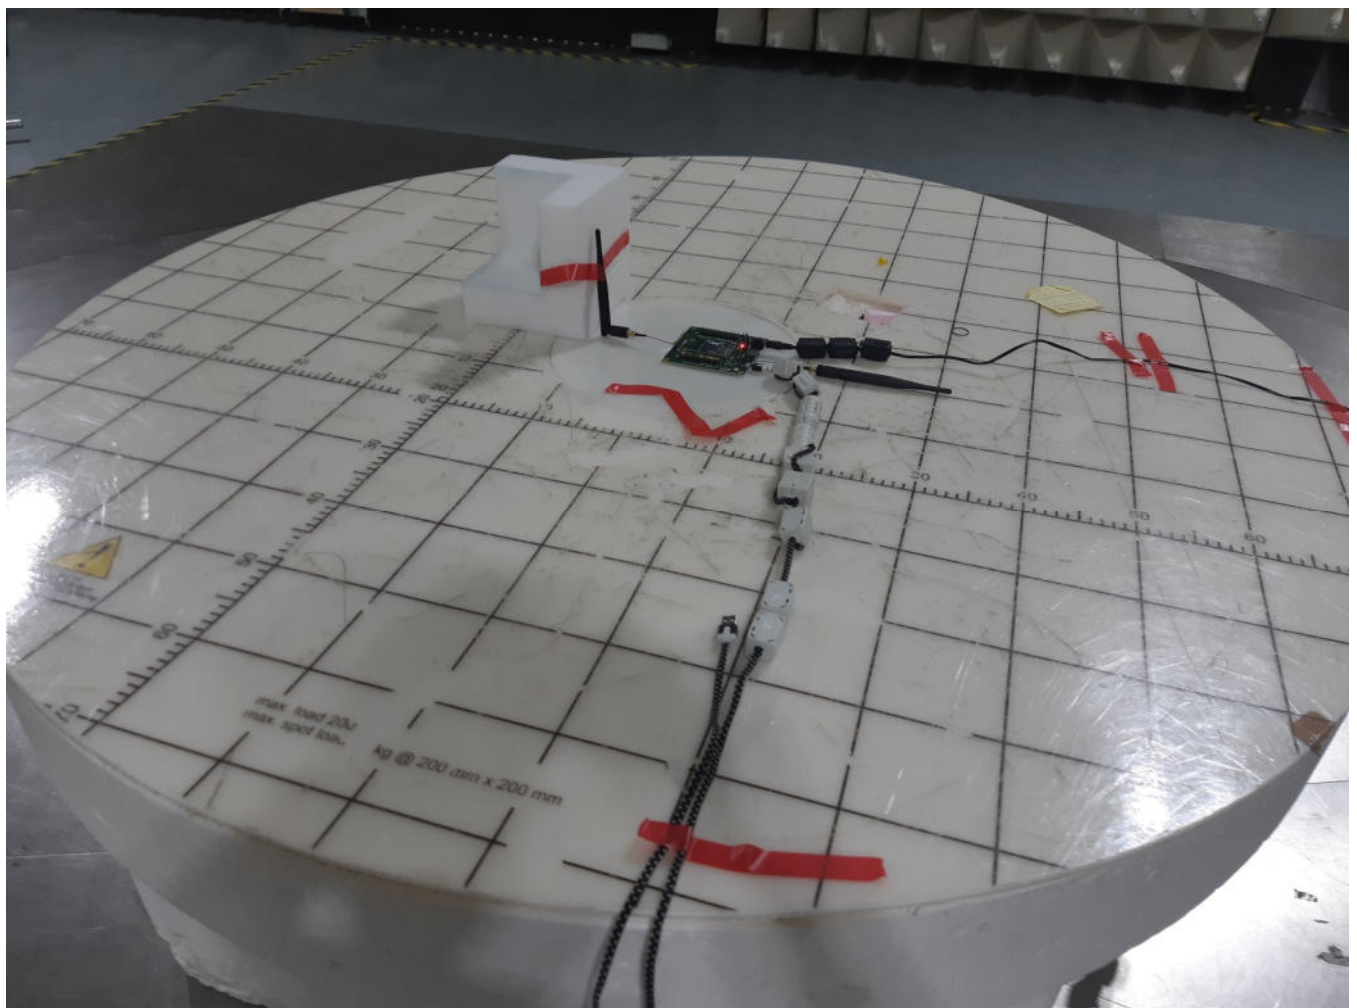

Appendix 2 Photodocumentation

Description: Test setup absorber chamber #2

Division:
Industry & Energy

Department: FG

Test report reference:
INE-AT/FG-21/145

Page: 6 of 6

Date: 29.07.2021

