



**Electro Magnetic Compatibility Test Report**  
**Regarding the CE Mark and the**  
**Australia / New Zealand Compliance of the**  
**Aleph Objects**  
**TAZ Workhorse 3D Printer**

**In Accordance with the Information Technology Standards**  
**AS/NZS CISPR 24, AS/NZS CISPR 32 and EN 55024, EN 55032,**  
**EN 61000-3-2, EN 61000-3-3 for Emissions, Class B for home use**

**Report Revision History**

<b>Revision</b>	<b>Date</b>	<b>Reason</b>
<b>1.0</b>	<b>27 June 2019</b>	<b>Initial Release</b>

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com

Revision 1.0



**Description of Equipment Under Test (EUT)**

Test Item : TAZ Workhorse 3D Printer  
Manufacturer : Aleph Objects, Inc.

**Manufacturer's information**

Manufacturers  
Representative : Mark Pelletier - Engineer  
Company : Aleph Objects, Inc.  
Address : 626 West 66<sup>th</sup> Street  
Loveland, Colorado 80538  
U.S.A.  
Website : <https://www.lulzbot.com/store/printers/lulzbot-taz-Workhorse>

**Tests Performed at**

Address : EMI Test Lab LLC  
1822 Skyway Drive Unit J  
Longmont, Colorado 80504  
U.S.A  
Website : <http://www.emitestlab.com/>

**Test Specifications**

: EN 55024, EN 55032, CISPR 24,  
CISPR 32, AS/NZS CISPR 24 and 32, All Class B emissions  
Tests completed : 28 May 2019

**Result of Testing** : **The EUT is in Compliance with EN 61000-3-2, EN 61000-3-3  
EN 55024:2010+A1:2015, EN 55032:2015,  
CISPR 24:2015, CISPR 32:2015, Class B  
AS/NZS CISPR 24:2013, AS/NZS CISPR 32:2015**

Senior EMC Engineer : Dennis King

Report written by : Dennis King – EMI Test Lab  
Test Plan : Dennis King and Mark Pelletier for Aleph Objects  
Report date : 27 June 2019

**These test results relate only to the specific unit that was tested. A periodic production audit to verify continued compliance is recommended.**

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0



**Table of Contents**

1. General Test Information.....page 4  
    1.1. Applied Standards  
    1.2. Detailed description of test configuration, input and output ports  
        1.2.1. Description of test configuration  
        1.2.2. Description of input and output ports and power supply information  
        1.2.3. Operating modes

2. Emissions.....page 9  
    2.1. AC Mains conducted emissions  
    2.2. Enclosure radiated emissions  
        2.2.1. 30-1,000 MHz  
        2.2.2. 1-6 GHz  
    2.3. Harmonic current emissions  
    2.4. Voltage fluctuations and flicker

3. Immunity.....page 41  
    3.1. Performance criteria  
    3.2. Enclosure tests  
        3.2.1. Radio-frequency electromagnetic fields  
        3.2.2. Electrostatic discharge  
        3.2.3. RF common mode on signal and telecom ports  
        3.2.4. Fast transients on signal and telecom ports  
    3.3. AC power port tests  
        3.3.1. Radio-frequency immunity, common mode  
        3.3.2. Surges  
        3.3.3. Fast Transients, common mode  
        3.3.4. Voltage Dips and Interruptions  
        3.3.5. Power Frequency Magnetic Fields

4. Modifications .....page 74

5. Test equipment.....page 75

6. Measurement Uncertainty.....page 77

7. Test Plan .....page 79

8. Conclusion .....page 80



## 1 General

### 1.1 Applied Standards

The Aleph TAZ Workhorse 3D Printer was evaluated for emissions using the international standards CISPR 32:2015, the EU European standards EN 55032:2015 and Australia's standard AS/NZS CISPR 32:2015.

Immunity standards applied are the international standards CISPR 24:2015, the EU European standard EN 55024:2010+A1:2015 and Australia's standard AS/NZS CISPR 24:2013.

CISPR are the international standards, countries across the world adopt the CISPR standards with sometimes minor changes and sometimes with no changes at all. The EU adopts the CISPR standards and adds the prefix "EN". Australia and New Zealand adopt the CISPR standards and adopt the prefix AS/NZS, and so on around the world. North America has harmonized with the CISPR emissions standards but has no requirement for immunity.

### 1.2 Detailed description of the test configuration, input and output ports

The 3D Printer was tested while running test code that simulates a worst case for operation of the printer. The heater bed was on during all the testing.

Test code used is called TEST\_2.gcode

For all test configurations the equipment under test (EUT) is powered by European AC power: 230VAC/50Hz. This voltage also covers Australia and New Zealand. All I/O cables are less than 3 meters.


#### **LulzBot Software:**

The default software for the TAZ WORKHORSE 3D printer is called Cura LulzBot Edition. Cura is a Free Software program that both prepares your files for printing (by converting your model into GCODE), and also allows you to control the operation of your LulzBot 3D printer.



*EMI Test Lab LLC*

Electro Magnetic Interference Testing  
EmiTestLab.com

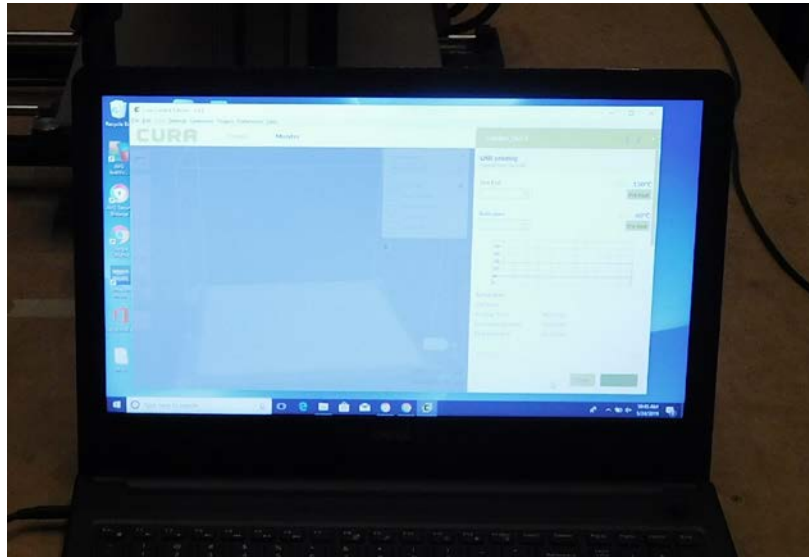

**Typical screen shot of software used during emissions and immunity testing.**

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com

Revision 1.0



**1.2.1 Description of test configuration**

EUT : TAZ Workhorse 3D Printer  
Manufacturer : Aleph Objects, Inc.  
System model name : TAZ Workhorse  
Serial Number : WH001  
Test Voltage : 230 VAC 50 Hz

**1.2.2. Description of tested input and output ports and power supply information**

Number of cable type	Type of Cable	From	To	Shielded?	Remarks - length
1	USB	unterminated	TAZ Workhorse	Yes	6 ft. Tripp Lite model: U023-006 – ferrites on both ends

Power supply location	Manufacturer	Model	Serial number	Shielded	Remarks
Internal AC supply	Meanwell	RSP-500-24	Not available	Shielded enclosure	UL and TUV Rheinland Certified – Output; 24V 21A



### 1.2.3 Operation modes

During preliminary testing for emissions it was determined that the following configurations are worst case for emissions and immunity. All further testing was done in these modes.

The 3D Printer was tested while running test code that continuously moves the print heads and heats the heater bed.

The 3D Printer was checked while printing from the SD Card and also while operated from a laptop connecting to the printer through a USB cable that is supplied with the unit.

*EMI Test Lab LLC*

Electro Magnetic Interference Testing  
EmiTestLab.com



### The TAZ Workhorse – 3D Printer

<https://www.lulzbot.com/store/printers/lulzbot-taz-workhorse>

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0





## **2 Emissions**

The EUT (equipment under test) has been tested to determine conformity with the relevant emissions parts of EN 55032:2015, CISPR 32, and AS/NZS 32:2015.

AC Power line conducted and radiated field strength measurements concerning the emission of radiated and conducted electromagnetic disturbances were made.

Harmonic currents at the AC mains connection terminals of the EUT were measured in conformance with and according to EN 61000-3-2:2014.

Voltage fluctuations and flicker at the AC mains connection terminals of the EUT were measured in conformance with and according to EN 61000-3-3:2013.




## EMI Test Lab LLC

Electro Magnetic Interference Testing  
EmiTestLab.com

### 2.1 AC Mains Power Input Ports

The disturbance voltage emissions levels at the AC mains power port of the EUT were measured in conformity with and according to the criteria as stated below.

Basic standard	:	CISPR 32:2015
Test setup	:	EN 55032, AS/NZS CISOR 32
Frequency range 1	:	0.15 – 0.5 MHz
Limit	:	66 dBuV quasi peak, 56 dBuV average Decreasing with the log of frequency to range 2
Frequency range 2	:	0.5 – 5 MHz
Limit	:	56 dBuV quasi peak, 46 dBuV average
Frequency range 3	:	5 – 30 MHz
Limit	:	60 dBuV quasi peak, 50 dBuV average

Results of the measurements concerning the emissions of voltage levels at the AC mains input port of the EUT.	<b><u>PASS Class B</u></b>
Name of Test Engineer:	Dennis King
Signature:	
Date:	27 May 2019
Remarks: The configuration was tested at 230 VAC 50Hz. <b><u>Conducted Emission Summary:</u></b> Passing.	

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0




EMI Test Lab LLC

Electro Magnetic Interference Testing  
EmiTestLab.com

**230 VAC 50 Hz – Line – Peak passing Quasi peak limit – Average data passing the average limit**

**Running from a laptop through usb**

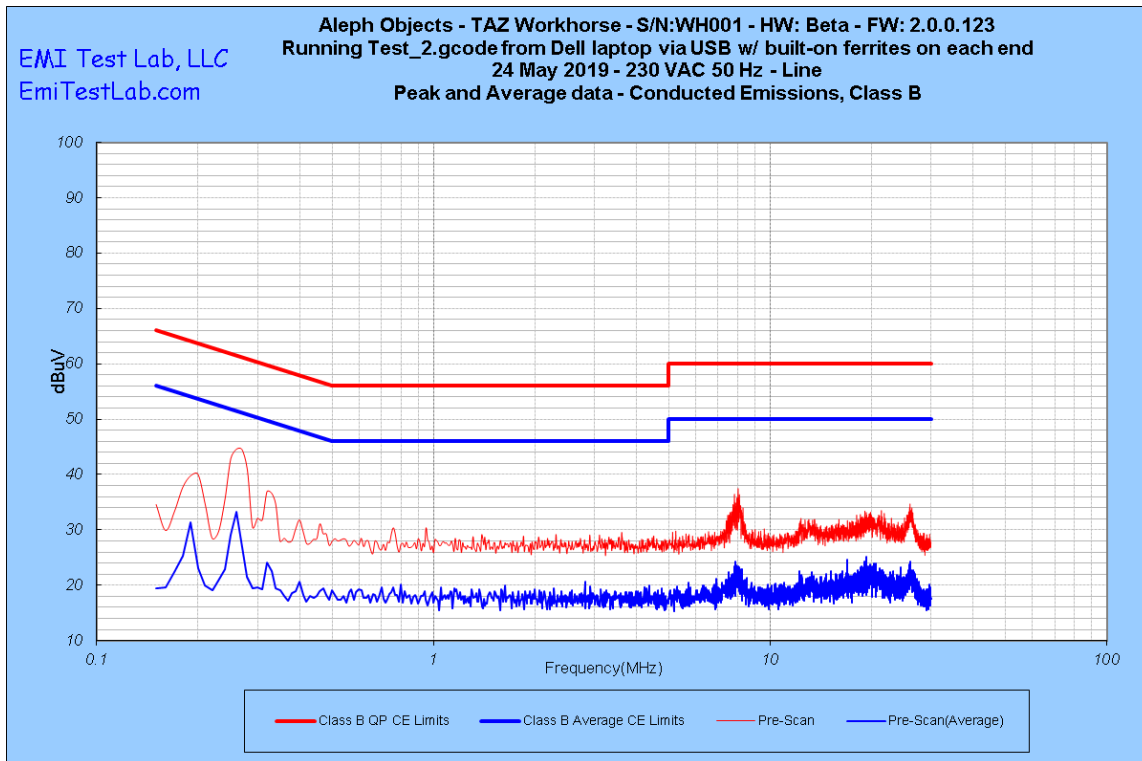

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0




# EMI Test Lab LLC

Electro Magnetic Interference Testing  
 EmiTestLab.com

## 230 VAC 50 Hz – Line – Peak passing Quasi peak limit – Average data passing the average limit

### Running from a laptop through usb

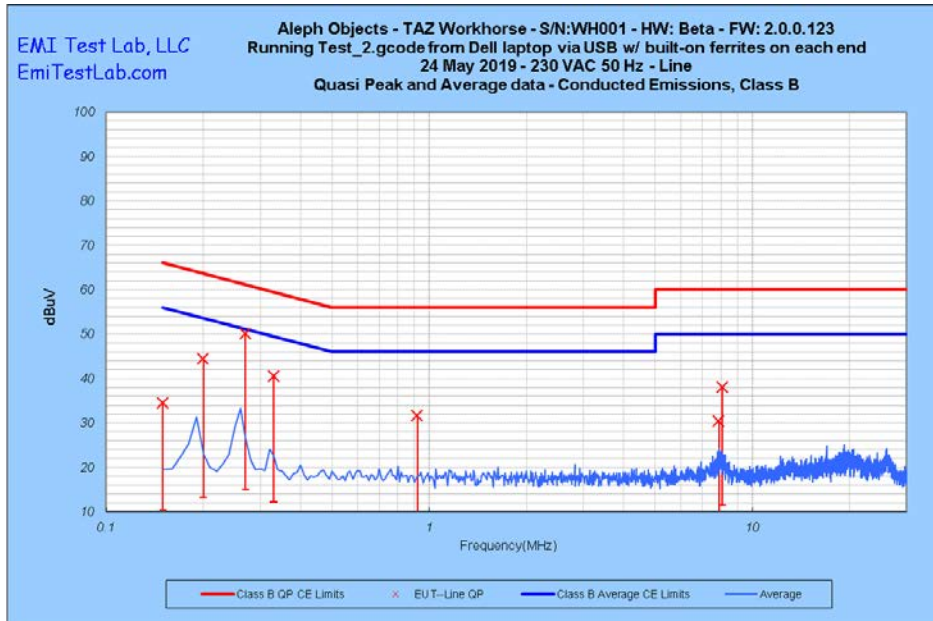

Frequency (MHz)	QP Disturbance (dBuV)	QP Limit	EUT--Line QP	Tranducer Connection	Correction Factor (dB)
0.150	36.00	66.00	30.00	AMN	0.20
7.880	30.43	60.00	29.57	AMN	1.13
0.200	44.31	64.57	20.26	AMN	0.21
0.338	40.55	60.63	20.08	AMN	0.25
0.270	50.03	62.56	12.53	AMN	0.23
0.920	31.60	56.00	24.40	AMN	0.80
8.100	38.08	60.00	21.92	AMN	1.14

Test Specification: CISPR 24, 32  
 Model Name of EUT: TAZ Workhorse  
 Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com

Revision 1.0




EMI Test Lab LLC

Electro Magnetic Interference Testing  
EmiTestLab.com

**230 VAC 50 Hz – Neutral – Peak passing Quasi peak limit – Average data passing the average limit**

**Running from a laptop through usb**

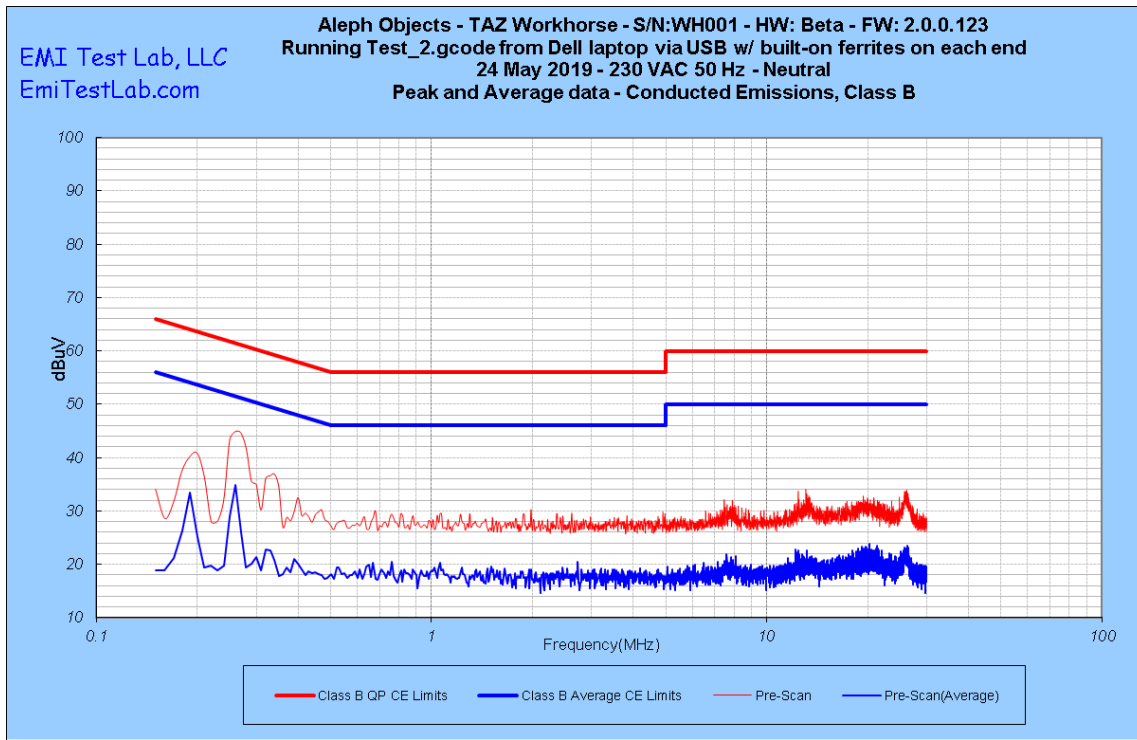

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMI Test Lab.com

Revision 1.0




# EMI Test Lab LLC

Electro Magnetic Interference Testing  
 EmiTestLab.com

## 230 VAC 50 Hz – Neutral – Peak passing Quasi peak limit – Average data passing the average limit

### Running from a laptop through usb

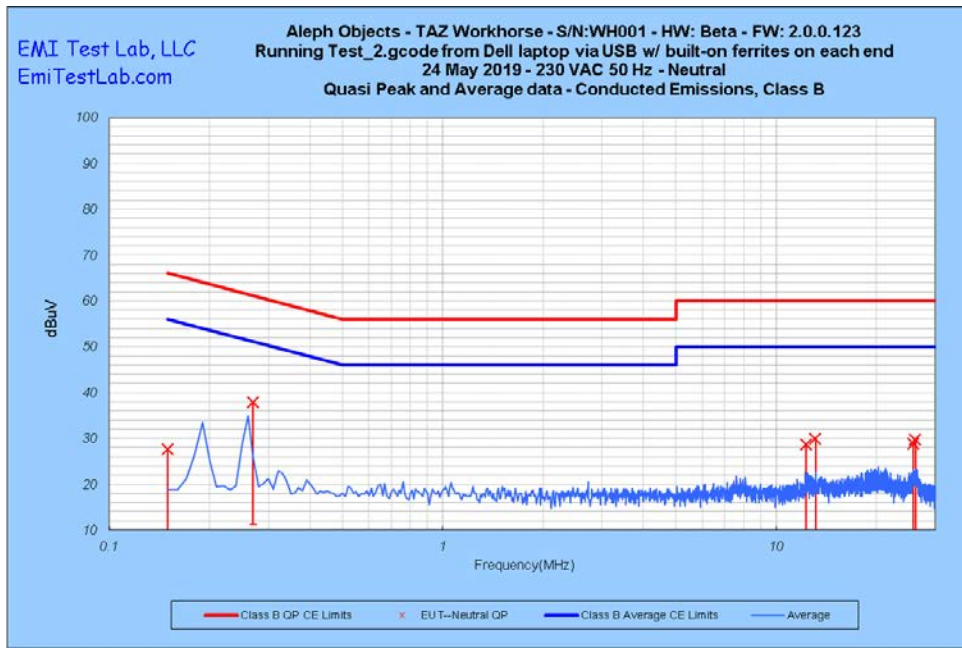

Frequency (MHz)	QP Disturbance (dBuV)	QP Limit	EUT--Line QP	Tranducer Connection	Correction Factor (dB)
0.150	36.40	66.00	29.60	AMN	0.20
0.270	43.34	62.57	19.23	AMN	0.23
12.320	28.53	60.00	31.47	AMN	1.23
13.130	29.92	60.00	30.08	AMN	1.25
25.770	28.74	60.00	31.26	AMN	1.44
26.150	29.71	60.00	30.29	AMN	1.44

Test Specification: CISPR 24, 32  
 Model Name of EUT: TAZ Workhorse  
 Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com

Revision 1.0




EMI Test Lab LLC

Electro Magnetic Interference Testing  
EmiTestLab.com

**230 VAC 50 Hz – Line – Peak passing Quasi peak limit – Average data passing the average limit**

**Running from the SD card**

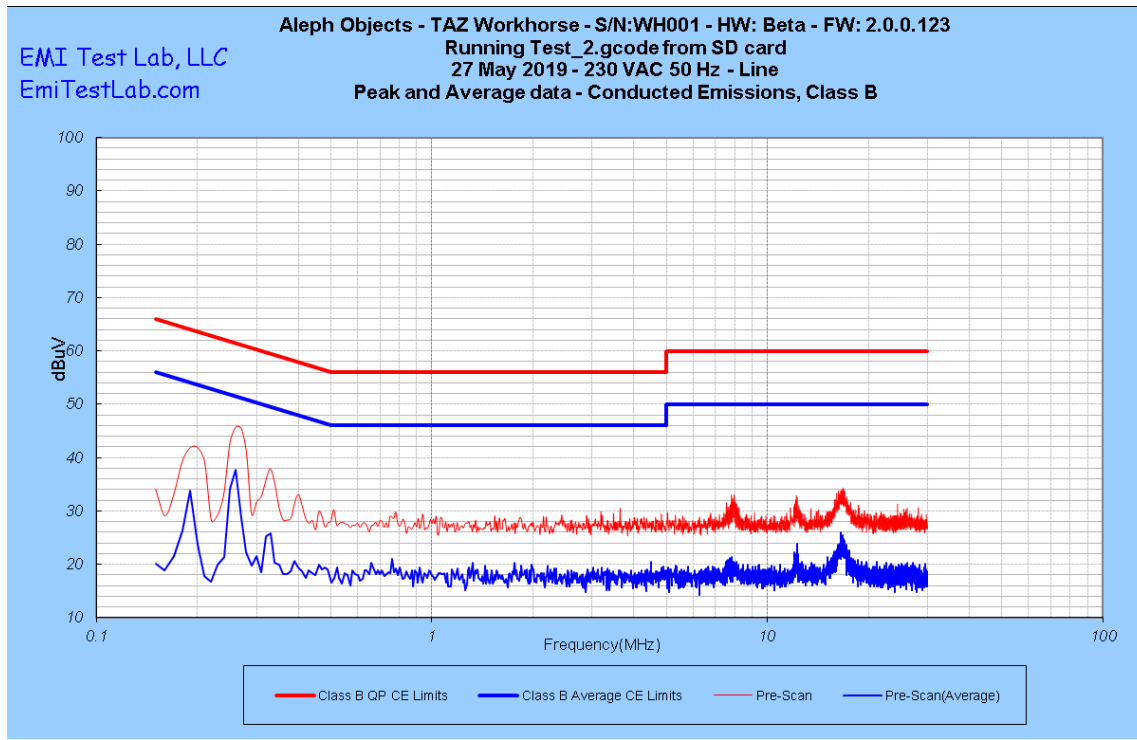

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com

Revision 1.0




# EMI Test Lab LLC

Electro Magnetic Interference Testing  
 EmiTestLab.com

## 230 VAC 50 Hz – Line – Peak passing Quasi peak limit – Average data passing the average limit

### Running from the SD card

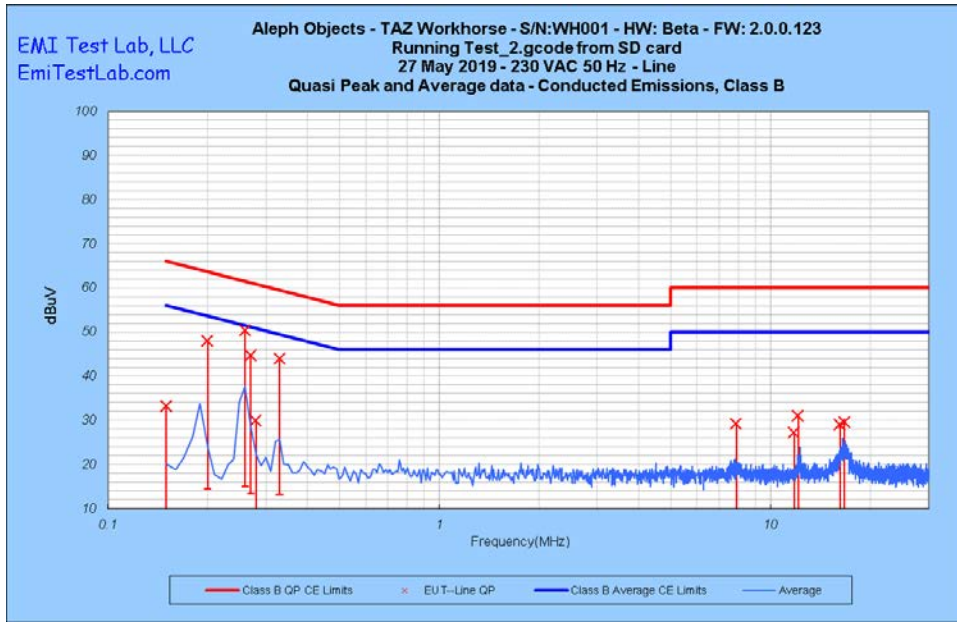

Frequency (MHz)	QP Disturbance (dBuV)	QP Limit	EUT-Line QP	Tranducer Connection	Correction Factor (dB)
0.150	36.00	66.00	30.00	AMN	0.20
0.270	44.56	62.57	18.01	AMN	0.23
0.280	29.84	62.28	32.45	AMN	0.24
7.880	29.22	60.00	30.78	AMN	1.13
11.780	27.15	60.00	32.85	AMN	1.23
12.120	30.94	60.00	29.06	AMN	1.23
16.190	28.95	60.00	31.05	AMN	1.29
16.710	29.60	60.00	30.40	AMN	1.30
0.203	48.02	64.49	16.48	AMN	0.22
0.269	50.23	62.61	12.38	AMN	0.23
0.339	43.95	60.61	16.66	AMN	0.25

Test Specification: CISPR 24, 32  
 Model Name of EUT: TAZ Workhorse  
 Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com

Revision 1.0






**EMI Test Lab LLC**

**Electro Magnetic Interference Testing**  
**EmiTestLab.com**

**230 VAC 50 Hz – Neutral – Peak passing Quasi peak limit – Average data passing the average limit**

**Running from the SD card**

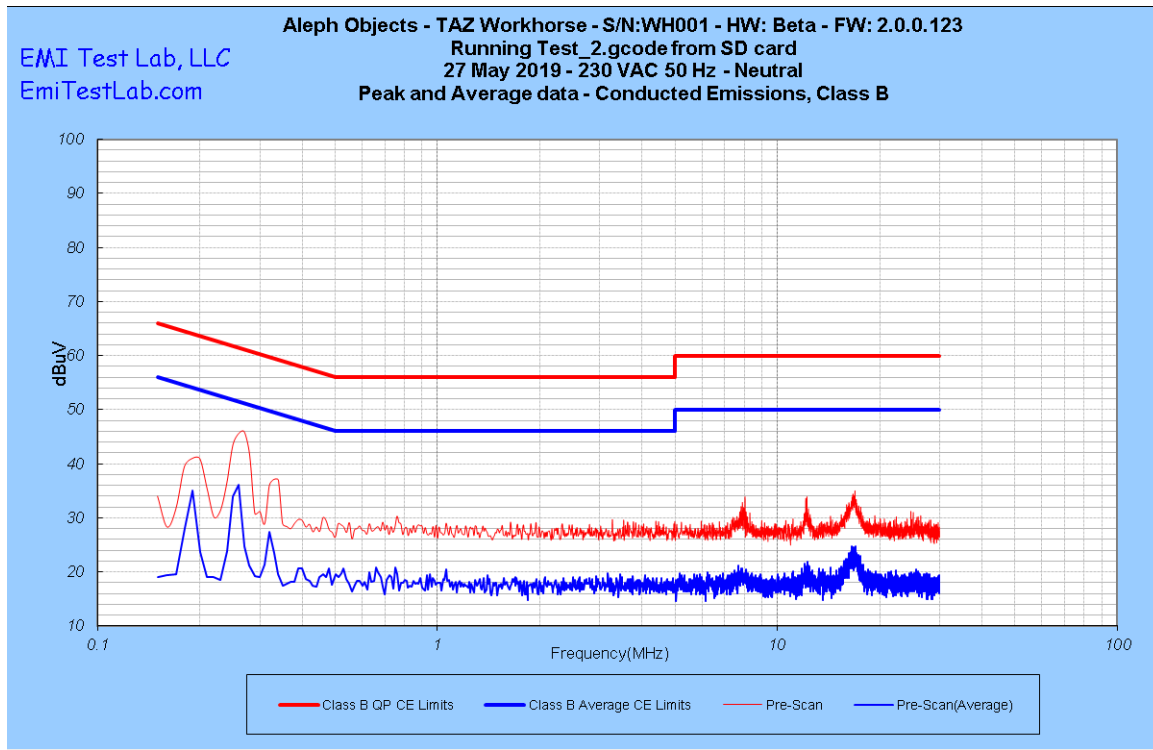

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0




# EMI Test Lab LLC

Electro Magnetic Interference Testing  
 EmiTestLab.com

## 230 VAC 50 Hz – Neutral – Peak passing Quasi peak limit – Average data passing the average limit

### Running from the SD card

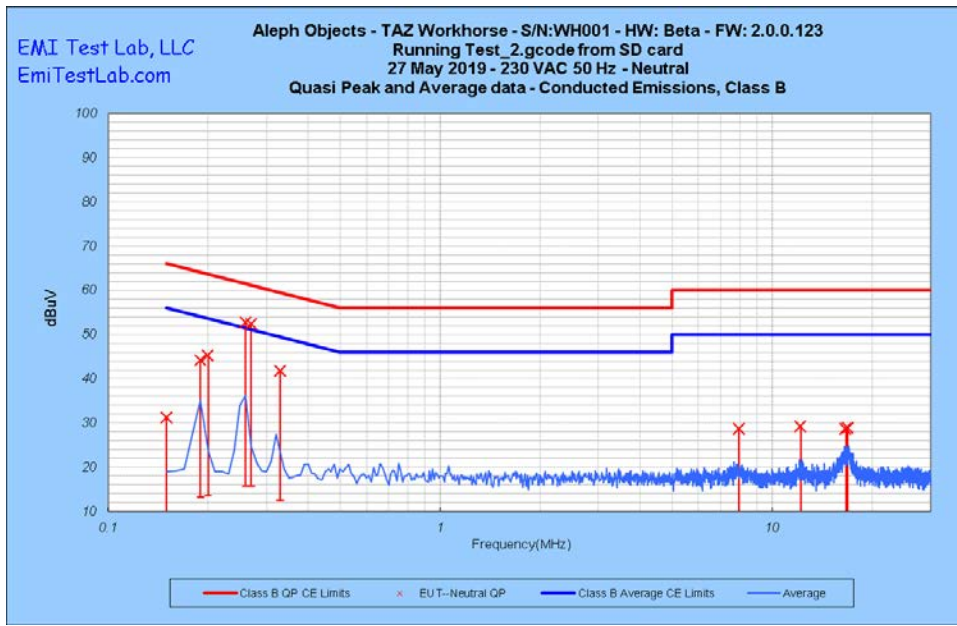


Frequency (MHz)	QP Disturbance (dBuV)	QP Limit	EUT--Line QP	Tranducer Connection	Correction Factor (dB)
0.150	34.70	66.00	31.30	AMN	0.20
7.950	28.61	60.00	31.39	AMN	1.13
0.150	31.10	66.00	34.90	AMN	0.20
12.180	29.16	60.00	30.84	AMN	1.23
16.680	28.60	60.00	31.40	AMN	1.30
16.880	28.71	60.00	31.29	AMN	1.30
0.204	45.22	64.45	19.23	AMN	0.22
0.200	44.01	64.57	20.56	AMN	0.21
0.270	52.73	62.58	9.85	AMN	0.23
0.337	41.65	60.64	18.99	AMN	0.25


Test Specification: CISPR 24, 32  
 Model Name of EUT: TAZ Workhorse  
 Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com

Revision 1.0

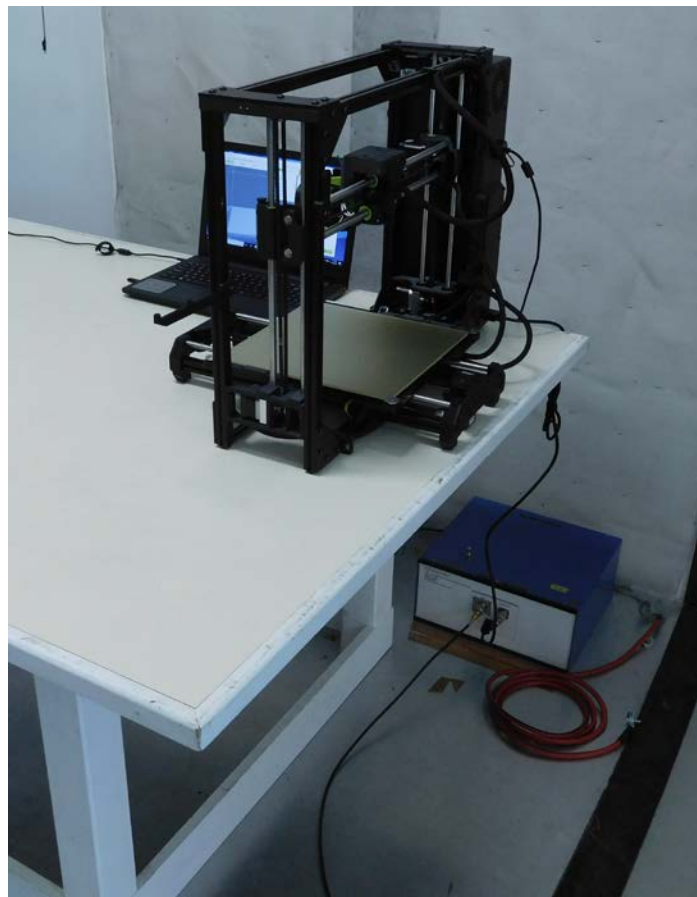

**Test setup for Conducted Emissions – with laptop**

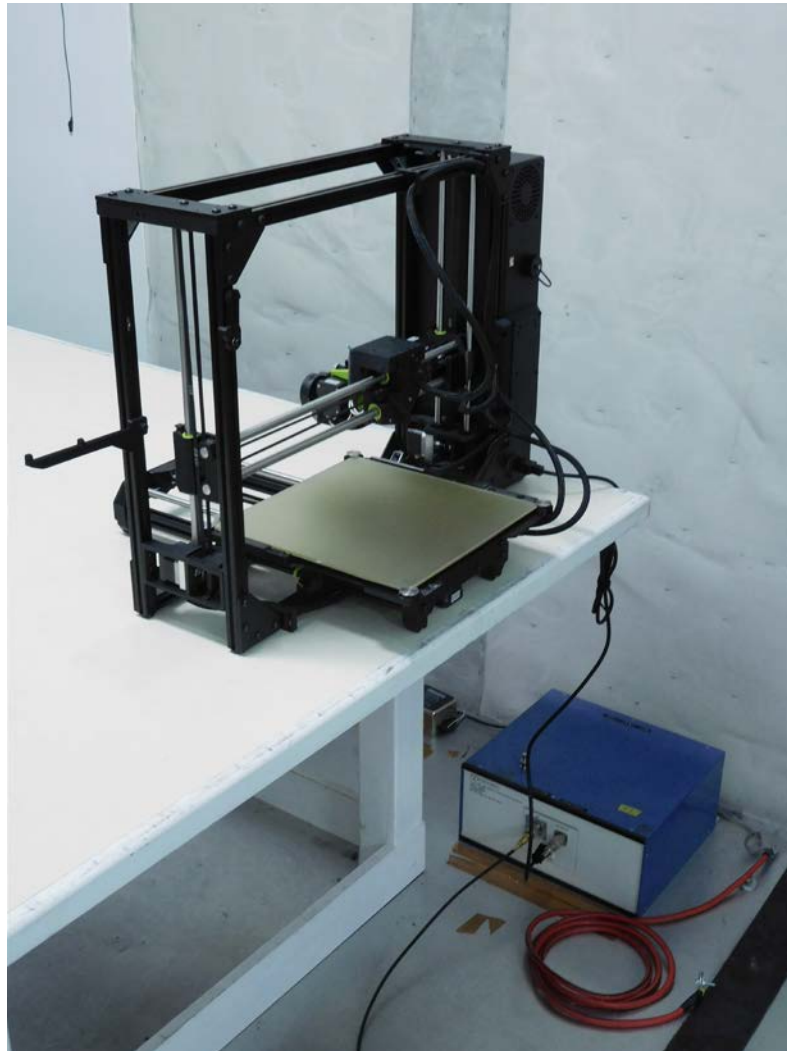

**Test setup for Conducted Emissions – with SD Card**



## EMI Test Lab LLC


Electro Magnetic Interference Testing  
EmiTestLab.com

### 2.2 Enclosure

#### 2.2.1 30-1,000 MHz

The radiated field strength levels (electric component) have been measured in conformity with and according to the criteria as stated below.

Basic standard	:	CISPR 32:2015
Test setup	:	EN 55032, AS/NZS CISPR 32
Limit distance	:	3 meters
Frequency range 1	:	30 -230 MHz
Limits	:	40 dBuV/m
Frequency range 2	:	230 – 1,000 MHz
Limits	:	47 dBuV/m

Results of the measurements concerning radiated electromagnetic fields (electric component) emitted by the EUT, enclosure, as a tested system	<b><u>PASS Class B</u></b>
Name of Test Engineer:	Dennis King
Signature:	
Date:	24 May 2019
Remarks: <b><u>Radiated Emissions Summary:</u></b> Passing Class B for Home and Commercial use.	


Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0



Peak data compared to a quasi peak limit – see the next chart for the passing quasi peak data – with usb connection

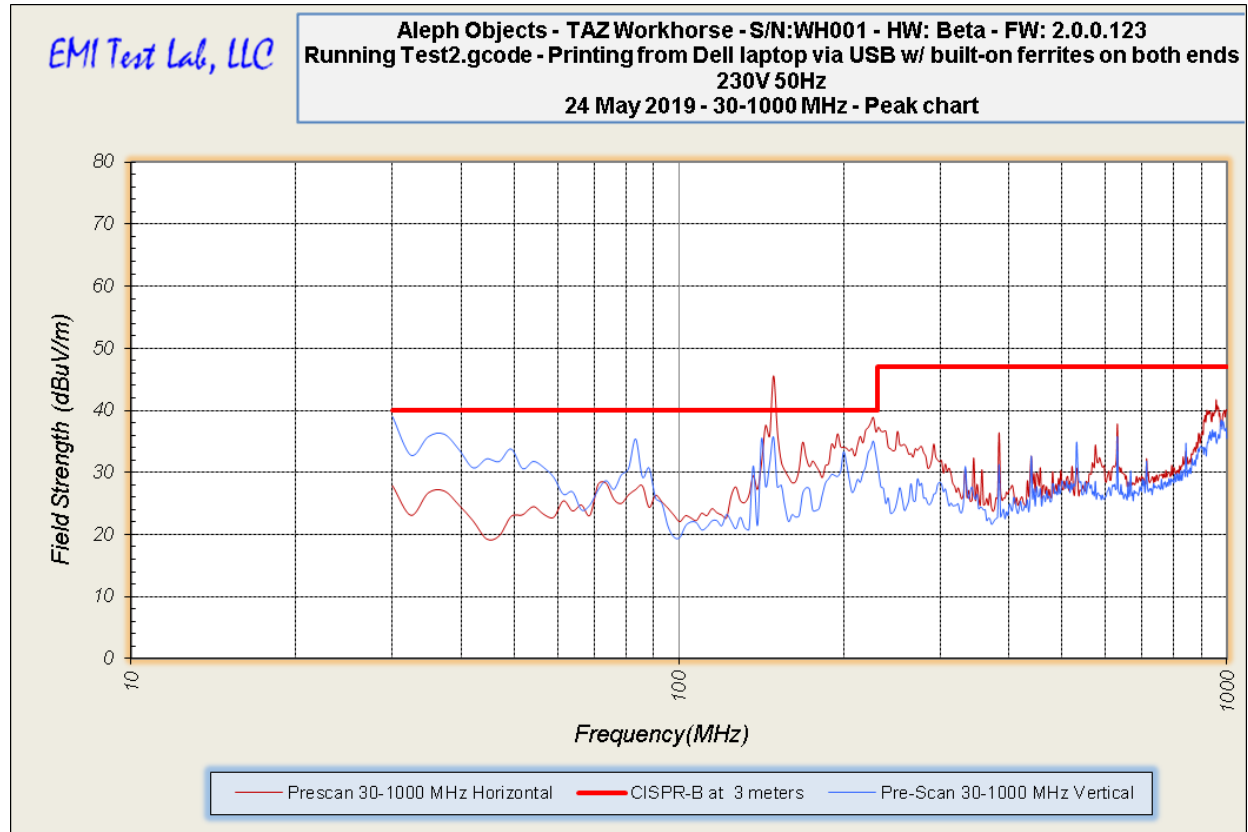




EMI Test Lab LLC

Electro Magnetic Interference Testing  
EmiTestLab.com

### Passing Quasi peak data compared to the quasi peak limit – with usb connection

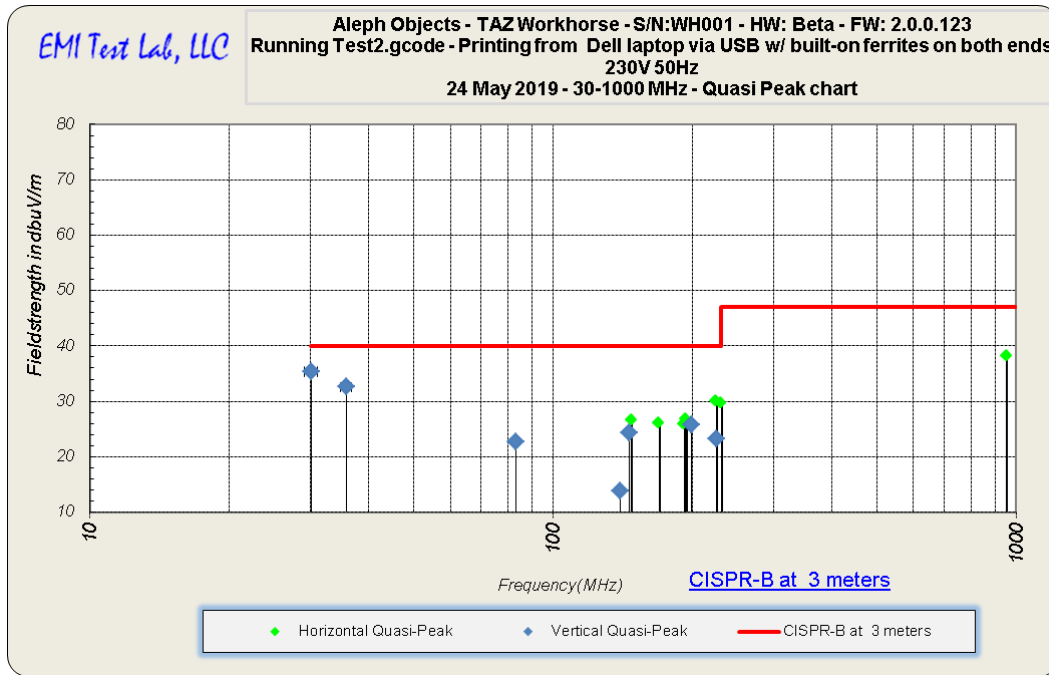

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com

Revision 1.0



**EMI Test Lab LLC**

**Electro Magnetic Interference Testing**  
**EmiTestLab.com**

**Quasi peak data – with usb connection**

EMI Test Lab						Sheet4
Frequency	Field Strength EUT	Limit	Azimuth	Height	Antenna Polarization	Delta from the Limit
<i>(MHz)</i>	<i>(dBuV/m)</i>	<i>(dBuV/m)</i>	<i>Degrees</i>	<i>meters</i>	<i>H or V</i>	<i>dB micro volts</i>
199.45	25.83	40	20.0	1.4	V	-14.17
139.55	13.84	40	32.0	1.4	V	-26.16
225.26	23.32	40	168.0	1.4	V	-16.68
83.36	22.76	40	192.0	1.4	V	-17.24
30.04	35.37	40	236.0	1.4	V	-4.63
35.74	32.61	40	272.0	1.4	V	-7.39
146.39	24.28	40	356.0	1.4	V	-15.72
231.56	29.51	47	4.0	1.4	H	-17.49
192.20	25.75	40	76.0	1.4	H	-14.25
225.99	30.53	40	168.0	1.4	H	-9.47
955.71	38.17	47	228.0	1.4	H	-8.83
170.03	25.88	40	316.0	1.4	H	-14.12
194.40	26.65	40	356.0	1.4	H	-13.35
225.55	29.98	40	356.0	1.4	H	-10.02
148.05	26.56	40	356.0	1	H	-13.44

Test Specification: CISPR 24, 32  
 Model Name of EUT: TAZ Workhorse  
 Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0






EMI Test Lab LLC

Electro Magnetic Interference Testing  
EmiTestLab.com

Peak data compared to a quasi peak limit – see the next chart for the passing quasi peak data – with SD Card

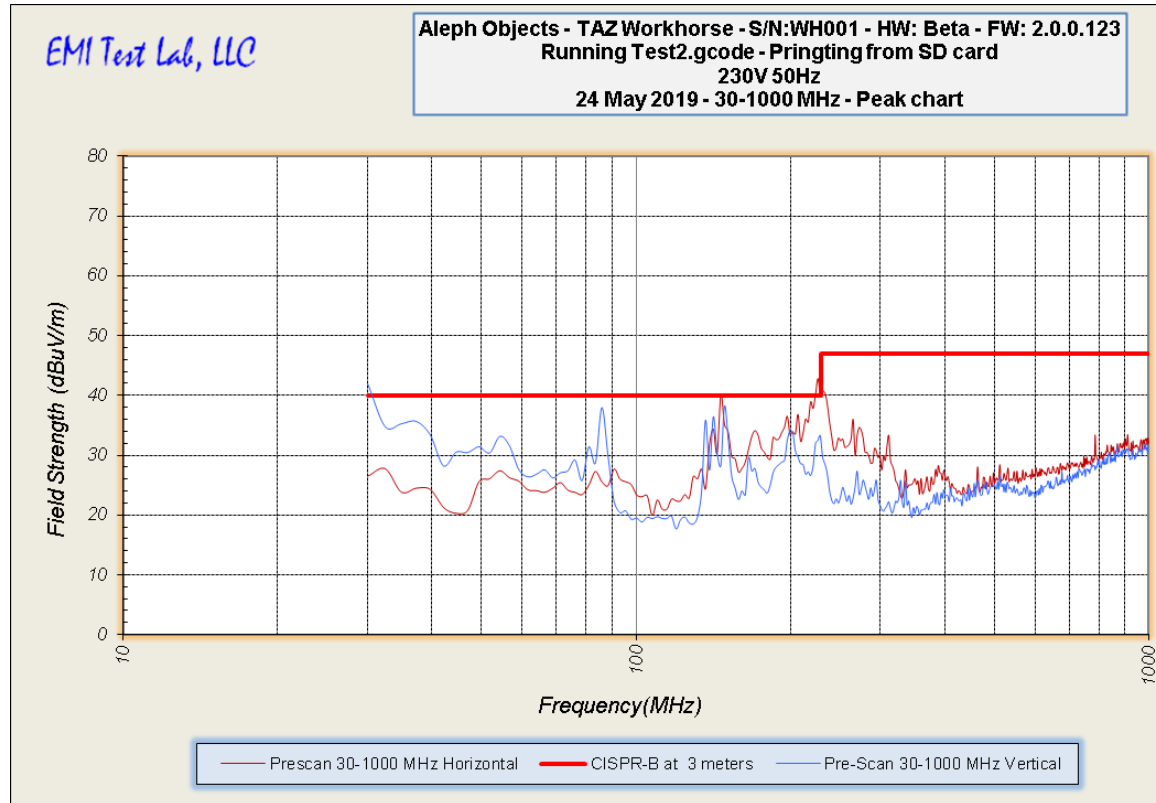

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com


Revision 1.0



EMI Test Lab LLC

Electro Magnetic Interference Testing  
EmiTestLab.com

### Passing Quasi peak data compared to the quasi peak limit – with SD Card

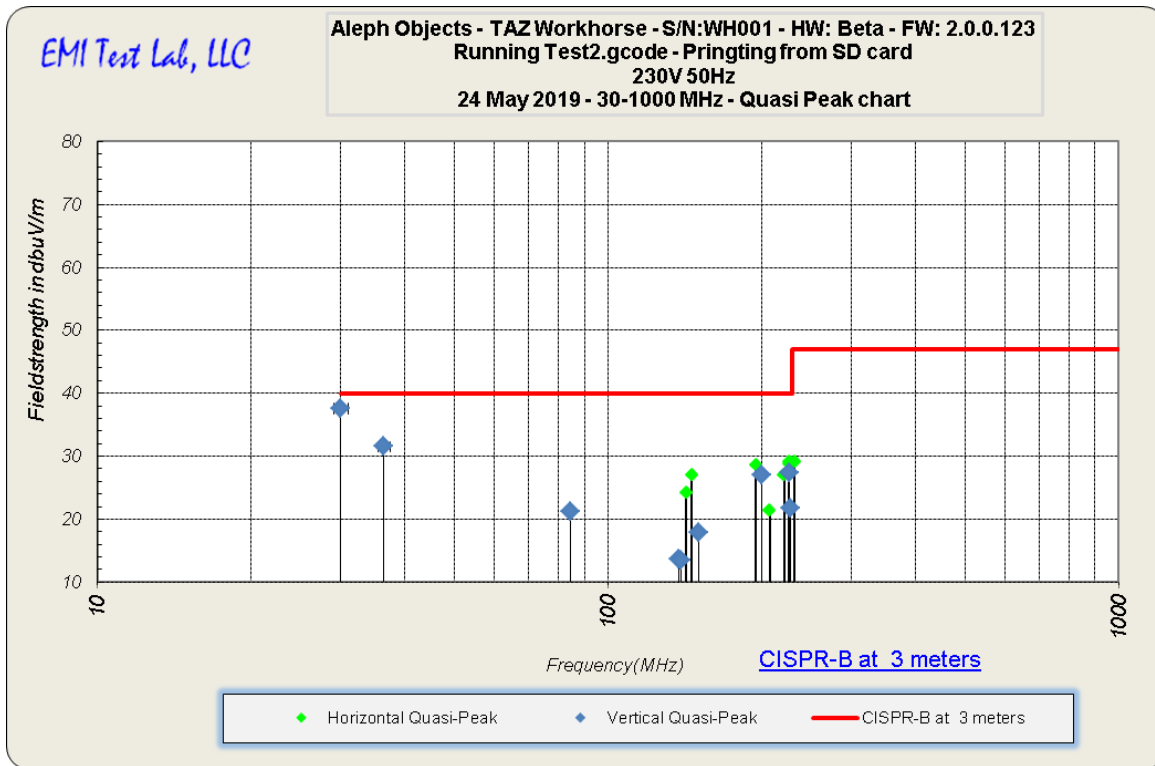

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com

Revision 1.0



**EMI Test Lab LLC**

Electro Magnetic Interference Testing  
 EmiTestLab.com

**Quasi peak data – with SD Card**

EMI Test Lab						Sheet4
Frequency	Field Strength EUT	Limit	Azimuth	Height	Antenna Polarization	Delta from the Limit
<i>(MHz)</i>	<i>(dBuV/m)</i>	<i>(dBuV/m)</i>	<i>Degrees</i>	<i>meters</i>	<i>H or V</i>	<i>dB micro volts</i>
227.65	21.69	40	32.0	1.4	V	-18.31
137.95	13.6	40	32.0	1.4	V	-26.4
227.30	27.36	40	48.0	1.4	V	-12.64
150.40	17.79	40	148.0	1.4	V	-22.21
84.36	21.13	40	152.0	1.4	V	-18.87
30.00	37.60	40	232.0	1.4	V	-2.4
36.45	31.52	40	264.0	1.4	V	-8.48
139.15	13.50	40	340.0	1.4	V	-26.5
200.46	26.94	40	352.0	1.4	V	-13.06
146.13	26.99	40	0.0	1.4	H	-13.01
207.49	21.42	40	24.0	1.4	H	-18.58
195.14	28.52	40	24.0	1.4	H	-11.48
226.44	28.74	40	32.0	1.4	H	-11.26
232.29	29.15	47	48.0	1.4	H	-17.85
226.59	29.21	40	48.0	1	H	-10.79
221.64	27.00	40	192.0	1	H	-13
142.35	24.22	40	340.0	1	H	-15.78

Test Specification: CISPR 24, 32  
 Model Name of EUT: TAZ Workhorse  
 Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com


Revision 1.0



**2.2.2 1-6 GHz**

The radiated field strength levels (electric component) have been measured in conformity with and according to the criteria as stated below.


Basic standard	:	CISPR 32:2015
Test setup	:	EN 55032, AS/NZS CISPR 32
Limit distance	:	3 meters
Frequency range 1	:	1-3 GHz
Limits	:	Average 50 dBuV/m, Peak 70 dBuV/m
Frequency range 2	:	3-6 GHz
Limits	:	Average 54 dBuV/m, Peak 74 dBuV/m

Results of the measurements concerning radiated electromagnetic fields (electric component) emitted by the EUT, enclosure, as a tested system	<b><u>Pass</u></b>
Name of Test Engineer:	Dennis King
Signature:	
Date:	24 May 2019
Remarks:	Passing from 1-6 GHz



# EMI Test Lab LLC

Electro Magnetic Interference Testing  
EmiTestLab.com

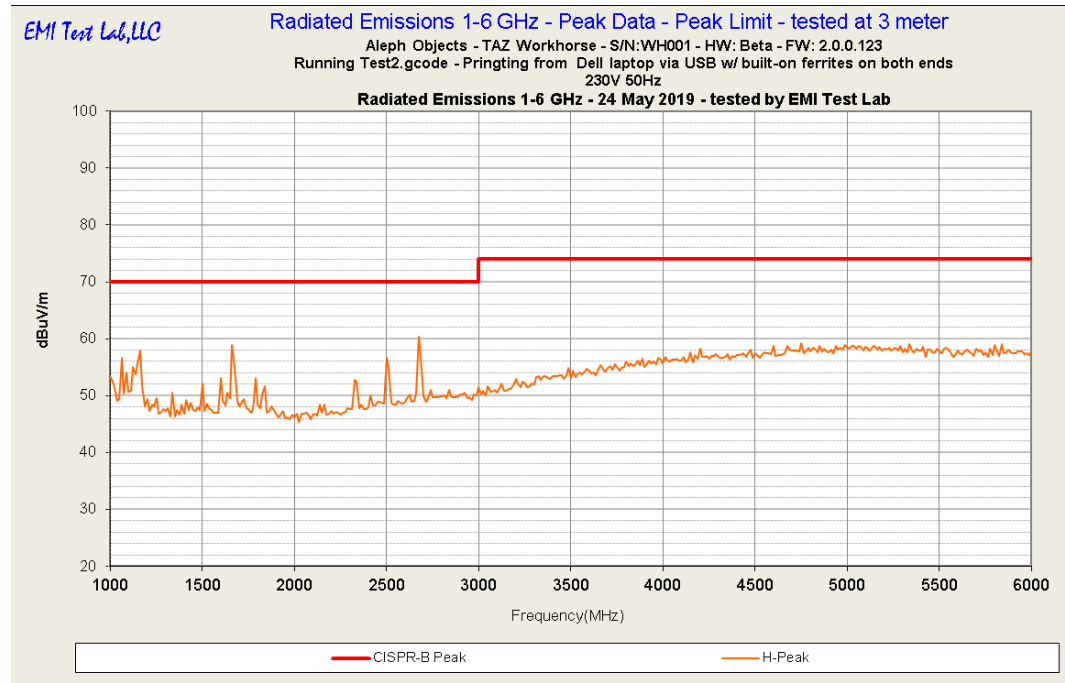

### 3 meter test limits

Frequency Range	Class A Limits		Class B Limits	
	FCC <sup>Note 1</sup>	CISPR	FCC	CISPR
1 – 3GHz	Avg 60dBuV/m Pk 80dBuV/m	Avg 56dBuV/m Pk 76dBuV/m	Avg 54dBuV/m Pk 74dBuV/m	Avg 50dBuV/m Pk 70dBuV/m
3 – 6GHz	Avg 60dBuV/m Pk 80dBuV/m	Avg 60dBuV/m Pk 80dBuV/m	Avg 54dBuV/m Pk 74dBuV/m	Avg 54dBuV/m Pk 74dBuV/m
6 – 40 GHz	Avg 60dBuV/m Pk 80dBuV/m	No requirement	Avg 54dBuV/m Pk 74dBuV/m	No requirement <sup>Note 3</sup>

Note 1: The limit above has been extrapolated from 10m (as detailed in FCC rules) to 3m. The 10m limits are 49.5dBuV/m for average and 69.5dBuV/m for peak.

Note 2: **Pk** indicates the peak limit and **Avg** indicates the average limit. There are some differences in the specifications for the detectors used to make peak and average measurements between FCC/ANSI and CISPR standards.

Note 3: Work is in progress to extend the frequency range to 18 GHz

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.


Prepared by EMI Test Lab - EmiTestLab.com

Revision 1.0



# EMI Test Lab LLC

Electro Magnetic Interference Testing  
 EmiTestLab.com

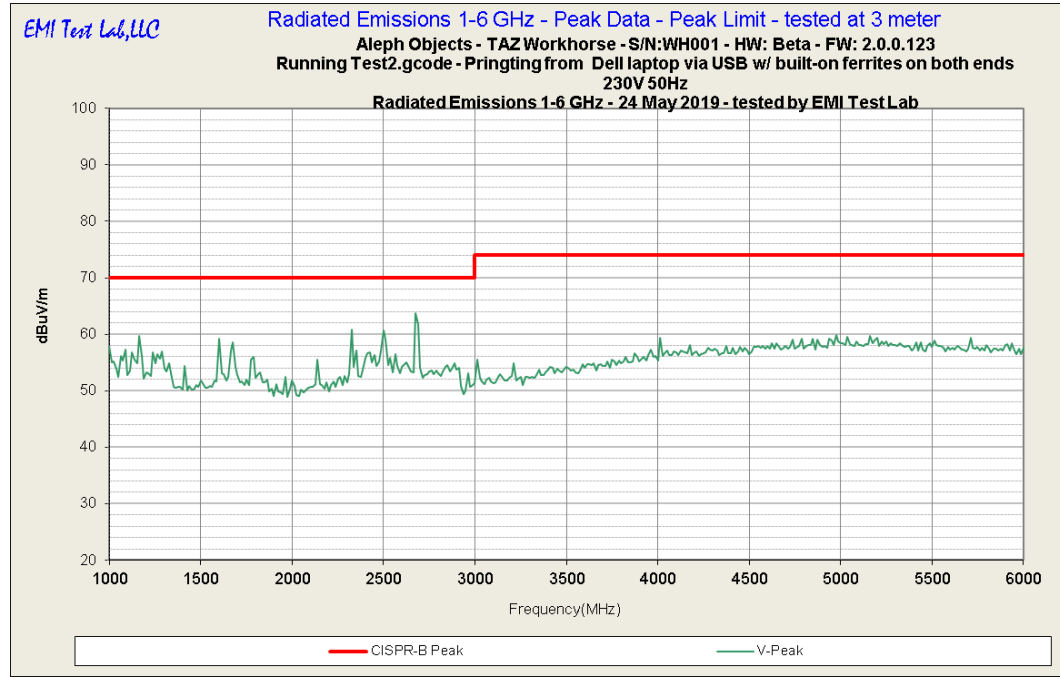


Frequency Range	Class A Limits		Class B Limits	
	FCC <sup>Note 1</sup>	CISPR	FCC	CISPR
1 – 3GHz	Avg 60dBuV/m Pk 80dBuV/m	Avg 56dBuV/m Pk 76dBuV/m	Avg 54dBuV/m Pk 74dBuV/m	Avg 50dBuV/m Pk 70dBuV/m
3 – 6GHz	Avg 60dBuV/m Pk 80dBuV/m	Avg 60dBuV/m Pk 80dBuV/m	Avg 54dBuV/m Pk 74dBuV/m	Avg 54dBuV/m Pk 74dBuV/m
6 – 40 GHz	Avg 60dBuV/m Pk 80dBuV/m	No requirement	Avg 54dBuV/m Pk 74dBuV/m	No requirement <small>Note 3</small>

Note 1: The limit above has been extrapolated from 10m (as detailed in FCC rules) to 3m. The 10m limits are 49.5dBuV/m for average and 69.5dBuV/m for peak.  
 Note 2: **Pk** indicates the peak limit and **Avg** indicates the average limit. There are some differences in the specifications for the detectors used to make peak and average measurements between FCC/ANSI and CISPR standards.  
 Note 3: Work is in progress to extend the frequency range to 18 GHz


Test Specification: CISPR 24, 32  
 Model Name of EUT: TAZ Workhorse  
 Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com

Revision 1.0

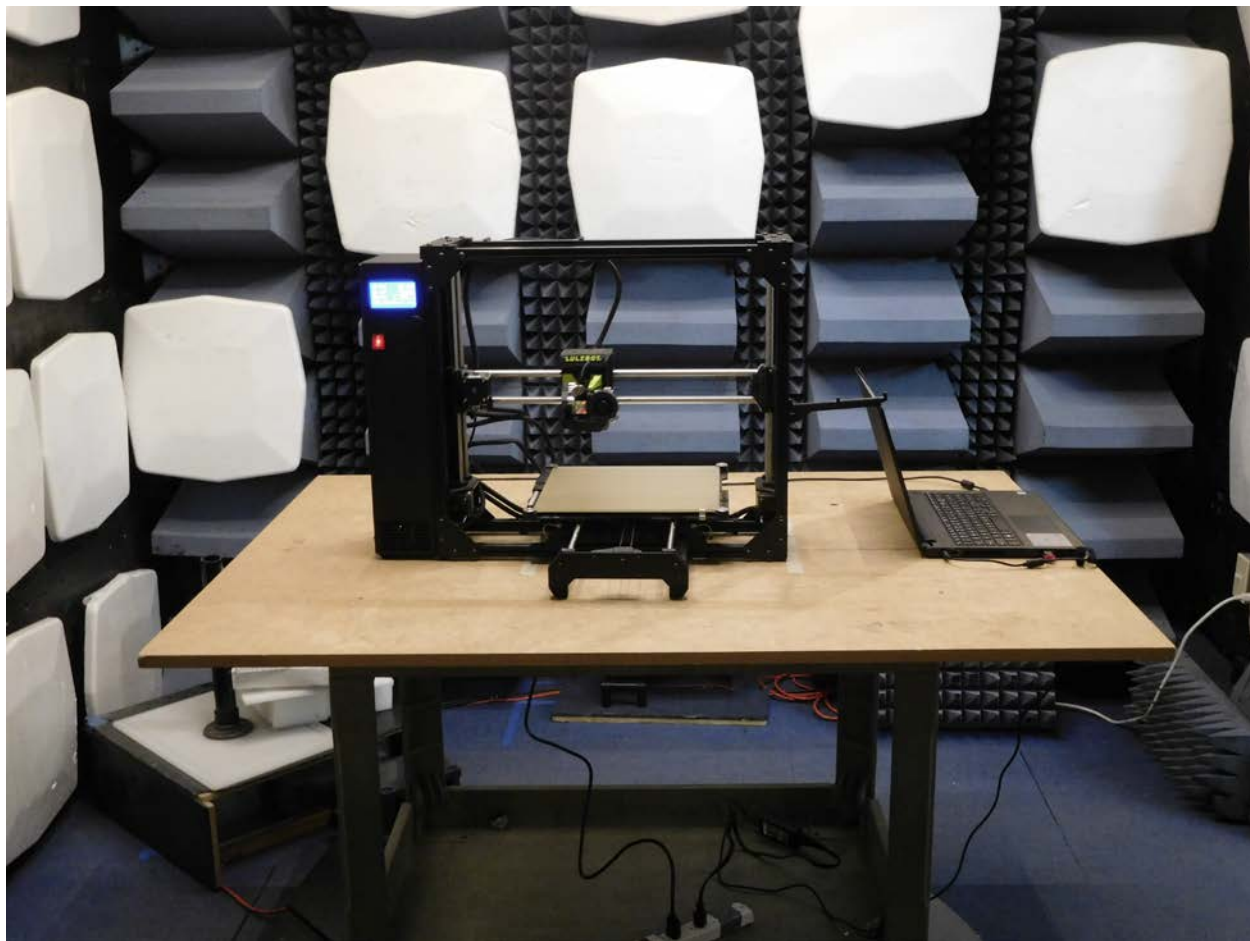

**Test setup for Radiated Emissions - usb**

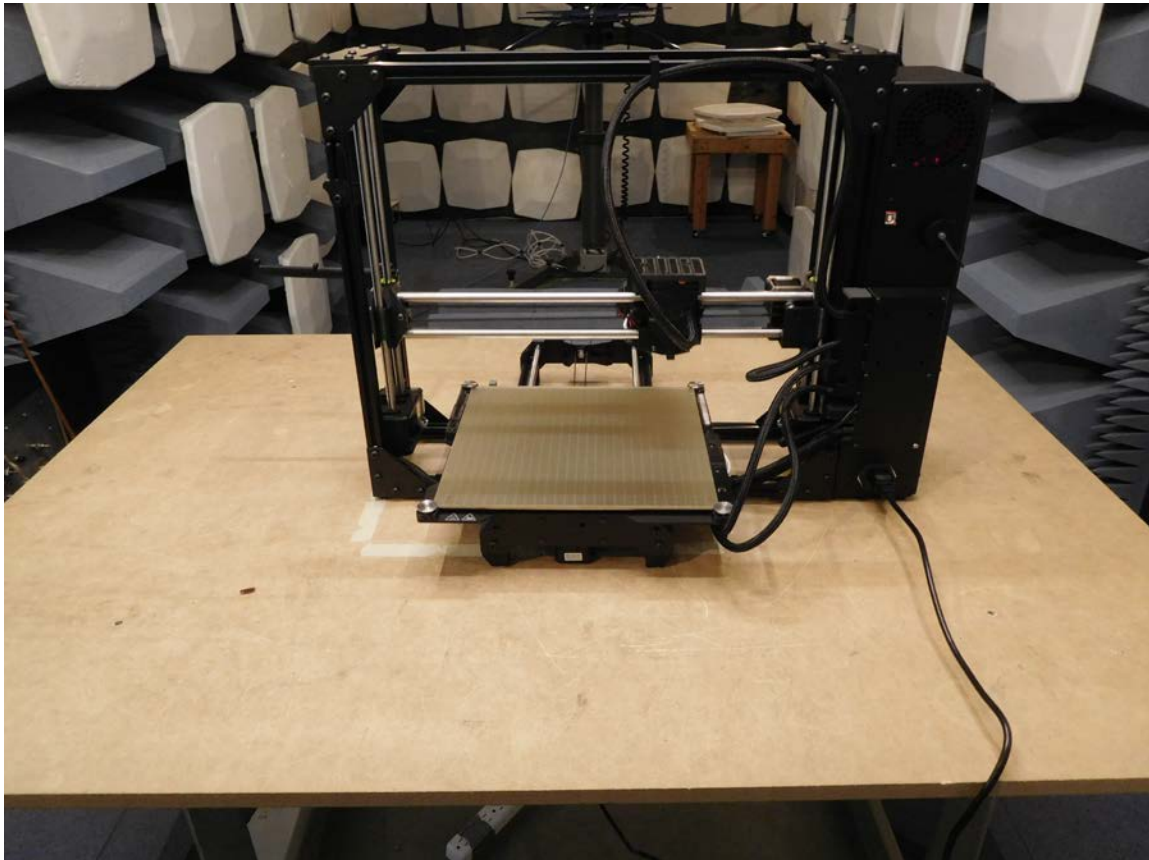


**Test setup for Radiated Emissions – SD Card**





*EMI Test Lab LLC*

Electro Magnetic Interference Testing  
EmiTestLab.com

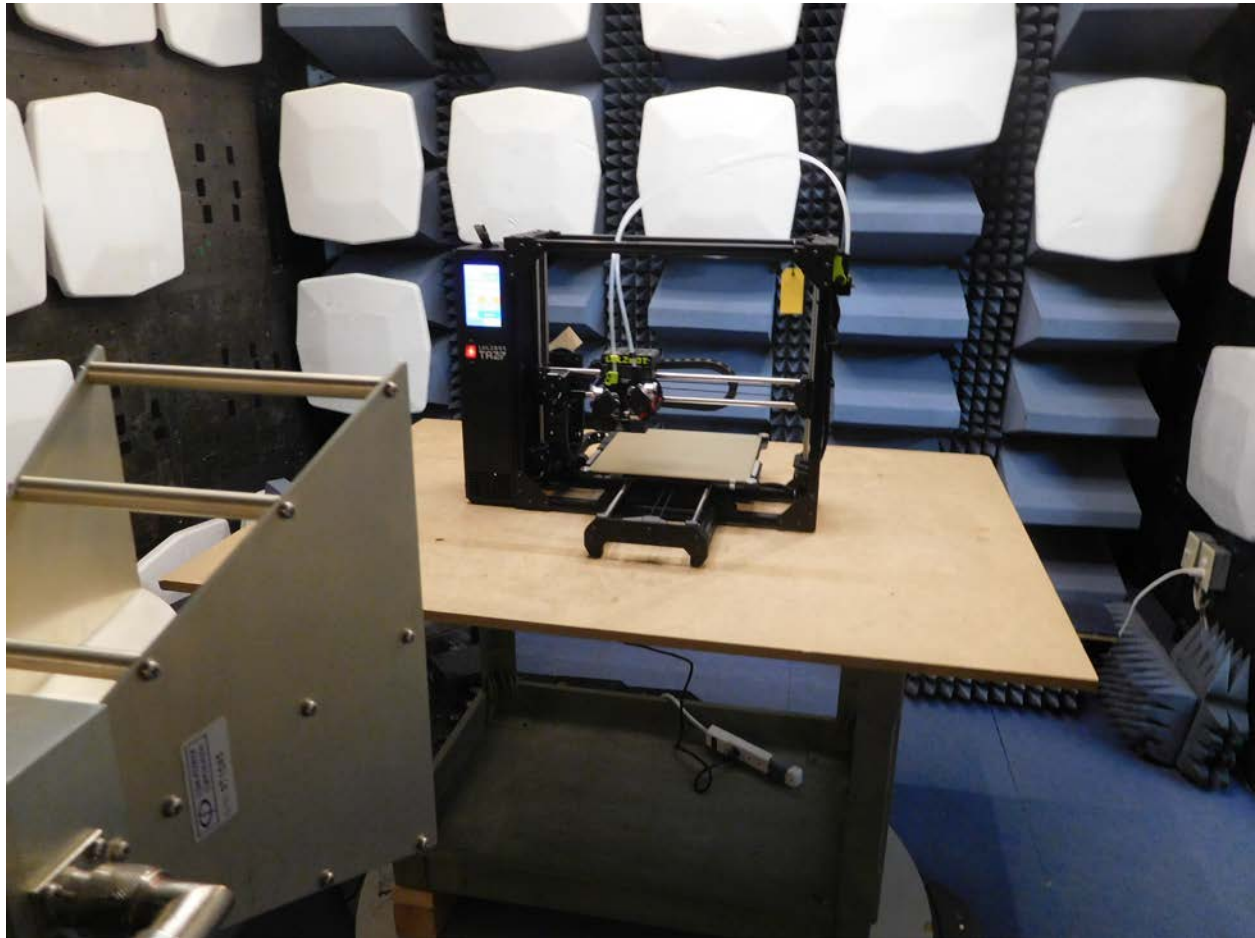

**Test setup for Radiated Emissions – SD card – 1- 6 GHz Horn antenna**

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com


Revision 1.0



### 2.3 Harmonic current emissions

The emissions of harmonic currents at the AC mains connection terminals of the EUT were measured in conformance with and according to the criteria as stated below.

Basic standard : EN 61000-3-2:2014  
Test setup : EN 61000-3-2:2014  
Frequency range : 100 Hz – 2000 Hz

Results of the measurements concerning the emission of harmonic currents at the AC mains connection terminals of the EUT	<b><u>PASS</u></b>
Name of Test Engineer:	Dennis King
Signature:	
Date:	28 May 2019
Remarks:	
The power supply was tested at 230VAC 50Hz.	



The screenshot shows the TTI HA1600 POWER & HARMONICS ANALYSER HA-PC Link Plus software interface. The main window displays a table of test results for various harmonics, with columns for N, Filtered, Limit, Avg, %Limit, Max, %Limit, and a Pass/Fail status. The results are all marked as 'Pass'. Below the table, there are summary boxes for 'SUPPLY VOLTAGE', 'LOAD POWER', and 'LOAD CURRENT'. A 'HARMONICS SUMMARY' box indicates 'PASS' and 'Supply Meets EN Requirements'. The interface also shows settings for 'Class A', 'Professional', and 'Test Method Standard EN61000-4-7:2002'.

N	Filtered	Limit	Avg	%Limit	Max	%Limit	N	Filtered	Limit	Avg	%Limit	Max	%Limit
1	846.1	-	-	-	-	-	2	32.0	1080.0	33.9	3.1	41.6	3.9
3	127.9	2300.0	131.2	5.7	142.7	6.2	4	25.7	430.0	28.3	6.6	33.3	7.7
5	16.4	1140.0	15.8	1.4	17.8	1.6	6	8.3	300.0	9.5	3.2	11.3	3.8
7	25.1	770.0	24.1	3.1	26.9	3.5	8	4.9	230.0	5.3	2.3	6.5	2.8
9	23.3	400.0	25.2	6.3	30.5	7.6	10	5.0	184.0	5.5	3.0	7.4	4.0
11	11.6	330.0	12.6	3.8	16.9	5.1	12	5.8	153.3	7.0	4.6	8.2	5.3
13	15.4	210.0	15.0	7.1	17.5	8.3	14	6.5	131.4	6.3	4.8	6.9	5.3
15	17.5	150.0	17.1	11.4	18.5	12.3	16	6.9	115.0	7.2	6.3	8.1	7.0
17	15.2	132.3	15.7	11.9	16.9	12.8	18	7.2	102.2	7.3	7.1	8.0	7.8
19	12.3	118.4	13.2	11.1	16.0	13.5	20	5.9	92.0	6.2	6.7	7.3	7.9
21	12.5	107.1	13.2	12.3	14.4	13.4	22	6.2	83.6	5.8	6.9	6.3	7.5
23	11.9	97.8	11.8	12.1	13.3	13.6	24	5.0	76.7	5.4	7.0	6.2	8.1
25	10.3	90.0	10.1	11.2	11.6	12.9	26	4.1	70.8	4.1	5.8	4.4	6.2
27	9.2	83.3	9.2	11.0	10.3	12.4	28	4.1	65.7	4.4	6.7	5.1	7.8
29	9.2	77.6	9.5	12.2	9.9	12.8	30	4.0	61.3	4.2	6.9	4.7	7.7
31	8.1	72.6	8.0	11.0	8.9	12.3	32	3.7	57.5	3.8	6.6	4.4	7.7
33	6.1	66.2	5.9	8.7	6.8	10.0	34	3.2	54.1	3.1	5.7	3.5	6.5
35	5.7	64.3	5.7	8.9	6.2	9.6	36	3.4	51.1	3.5	6.8	4.1	6.0
37	6.5	60.8	6.7	11.0	7.3	12.0	38	3.4	48.4	3.7	7.6	4.2	8.7
39	7.1	57.7	7.0	12.1	7.7	13.3	40	3.6	46.0	3.8	8.3	4.2	9.1
P	28.5	251.4	28.6	11.4	29.8	11.9	-	-	-	-	-	-	-

HA-PC Link Plus. Software v2.02. Firmware v2.81

Report Number : 165

Tested On : 28 May 2019 15:40 for 150 Seconds.

Equipment Under Test : TAZ Workhorse

Serial Number :

Tested by : Dennis King

Supply Voltage : 230.8 to 231.1 Vrms 327.0 Vpk Frequency : 50.07 to 50.18 Hz

Supply Meets EN Requirements

Load Power : 0.36 to 386.80 W 199.7 VA Power Factor 0.881

Load Current : 0.9 to 1555.1 mA rms 1.4 to 2512.0 mA pk Crest Factor: 1.703

Measurement Standard : EN61000-4-7:2002

Limits Applied : EN61000-3-2 Class A Limits Apply.

Harmonic Limit Average % max. Value % Assessment

Number Current (filtered) Limit (Filtered) Limit  
mA mA mA

Fundamental : 846.1

2 : 1080.0 33.9 3.1 41.6 3.9 Pass

3 : 2300.0 131.2 5.7 142.7 6.2 Pass

4 : 430.0 28.3 6.6 33.3 7.7 Pass

Test Specification: CISPR 24, 32

Model Name of EUT: TAZ Workhorse

Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com

Revision 1.0



## EMI Test Lab LLC

### Electro Magnetic Interference Testing EmiTestLab.com

5:	1140.0	15.8	1.4	17.8	1.6	Pass
6:	300.0	9.5	3.2	11.3	3.8	Pass
7:	770.0	24.1	3.1	26.9	3.5	Pass
8:	230.0	5.3	2.3	6.5	2.8	Pass
9:	400.0	25.2	6.3	30.5	7.6	Pass
10:	184.0	5.5	3.0	7.4	4.0	Pass
11:	330.0	12.6	3.8	16.9	5.1	Pass
12:	153.3	7.0	4.6	8.2	5.3	Pass
13:	210.0	15.0	7.1	17.5	8.3	Pass
14:	131.4	6.3	4.8	6.9	5.3	Pass
15:	150.0	17.1	11.4	18.5	12.3	Pass
16:	115.0	7.2	6.3	8.1	7.0	Pass
17:	132.3	15.7	11.9	16.9	12.8	Pass
18:	102.2	7.3	7.1	8.0	7.8	Pass
19:	118.4	13.2	11.1	16.0	13.5	Pass
20:	92.0	6.2	6.7	7.3	7.9	Pass
21:	107.1	13.2	12.3	14.4	13.4	Pass
22:	83.6	5.8	6.9	6.3	7.5	Pass
23:	97.8	11.8	12.1	13.3	13.6	Pass
24:	76.7	5.4	7.0	6.2	8.1	Pass
25:	90.0	10.1	11.2	11.6	12.9	Pass
26:	70.8	4.1	5.8	4.4	6.2	Pass
27:	83.3	9.2	11.0	10.3	12.4	Pass
28:	65.7	4.4	6.7	5.1	7.8	Pass
29:	77.6	9.5	12.2	9.9	12.8	Pass
30:	61.3	4.2	6.9	4.7	7.7	Pass
31:	72.6	8.0	11.0	8.9	12.3	Pass
32:	57.5	3.8	6.6	4.4	7.7	Pass
33:	68.2	5.9	8.7	6.8	10.0	Pass
34:	54.1	3.1	5.7	3.5	6.5	Pass
35:	64.3	5.7	8.9	6.2	9.6	Pass
36:	51.1	3.5	6.8	4.1	8.0	Pass
37:	60.8	6.7	11.0	7.3	12.0	Pass
38:	48.4	3.7	7.6	4.2	8.7	Pass
39:	57.7	7.0	12.1	7.7	13.3	Pass
40:	46.0	3.8	8.3	4.2	9.1	Pass
21 - 39 :	251.4	28.6	11.4	29.8	11.9	-

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com


Revision 1.0




## 2.4 Voltage fluctuations and flicker

Voltage fluctuations and flicker at the AC mains connection terminals of the EUT were measured in conformance with and according to the criteria as stated below.

Basic standard : EN 61000-3-3:2013  
Test setup : EN 61000-3-3:2013

Results of the measurements concerning voltage fluctuations and flicker at the AC mains connection terminals of the EUT	<b><u>PASS</u></b>
Name of Test Engineer:	Dennis King
Signature:	
Date:	28 May 2019
Remarks: The unit was tested at 230VAC 50Hz.	

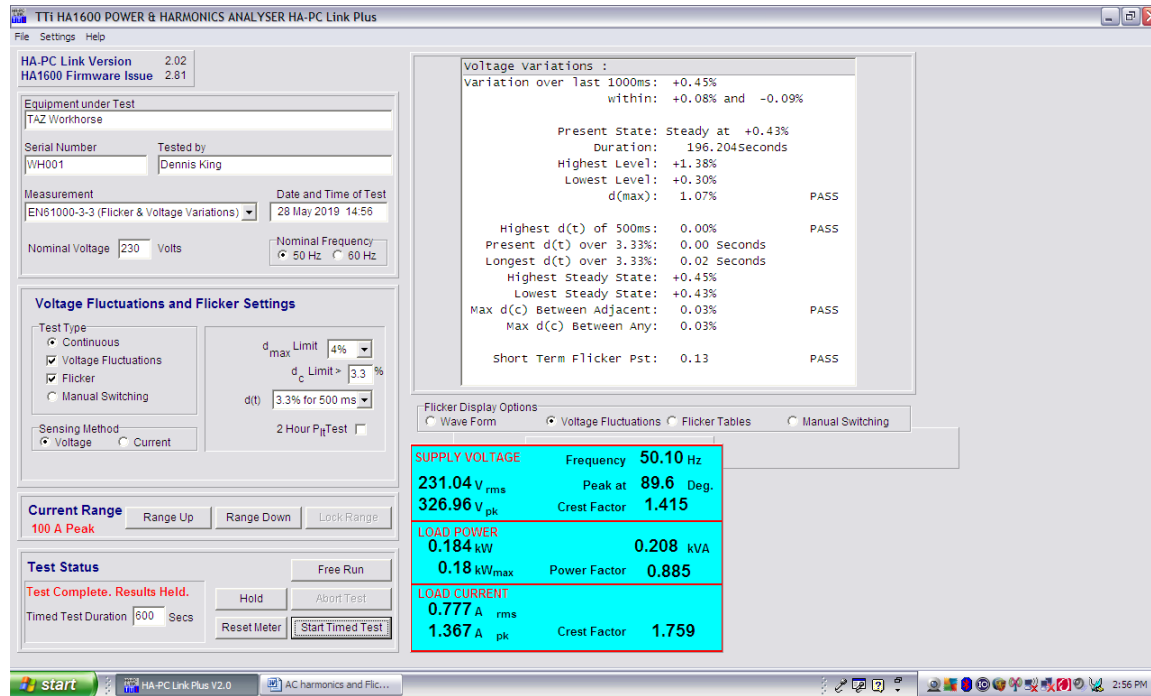

HA-PC Link Plus. Software v2.02. Firmware v2.81

Report Number : 166  
 Tested On : 28 May 2019 14:30 for 600 Seconds.  
 Equipment Under Test : TAZ Workhorse  
 Serial Number : WH001  
 Tested by : Dennis King

Supply Voltage : 231.1 Vrms 327.0 Vpk Frequency : 50.07 to 50.18 Hz  
 Load Current : 0.8 Arms 1.4 Apk Crest Factor: 1.707

Test Method: EN61000-3-3:2008

Voltage Variations :  
 Highest Level: +1.38%  
 Lowest Level: +0.30%  
 d(max): 1.07% PASS  
  
 Highest d(t) of 500ms: 0.00% PASS  
 Present d(t) over 3.33%: 0.00 Seconds  
 Longest d(t) over 3.33%: 0.02 Seconds  
 Highest Steady State: +0.45%

Test Specification: CISPR 24, 32  
 Model Name of EUT: TAZ Workhorse  
 Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com

Revision 1.0



*EMI Test Lab LLC*

**Electro Magnetic Interference Testing**  
**EmiTestLab.com**

Lowest Steady State: +0.43%  
Max d(c) Between Adjacent: 0.03%      PASS  
Max d(c) Between Any: 0.03%  
  
Short Term Flicker Pst: 0.13      PASS

Flicker Results :

Pst Classifier	Plt Calculation	
Duration	Flicker Interval	Pst
0.1%		0.18
0.7%		0.04
1.0%		0.04
1.5%		0.03
2.2%		0.03
3%		0.03
4%		0.03
6%		0.02
8%		0.02
10%		0.02
13%		0.02
17%		0.02
30%		0.02
50%		0.02
80%		0.01

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0



500W Single Output with PFC Function

**RSP-500 series**



- Features :
- Universal AC Input / Full range
- Built-in active PFC function, PF>0.95
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Forced air cooling by built-in DC Fan (Note5)
- 1U low profile 40.5mm
- High efficiency up to 90.5%
- Built-in remote ON-OFF control
- Built-in remote sense function
- LED indicator for power on
- 3 years warranty



**SPECIFICATION**

MODEL	RSP-500-3.3	RSP-500-4	RSP-500-5	RSP-500-12	RSP-500-15	RSP-500-24	RSP-500-27	RSP-500-48		
OUTPUT	DC VOLTAGE	3.3V	4V	5V	12V	15V	24V	27V	48V	
	RATED CURRENT	90A	90A	90A	41.7A	33.4A	21A	18.6A	10.5A	
	CURRENT RANGE	0 - 90A	0 - 90A	0 - 90A	0 - 41.7A	0 - 33.4A	0 - 21A	0 - 18.6A	0 - 10.5A	
	RATED POWER	297W	360W	450W	500.4W	501W	504W	502.2W	504W	
	RIPPLE & NOISE (max.) Note2	120mVp-p	120mVp-p	150mVp-p	150mVp-p	150mVp-p	150mVp-p	150mVp-p	150mVp-p	
	VOLTAGE ADJ. RANGE	2.8 - 3.6V	3.6 - 4.3V	4.5 - 5.5V	10 - 13.2V	13.5 - 18V	20 - 26.4V	26 - 30V	41 - 56V	
	VOLTAGE TOLERANCE Note3	±2.0%	±2.0%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.3%	±0.3%	±0.2%	±0.2%	±0.2%	
	LOAD REGULATION	±1.0%	±1.0%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	
	SETUP, RISE TIME	1500ms, 80ms/230VAC		3000ms, 80ms/115VAC at full load						
HOLD UP TIME (Typ.)	18ms/230VAC		14ms/115VAC at full load							
INPUT	VOLTAGE RANGE Note4	85 - 264VAC		120 - 370VDC						
	FREQUENCY RANGE	47 - 63Hz								
	POWER FACTOR (Typ.)	PF>0.95/230VAC		PF>0.98/115VAC at full load						
	EFFICIENCY (Typ.)	81%	83%	84%	88%	89%	89.5%	89.5%	90.5%	
	AC CURRENT (Typ.)	4.2A/115VAC	2.1A/230VAC	5.3A/115VAC	2.65A/230VAC					
	INRUSH CURRENT (Typ.)	20A/115VAC		40A/230VAC						
	LEAKAGE CURRENT	<2mA / 240VAC								
PROTECTION	OVERLOAD	105 - 130% rated output power Protection type: Constant current limiting, recovers automatically after fault condition is removed								
	OVER VOLTAGE	3.8 - 4.5V	4.5 - 5.3V	5.75 - 6.75V	13.8 - 16.2V	18.8 - 21.8V	27.8 - 32.4V	32.9 - 38.3V	58.4 - 68V	
	OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down								
FUNCTION	REMOTE CONTROL	POWER ON: open or 0-0.8VDC between RC+(Pin 4)&RC-(Pin3) on CN100 POWER OFF: 4-10VDC between RC+(Pin 4)&RC-(Pin3) on CN100								
	REMOTE SENSE	Compensate voltage drop on the load wiring up to 0.3V								
ENVIRONMENT	FAN CONTROL (Typ.)	RTH2±50°C±10°C Fan on ; RTH2±40°C±10°C Fan off (Fan always on for 3.3-5V, Fan ON/OFF control for 12-48V)								
	WORKING TEMP.	-30 ~ +70°C (Refer to "Derating Curve")								
	WORKING HUMIDITY	20 ~ 90% RH non-condensing								
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH								
	TEMP. COEFFICIENT	±0.03%/°C (0 - 50°C)								
SAFETY & EMC (Note 4)	VIBRATION	10 - 500Hz, 2G 10min/1 cycle, 60min, each along X, Y, Z axes								
	SAFETY STANDARDS	UL60950-1, TUV EN60950-1, EAC TP TC 004, CCC GB4943.1, BSMI CNS14336-1 approved								
	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC I/P-FG: 2KVAC O/P-FG: 0.5KVAC								
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG: 100M Ohms / 500VDC / 25°C / 70% RH								
OTHERS	EMC EMISSION	Compliance to EN55032 (CISPR32) Class B, EN61000-3-2-3, EAC TP TC 020, GB/T 9254, CNS13438 Class B								
	EMC IMMUNITY	Compliance to EN61000-4-2, 3.4, 5.8, 8.11, EN55024, EN61000-6-2, EN61204-3 heavy industry level, criteria A, EAC TP TC 020								
	MTBF	187.7K hrs min. MIL-HDBK-217F (25°C)								
	DIMENSION	230*127*40.5mm (L*W*H)								

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0





### 3 Immunity

The EUT has been tested in conformity with the standards EN 55024:2010+A1:2015, CISPR 24:2015 and AS/NZS CISPR 24:2013 (immunity) concerning susceptibility and transient, conducted and radiated disturbances including electrostatic discharges.

#### 3.1 Performance criteria

The general principles (performance criteria) for the evaluation of the immunity test results are given below. The details are in EN 55024:2010+A1:2015, CISPR 24:2015 and AS/NZS CISPR 24:2013.

**Performance Criterion A:** The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended.

**Performance Criterion B:** The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of function) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed, however, no change of actual operating state or stored data is allowed.

**Performance Criterion C:** Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.



# EMI Test Lab LLC


Electro Magnetic Interference Testing  
EmiTestLab.com

## 3.2 Enclosure Port

### 3.2.1 Radio-frequency electromagnetic field. Amplitude modulated.

The susceptibility of the EUT to radio-frequency electromagnetic fields has been tested in conformity with and according to the criteria as stated below.


Basic standard	:	CISPR 24:2015
Test setup	:	EN 61000-4-3
Frequency range	:	80 MHz to 1000 MHz
Field strength level	:	3 V/m (selected w/o modulation, applied w/mod.)
Modulation	:	1 kHz AM modulation, 80% depth
Performance criteria	:	Criteria A

Results of the measurements concerning the susceptibility of the EUT to radio-frequency electromagnetic fields	<b><u>PASS Criteria A</u></b>
Name of Test Engineer:	Dennis King
Signature:	
Date:	27 May 2019
Remarks: <b><u>No loss of performance was observed during and after the test, all sides and both antenna polarizations meet Performance Criteria A.</u></b> <b><u>Radiated Immunity Summary:</u></b> <b><u>Configuration :The printer was running test software during the entire test using the usb cable connected to a laptop: PASS 3 V/M</u></b> <b><u>No loss of function or data was detected during the testing.</u></b>	

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0

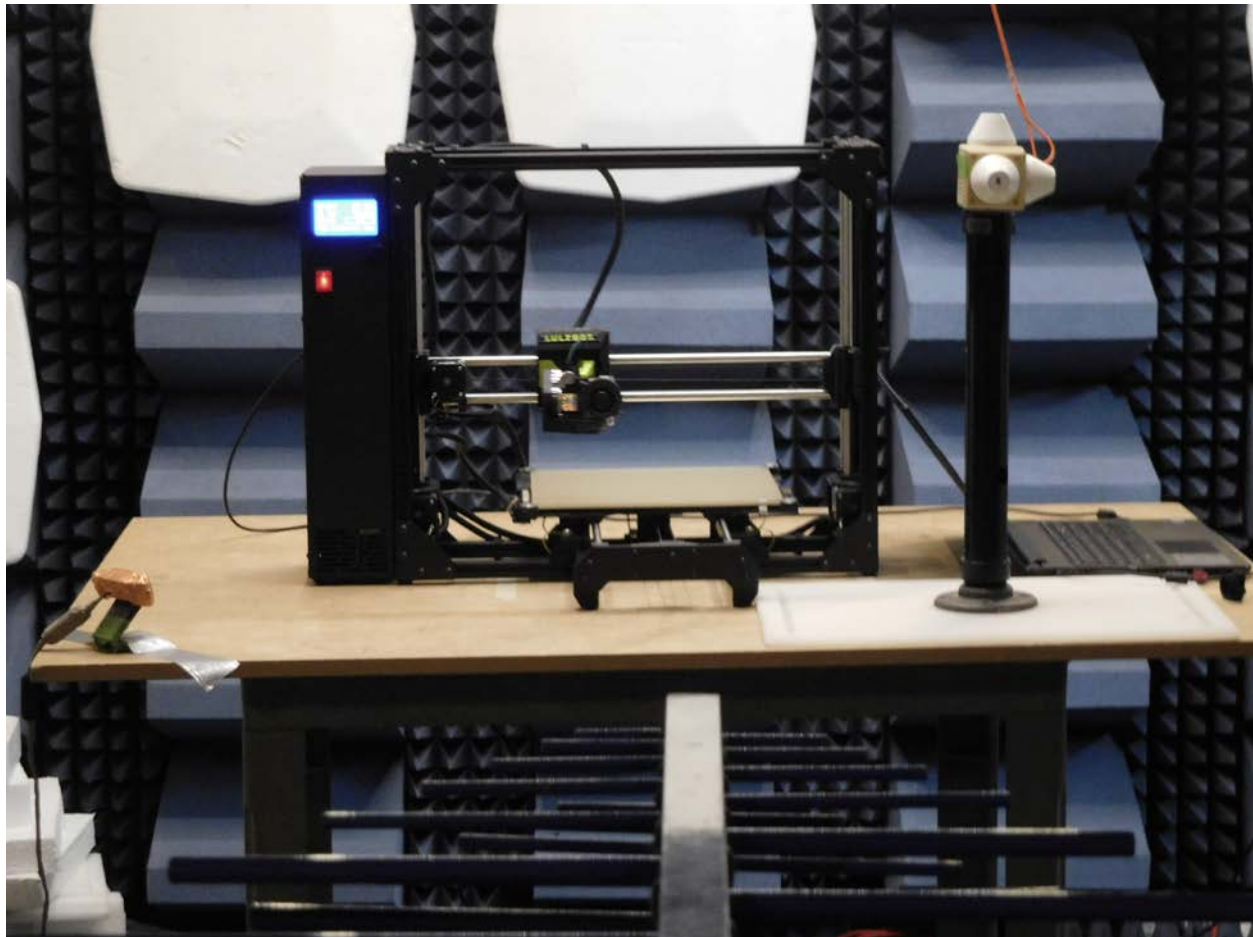

**Radiated immunity test setup – 80-1,000 MHz**

**All 4 sides, Vertical and Horizontal were checked at 3 V/M  
No errors were detected - passing Criteria A.**

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com

Revision 1.0




## EMI Test Lab LLC

Electro Magnetic Interference Testing  
EmiTestLab.com

### 3.2.2 Electrostatic discharge

The susceptibility of the EUT to electrostatic discharge was tested.

Basic standard : CISPR 24:2015  
Test setup : EN 61000-4-2  
Test levels : +- 2,4kV and +- 8 kV air discharge  
                  +- 2kV and +- 4 kV contact discharge  
                  +- 2kV and +- 4 kV, indirect, horizontal and vertical  
                  coupling plane.  
Performance criteria : B

Results of the test concerning the susceptibility of the EUT to electrostatic discharges (enclosure port)	<b><u>Pass Criteria A</u></b>
Name of Test Engineer:	Dennis King
Signature:	
Date:	27 May 2019
Remarks: The printer continued to function as intended during the testing with no loss of data or function. <b>PASS Criteria A.</b>	

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.


Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0



*EMI Test Lab LLC*

Electro Magnetic Interference Testing  
EmiTestLab.com

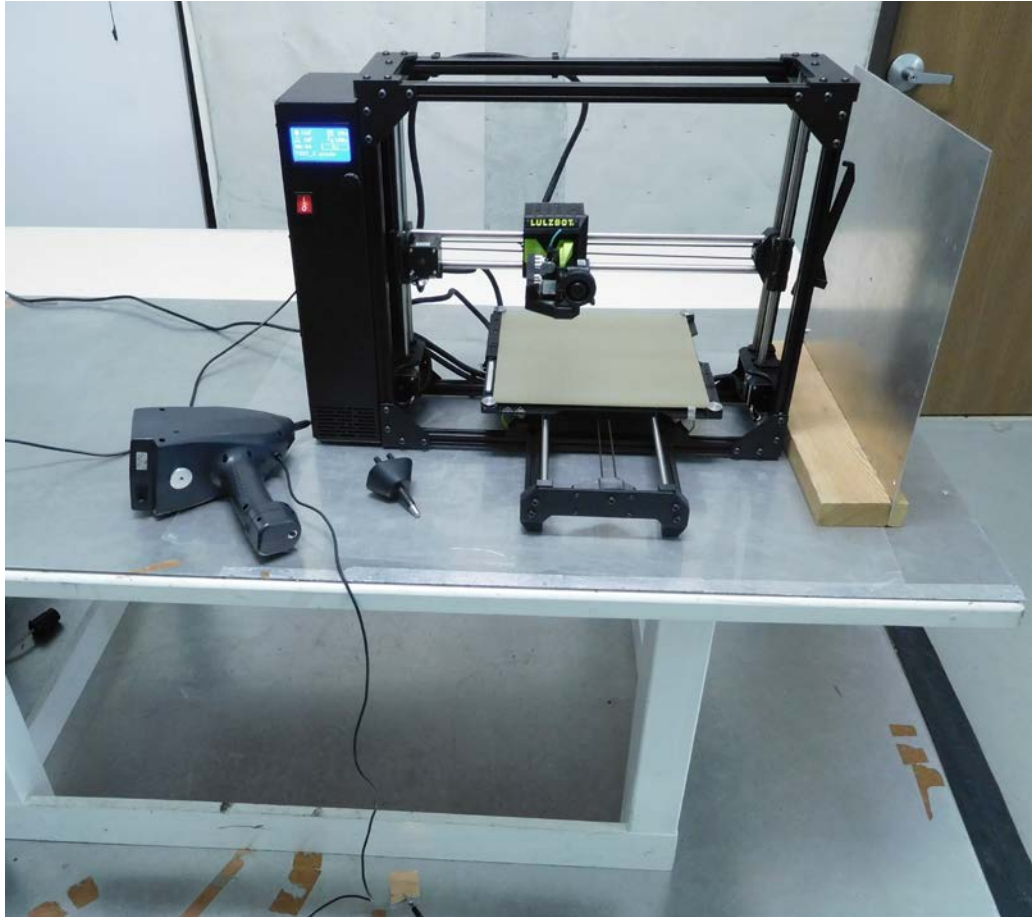


**ESD test setup per EN 61000-4-2  
Horizontal and Vertical coupling planes were also checked**

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com


Revision 1.0

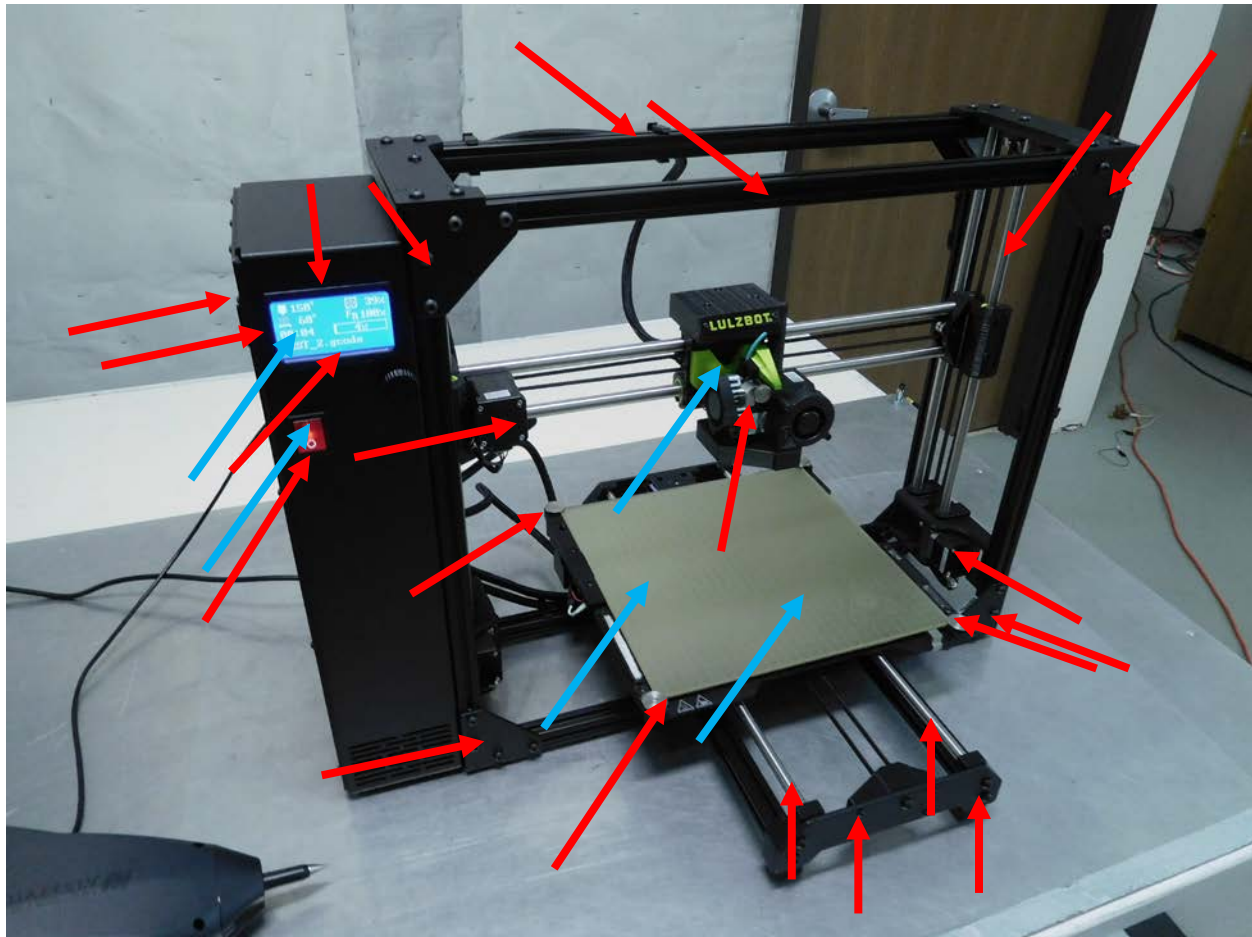

**ESD Test Setup per EN 61000-4-2:2009**

**Blue arrows are places that were checked for Air Discharge  
Red arrows are places that were checked for Contact Discharge**

**All metal parts that the user might touch were tested for contact discharge. All plastic areas that the user might touch were tested for air discharge.**

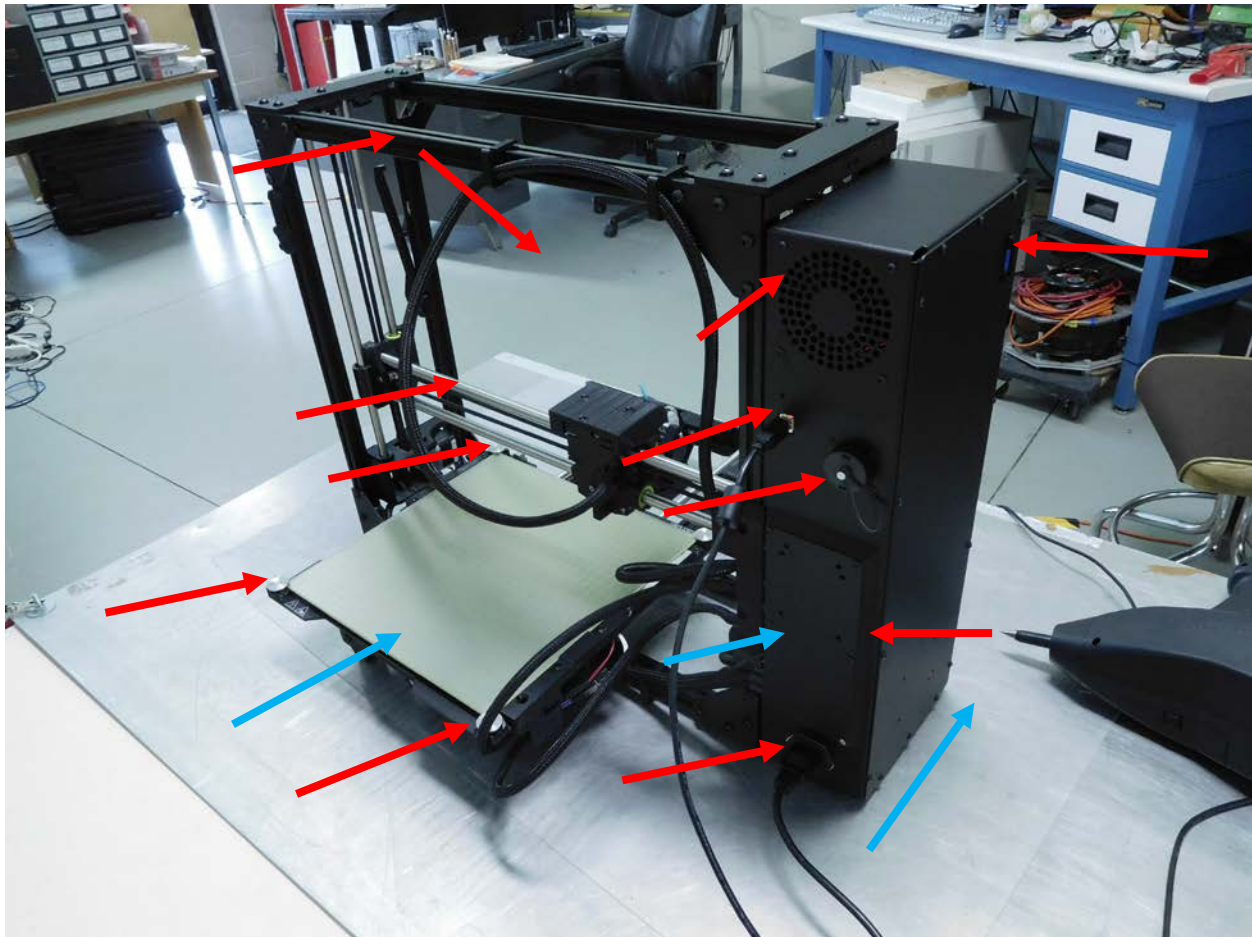

**ESD Test Setup per EN 61000-4-2:2009**

**Blue arrows are places that were checked for Air Discharge  
Red arrows are places that were checked for Contact Discharge**

**All metal parts that the user might touch were tested for contact discharge. All plastic areas that the user might touch were tested for air discharge.**

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com

Revision 1.0



**EMI Test Lab LLC**

**Electro Magnetic Interference Testing**  
**EmiTestLab.com**


**Signal ports including telecommunication ports**

**3.2.3 Radio-frequency (common mode). Amplitude modulated**

The susceptibility of the EUT to radio-frequency (common mode, amplitude modulated) signals to be tested in conformity with and according to the criteria as stated below

Basic Standard : CISPR 24:2015  
Test setup : EN 61000-4-6  
Frequency range : 0.15 – 80 MHz  
Test level : 3 Vrms  
Modulation : 1 kHz AM to a depth of 80%  
Source impedance : 150 Ohms  
Performance criteria : Criteria A

**Note: Conducted only on ports interfacing with cables whose total length, according to the manufacturer's functional specification, may exceed 3 meters.**

Results of the test concerning the susceptibility of the EUT to radio-frequency signals (common mode, AM modulated applied to signal and telecom ports)	<b><u>Not Applicable</u></b>
Name of Test Engineer:	Dennis King
Signature:	
Date:	27 May 2019
Remarks: No I/O cables 3 meters or longer. There are no interconnecting cables on the unit that exceed 3 meters. See the test plan.	

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMI Test Lab.com

Revision 1.0





## EMI Test Lab LLC


Electro Magnetic Interference Testing  
EmiTestLab.com

### 3.2.4 Fast Transients

The susceptibility of the EUT to fast transients has been tested in conformity with and according to the criteria as stated below.

Basic standard : CISPR 24:2015  
Test setup : EN 61000-4-4  
Test level : +- 0.5 KV  
Tr/Th : 5/50 nSec  
Repetition frequency : 5 kHz  
Performance criteria : Criteria B

**Note: Conducted only on ports interfacing with cables whose total length, according to the manufacturer's functional specification, may exceed 3 meters.**

Results of the test concerning the susceptibility of the EUT to fast transients	<b><u>Not Applicable</u></b>
Name of Test Engineer:	Dennis King
Signature:	
Date:	27 May 2019
Remarks:	There are no interconnecting cables on the unit that exceed 3 meters.

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0



## EMI Test Lab LLC


Electro Magnetic Interference Testing  
EmiTestLab.com

### 3.3 AC input and AC output power ports

#### 3.3.1 Radio-frequency (common mode, amplitude modulated)

The susceptibility of the EUT to radio-frequency signals (common mode, amplitude modulated), has been tested in conformity with and according to the criteria as stated below.

Basic standard	:	CISPR 24:2015
Test setup	:	EN 61000-4-6
Frequency range	:	0.15 – 80 MHz
Test level	:	3 Vrms
Source impedance	:	150 Ohms
Performance criteria	:	Criteria A

Results of the test concerning the susceptibility of the EUT to radio-frequency signals (common mode, amplitude modulated) – AC input and AC output power ports	<b><u>Pass Criteria A – 3 Vrms</u></b>
Name of Test Engineer:	Dennis King
Signature:	
Date:	27 May 2019
Remarks:	
Tested at 230 VAC 50 Hz – the EUT continued to operate as intended with no loss of data or function. <b>The TAZ WORKHORSE passed Criteria A, 3 Vrms PASS</b>	

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.


Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0




*EMI Test Lab LLC*

Electro Magnetic Interference Testing  
EmiTestLab.com

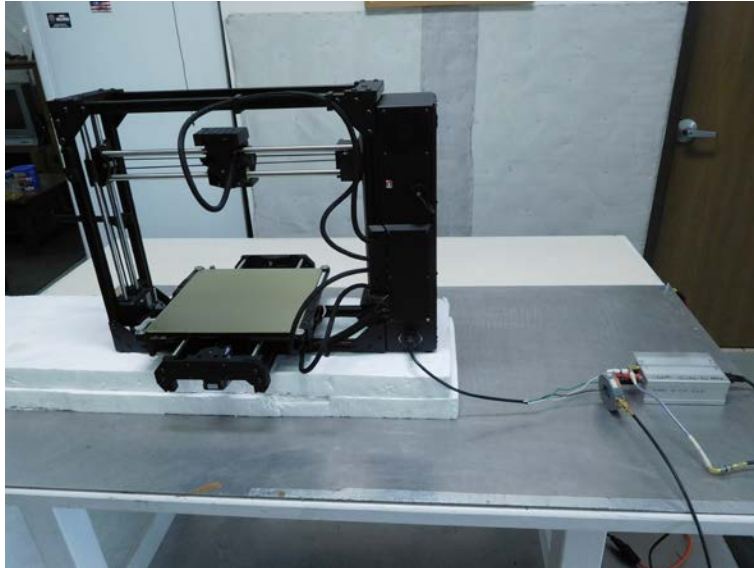

**AC power line conducted immunity setup per EN 61000-4-6  
The injected signal is monitored with the current clamp on the spectrum analyzer**

**The spectrum analyzer display is recorded below**

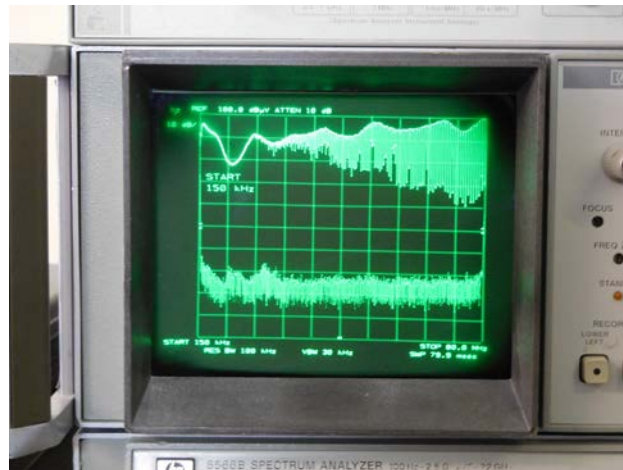

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com


Revision 1.0



**3.3.2 Surges**

The susceptibility of the EUT to surges has been tested in conformity with and according to the criteria as stated below

- Basic Standard : CISPR 24:2015
- Test setup : EN 61000-4-5
- Test level 1 : +- 0.5 kV, +- 1.0 kV, Differential mode
- Test level 2 : +- 0.5 kV, +- 1.0 kV, +- 2 kV Common Mode
- Tr/Th : 1.2/50(8/20) micro Seconds
- Number of pulses
- Per phase angle/voltage : 5
- Performance criteria : Criteria B
- Note : **Applicable only to input AC ports**

Results of the test concerning the susceptibility of the EUT to surges (AC input and AC output power ports)	<b><u>Pass Criteria A</u></b>
Name of Test Engineer:	Dennis King
Signature:	
Date:	27 May 2019
Remarks:	Tested at the highest voltage levels since this is a confirmation of the original passing data from the power supply manufacturer. <b>PASS</b>



## Surge Test Data

### ● Step #1 Setup

Filename: Internal\500V L-N			
**** Setup ****			
Peak Voltage:	+500 V	Repetition Rate:	1 min
Async:		Number of Surge:	10
Trigger:	Auto	Test Mode:	Standard
Output:	Line		
L1-N	ON	L1-PE	OFF
N-PE	OFF		
Test Stop and Line Off	External Source:	ON	
Monitor Line Current:	ON	Max Line Current	16 A
Monitor Peak Voltage min:	OFF	Peak Voltage min:	---
Monitor Peak Voltage max:	OFF	Peak Voltage max:	---
Monitor Peak Current min:	OFF	Peak Current min:	---
Monitor Peak Current max:	OFF	Peak Current max:	---
**** Test End ****			
Line:	OFF	Sound:	ON
**** Transition Function ****			
** Alternate Polarity:	ON		
No. of Surge Positive:	5	No. of Surge Negative	5
** Peak Voltage Transition:	OFF		
** Phase Transition:	OFF		

### ● Step #2 Setup

Filename: Internal\1 kV L-N			
**** Setup ****			
Peak Voltage:	+1.00 kV	Repetition Rate:	1 min
Line sync:	Transition	Number of Surge:	10
Trigger:	Auto	Test Mode:	Standard
Output:	Line		
L1-N	ON	L1-PE	OFF
N-PE	OFF		
**** EUT Fail ****			
EUT Fail Action:	Test Stop and Line Off	External Source:	ON
Monitor Line Current:	ON	Max Line Current	16 A
Monitor Peak Voltage min:	OFF	Peak Voltage min:	---

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0



# EMI Test Lab LLC

## Electro Magnetic Interference Testing EmiTestLab.com

<b>Monitor Peak Voltage max:</b>	OFF	<b>Peak Voltage max:</b>	---
<b>Monitor Peak Current min:</b>	OFF	<b>Peak Current min:</b>	---
<b>Monitor Peak Current max:</b>	OFF	<b>Peak Current max:</b>	---
<b>**** Test End ****</b>			
<b>Line:</b>	OFF	<b>Sound:</b>	ON
<b>**** Transition Function ****</b>			
<b>** Alternate Polarity:</b>	ON		
<b>No. of Surge Positive:</b>	5	<b>No. of Surge Negative</b>	5
<b>** Peak Voltage Transition:</b>	OFF		
<b>** Phase Transition:</b>	ON		
<b>Start Phase:</b>	0 deg	<b>Delta Phase:</b>	90 deg
<b>Stop Phase:</b>	270 deg		

## Logs

### ○ Sequence Log

<u>Step No.</u>	<u>Start Date</u>	<u>Start Time</u>	<u>End Date</u>	<u>End Time</u>	<u>Result</u>
#1	27.05.2019	10:26:01			
#1			27.05.2019	10:36:02	<b>PASSED</b>
#2	27.05.2019	10:40:57			
#2			27.05.2019	11:21:00	<b>PASSED</b>

### ● Step #1 AXOS Surge Log

<u>Date</u>	<u>Time</u>	<u>Coupling Path</u>	<u>Repetition Rate</u>	<u>Peak Voltage</u>	<u>Sync</u>	<u>U peak</u>	<u>I peak</u>	
27.05.2019	10:26:02	L1-N	1 min	+500 V	---	-2.39 kV	-0.05 kA	<i>Test Start</i>
27.05.2019	10:27:02	L1-N	1 min	+500 V	---	+0.40 kV	0.12 kA	
27.05.2019	10:28:02	L1-N	1 min	+500 V	---	+0.37 kV	0.11 kA	
27.05.2019	10:29:02	L1-N	1 min	+500 V	---	+0.40 kV	0.11 kA	
27.05.2019	10:30:02	L1-N	1 min	+500 V	---	+0.47 kV	0.11 kA	
27.05.2019	10:31:02	L1-N	1 min	+500 V	---	+0.38 kV	0.11 kA	
27.05.2019	10:32:02	L1-N	1 min	-500 V	---	-0.36 kV	-0.11 kA	
27.05.2019	10:33:02	L1-N	1 min	-500 V	---	-0.47 kV	-0.11 kA	
27.05.2019	10:34:02	L1-N	1 min	-500 V	---	-0.46 kV	-0.12 kA	
27.05.2019	10:35:02	L1-N	1 min	-500 V	---	-0.49 kV	-0.12 kA	
27.05.2019	10:36:02	L1-N	1 min	-500 V	---	-0.34 kV	-0.11 kA	
27.05.2019	10:36:02	L1-N	1 min	-500 V	---	-0.34 kV	-0.11 kA	<i>Test End</i>

Test Specification: CISPR 24, 32  
 Model Name of EUT: TAZ Workhorse  
 Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0



## ● Step #2 AXOS Surge Log

<u>Date</u>	<u>Time</u>	<u>Coupling Path</u>	<u>Repetition Rate</u>	<u>Peak Voltage</u>	<u>Sync</u>	<u>U peak</u>	<u>I peak</u>	
27.05.2019	10:40:57	L1-N	1 min	+1.00 kV	0 deg	+0.84 kV	0.23 kA	<i>Test Start</i>
27.05.2019	10:41:57	L1-N	1 min	+1.00 kV	0 deg	+0.83 kV	0.23 kA	
27.05.2019	10:42:57	L1-N	1 min	+1.00 kV	0 deg	+0.83 kV	0.23 kA	
27.05.2019	10:43:57	L1-N	1 min	+1.00 kV	0 deg	+0.84 kV	0.23 kA	
27.05.2019	10:44:57	L1-N	1 min	+1.00 kV	0 deg	+0.84 kV	0.23 kA	
27.05.2019	10:45:57	L1-N	1 min	+1.00 kV	0 deg	+0.84 kV	0.23 kA	
27.05.2019	10:45:58	L1-N	1 min	+1.00 kV	90 deg	+0.84 kV	0.23 kA	
27.05.2019	10:46:58	L1-N	1 min	+1.00 kV	90 deg	+0.56 kV	0.26 kA	
27.05.2019	10:47:58	L1-N	1 min	+1.00 kV	90 deg	+0.60 kV	0.26 kA	
27.05.2019	10:48:58	L1-N	1 min	+1.00 kV	90 deg	+0.60 kV	0.26 kA	
27.05.2019	10:49:58	L1-N	1 min	+1.00 kV	90 deg	+0.61 kV	0.26 kA	
27.05.2019	10:50:58	L1-N	1 min	+1.00 kV	90 deg	+0.61 kV	0.26 kA	
27.05.2019	10:50:58	L1-N	1 min	+1.00 kV	180 deg	+0.61 kV	0.26 kA	
27.05.2019	10:51:58	L1-N	1 min	+1.00 kV	180 deg	+0.85 kV	0.24 kA	
27.05.2019	10:52:58	L1-N	1 min	+1.00 kV	180 deg	+0.76 kV	0.24 kA	
27.05.2019	10:53:58	L1-N	1 min	+1.00 kV	180 deg	+0.76 kV	0.24 kA	
27.05.2019	10:54:58	L1-N	1 min	+1.00 kV	180 deg	+0.76 kV	0.24 kA	
27.05.2019	10:55:58	L1-N	1 min	+1.00 kV	180 deg	+0.76 kV	0.24 kA	
27.05.2019	10:55:58	L1-N	1 min	+1.00 kV	270 deg	+0.76 kV	0.24 kA	
27.05.2019	10:56:58	L1-N	1 min	+1.00 kV	270 deg	+0.93 kV	0.23 kA	
27.05.2019	10:57:58	L1-N	1 min	+1.00 kV	270 deg	+0.92 kV	0.23 kA	
27.05.2019	10:58:58	L1-N	1 min	+1.00 kV	270 deg	+0.92 kV	0.23 kA	
27.05.2019	10:59:58	L1-N	1 min	+1.00 kV	270 deg	+0.92 kV	0.23 kA	
27.05.2019	11:00:58	L1-N	1 min	+1.00 kV	270 deg	+0.92 kV	0.23 kA	
27.05.2019	11:00:58	L1-N	1 min	-1.00 kV	0 deg	+0.92 kV	0.23 kA	
27.05.2019	11:01:58	L1-N	1 min	-1.00 kV	0 deg	-0.78 kV	-0.24 kA	
27.05.2019	11:02:58	L1-N	1 min	-1.00 kV	0 deg	-0.76 kV	-0.24 kA	
27.05.2019	11:03:58	L1-N	1 min	-1.00 kV	0 deg	-0.76 kV	-0.24 kA	
27.05.2019	11:04:58	L1-N	1 min	-1.00 kV	0 deg	-0.76 kV	-0.24 kA	
27.05.2019	11:05:58	L1-N	1 min	-1.00 kV	0 deg	-0.78 kV	-0.24 kA	
27.05.2019	11:05:59	L1-N	1 min	-1.00 kV	90 deg	-0.78 kV	-0.24 kA	
27.05.2019	11:06:59	L1-N	1 min	-1.00 kV	90 deg	-0.92 kV	-0.23 kA	
27.05.2019	11:07:59	L1-N	1 min	-1.00 kV	90 deg	-0.94 kV	-0.24 kA	
27.05.2019	11:08:59	L1-N	1 min	-1.00 kV	90 deg	-0.94 kV	-0.24 kA	
27.05.2019	11:09:59	L1-N	1 min	-1.00 kV	90 deg	-0.94 kV	-0.24 kA	
27.05.2019	11:10:59	L1-N	1 min	-1.00 kV	90 deg	-0.94 kV	-0.24 kA	
27.05.2019	11:10:59	L1-N	1 min	-1.00 kV	180 deg	-0.94 kV	-0.24 kA	

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0



# EMI Test Lab LLC

## Electro Magnetic Interference Testing EmiTestLab.com

27.05.2019	11:11:59	L1-N	1 min	-1.00 kV	180 deg	-0.85 kV	-0.23 kA
27.05.2019	11:12:59	L1-N	1 min	-1.00 kV	180 deg	-0.77 kV	-0.23 kA
27.05.2019	11:13:59	L1-N	1 min	-1.00 kV	180 deg	-0.84 kV	-0.23 kA
27.05.2019	11:14:59	L1-N	1 min	-1.00 kV	180 deg	-0.88 kV	-0.23 kA
27.05.2019	11:15:59	L1-N	1 min	-1.00 kV	180 deg	-0.85 kV	-0.23 kA
27.05.2019	11:15:59	L1-N	1 min	-1.00 kV	270 deg	-0.85 kV	-0.23 kA
27.05.2019	11:16:59	L1-N	1 min	-1.00 kV	270 deg	-0.58 kV	-0.27 kA
27.05.2019	11:17:59	L1-N	1 min	-1.00 kV	270 deg	-0.62 kV	-0.27 kA
27.05.2019	11:18:59	L1-N	1 min	-1.00 kV	270 deg	-0.62 kV	-0.27 kA
27.05.2019	11:19:59	L1-N	1 min	-1.00 kV	270 deg	-0.61 kV	-0.27 kA
27.05.2019	11:20:59	L1-N	1 min	-1.00 kV	270 deg	-0.60 kV	-0.27 kA
27.05.2019	11:21:00	L1-N	1 min	-1.00 kV	270 deg	-0.60 kV	-0.27 kA <i>Test End</i>

### Results

#### ○ Sequence Result

○	→ Sequence Result (summary) :	<b>PASSED</b>
①	→ Immunity supervised :	<b>YES</b>
①	→ EUT Immunity Criteria :	<b>Normal performance of device</b>

#### ● Step Results

<u>Step No.</u>	<u>Step Type</u>	<u>Generator</u>	<u>Filename</u>	<u>Comments</u>	<u>Result</u>
#1	TEST	AXOS	Internal\500V L-N		<b>PASSED</b>
#2	TEST	AXOS	Internal\1 kV L-N		<b>PASSED</b>

Test Specification: CISPR 24, 32  
 Model Name of EUT: TAZ Workhorse  
 Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0





#	Date	Time	Coupling Path	Repetition Rate	Peak Voltage	Sync	U peak	I peak
#1	27.05.2019	17:51:26						
#1				27.05.2019	19:11:29	PASSED		

## 1 ● Step #1 AXOS Surge Log

2	3	4	Repetition Rate	Peak Voltage	Sync	U peak	I peak	5	
#	Date	Time	Coupling Path						
	27.05.2019	17:51:26	L1-PE	1 min	+2.00 kV	0 deg	+0.00 kV	0.00 kA	Test Start
	27.05.2019	17:52:27	L1-PE	1 min	+2.00 kV	0 deg	+2.49 kV	0.04 kA	
	27.05.2019	17:53:27	L1-PE	1 min	+2.00 kV	0 deg	+2.50 kV	0.04 kA	
	27.05.2019	17:54:27	L1-PE	1 min	+2.00 kV	0 deg	+2.47 kV	0.05 kA	
	27.05.2019	17:55:27	L1-PE	1 min	+2.00 kV	0 deg	+2.46 kV	0.05 kA	
	27.05.2019	17:56:27	L1-PE	1 min	+2.00 kV	0 deg	+2.46 kV	0.05 kA	
	27.05.2019	17:56:27	L1-PE	1 min	+2.00 kV	90 deg	+2.46 kV	0.05 kA	
	27.05.2019	17:57:27	L1-PE	1 min	+2.00 kV	90 deg	+2.33 kV	0.05 kA	
	27.05.2019	17:58:27	L1-PE	1 min	+2.00 kV	90 deg	+2.29 kV	0.05 kA	
	27.05.2019	17:59:27	L1-PE	1 min	+2.00 kV	90 deg	+2.35 kV	0.05 kA	
	27.05.2019	18:00:27	L1-PE	1 min	+2.00 kV	90 deg	+2.36 kV	0.05 kA	
	27.05.2019	18:01:27	L1-PE	1 min	+2.00 kV	90 deg	+2.32 kV	0.05 kA	
	27.05.2019	18:01:27	L1-PE	1 min	+2.00 kV	180 deg	+2.32 kV	0.05 kA	
	27.05.2019	18:02:27	L1-PE	1 min	+2.00 kV	180 deg	+2.47 kV	0.05 kA	
	27.05.2019	18:03:27	L1-PE	1 min	+2.00 kV	180 deg	+2.49 kV	0.05 kA	
	27.05.2019	18:04:27	L1-PE	1 min	+2.00 kV	180 deg	+2.51 kV	0.05 kA	
	27.05.2019	18:05:27	L1-PE	1 min	+2.00 kV	180 deg	+2.50 kV	0.05 kA	
	27.05.2019	18:06:27	L1-PE	1 min	+2.00 kV	180 deg	+2.51 kV	0.04 kA	
	27.05.2019	18:06:27	L1-PE	1 min	+2.00 kV	270 deg	+2.51 kV	0.04 kA	
	27.05.2019	18:07:27	L1-PE	1 min	+2.00 kV	270 deg	+2.47 kV	0.05 kA	
	27.05.2019	18:08:27	L1-PE	1 min	+2.00 kV	270 deg	+2.48 kV	0.05 kA	
	27.05.2019	18:09:27	L1-PE	1 min	+2.00 kV	270 deg	+2.48 kV	0.05 kA	
	27.05.2019	18:10:27	L1-PE	1 min	+2.00 kV	270 deg	+2.49 kV	0.05 kA	
	27.05.2019	18:11:27	L1-PE	1 min	+2.00 kV	270 deg	+2.51 kV	0.04 kA	
	27.05.2019	18:11:27	L1-PE	1 min	-2.00 kV	0 deg	+2.51 kV	0.04 kA	
	27.05.2019	18:12:27	L1-PE	1 min	-2.00 kV	0 deg	-2.49 kV	-0.05 kA	
	27.05.2019	18:13:27	L1-PE	1 min	-2.00 kV	0 deg	-2.56 kV	-0.04 kA	
	27.05.2019	18:14:27	L1-PE	1 min	-2.00 kV	0 deg	-2.57 kV	-0.04 kA	

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0



# EMI Test Lab LLC

## Electro Magnetic Interference Testing EmiTestLab.com

27.05.2019	18:15:27	L1-PE	1 min	-2.00 kV	0 deg	-2.58 kV	-0.04 kA
27.05.2019	18:16:27	L1-PE	1 min	-2.00 kV	0 deg	-2.57 kV	-0.04 kA
27.05.2019	18:16:27	L1-PE	1 min	-2.00 kV	90 deg	-2.57 kV	-0.04 kA
27.05.2019	18:17:27	L1-PE	1 min	-2.00 kV	90 deg	-2.60 kV	-0.05 kA
27.05.2019	18:18:27	L1-PE	1 min	-2.00 kV	90 deg	-2.59 kV	-0.05 kA
27.05.2019	18:19:27	L1-PE	1 min	-2.00 kV	90 deg	-2.59 kV	-0.05 kA
27.05.2019	18:20:27	L1-PE	1 min	-2.00 kV	90 deg	-2.57 kV	-0.05 kA
27.05.2019	18:21:27	L1-PE	1 min	-2.00 kV	90 deg	-2.58 kV	-0.05 kA
27.05.2019	18:21:28	L1-PE	1 min	-2.00 kV	180 deg	-2.58 kV	-0.05 kA
27.05.2019	18:22:28	L1-PE	1 min	-2.00 kV	180 deg	-2.56 kV	-0.04 kA
27.05.2019	18:23:28	L1-PE	1 min	-2.00 kV	180 deg	-2.57 kV	-0.04 kA
27.05.2019	18:24:28	L1-PE	1 min	-2.00 kV	180 deg	-2.56 kV	-0.04 kA
27.05.2019	18:25:28	L1-PE	1 min	-2.00 kV	180 deg	-2.57 kV	-0.04 kA
27.05.2019	18:26:28	L1-PE	1 min	-2.00 kV	180 deg	-2.56 kV	-0.04 kA
27.05.2019	18:26:28	L1-PE	1 min	-2.00 kV	270 deg	-2.56 kV	-0.04 kA
27.05.2019	18:27:28	L1-PE	1 min	-2.00 kV	270 deg	-2.46 kV	-0.06 kA
27.05.2019	18:28:28	L1-PE	1 min	-2.00 kV	270 deg	-2.41 kV	-0.06 kA
27.05.2019	18:29:28	L1-PE	1 min	-2.00 kV	270 deg	-2.41 kV	-0.06 kA
27.05.2019	18:30:28	L1-PE	1 min	-2.00 kV	270 deg	-2.39 kV	-0.05 kA
27.05.2019	18:31:28	L1-PE	1 min	-2.00 kV	270 deg	-2.39 kV	-0.06 kA
27.05.2019	18:31:28	N-PE	1 min	+2.00 kV	0 deg	-2.39 kV	-0.06 kA
27.05.2019	18:32:28	N-PE	1 min	+2.00 kV	0 deg	+2.42 kV	0.05 kA
27.05.2019	18:33:28	N-PE	1 min	+2.00 kV	0 deg	+2.44 kV	0.05 kA
27.05.2019	18:34:28	N-PE	1 min	+2.00 kV	0 deg	+2.46 kV	0.05 kA
27.05.2019	18:35:28	N-PE	1 min	+2.00 kV	0 deg	+2.47 kV	0.05 kA
27.05.2019	18:36:28	N-PE	1 min	+2.00 kV	0 deg	+2.48 kV	0.05 kA
27.05.2019	18:36:28	N-PE	1 min	+2.00 kV	90 deg	+2.48 kV	0.05 kA
27.05.2019	18:37:28	N-PE	1 min	+2.00 kV	90 deg	+2.35 kV	0.05 kA
27.05.2019	18:38:28	N-PE	1 min	+2.00 kV	90 deg	+2.25 kV	0.05 kA
27.05.2019	18:39:28	N-PE	1 min	+2.00 kV	90 deg	+2.34 kV	0.05 kA
27.05.2019	18:40:28	N-PE	1 min	+2.00 kV	90 deg	+2.31 kV	0.05 kA
27.05.2019	18:41:28	N-PE	1 min	+2.00 kV	90 deg	+2.31 kV	0.05 kA
27.05.2019	18:41:29	N-PE	1 min	+2.00 kV	180 deg	+2.31 kV	0.05 kA
27.05.2019	18:42:29	N-PE	1 min	+2.00 kV	180 deg	+2.47 kV	0.05 kA
27.05.2019	18:43:29	N-PE	1 min	+2.00 kV	180 deg	+2.44 kV	0.05 kA
27.05.2019	18:44:29	N-PE	1 min	+2.00 kV	180 deg	+2.43 kV	0.05 kA
27.05.2019	18:45:29	N-PE	1 min	+2.00 kV	180 deg	+2.47 kV	0.05 kA
27.05.2019	18:46:29	N-PE	1 min	+2.00 kV	180 deg	+2.44 kV	0.05 kA
27.05.2019	18:46:29	N-PE	1 min	+2.00 kV	270 deg	+2.44 kV	0.05 kA
27.05.2019	18:47:29	N-PE	1 min	+2.00 kV	270 deg	+2.50 kV	0.05 kA
27.05.2019	18:48:29	N-PE	1 min	+2.00 kV	270 deg	+2.51 kV	0.05 kA
27.05.2019	18:49:29	N-PE	1 min	+2.00 kV	270 deg	+2.51 kV	0.05 kA
27.05.2019	18:50:29	N-PE	1 min	+2.00 kV	270 deg	+2.52 kV	0.05 kA
27.05.2019	18:51:29	N-PE	1 min	+2.00 kV	270 deg	+2.52 kV	0.04 kA
27.05.2019	18:51:29	N-PE	1 min	-2.00 kV	0 deg	+2.52 kV	0.04 kA
27.05.2019	18:52:29	N-PE	1 min	-2.00 kV	0 deg	-2.54 kV	-0.05 kA
27.05.2019	18:53:29	N-PE	1 min	-2.00 kV	0 deg	-2.54 kV	-0.05 kA

Test Specification: CISPR 24, 32

Prepared by EMI Test Lab - EMI Test Lab.com

Model Name of EUT: TAZ Workhorse

Manufacturer: Aleph Objects Inc.

Revision 1.0



## EMI Test Lab LLC

### Electro Magnetic Interference Testing EmiTestLab.com


27.05.2019	18:54:29	N-PE	1 min	-2.00 kV	0 deg	-2.53 kV	-0.05 kA
27.05.2019	18:55:29	N-PE	1 min	-2.00 kV	0 deg	-2.51 kV	-0.05 kA
27.05.2019	18:56:29	N-PE	1 min	-2.00 kV	0 deg	-2.53 kV	-0.05 kA
27.05.2019	18:56:29	N-PE	1 min	-2.00 kV	90 deg	-2.53 kV	-0.05 kA
27.05.2019	18:57:29	N-PE	1 min	-2.00 kV	90 deg	-2.58 kV	-0.04 kA
27.05.2019	18:58:29	N-PE	1 min	-2.00 kV	90 deg	-2.59 kV	-0.04 kA
27.05.2019	18:59:29	N-PE	1 min	-2.00 kV	90 deg	-2.58 kV	-0.04 kA
27.05.2019	19:00:29	N-PE	1 min	-2.00 kV	90 deg	-2.59 kV	-0.04 kA
27.05.2019	19:01:29	N-PE	1 min	-2.00 kV	90 deg	-2.60 kV	-0.04 kA
27.05.2019	19:01:29	N-PE	1 min	-2.00 kV	180 deg	-2.60 kV	-0.04 kA
27.05.2019	19:02:29	N-PE	1 min	-2.00 kV	180 deg	-2.57 kV	-0.04 kA
27.05.2019	19:03:29	N-PE	1 min	-2.00 kV	180 deg	-2.58 kV	-0.04 kA
27.05.2019	19:04:29	N-PE	1 min	-2.00 kV	180 deg	-2.56 kV	-0.04 kA
27.05.2019	19:05:29	N-PE	1 min	-2.00 kV	180 deg	-2.54 kV	-0.04 kA
27.05.2019	19:06:29	N-PE	1 min	-2.00 kV	180 deg	-2.53 kV	-0.05 kA
27.05.2019	19:06:29	N-PE	1 min	-2.00 kV	270 deg	-2.53 kV	-0.05 kA
27.05.2019	19:07:29	N-PE	1 min	-2.00 kV	270 deg	-2.43 kV	-0.05 kA
27.05.2019	19:08:29	N-PE	1 min	-2.00 kV	270 deg	-2.40 kV	-0.05 kA
27.05.2019	19:09:29	N-PE	1 min	-2.00 kV	270 deg	-2.41 kV	-0.05 kA
27.05.2019	19:10:29	N-PE	1 min	-2.00 kV	270 deg	-2.40 kV	-0.05 kA
27.05.2019	19:11:29	N-PE	1 min	-2.00 kV	270 deg	-2.39 kV	-0.05 kA
27.05.2019	19:11:29	N-PE	1 min	-2.00 kV	270 deg	-2.39 kV	-0.05 kA

Test End

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0

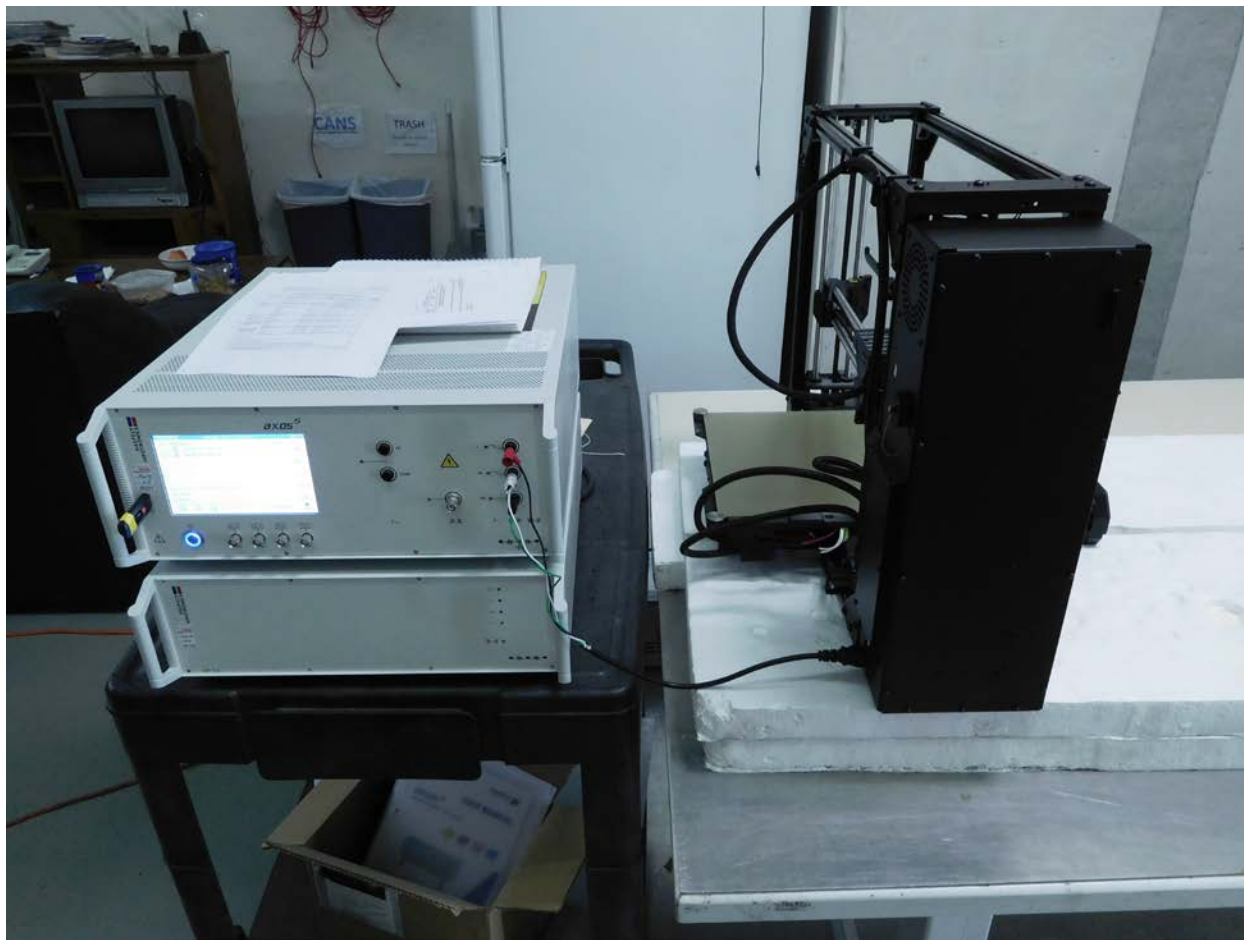

**Test setup according to EN 61000-4-5, Surge**




## EMI Test Lab LLC

Electro Magnetic Interference Testing  
EmiTestLab.com

### 3.2.4 Fast Transients

The susceptibility of the EUT to fast transients (common mode) has been tested in conformity with and according to the criteria as stated below.


Basic standard : CISPR 24:2015  
Test setup : EN 61000-4-4  
Test level : +- 1 KV  
Tr/Th : 5/50 nSec  
Repetition frequency : 5 kHz  
Performance criteria : Criteria B  
Note : **Conducted on the AC input.**

Results of the test concerning the susceptibility of the EUT to fast transients (common mode, AC input and AC output ports)	<b><u>Pass Criteria A</u></b>
Name of Test Engineer:	Dennis King
Signature:	
Date:	27 May 2019
Remarks:	Tested at 230 VAC 50 Hz . The unit continued to function as intended.

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0

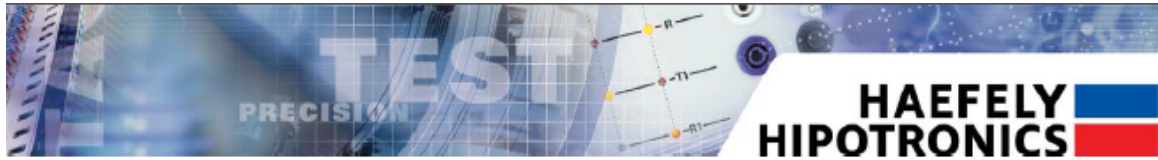

## Test Report

Description of used Test System : AXOS 5  
Sequence File Name : InternalITE- EFT Lvl 2 - Power ports.asq

## Setups


### ○ Sequence Setup (Sequence of ● Steps)

Step No.	Step Type	Test Type	Generator Name	Filename
#1	TEST	EFT	AXOS	Internal+1kv - 5khz-Line.asb
#2	TEST	EFT	AXOS	Internal-1kv - 5khz-Line.asb

### ● Step #1 Setup

Filename: Internal+1kv - 5khz-Line.asb


<b>**** Setup ****</b>			
Peak Voltage:	+1.00 kV	Burst Duration:	750 µs
Repetition Frequency:	5.0 kHz	Burst Period:	300 ms
Async:		Test Time:	1 min
Burst Mode:	Normal	Trigger:	Auto
Test Mode:	Standard		
Output:	Line		
L1-GND	ON	N-GND	ON
PE-GND	ON	L1N-GND	ON
L1PE-GND	ON	NPE-GND	ON
L1NPE-GND	ON		
<b>**** EUT Fail ****</b>			
EUT Fail Action:	Test Stop and Line Off	External Source:	ON
Monitor Line Current:	OFF	Max Line Current:	---
<b>**** Test End ****</b>			
Line:	OFF	Sound:	ON
<b>**** Transition Function ****</b>			
** Alternate Polarity:	OFF		
** Peak Voltage Transition:	OFF		
** Repetition Freq. Transition:	OFF		
** Phase Transition:	OFF		

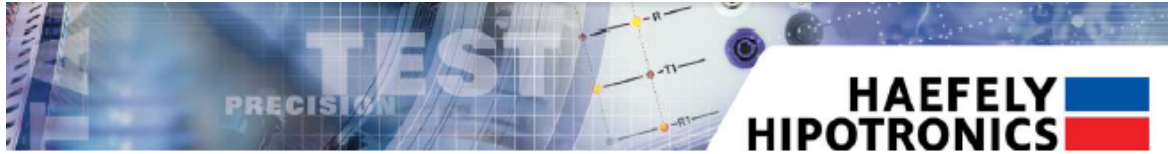

● Step #2 Setup

Filename: Internall-1kv - 5khz-Line.asb

**** Setup ****			
Peak Voltage:	-1.00 kV	Burst Duration:	750 $\mu$ s
Repetition Frequency:	5.0 kHz	Burst Period:	300 ms
Async:		Test Time:	1 min
Burst Mode:	Normal	Trigger:	Auto
Test Mode:	Standard		
Output:	Line		
L1-GND	ON	N-GND	ON
PE-GND	ON	L1N-GND	ON
L1PE-GND	ON	NPE-GND	ON
L1NPE-GND	ON		
**** EUT Fail ****			
EUT Fail Action:	Test Stop and Line Off	External Source:	ON
Monitor Line Current:	OFF	Max Line Current	---
**** Test End ****			
Line:	OFF	Sound:	ON
**** Transition Function ****			
** Alternate Polarity:	OFF		
** Peak Voltage Transition:	OFF		
** Repetition Freq. Transition:	OFF		
** Phase Transition:	OFF		

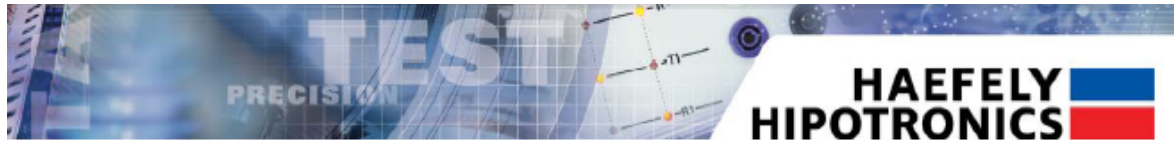

## Logs

### Sequence Log

Step No.	Start Date	Start Time	End Date	End Time	Result
#1	27.05.2019	11:09:35			
#1			27.05.2019	11:17:02	PASSED
#2	27.05.2019	11:17:05			
#2			27.05.2019	11:24:32	PASSED


### Step #1 AXOS EFT / Burst Log

Date	Time	Coupling Path	Peak Voltage	Repetition Frequency	Burst Period	Burst-duration	Sync
27.05.2019	11:09:35	L1-GND	+1.00 kV	5.0 kHz	300 ms	750 µs	---
<i>Test Start</i>							
27.05.2019	11:10:40	N-GND	+1.00 kV	5.0 kHz	300 ms	750 µs	---
27.05.2019	11:11:44	PE-GND	+1.00 kV	5.0 kHz	300 ms	750 µs	---
27.05.2019	11:12:48	L1N-GND	+1.00 kV	5.0 kHz	300 ms	750 µs	---
27.05.2019	11:13:52	L1PE-GND	+1.00 kV	5.0 kHz	300 ms	750 µs	---
27.05.2019	11:14:56	NPE-GND	+1.00 kV	5.0 kHz	300 ms	750 µs	---
27.05.2019	11:16:01	L1NPE-GND	+1.00 kV	5.0 kHz	300 ms	750 µs	---
27.05.2019	11:17:02	L1NPE-GND	+1.00 kV	5.0 kHz	300 ms	750 µs	---
<i>Test End</i>							

### Step #2 AXOS EFT / Burst Log

Date	Time	Coupling Path	Peak Voltage	Repetition Frequency	Burst Period	Burst-duration	Sync
27.05.2019	11:17:05	L1-GND	-1.00 kV	5.0 kHz	300 ms	750 µs	---
27.05.2019	11:18:10	N-GND	-1.00 kV	5.0 kHz	300 ms	750 µs	---
27.05.2019	11:19:14	PE-GND	-1.00 kV	5.0 kHz	300 ms	750 µs	---
27.05.2019	11:20:18	L1N-GND	-1.00 kV	5.0 kHz	300 ms	750 µs	---
27.05.2019	11:21:22	L1PE-GND	-1.00 kV	5.0 kHz	300 ms	750 µs	---
27.05.2019	11:22:26	NPE-GND	-1.00 kV	5.0 kHz	300 ms	750 µs	---
27.05.2019	11:23:31	L1NPE-GND	-1.00 kV	5.0 kHz	300 ms	750 µs	---
27.05.2019	11:24:32	L1NPE-GND	-1.00 kV	5.0 kHz	300 ms	750 µs	---
<i>Test End</i>							



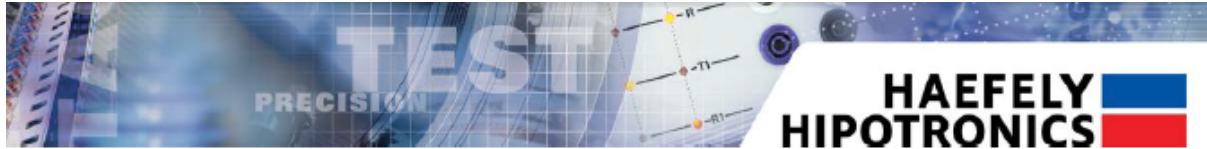


**Results**

○ **Sequence Result**

○ → Sequence Result (summary) : **PASSED**  
① → Immunity supervised : **YES**  
① → EUT Immunity Criteria : **Normal performance of device**

● **Step Results**

<u>Step No.</u>	<u>Step Type</u>	<u>Generator</u>	<u>Filename</u>	<u>Comments</u>	<u>Result</u>
#1	TEST	AXOS	Internal+1kv - 5khz-Line.asb		PASSED
#2	TEST	AXOS	Internal-1kv - 5khz-Line.asb		PASSED

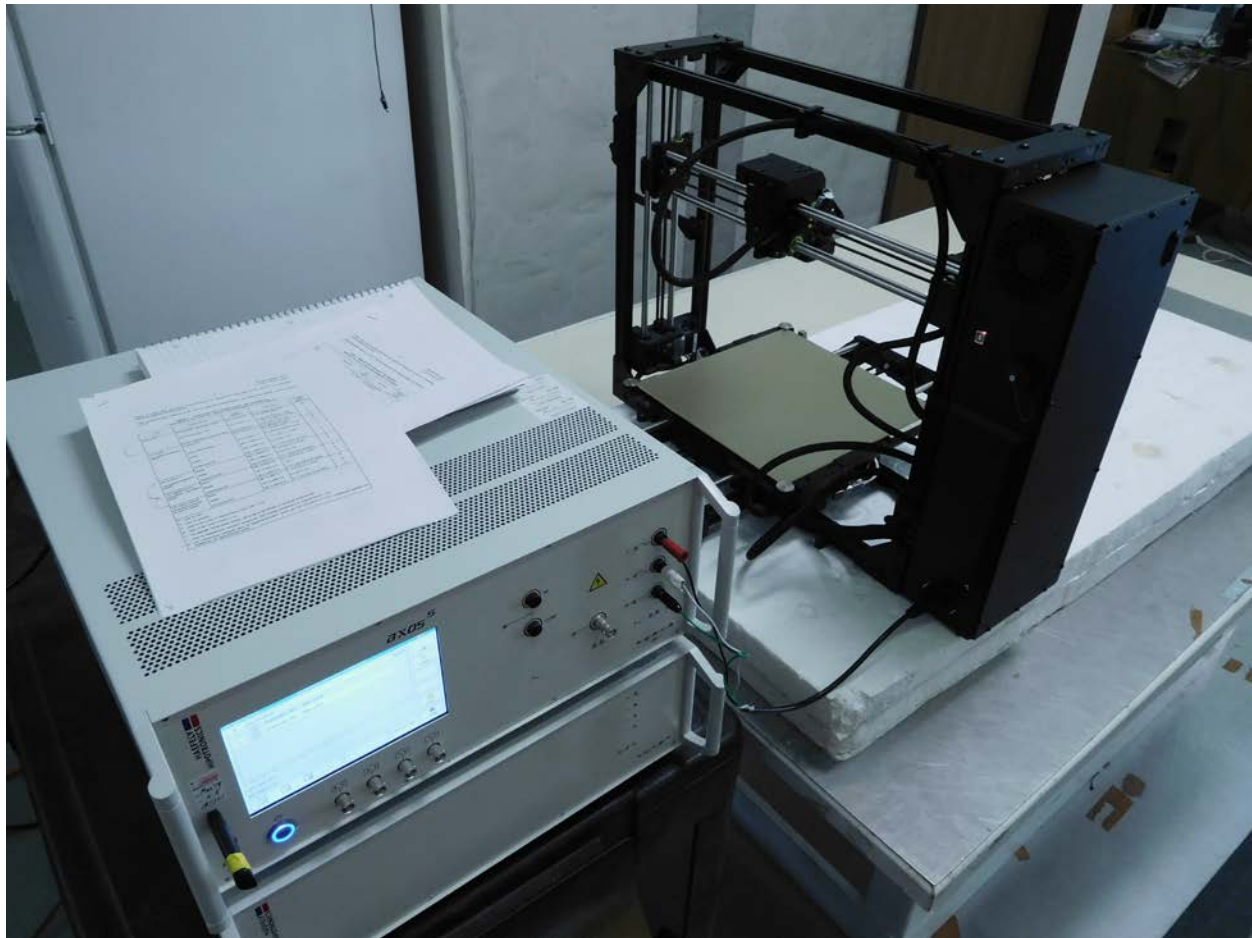


**Test Setup per EN 61000-4-4**




### 3.3.4 Voltage Dips and Interruptions

The susceptibility of the EUT to voltage dips and interruptions has been tested in conformity with and according to the criteria as stated below.

Basic Standard : CISPR 24:2015  
Test setup : EN 61000-4-11  
Test level (a) : Line at <5% of nominal for 0.5 cycles  
Test level (b) : Line at 70% of nominal for 25 cycles  
Test level (c) : Line at <5% of nominal for 250 cycles

Results of the test concerning the susceptibility of the EUT to voltage dips and interruptions – AC input and AC output ports	<b>Pass</b>
Name of Test Engineer:	Dennis King
Signature:	
Date:	27 May 2019
Remarks:	Tested at 230 VAC 50 Hz while printing. The unit continued to function as intended.

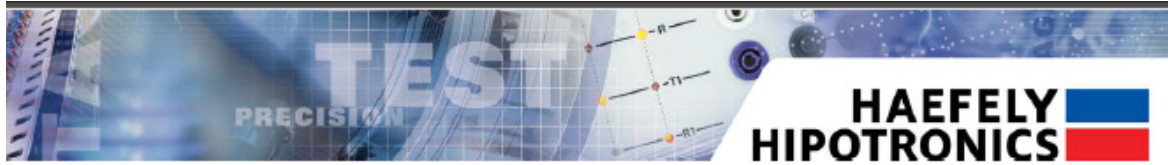

**Test Report**

**Description of used Test System :** AXOS 5 + DIP 116  
**Sequence File Name :** Internal\AC Dips - Basic enviro - ITE- Lab.asq

**Setups**

● **Sequence Setup (Sequence of ● Steps)**

Step No.	Step Type	Test Type	Generator Name	Filename
#1	TEST	VOLTAGE DIPS	AXOS	Internal\0% Open .5 P[half cyc].asd
#2	TEST	VOLTAGE DIPS	AXOS	Internal\0% Open 1 P[1 cyc].asd
#3	TEST	VOLTAGE DIPS	AXOS	Internal\70% 25 of 30 cyc.asd
#4	TEST	VOLTAGE DIPS	AXOS	Internal\0% 250 of 300 cyc.asd

● **Step #1 Setup**

Filename: Internal\0% Open .5 P[half cyc].asd

<b>**** Setup ****</b>			
Dip Voltage:	0%	Duration:	0.5 P
Line sync:	0 deg	Interval:	1 min
		Test Time:	3 min
Trigger:	Auto	Test Mode:	Standard
<b>**** EUT Fail ****</b>			
EUT Fail Action:	Test Stop and Line Off	External Source:	ON
Monitor Line Current:	ON	Max Line Current:	16 A
<b>**** Test End ****</b>			
Line:	OFF	Sound:	ON
<b>**** Transition Function ****</b>			
** Duration Transition:	OFF		
** Interval Transition:	OFF		
** Phase Transition:	OFF		



### ● Step #2 Setup

Filename: Internal0% Open 1 P[1 cyc].asd

**** Setup ****			
Dip Voltage:	0%	Duration:	1 P
		Interval:	1 min
Line sync:	0 deg	Test Time:	3 min
Trigger:	Auto	Test Mode:	Standard
**** EUT Fall ****			
EUT Fall Action:	Test Stop and Line Off	External Source:	ON
Monitor Line Current:	ON	Max Line Current	16 A
**** Test End ****			
Line:	OFF	Sound:	ON
**** Transition Function ****			
** Duration Transition:	OFF		
** Interval Transition:	OFF		
** Phase Transition:	OFF		

### ● Step #3 Setup

Filename: Internal70% 25 of 30 cyc.asd

**** Setup ****			
Dip Voltage:	70%	Duration:	30 P
		Interval:	1 min
Line sync:	0 deg	Test Time:	3 min
Trigger:	Auto	Test Mode:	Standard
**** EUT Fall ****			
EUT Fall Action:	Test Stop and Line Off	External Source:	ON
Monitor Line Current:	ON	Max Line Current	16 A
**** Test End ****			
Line:	OFF	Sound:	ON
**** Transition Function ****			
** Duration Transition:	OFF		
** Interval Transition:	OFF		
** Phase Transition:	OFF		

### ● Step #4 Setup

Filename: Internal0% 250 of 300 cyc.asd

**** Setup ****			
Dip Voltage:	0%	Duration:	300 P
		Interval:	1 min
Line sync:	0 deg	Test Time:	3 min
Trigger:	Auto	Test Mode:	Standard
**** EUT Fall ****			
EUT Fall Action:	Test Stop and Line Off	External Source:	ON
Monitor Line Current:	ON	Max Line Current	16 A
**** Test End ****			
Line:	OFF	Sound:	ON
**** Transition Function ****			
** Duration Transition:	OFF		
** Interval Transition:	OFF		
** Phase Transition:	OFF		



## Logs

### ● Sequence Log

<u>Step No.</u>	<u>Start Date</u>	<u>Start Time</u>	<u>End Date</u>	<u>End Time</u>	<u>Result</u>
#1	27.05.2019	11:31:53			
#1			27.05.2019	11:34:55	PASSED
#2	27.05.2019	11:34:56			
#2			27.05.2019	11:37:57	PASSED
#3	27.05.2019	11:37:59			
#3			27.05.2019	11:41:00	PASSED
#4	27.05.2019	11:41:02			
#4			27.05.2019	11:44:03	PASSED

### ● Step #1 AXOS Voltage Dips Log

<input type="checkbox"/> Date	<input checked="" type="radio"/> Time	<u>Duration</u>	<u>Interval</u>	<u>Sync</u>	
27.05.2019	11:31:53	0.5 P	1 min	0 deg	Test Start
27.05.2019	11:34:55	0.5 P	1 min	0 deg	Test End

### ● Step #2 AXOS Voltage Dips Log


<input type="checkbox"/> Date	<input checked="" type="radio"/> Time	<u>Duration</u>	<u>Interval</u>	<u>Sync</u>	
27.05.2019	11:34:56	1 P	1 min	0 deg	Test Start
27.05.2019	11:37:57	1 P	1 min	0 deg	Test End

### ● Step #3 AXOS Voltage Dips Log

<input type="checkbox"/> Date	<input checked="" type="radio"/> Time	<u>Duration</u>	<u>Interval</u>	<u>Sync</u>	
27.05.2019	11:37:59	30 P	1 min	0 deg	Test Start
27.05.2019	11:41:00	30 P	1 min	0 deg	Test End

### ● Step #4 AXOS Voltage Dips Log

<input type="checkbox"/> Date	<input checked="" type="radio"/> Time	<u>Duration</u>	<u>Interval</u>	<u>Sync</u>	
27.05.2019	11:41:02	300 P	1 min	0 deg	Test Start
27.05.2019	11:44:03	300 P	1 min	0 deg	Test End

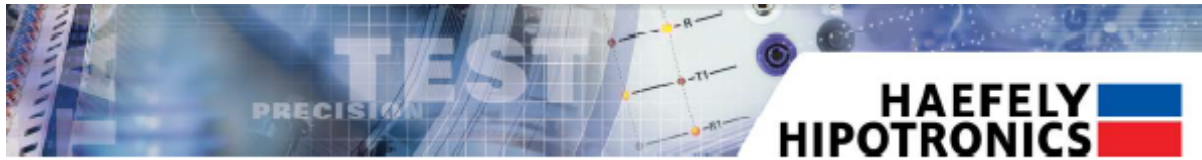


**Results**

● **Sequence Result**

● → Sequence Result (summary) : **PASSED**  
① → Immunity supervised : **YES**  
① → EUT Immunity Criteria : **Normal performance of device**

● **Step Results**

<u>Step No.</u>	<u>Step Type</u>	<u>Generator</u>	<u>Filename</u>	<u>Comments</u>	<u>Result</u>
#1	TEST	AXOS	Internal\0% Open .5 P[half cyc].asd		PASSED
#2	TEST	AXOS	Internal\0% Open 1 P[1 cyc].asd		PASSED
#3	TEST	AXOS	Internal\70% 25 of 30 cyc.asd		PASSED
#4	TEST	AXOS	Internal\0% 250 of 300 cyc.asd		PASSED

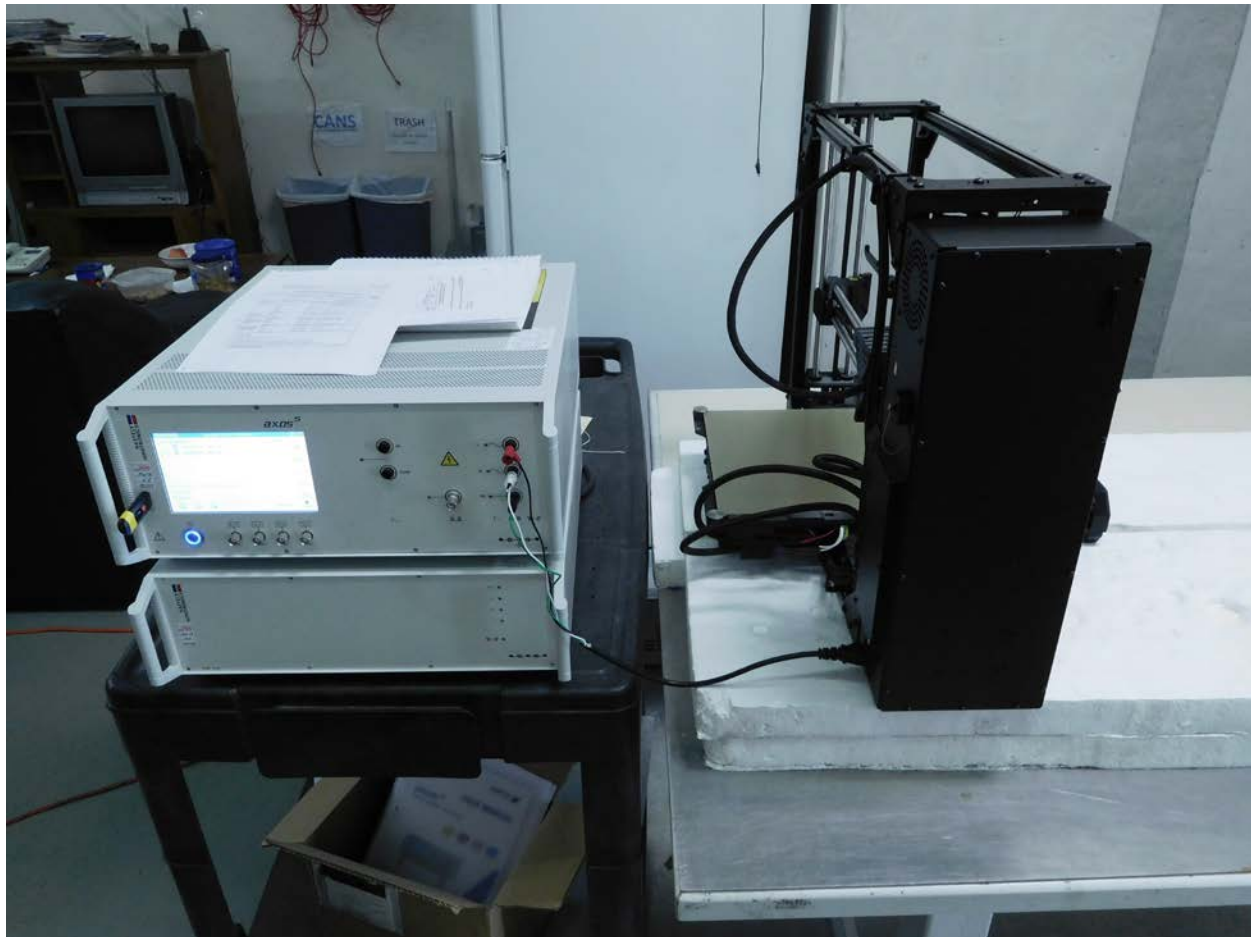

**Test setup according to EN 61000-4-11**






**EMI Test Lab LLC**

**Electro Magnetic Interference Testing**  
**EmiTestLab.com**

### 3.3.5 Power Frequency Magnetic Fields

The susceptibility of the EUT to power frequency magnetic fields has been tested in conformity with and according to the criteria as stated below.

Basic Standard : CISPR 24:2015  
Test setup : EN 61000-4-8  
Test level : 3 Amps per meter, X,Y and Z axis

Results of the test concerning the susceptibility of the EUT to	<b><u>Not applicable</u></b>
Name of Test Engineer:	Dennis King
Signature:	
Date:	27 May 2019
Remarks:	Due to previous experience and magnetic field testing with this line of 3D printers there are no magnetically sensitive components in the system. Per the standard this test is not required.

Test Specification: CISPR 24, 32  
Model Name of EUT: TAZ Workhorse  
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0



*EMI Test Lab LLC*

Electro Magnetic Interference Testing  
EmiTestLab.com

#### **4.0 Modifications**

No modifications required at the time of the compliance testing.



**5.0 Test equipment and Environmental Conditions**

All tests were conducted within parameters specified for each test, for example >30% humidity for ESD. The lab temperature during all testing was between 72-74 degrees F.

All equipment used for testing has been calibrated or verified for cal using NIST traceable standards. Each piece of test equipment has a cal verification procedure that is conducted before and after each test.

**Table of Test Equipment**

Equipment	Description and Test	Model	Serial number	Next cal due
EMC Compact Tester - Haefely	EFT, Surge, AC Dips and Interrupts	AXOS 5	185501	28 March 2020
HP Spectrum Analyzer	Used for Radiated and Conducted Emissions	8566B	2607A02760	3 June 2020
HP Quasi-Peak Adapter	Used for Radiated and Conducted Emissions	85650A	8574A00233	3 June 2020
HP/Agilent Spectrum Analyzer	Used for Radiated and Conducted Emissions	E7401A	US41110467	22 Jan 2021
HP/Agilent Spectrum Analyzer	Used for Radiated Emissions 1-22 GHz	8593E	3710A02875	9 Jan 2021
HP/Agilent Spectrum Analyzer	Used for Radiated and Conducted Emissions	E7401A	US40240440	9 Jan 2021
Com-Power transient Limiter	Conducted Emissions	HZ560	001	3 June 2020
RF Bay Pre-Amp	Radiated emissions – 100kHz to 10 GHz	LPA-10-20	0643	12 Dec 2019
GTEM	Radiated Emissions and Radiated Immunity	5317	9703-1209	25 April 2020 – Field Uniformity Cal per IEC 61000-4-20
3 Meter FAR – Fully Anechoic Room	Radiated Immunity and Emissions	N/A	FAR #1	15 October 2019 Field Uniformity per IEC/EN 61000-4-3 and Correlation data to GTEM
ComPower Horn Antenna	1-18 GHz – Radiated Immunity and Emissions	AH 118	071040	20 March 2020
Chase BiLog Antenna	Radiated Emissions and Immunity	CBL6111	1121	20 March 2020
Marconi Instruments – Signal Generator 10kHz	Radiated Immunity	2031	1196061031	20 October 2019

Test Specification: CISPR 24, 32

Prepared by EMI Test Lab - EMI Test Lab.com

Model Name of EUT: TAZ Workhorse

Manufacturer: Aleph Objects Inc.

Revision 1.0



- 2.7 GHz				
HP Signal Generator	Radiated Immunity	8657A	STD0578	3 May 2020
Amplifier Research .800 - 4.2 GHz Amp	Radiated Immunity - 1 GHz to 2.7 GHz	10S1G4	34516	4 May 2020
Antenna Research Associates - 100 Watt amplifier w/controller	Radiated Immunity - 80- 1000 MHz in the FAR	ARAPS/PC757LC ARA757LC-CE	587V7 587V7	20 October 2019
Kalmus Power Amplifier	Radiated Immunity 150kHz - 1 GHz - in the GTEM	747LC-CE	7894-1	12 May 2020
Amplifier Research E- Field probe	Radiated Immunity	FP 2000	12845	12 May 2020
Com-Power LISN	Conducted emissions	LI-115	241010	17 May 2020
Com-Power LISN	Conducted emissions	LI-115	241011	17 May 2020
California Instruments 1000 VA Power Source	Emissions and Immunity - used as a 100/120/230/240-VAC 50/60 Hz AC source	1001WP	L04788	4 June 2020
EMI Labs CDN	Conducted Immunity	EMICDN	001	9 Dec 2019
Hafely ESD Gun	Electro Static Discharge	ONYX16	181726	24 June 2020
KeyTek ECAT	Fast transients / Burst	E412	32612	5 June 2020
FCC Inc. RF Current probe	Monitor Conducted Immunity signal	F-33-1	423	9 Dec 2019
EMI Labs Mag Loop	Magnetic Loop Antenna	Mag100	80162	12 Dec 2019
Thermo Keytek CE Master	Surge/ AC Dips and Interrupts	CE Master	0405277	15 Dec 2019
Audio Frequency Helmholtz Coil - Tektronix Audio Signal Generator and Audio Amplifier Test System	50 Hz to 10 kHz Magnetic field, homogenous - Immunity test	Audio Magnetic Field Test System	EMI-HH001	20 August 2020

Test Specification: CISPR 24, 32  
 Model Name of EUT: TAZ Workhorse  
 Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMI Test Lab.com

Revision 1.0



**6.0 Measurement Uncertainty - Radiated Emissions example;**

Table of Uncertainty Calculation					
√	Contribution	Designation	Probability Distribution	k	Uncertainty (dB)
	Equipment Under Test Uncertainties	$U_{EUT}$			Note 1
√	Measuring Receiver Amplitude Accuracy	$U_{RXaccuracy}$	rectangular	$\sqrt{3}$	± 0.9
√	GTEM Uniformity	$U_{Uniformity}$	rectangular	$\sqrt{3}$	± 4.0
√	Secondary Field Components	$U_{Secondary}$			Excluded by Test Method
√	Mismatch Uncertainty-GTEM to Pre-Amplifier	$U_{Mismatch}$	U-shaped	$\sqrt{2}$	+0.63 and -0.65
√	Mismatch Uncertainty-Pre-Amplifier to Spectrum Analyzer	$U_{Mismatch}$	U-shaped	$\sqrt{2}$	+0.92 and -1.03
√	System Sensitivity Error	$U_{Sensitivity}$	rectangular	$\sqrt{3}$	0.28
√	GTEM Electric-Field Frequency Response	$U_{E-Field}$	rectangular	$\sqrt{3}$	± 1.6
	Ambient Signal Uncertainty	$U_{Ambient}$			Not Significant
√	GTEM to OATS Correlation	$U_{Corr}$	rectangular	$\sqrt{3}$	±1.2
√	Septum Height Variation	$U_{Septum}$	normal	2	+0.72 and -0.82
	Coaxial Cable Temperature Variations	$U_{CableTemperature}$			Not Significant
√	Coaxial Cable Calibration	$U_{CableCalibration}$	rectangular	$\sqrt{3}$	±0.05
√	Pre-amplifier Calibration Uncertainty	$U_{Pre-Amp}$	rectangular	$\sqrt{3}$	±0.05
	Combined Uncertainty(dB) Positive Terms				2.77
	Combined Uncertainty(dB) Negative Terms				-2.75
	Expanded Uncertainty Positive Terms		Normal	2	5.54
	Expanded Uncertainty Negative Terms		Normal	2	-5.50



**Typical Measurement Uncertainty for the following Tests:**

The estimated combined standard uncertainty for ESD testing, EN 61000-4-2 is $\pm 4\%$
The estimated combined standard uncertainty for Radiated Immunity, EN 61000-4-3 is $\pm 2.7\text{dB}$
The estimated combined standard uncertainty for EFT/Burst, EN 61000-4-4 is $\pm 5.8\%$
The estimated combined standard uncertainty for Surge, EN 61000-4-5 is $\pm 8\%$
The estimated combined standard uncertainty for Conducted Immunity, EN 61000-4-6 is $\pm 1.5\text{ dB}$
The estimated combined standard uncertainty for Magnetic Fields, EN 61000-4-8 is $\pm 0.6\%$
The estimated combined standard uncertainty for Voltage Dips and Interrupts, EN 61000-4-11 is $\pm 4.3\%$
The estimated combined standard uncertainty for Conducted Emissions is $\pm 1.2\text{dB}$
The estimated combined standard uncertainty for Harmonic current and flicker is $\pm 11.6\%$



## 7.0 Test Plan

### Testing required

The LulzBot TAZ WORKHORSE 3D Printer will be tested for Radiated and Conducted emissions, Harmonics and Flicker and all applicable Immunity tests as required for the EMC portion of the CE Mark and the Australia / New Zealand EMC standards. Previous power supply testing may be used as applicable.

### Test Setup

The TAZ WORKHORSE will be operating using test software during all the testing.

The test software will be installed on an SD card, the program will be loaded from this drive.

The Printer will also be tested while connected and operated from a laptop through the usb cable supplied with the unit.

### Failure Criteria

If the unit stops working or the printing process is altered by the injected noise, this would be considered a failure.

### I/O cables

The unit has only one I/O cable, the USB cable that is used to control the printer from software installed on the host computer. There are no I/O cables on the unit 3 meters or longer.

### Status of the test unit

Beta build.



## **8.0 Conclusion**

**The Aleph Objects – TAZ Workhorse 3D Printer complies with the emissions standards:**

- 1. AS/NZS CISPR 32:2015**
- 2. EN 55032:2015**
- 3. EN 61000-3-2:2014**
- 4. EN 61000-3-3:2013**

**and the immunity standards:**

- 1. AS/NZS CISPR 24:2013**
- 2. EN 55024:2015**

**in the configurations and operating modes as stated in this test report.**

**End of Report**