



Creating selectability for your lighting applications



ProLED Select Indoor and Outdoor Product Guide



Table of Contents

Indoor Fixtures

ProLED Select Edgelit Panel Series	Page 2
ProLED Select Backlit Panel Series	Page 3
ProLED Select Slim Downlight Series	Page 4
ProLED Select Downlight Retrofit Series	Page 5
ProLED Select Linear Vaportight Series	Page 6
ProLED Select Volumetric Panel Series.....	Page 7
ProLED Select Commerical Downlight Retrofit Series ...	Page 8


Outdoor Fixtures

ProLED Select Flood Series	Page 9
ProLED Select Wallpack Series	Page 10
ProLED Select SekurPak Wallpack Series	Page 11
ProLED Select Benefits	Page 12

ProLED Select puts the power of field selectability in your hands.

Halco Lighting Technologies has a complete portfolio of ProLED Select fixtures for indoor and outdoor applications. Every product in the ProLED Select family allows for field selectability of color temperature, wattage or both. Designed with contractors in mind, the ProLED Select products feature easy-to-use switches and quality materials that make installation and on-the-job changes easy. Sleek designs and built to last - ProLED select fixtures are the perfect option for your next project!

Selecting desired CCT and Wattage on the ProLED Select fixtures is easy!

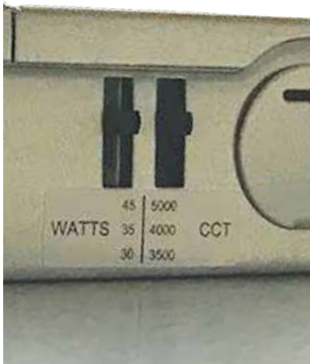

**ProLED Select
EdgeLit Panel**



**ProLED Select
Backlit Panel**



**ProLED Select
Slim Downlight**



**ProLED Select
Downlight Retrofit**



**ProLED Select
Commercial
Downlight Retrofit**



**ProLED Select
Flood Light**



**ProLED Select
Wallpack**



**ProLED Select
SekurPak Wallpack**



ProLED Select EdgeLit Panel Series

The ProLED Select EdgeLit Panel is the ideal solution where lighting preferences vary from space to space. It is Field Selectable, allowing the installer to select both the preferred light output and color temperature (via DIP Switch) on the product driver box.

- Selectable wattage: 25W, 30W, 35W, 40W, 45W
- Selectable color temperature: 3500K, 4000K, 5000K
- 0 -10V dimming
- Universal 120-277VAC
- L70 over 50,000 hours
- Die cast steel housing
- Lumen range: 3300 - 5500



Ordering Information

Product Code	Product Number	Product Description
14FSEPL/8DU	10330	FIELD SELECTABLE EDGE LIT PANEL; 1X4, 80 CRI, 0-10V DIMMING, 120-277V, SELECTABLE CCT: 3500K, 4000K, 5000K; SELECTABLE WATTAGE: 25W, 30W, 40W
22FSEPL/8DU	10331	FIELD SELECTABLE EDGE LIT PANEL; 2X2, 80 CRI, 0-10V DIMMING, 120-277V, SELECTABLE CCT: 3500K, 4000K, 5000K; SELECTABLE WATTAGE: 25W, 30W, 40W
24FSEPL/8DU	10332	FIELD SELECTABLE EDGE LIT PANEL; 2X4, 80 CRI, 0-10V DIMMING, 120-277V, SELECTABLE CCT: 3500K, 4000K, 5000K; SELECTABLE WATTAGE: 30W, 35W, 45W





ProLED Select Backlit Panel Series

ProLED Select Backlit panels are the perfect look and feel for your ceiling application featuring a lightweight, low-profile side mount driver design to save space during shipping and installation.

- Wattage: 1x4 & 2x2 - 30W
2x4 - 50W
- Selectable color temperature:
3500K, 4000K, 5000K
- 0 -10V dimming
- Universal 120-277VAC
- L70 over 50,000 hours
- Die cast aluminum housing
- Lumen range: 3300 - 5500



Ordering Information



Product Code	Product Number	Product Description
14FSBPL/30U8D	10363	FIELD SELECTABLE BACKLIT PANEL; 1X4, 80 CRI, 0-10V DIMMING, 120-277V, SELECTABLE CCT: 3500K, 4000K, 5000K
22FSBPL/30U8D	10364	FIELD SELECTABLE BACKLIT PANEL; 2X2, 80 CRI, 0-10V DIMMING, 120-277V, SELECTABLE CCT: 3500K, 4000K, 5000K
24FSBPL/50U8D	10365	FIELD SELECTABLE BACKLIT PANEL; 2X4, 80 CRI, 0-10V DIMMING, 120-277V, SELECTABLE CCT: 3500K, 4000K, 5000K



ProLED Select Slim Downlight Series

The ProLED Select Slim Downlight Series offers the ability to select between 5 color temperatures which essentially reduces 30 products down to just 6 SKU's. This innovative product is available in both round and square, 4 inch and 6 inch housings with three different lumen outputs.

- Wattage: 10W, 12W, 15W
- Selectable color temperature: 2700K, 3000K, 3500K, 4000K, 5000K
- 0 -10V dimming
- 120VAC
- L70 over 50,000 hours
- 4" and 6" models
- Wet Location Rated, ETL Listed, IC Rated
- Lumen range: 750 - 1100



Ordering Information



Product Code	Product Number	Product Description
FSDLS4FR10/CCT/LED	89093	Field Selectable Slim Downlight 4" 10W 2700K-5000K Dimmable JA-8 ProLED Select
FSDLS6FR12/CCT/LED	89094	Field Selectable Slim Downlight 6" 12W 2700K-5000K Dimmable JA-8 ProLED Select
FSDLS6FR15/CCT/LED	89095	Field Selectable Slim Downlight 6" 15W 2700K-5000K Dimmable JA-8 ProLED Select
FSDLS4FR10/SQ/CCT/LED	89096	Field Selectable Square Slim Downlight 4" 10W 2700K-5000K Dimmable JA-8 ProLED Select
FSDLS6FR12/SQ/CCT/LED	89097	Field Selectable Square Slim Downlight 6" 12W 2700K-5000K Dimmable JA-8 ProLED Select
FSDLS6FR15/SQ/CCT/LED	89098	Field Selectable Square Slim Downlight 6" 15W 2700K-5000K Dimmable JA-8 ProLED Select



ProLED Select Downlight Retrofit Series

The ProLED Select Downlight Retrofit Series replaces 10 products with just 2, allowing the user to select from 5 different color temperatures in either 4" or 5/6" sizes by simply using a switch on the back of the fixture.

- Wattage: 4" - 6.5W
6" - 9W, 11W
- Selectable color temperature: 2700K, 3000K, 3500K, 4000K, 5000K
- 0 -10V dimming
- 120VAC
- L70 over 50,000 hours
- 4" and 5-6" models
- Poly-carbonate housing
- Wet Location Rated, ETL Listed, IC Rated
- Lumen range: 550 - 1000



Ordering Information



Product Code	Product Number	Product Description
FSDL4FR6/CCT/LED	82983	4" ProLED Select Downlight Retrofit - 5 CCT Selectable
FSDL6FR9/CCT/LED	82984	5-6" ProLED Select Downlight Retrofit - 5 CCT Selectable
FSDL6FR11/CCT/LED	83985	5-6" ProLED Select Downlight Retrofit - 5 CCT Selectable
ADP/DL/GU24/LED	91003	GU24 Socket Adapter



ProLED Select Linear Vaportight Series

The ProLED Select Linear Vaportight provides on-target lighting in the most severe conditions. In 2, 4 and 8-foot lengths, this innovative product features both Wattage and CCT Selectability. The rugged durability of the ProLED Select LVPT coupled with Wattage and CCT Selectability makes this the most versatile Linear Vaportight fixtures on the market.

- Selectable color temperature: 3500K, 4000K, 5000K
- Wattage Selectable:
 - 2 - 20W, 25W, 30W
 - 4 - 40W, 50W, 60W
 - 8 - 60W, 75W, 90W
- 0 -10V dimming
- 120-277VAC
- L70 over 50,000 hours
- 6”and 8” models
- Poly-carbonate housing
- Wet Location Rated, ETL Listed and IC Rated
- Lumen range: 900 - 2300



Ordering Information



Product Code	Product Number	Product Description
LVPT-2-WS-CS-U	28090	LVPT-2-WS-CS-U 28090 ProLED Select Linear Vaportight 2' Field Selectable Wattage & CCT
LVPT-4-WS-CS-U	28091	LVPT-4-WS-CS-U 28091 ProLED Select Linear Vaportight 4' Field Selectable Wattage & CCT
LVPT-8-WS-CS-U	28092	LVPT-8-WS-CS-U 28092 ProLED Select Linear Vaportight 8' Field Selectable Wattage & CCT



ProLED Select Volumetric Panel Series

The ProLED Select Volumetric Panel Series provides an architectural, modern design with increased visual comfort and functionality. This innovative product features both Wattage and CCT Selectability to make this one of the most versatile Volumetric Panels on the market.

- Selectable Wattage: -1x4 15W, 19W, 24W, 29W
 -2 x 2 15W, 19W, 24W, 29W
 -2 x 4 24W, 29W, 32W, 39W
- Selectable Color Temperature
- 0-10V Dimming
- Direct Backlit Design
- 5 Year Warranty



Ordering Information



Product Code	Product Number	Product Description
14FSVPL/8DU	81779	ProLED Select Volumetric Panel 1x4 Selectable Wattage and CCT 0-10V Dimmable
22FSVPL/8DU	81780	ProLED Select Volumetric Panel 2x2 Selectable Wattage and CCT 0-10V Dimmable
24FSVPL/8DU	81781	ProLED Select Volumetric Panel 2x4 Selectable Wattage and CCT 0-10V Dimmable
14BPL/SMK	81782	1X4 Surface Mount Kit for Backlit Panels
22BPL/SMK	81783	2x2 Surface Mount Kit for Backlit Panels
24BPL/SMK	81784	2X4 Surface Mount Kit for Backlit Panels
BBU/EM8WU	10310	Emergency Battery Back Up 8W 120-277V



ProLED Select Commercial Downlight Retrofit Series

The ProLED Select Commercial Downlight Retrofit Series provides the perfect solution for 6" and 8" commercial retrofit projects that require flexibility in color and light output.

- Selectable color temperature: 3000K, 4000K, 5000K
- Wattage Selectable: 6" - 10W, 15W, 22W
8" - 12W, 20W, 30W
- 0 -10V dimming
- 120-277VAC
- L70 over 50,000 hours
- 6"and 8" models
- Poly-carbonate housing
- Wet Location Rated, ETL Listed and IC Rated
- Lumen range: 900 - 2300



Ordering Information



Product Code	Product Number	Product Description
FSCDL6/MV/010V/LED	82985	6" ProLED Select Commercial Downlight Retrofit
FSCDL8/MV/010V/LED	82986	8" ProLED Select Commercial Downlight Retrofit



ProLED Select Flood Series

The ProLED Select Flood Series combines performance, design, and the option to select between three color temperatures in one competitively priced fixture.

- Selectable color temperature: 3000K, 4000K, 5000K
- 7H x 6V NEMA beam spread
- 0 -10V dimming
- Universal 120-277VAC
- L70 over 100,000 hours
- Die cast aluminum housing
- Lumen range: 1400 - 19000



Ordering Information

Product Code	Product Number	Product Description
FLFS12/3CCTU/KN	10339	PROLED SELECT FLOOD; 12W, FIELD SELECTABLE CCT: 3000K, 4000K, 5000K; 120-277V, 1/2 IN THREADED KNUCKLE MOUNT
FLFS12/3CCTU/YK	10340	PROLED SELECT FLOOD; 12W, FIELD SELECTABLE CCT: 3000K, 4000K, 5000K; 120-277V, YOKE MOUNT
FLFS30/3CCTU/KN	10341	PROLED SELECT FLOOD; 30W, FIELD SELECTABLE CCT: 3000K, 4000K, 5000K; 120-277V, 1/2 IN THREADED KNUCKLE MOUNT
FLFS30/3CCTU/YK	10342	PROLED SELECT FLOOD; 30W, FIELD SELECTABLE CCT: 3000K, 4000K, 5000K; 120-277V, YOKE MOUNT
FLFS50/3CCTU/KN	10343	PROLED SELECT FLOOD; 50W, FIELD SELECTABLE CCT: 3000K, 4000K, 5000K; 120-277V, 1/2 IN THREADED KNUCKLE MOUNT
FLFS50/3CCTU/YK	10344	PROLED SELECT FLOOD; 50W, FIELD SELECTABLE CCT: 3000K, 4000K, 5000K; 120-277V, YOKE MOUNT
FLFS70/3CCTU/SF	10345	PROLED SELECT FLOOD; 70W, FIELD SELECTABLE CCT: 3000K, 4000K, 5000K; 120-277V, SLIPFITTER KNUCKLE MOUNT
FLFS70/3CCTU/YK	10346	PROLED SELECT FLOOD; 70W, FIELD SELECTABLE CCT: 3000K, 4000K, 5000K; 120-277V, YOKE MOUNT
FLFS100/3CCTU/SF	10347	PROLED SELECT FLOOD; 100W, FIELD SELECTABLE CCT: 3000K, 4000K, 5000K; 120-277V, SLIPFITTER KNUCKLE MOUNT
FLFS100/3CCTU/YK	10348	PROLED SELECT FLOOD; 100W, FIELD SELECTABLE CCT: 3000K, 4000K, 5000K; 120-277V, YOKE MOUNT
FL150/U50/SF	10349	HALCO LED FLOOD, 150W, 120-277V, 5000K, SLIPFITTER KNUCKLE MOUNT **Not CCT Selectable**
FL150/U50/YK	10350	HALCO LED FLOOD, 150W, 120-277V, 5000K, YOKE MOUNT **Not CCT Selectable**
PC/120-277	10141	BUTTON PHOTOCELL; 120-277

Learn more about ProLED Select products at www.halcolighting.com



ProLED Select Wallpack Series

The ProLED Select Wallpack Series provides the best value in the Commercial & Industrial Wallpack market and features the innovative option to select both Wattage and Color Temperature.

- Selectable wattage: 30W, 40W, 50W, 60W, 70W, 80W, 90W, 100W
- Selectable color temperature: 3000K, 4000K, 5000K
- Universal 120-277VAC
- L70 over 50,000 hours
- Type IV distribution
- Die cast aluminum housing and shatter resistant Borosilicate glass
- ½” knockouts on top and sides with hinged door frame
- UL Listed for wet locations
- Lumen range: 3600 – 12000



Ordering Information



Product Code	Product Number	Product Description
WPFS-LW/3CCTU	10352	FIELD SELECTABLE WATTAGE & CCT; LOW WATTAGE: 30W, 40W, 50W, 60W; CCT SELECT: 3000K, 4000K, 5000K; 120-277VAC; BRONZE
WPFS-HW/3CCTU	10353	FIELD SELECTABLE WATTAGE & CCT; HIGH WATTAGE: 70W, 80W, 90W, 100W; CCT SELECT: 3000K, 4000K, 5000K; 120-277VAC; BRONZE
PC/120-277	10141	BUTTON PHOTOCELL; 120-277VAC



ProLED Select SekurPak Wallpack Series

The ProLED Select SekurPak Wall Pack is a rugged luminaire that will provide high quality light for your exterior wall lighting needs. Field selectability allows installer to select optimal color temperature via a convenient dip switch. Installation is a breeze with a backplate that separates from the aluminum housing.

- 3 Wattages: 15W, 20W, 26W
- Selectable color temperature: 3000K, 4000K & 5000K (via Dip Switch)
- Outstanding performance with high efficacy
 - Up to 135 LPW
- Photocell standard
- IP 65 rated
- Architectural slim profile design
- Lumen range: 1900 – 3300



Ordering Information



Product Code	Product Number	Product Description
SKWP-15-FS-U	10450	SKWP, 15W, CCT Field Select, UNV 120-277
SKWP-20-FS-U	10451	SKWP, 20W, CCT Field Select, UNV 120-277
SKWP-26-FS-U	10452	SKWP, 26W, CCT Field Select, UNV 120-277



ProLED[™] S E L E C T

Benefits


Streamline Inventory Management

ProLED Select fixtures replace the need for multiple stationary SKUs. Fewer SKUs means better easier inventory management.



Reduce Warehouse Space

Field selectability means fewer SKUs which will reduce the number of fixtures you need to keep in stock.

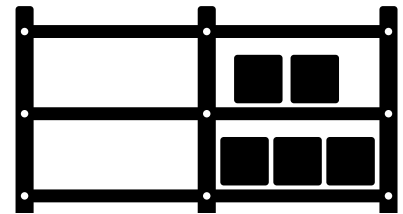

Enhance Productivity

Customers can install ProLED Select products quickly on the job even if layouts or requirements change (without having to change products).



Halco[®]

LIGHTING TECHNOLOGIES

Where there's *light* there's *Halco*

Complete Portfolio of *Indoor* and *Outdoor* Lamps & Fixtures

www.halcolighting.com

