

# CAPXM

Smart Video Intercom - M  
Section 28 13 00

---

## DATA SHEET


### Key Features

Unit Interface Capabilities

Scheduling Capabilities

Radio Receiver

Wireless Communication

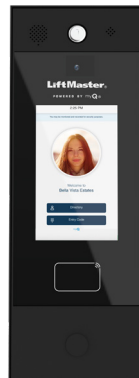

Touchscreen/voice/PIN/card/transmitter/RFID tag

Yes

Included

Yes\*\*

### Specifications

Data Connectivity

Wi-Fi/cellular/wired high-speed internet/DSL

Voice Communication

Wi-Fi/cellular/wired high-speed internet/DSL

Calling Connectivity

VoIP (Phone.com)

Power Supply

120VAC to 24VDC transformer (included)

Programming (Database Management)

Cloud (myQ® Community)

Remote Programming (Database Management)

Yes

Realtime Event Monitoring (Email Notifications)

Yes

Software

myQ Community

Wiegand Input Data Format

26 BIT, 30 BIT, 37 BIT (HID), 37 BIT (Transcore), AND 32 BIT (MiFare)

Wiegand Output Data Format

26 BIT

Local User Capacity Per Unit

50,000

Local Event History Per Unit

50,000

Max Number of Gates/Doors of Control (Each)

2

Wiegand Input

2

Relay Output

4 (2 primary, 2 auxiliary)

Mounting Options

Surface/flush/gooseneck

Operating Temperature

-20°F to 130°F (-29°C to 54°C)

Display Type

7-inch full color touch screen with Picture-in-Picture

Display Resolution

720p high definition

Integrated Video Camera

Yes

Anti-Tamper Alarm

Yes

Warranty

2 years

### Construction

Enclosure Material

Cast Metal, Power Coated Black


**LiftMaster®**

# CAPXM

## DATA SHEET

### Smart Video Intercom - M Section 28 13 00

#### Dimensions

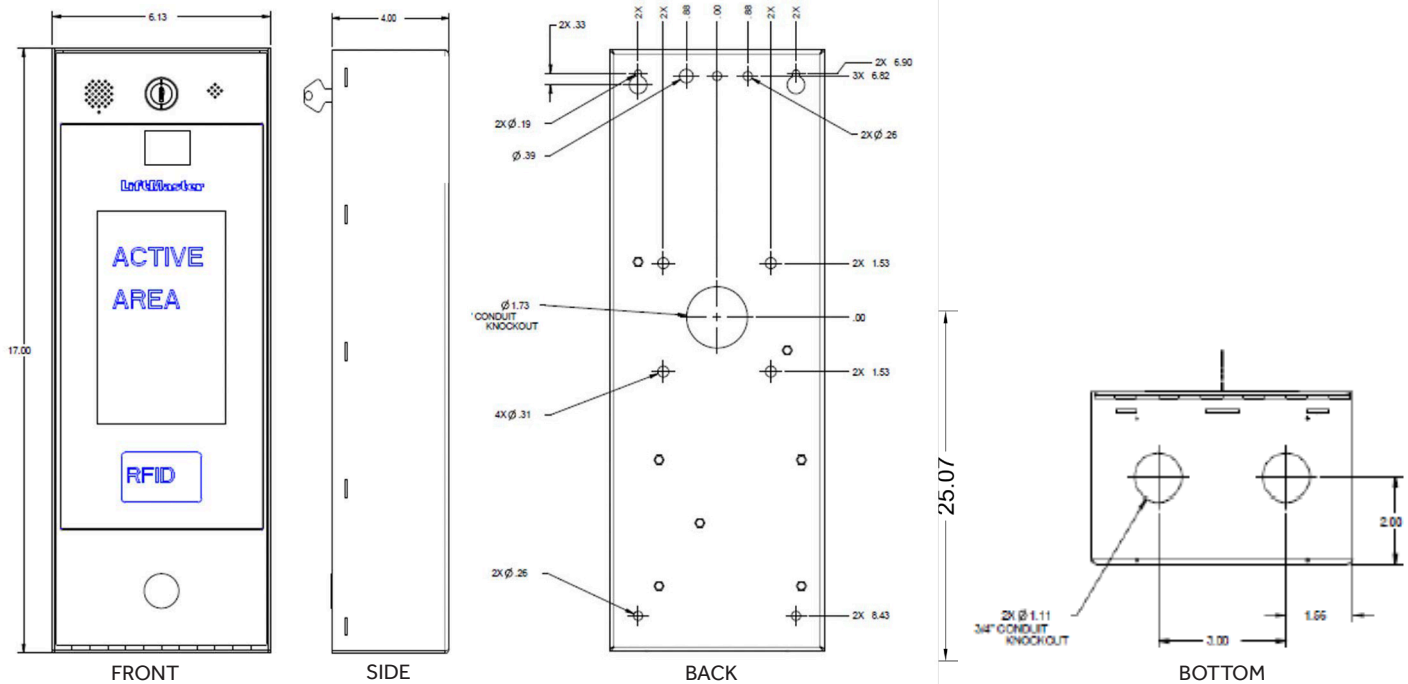

#### Range

CAPXM Feature	Wired	Wireless	Wire Type	Range
Power 120VAC to 24VDC transformer (from outlet to controller)	x		2 wire (14 AWG) 2 wire (16 AWG) 2 wire (18 AWG)	Up to 300 ft. Up to 200 ft. Up to 100 ft.
Wiegand accessory wiring	x		7 wire (18-22 AWG)	Up to 500 ft.
Relay output wiring	x		2 wire (18-24 AWG)	Up to 2500 ft.
Exit Request (REX)	x		2 wire (18-24 AWG)	Up to 500 ft.
Supervised Input	x		2 wire (18-24 AWG)	Up to 500 ft.
RJ-45 Internet	x		CAT5e or better 8 strand (24 AWG)	Up to 328 ft.
Wireless link to LiftMaster® Operators		x	N/A	Up to 750 ft.*
Wi-Fi		x	N/A	Up to 250 ft.**

\*When used with LiftMaster® Operators with Security +2.0® Radio

\*\*When used with LiftMaster® Gate Operator mfg. after Nov. 2017

© 2021 The Chamberlain Group, Inc. All Rights Reserved. myQ®, the myQ® logo, myQ® Community, LiftMaster, the LiftMaster logo, are registered trademarks of the Chamberlain Group, Inc. LiftMaster.com

LMACENDSCAPXM 5/21

**LiftMaster**