



HEATSTRIP

LEADING HEATING TECHNOLOGY



HEATSTRIP® 
LEADING HEATING TECHNOLOGY

LEADING HEATING TECHNOLOGY



The HEATSTRIP story

Thermofilm is justly proud that HEATSTRIP is the original design of this style of patio and conservatory heaters, the number one brand for reliability and is firmly established as the market leader on an international scale.

The HEATSTRIP brand was first established in Australia in 2004 when the product design team at Thermofilm (established in 1988) recognised the opportunity for a new style of electric radiant heaters. The first model was designed for indoor use and was an immediate success as architects and engineers specified them for schools, commercial buildings and many other applications.

It was a natural progression to further develop HEATSTRIP for outdoor application. Because of the higher operating temperature required for the outdoor model this presented some unique engineering challenges and required thousands of hours of development and testing time to perfect the revolutionary design.

This has resulted in a range of 6 different series of products within the HEATSTRIP product category: Elegance, Design, Max, Intense, Indoor and the Gas heater (Good Design Australia Selection). No matter what your requirements are, you will be able to find the indoor or outdoor heater for you from our extensive selection of solutions. Design and Elegance range is also available now with remote or app function.

Whatever your needs are, you will be able to find your indoor or outdoor heating in our extensive selection of solutions.

THE HEATER THAT
IS A DESIGN FEATURE!



What is a HEATSTRIP?

A HEATSTRIP is a high intensity electric radiant heater suitable for outdoor and tough indoor heating, preferably under canopies. It can heat a terrace within 10 minutes and is felt up to 4 meters from the source, depending of the type. The HEATSTRIP distinguishes itself by its modern appearance.

Advantages HEATSTRIP:

- Uses minimal space
- Stylish
- Does not become red hot
- Energy saving
- Low maintenance
- Suitable for built-in
- Design and development in Australia

TT-MTR and TT-MTM Wall Controller with remote control:

This HEATSTRIP has been designed for ease of use to ensure economic running costs of your heater. It provides a timer for automatic heater operation. The timer function has four settings. It can turn the heater on for 1 hour, 2 hours, 4 hours or constantly on. The TT-MTM controller has also an timer function but you are also able to adjust the temperature output of the HEATSTRIP in high, medium or low. The timer can be operated where it is installed or via remote control unit. The remote control has a range of 10 metres and must be within line of sight of the wall switch.



HEATSTRIP
Intense



HEATSTRIP
Max



HEATSTRIP
Elegance




HEATSTRIP
Design




HEATSTRIP
Indoor



| Application | Intense | Max | Elegance | Design | Indoor |
|--|---------|-----|----------|--------|--------|
| Indoor insulated areas: classrooms, offices, bathrooms, wet areas, drying rooms. | ✓ | ✗ | ✓ | ✓ | ✓ |
| Outdoor under cover: café, veranda, patio, balcony ceiling height 2,7m or less. | ✓ | ✓ | ✓ | ✓ | ✗ |
| Outdoor under cover: café, veranda, patio, balcony ceiling height 2,7m to 3,5m. | ✓ | ✓ | ✗ | ✗ | ✗ |
| Indoor open area: warehouse, factory, production areas, sports facilities. | ✓ | ✓ | ✓ | ✓ | ✓ |
| Indoor spot heating, above tables, assembly areas. | ✓ | ✓ | ✓ | ✓ | ✓ |

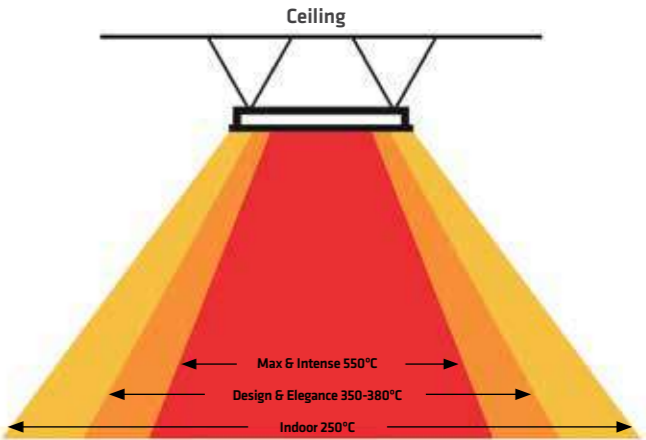

HEATSTRIP® Intense

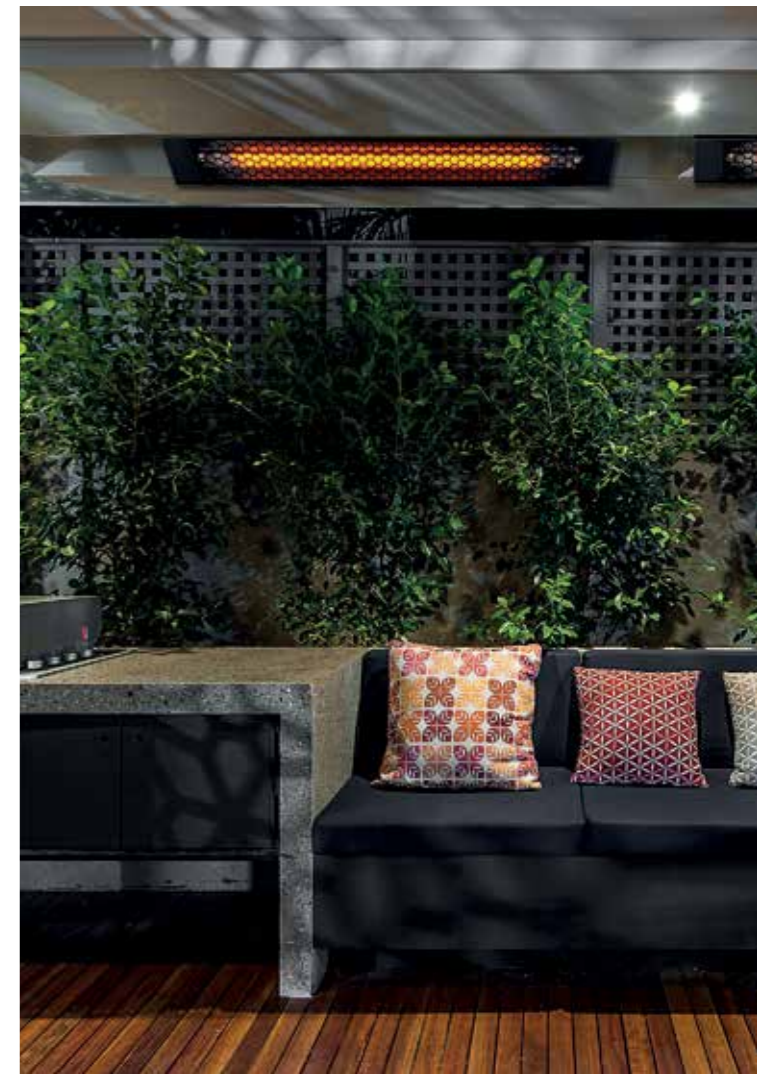



HEATSTRIP® Intense

The HEATSTRIP® Intense Electric heater is an attractive outdoor heating solution, providing high output, instant heat. HEATSTRIP has successfully enabled many entertainment venues such as restaurants, pubs and clubs to utilise their outdoor dining areas day and night, through all seasons.

- Features:**
- Easy DIY installation with brackets included
 - Ideal for undercover protected and semi- exposed outdoor locations
 - Complete with adjustable mounting supports suitable for walls and ceilings
 - The device comes with an 3 meter electric lead and plug
 - Voltage 230V, for United Kingdom 240V
 - Low-maintenance and protection against corrosion
 - Instantaneous, carbon-flament element
 - High quality construction with a new hexagonal grille
 - Carbon filament infra-red heating element provides high performance instant heat
 - Australian design and development
 - 2 year residential and 1 year commercial warranty
 - IPX5 This means that the Heatstrips are 100% rain and weatherproof



| Type | Surface area of covered patio | Surface area of enclosed space | Power (watts) | Current (Amps) | Dimensions (LxWxH) | Gewicht (Kg) | Weight (Kg) | Plug | Minimum mounting height | Maximum mounting height |
|----------|-------------------------------|--------------------------------|---------------|----------------|--------------------|--------------|-------------|------|-------------------------|-------------------------|
| THY22003 | 9 m ² | 14 m ² | 2200 | 9.2 | 1068 x 120 x 90 | 6 | 3000 | Yes | 2.1 m | 3.5m |

Accessories



Extension mounting bracket
30 cm, 60 cm, 90 cm & 120 cm



Standard mounting bracket




Stand




Flush mount enclosure

Table setting

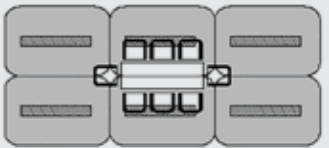


6x2200 Watt

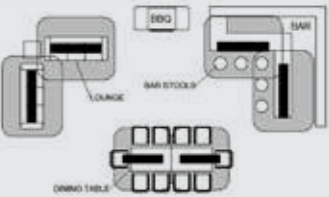


Mounting options


Mounting

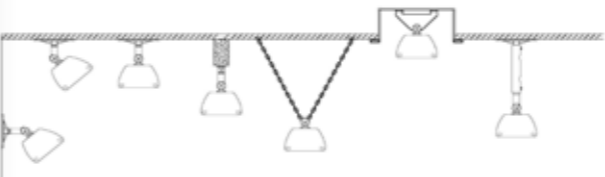

Extension mounting brackets

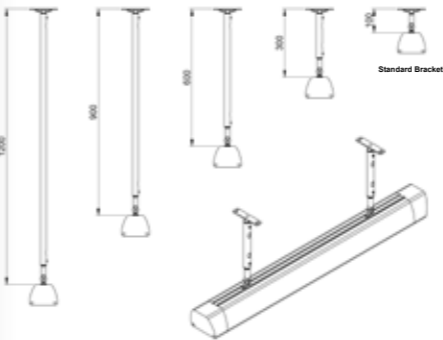



Flush mount enclosure

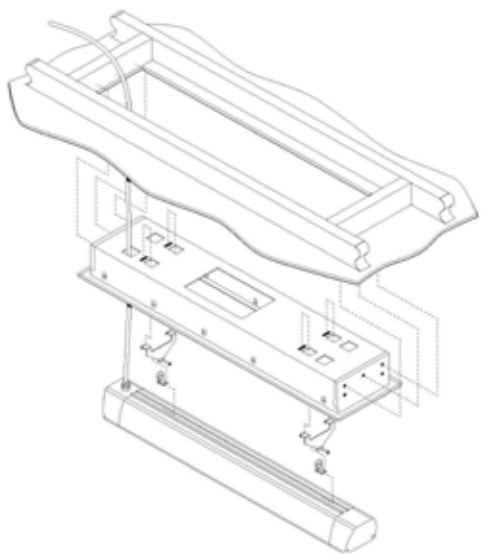

| Suitable for model | Part No | Hole cutout dimensions (mm) | Overall dimensions (mm) |
|--------------------|--------------|-----------------------------|-------------------------|
| THY2200 | THYAC - 047B | 1122 x 176 | 1150 x 204 x 190 |

HEATSTRIP® Max

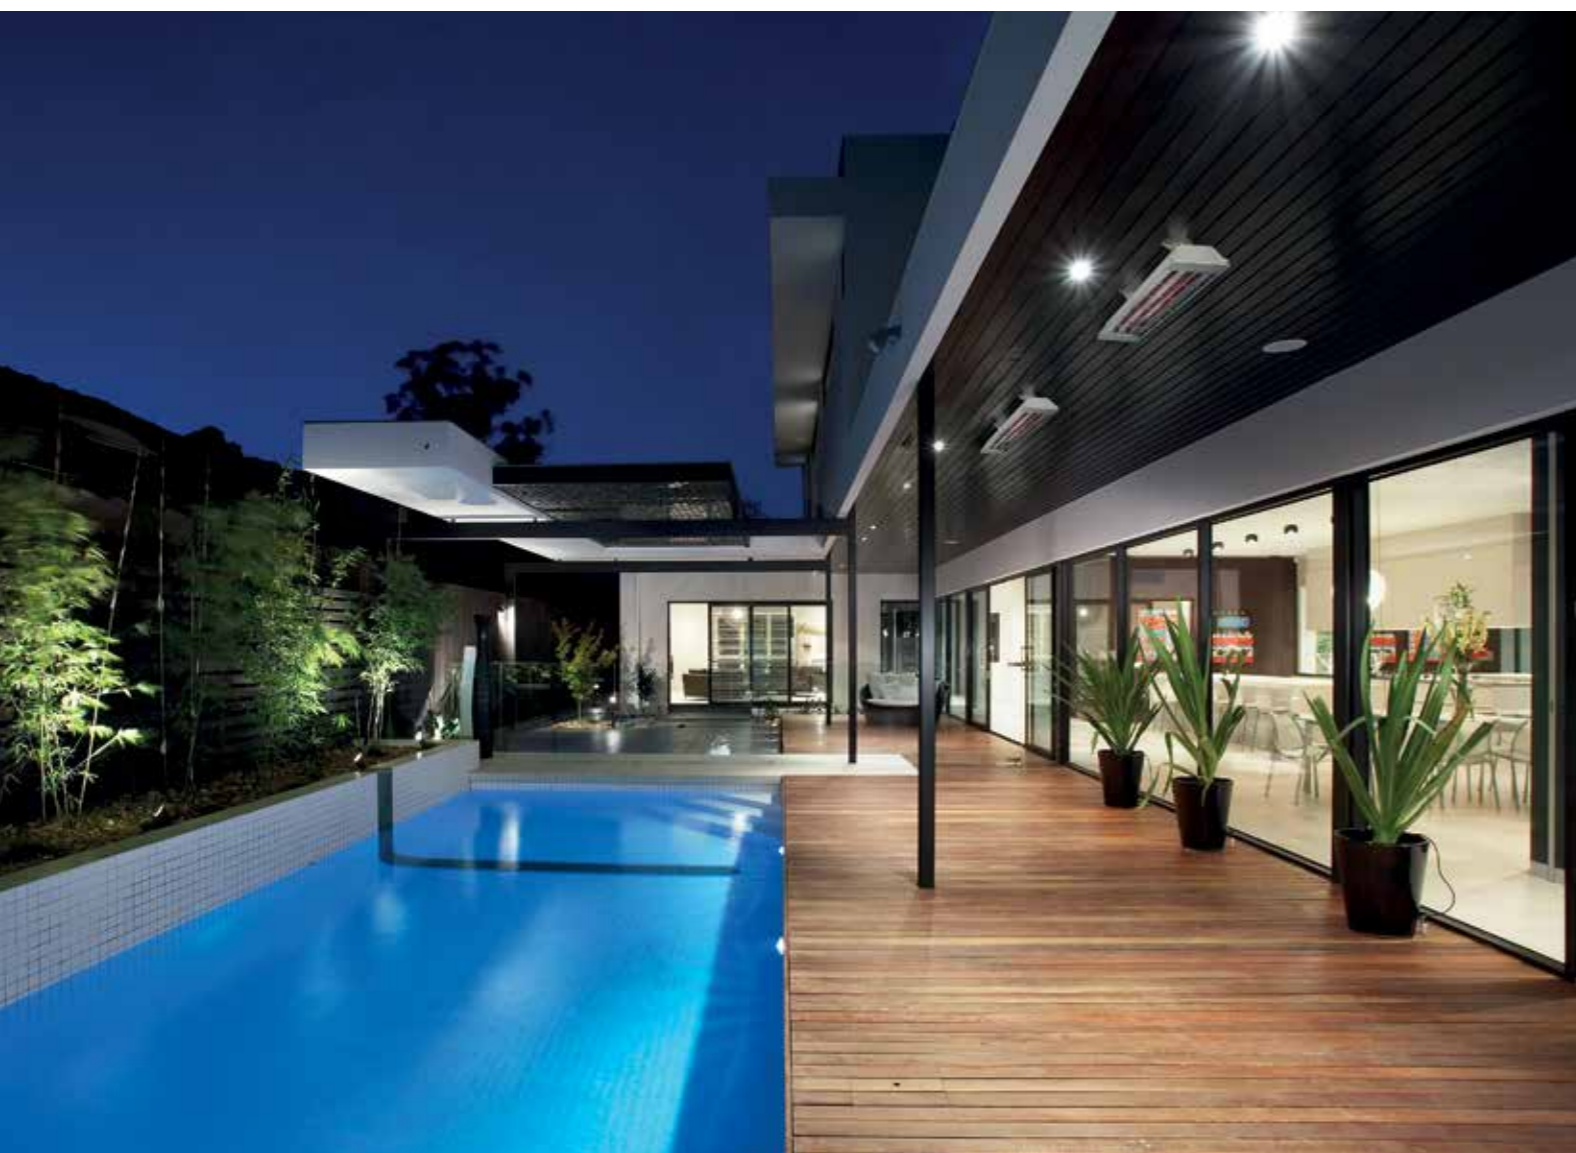

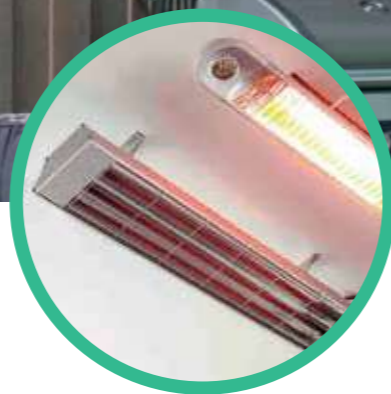

HEATSTRIP® Max

HEATSTRIP Max is an electric radiant heater that can be used indoors or outdoors with high quality, robust X heater grille design.

Features:



- High output radiant heat
- Unique Soft-glow heating technology, no dazzling red glow
- Suitable for permanent use outdoors
- 2 (2400W) of 3 (3600W) unique Incoloy 840 elements with an diameter vof 14mm, which can't be broken. Total different if you comparer it with an glass element. Incoly 840 is high end quality and is used often by bridgebuilser, shipbuilders and in the offshore industry.
- The device comes with an electric lead and plug (2400W)
- Voltage 230V, for United Kingdom 240V
- Low-maintenance and protection against corrosion
- Powerful incoloy element
- High quality
- The minimum mounting height is 2.10 m, for safety reasons. (the radiation panel surface reaches a temperature of at least 550°C)
- Australian design and development
- IPX5 This means that the Heatstrips are 100% rain and weatherproof

Unique Soft-glow technology

The specially designed and developed Soft-glow heating element produces a very gentle and discrete warmth. There is no dazzling glow, as is the case with other infrared heaters, so you can simply enjoy the warmth in peace.


High quality – four-year replacement guarantee

The HEATSTRIP Max is made of a very robust and high-quality material. This makes the HEATSTRIP Max durable, and it has a long usable life under all conditions. 4 year residential warranty and 2 year commercial warranty.

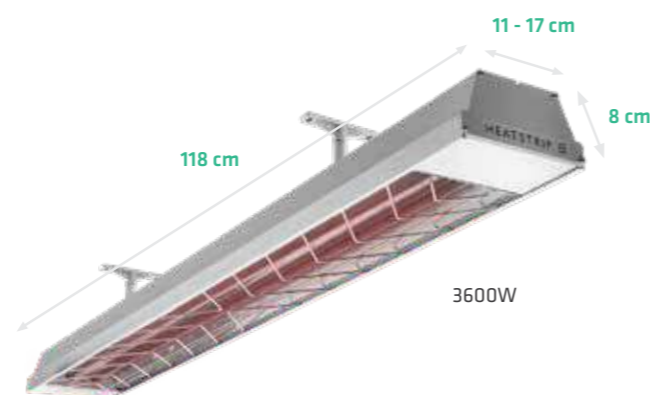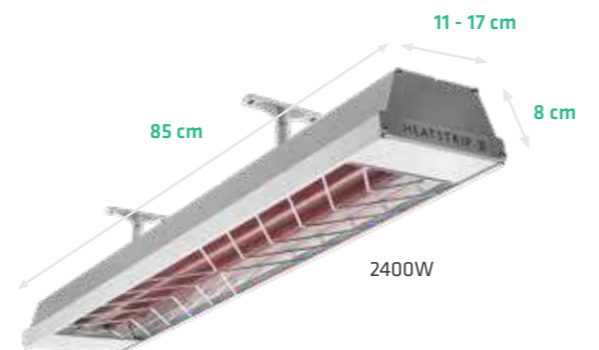

| Type | Surface area of covered patio | Surface area of enclosed space | Power (watts) | Current (Amps) | Dimensions (LxWxH) | Weight (Kg) | Lead Length (mm) | Plug | Minimum mounting height | Maximum mounting height |
|---------|-------------------------------|--------------------------------|---------------|----------------|--------------------|-------------|------------------|------|-------------------------|-------------------------|
| THX2400 | 6 m2 | 16 m2 | 2400 | 10 | 854 x 170 x 80 | 5 | 2000 | Yes | 2.1m | 3.5m |
| THX3600 | 9 m2 | 24 m2 | 3600 | 15 | 1184 x 170 x 80 | 6 | 1000 | Nee | 2.1m | 3.5m |

Accessories

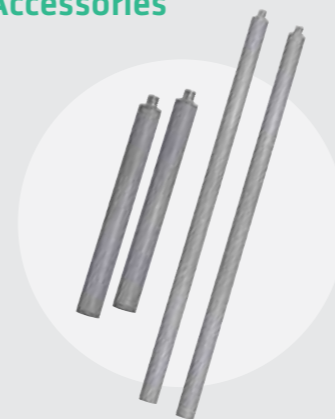

Extension mounting bracket
30 cm, 60 cm, 90 cm & 120 cm



Stand




Standard mounting bracket




Flush mount enclosure


Table setting

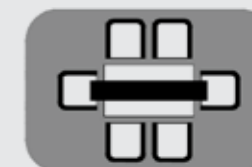

2400W

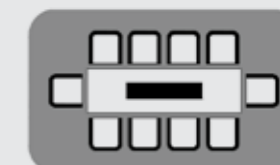


3600W

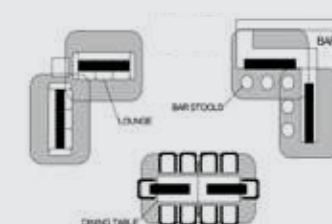


Mounting options


Mounting

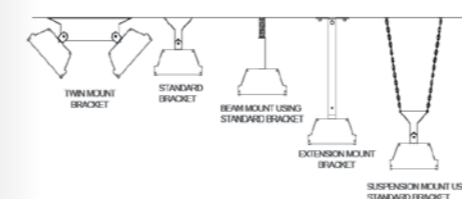

Extension mounting brackets

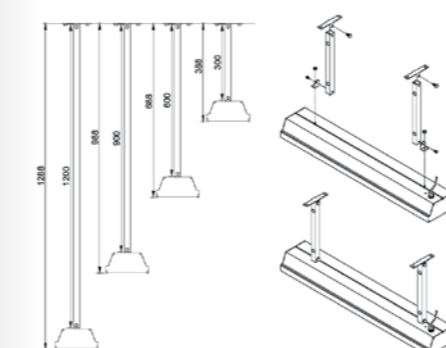

Flush mount enclosure

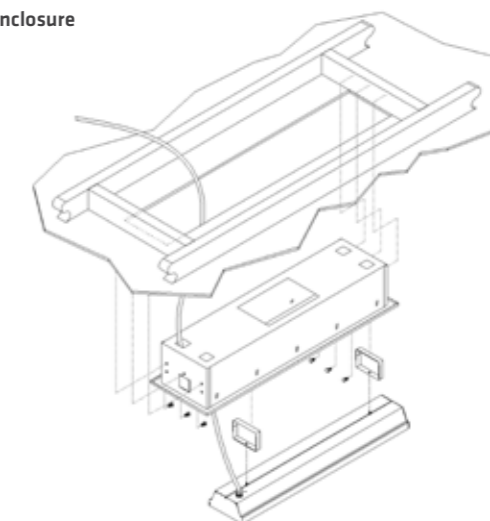

| Suitable for model | Part No | Hole cutout dimensions (mm) | Overall dimensions (mm) |
|--------------------|-----------|-----------------------------|-------------------------|
| THX2400 | THXAC-030 | 935 x 250 | 980 x 180 x 290 |
| THX3600 | THXAC-031 | 1260 x 250 | 1310 x 180 x 290 |

HEATSTRIP® Elegance






HEATSTRIP® Elegance

HEATSTRIP Elegance is a range of stylish, premium, high-intensity electric panel heaters. With huge running cost savings compared to bottled gas heaters, HEATSTRIP is ideal for outdoor undercover protected applications, both residential and commercial. The first off-white outdoor heater utilizes the latest technology for maximum comfort. Using the latest material coating and heating element technology.

Features:

- Electric radiant heater perfect for your protected alfresco area, pergola, verandah or café
- The elegant, slimline design and “off-white” colour blends in seamlessly with most white ceilings
- World leading element design produces a more compact and higher output heater
- The device comes with an electric lead and plug (1800W + 2400W)
- Voltage 230V, for United Kingdom 240V
- Significantly more cost-effective than bottled gas heaters
- Convenient DIY installation of 1800W and 2400W models, 3600W model must be hard wired
- The minimum installation height is 2,10 meters. (The panel reaches a temperature of 400 degrees celsius)
- The heaters are certified IP55 waterproof. This means that the Heatstrips are 100% rain and weatherproof
- 4 year residential warranty and 2 year commercial warranty

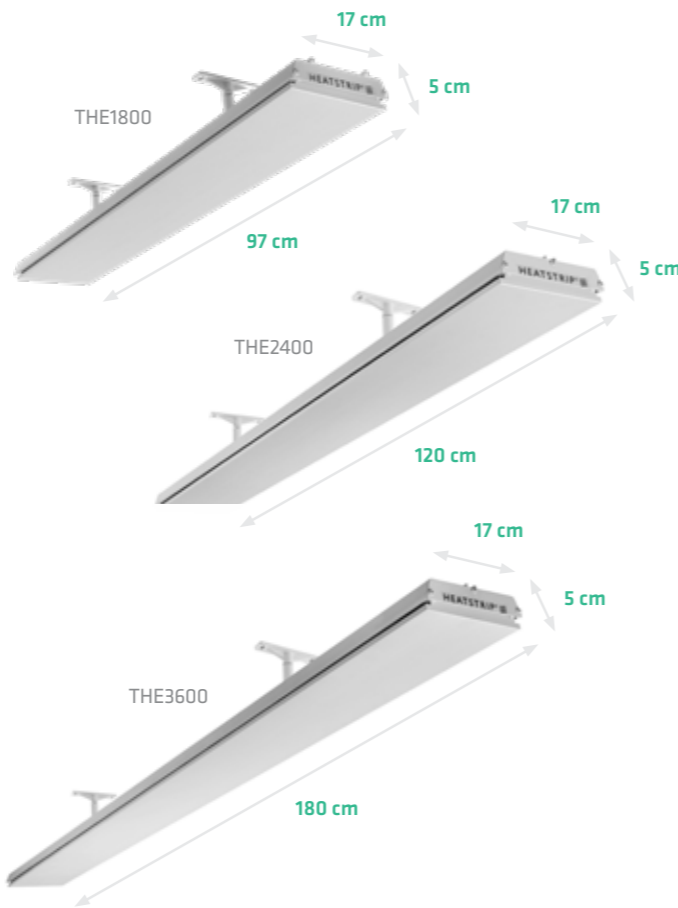

| Type | Surface area of covered patio | Surface area of enclosed space | Power (watts) | Current (Amps) | Dimensions (LxWxH) | Weight (Kg) | Lead Length (mm) | Plug | Minimum mounting height | Maximum mounting height |
|---------|-------------------------------|--------------------------------|---------------|----------------|--------------------|-------------|------------------|------|-------------------------|-------------------------|
| THE1800 | 3 m² | 4,5 m² | 1800 | 7.5 | 974 x 170 x 48.5 | 4 | 1000 | Yes | 2.1 m | 2.7 m |
| THE2400 | 4 m² | 6 m² | 2400 | 10 | 1204 x 170 x 48.5 | 7 | 1000 | Yes | 2.1 m | 2.7 m |
| THE3600 | 6 m² | 9 m² | 3600 | 15 | 1804 x 170 x 48.5 | 9 | 1000 | No | 2.1 m | 2.7 m |

Accessories



Extension mounting bracket
30 cm, 60 cm, 90 cm & 120 cm



Wall mounting bracket




Standard mounting bracket




Flush mount enclosure

Table settings

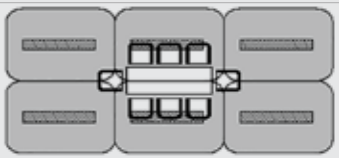

6x2400 Watt

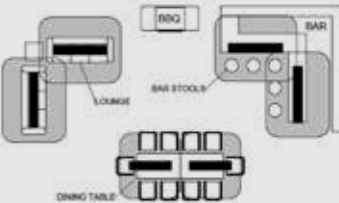


DINING TABLE




Mounting options


Mounting

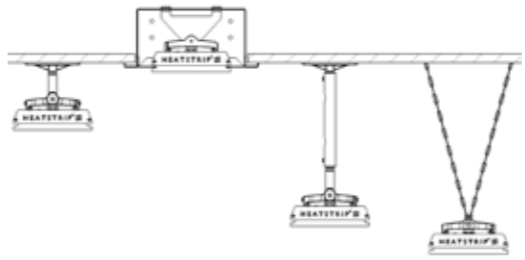

Extension mounting bracket

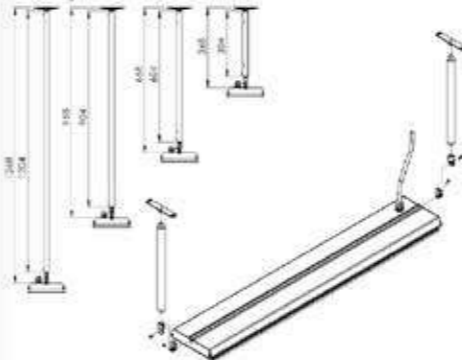

Flush mount enclosure

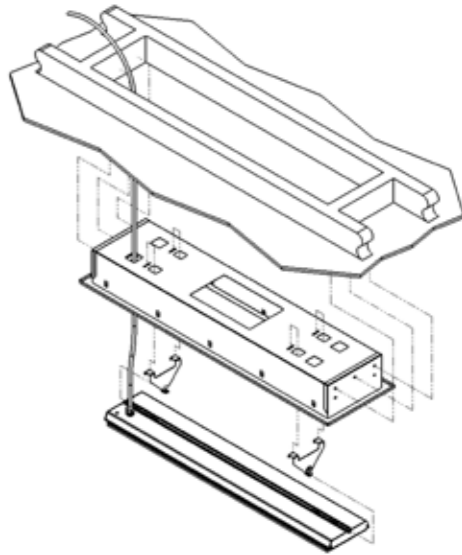

| Suitable for model | Part No | Hole cutout dimensions (mm) | Overall dimensions (mm) |
|--------------------|-----------|-----------------------------|-------------------------|
| THE 1800 | THEAC-040 | 1030 x 240 | 1080 x 290 x 125 |
| THE 2400 | THEAC-041 | 1260 x 240 | 1310 x 290 x 125 |
| THE 3600 | THEAC-042 | 1860 x 240 | 1910 x 290 x 125 |




HEATSTRIP® Elegance + remote

Choice of: Timer + Low/High or Smart App version

HEATSTRIP Elegance is a range of stylish, premium, high-intensity electric panel heaters. With huge running cost savings compared to bottled gas heaters, HEATSTRIP is ideal for outdoor undercover protected applications, both residential and commercial. The first off-white outdoor heater utilizes the latest technology for maximum comfort. Using the latest material ceramic coating and heating element technology.

Features:

- Electric radiant heater perfect for your protected alfresco area, pergola, verandah or café
- The elegant, slimline design and “off-white” colour blends in seamlessly with most white ceilings
- World leading element design produces a more compact and higher output heater
- The device comes with an electric lead and plug (2400W)
- Voltage 230V, for United Kingdom 240V
- Significantly more cost-effective than bottled gas heaters
- 2 different steps of energy use plus timer function of 1,2 or 4 hour.
Step 1 ON-H, HEATSTRIP works at full power: 100%
Step 2 ON-L, HEATSTRIP works at 70 % power, so it uses less energy.
- Convenient DIY installation of 1800W and 2400W models, 3600W model must be hard wired
- The minimum mounting height is 2.10 m . for safety reasons (the radiation surface reaches a temperature of about 400°C)
- The heaters are certified IP55 waterproof. This means that the Heatstrips are 100% rain and weatherproof
- 4 year residential warranty and 2 year commercial warranty
- Tuya smart app is compatible with Iphone / Android, Alexa and Google Hub

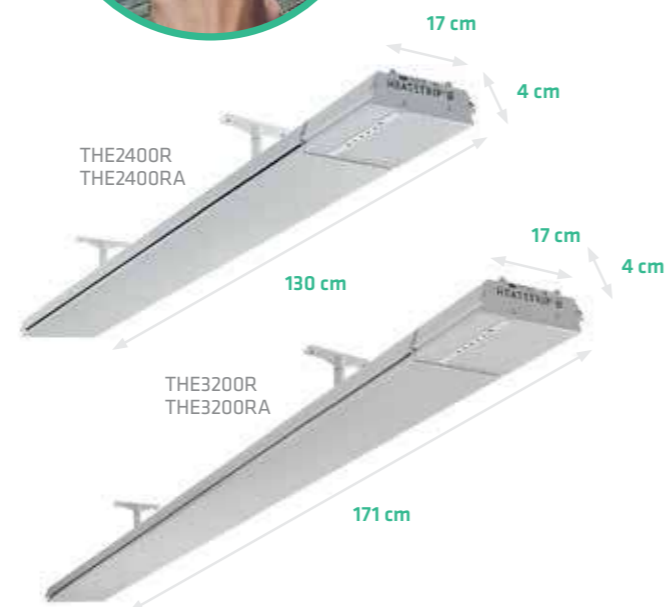

Compatible with
Iphone / Android
Alexa, Google Hub

Powered by
tuya
Intelligence
Inside



2400W/3200W
(remote)

| Type | Surface area of covered patio | Surface area of enclosed space | Power (watts) | Current (Amps) | Dimensions (LxWxH) | Weight (Kg) | Lead Length (mm) | Plug | Minimum mounting height | Maximum mounting height |
|-----------|-------------------------------|--------------------------------|---------------|----------------|--------------------|-------------|------------------|------|-------------------------|-------------------------|
| THE2400R | 4 m ² | 6 m ² | 2400 | 10 | 1306 x 170 x 43 | 6 | 1000 | Yes | 2.1 m | 2.7 m |
| THE3200R | 5 m ² | 8 m ² | 3200 | 13 | 1710 x 170 x 43 | 9 | 1000 | No | 2.1 m | 2.7 m |
| THE2400RA | 4 m ² | 6 m ² | 2400 | 10 | 1306 x 170 x 43 | 6 | 3000 | Yes | 2.1 m | 2.7 m |
| THE3200RA | 5 m ² | 8 m ² | 3200 | 13 | 1710 x 170 x 43 | 9 | 3000 | No | 2.1 m | 2.7 m |

Accessories



Extension mounting bracket
30 cm, 60 cm, 90 cm & 120 cm



Wall mounting bracket




Standard mounting bracket




Flush mount enclosure

Table settings

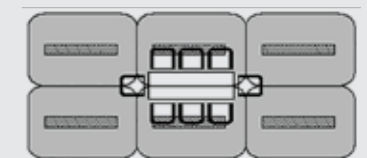

6x2400 Watt

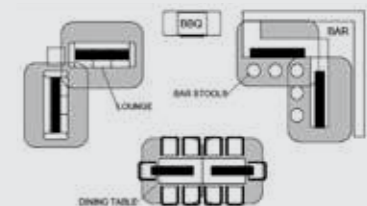


DINING TABLE




Mounting options


Mounting

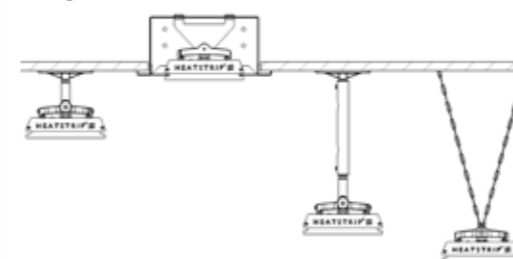

Extension mounting bracket

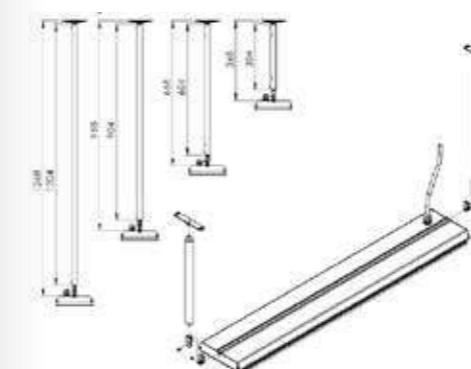

Flush mount enclosure

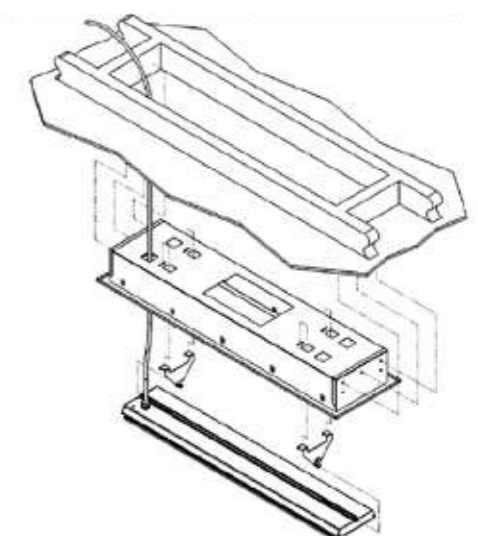

| Suitable for model | Part No | Hole cutout dimensions (mm) | Overall dimensions (mm) |
|--------------------|------------|-----------------------------|-------------------------|
| THE2400R | THERAC-056 | 1385 x 235 | 1439 x 290 x 125 |
| THE3200R | THERAC-057 | 1785 x 235 | 1839 x 290 x 125 |
| THE2400RA | THERAC-056 | 1385 x 235 | 1439 x 290 x 125 |
| THE3200RA | THERAC-057 | 1785 x 235 | 1839 x 290 x 125 |

HEATSTRIP® Design





HEATSTRIP® Design

The HEATSTRIP Design is a high intensity electric radiant heater suitable for outdoor and tough indoor heating. Taking up only a little space, the HEATSTRIP Design is thin but functional and can heat a terrace within 10 minutes. Energy savings and a great performance can be expected. It should be preferably be used under a roof outdoors in order to prevent loss of heat.


- Features:**
- Casing made of high-grade aluminium
 - Complete with adjustable mounting supports suitable for walls and ceilings
 - The device comes with an electric lead and plug (1500W + 2400W)
 - The radiation panel itself is black, and produces no red glow
 - Voltage 230V, for United Kingdom 240V
 - The maximum mounting height is 2.70 m
 - The recommended mounting height is approx. 2.50 m
 - The minimum mounting height is 2.10 m, for safety reasons (the radiation panel surface reaches a temperature of at least 350°C)
 - The heaters are certified IP55 waterproof. This means that the Heatstrips are 100% rain and weatherproof
 - 4 year residential warranty and 2 year commercial warranty

HEATSTRIP has successfully enabled many entertainment venues such as restaurants, pubs and clubs to utilise their outdoor dining areas day and night, through all seasons.



| Type | Surface area of covered patio | Surface area of enclosed space | Power (watts) | Current (Amps) | Dimensions (LxWxH) | Weight (Kg) | Lead Length (mm) | Plug | Minimum mounting height | Maximum mounting height |
|---------|-------------------------------|--------------------------------|---------------|----------------|--------------------|-------------|------------------|------|-------------------------|-------------------------|
| THH1500 | 3.0 m² | 3.75 m² | 1500 | 6.3 | 924 x 165 x 48 | 5 | 1000 | Yes | 2.1 m | 2.7 m |
| THH2400 | 5.0 m² | 6 m² | 2400 | 10 | 1364 x 165 x 48 | 6 | 1000 | Yes | 2.1 m | 2.7 m |
| THH3200 | 6.0 m² | 8 m² | 3200 | 13.3 | 1774 x 165 x 48 | 8 | 1000 | No | 2.1 m | 2.7 m |

Accessories

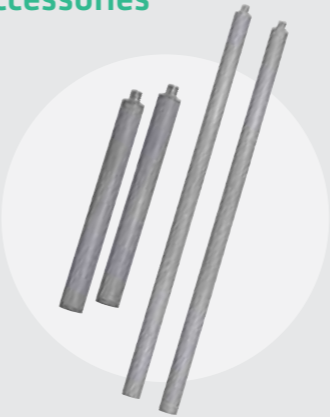

Extension mounting bracket
30 cm, 60 cm, 90 cm & 120 cm



Wall mounting bracket




Standard mounting bracket




Flush mount enclosure
**Also available in matte black*


Table setting

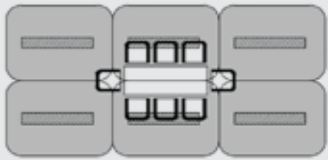

6x2400W

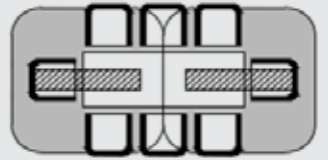


2x 2400W

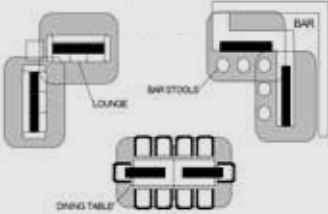


Mounting options


Mounting

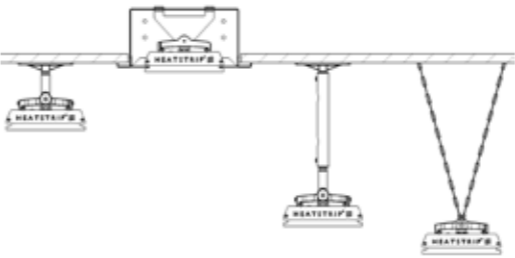

Extension mounting bracket

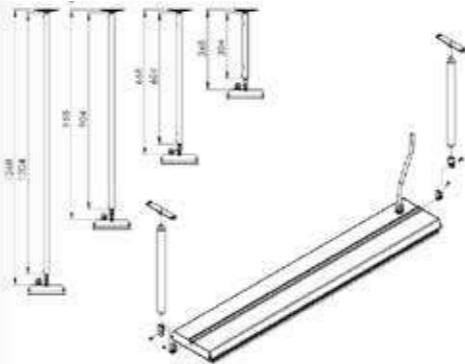

Flush mounting bracket

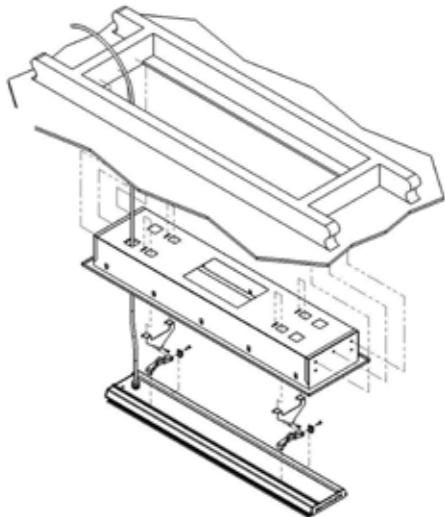

| Suitable for model | Part No | Hole cutout dimensions (mm) | Overall dimensions (mm) |
|--------------------|-----------|-----------------------------|-------------------------|
| THH1500 | THHAC-009 | 980 x 230 | 1030 x 280 x 125 |
| THH2400 | THHAC-011 | 1420 x 230 | 1470 x 280 x 125 |
| THH3200 | THHAC-012 | 1830 x 230 | 1880 x 280 x 125 |




HEATSTRIP® Design + remote

Choise of: Timer + Low/High or Smart App version

The HEATSTRIP Design with remote is a high intensity electric radiant heater suitable for outdoor and tough indoor heating. The HEATSTRIP Design is thin but functional and can heat a terrace within 10 minutes. The remote function gives you the possibility to use the timer function and switch in output (medium or high). Energy savings and a great performance can be expected. It should be preferably be used under a roof outdoors in order to prevent loss of heat.

Features:

- Electric radiant heater perfect for your protected alfresco area, pergola, verandah or café
- The elegant, slimline design and “off-white” colour blends in seamlessly with most white ceilings
- World leading element design produces a more compact and higher output heater
- The device comes with an electric lead and plug (2400W)
- Voltage 230V, for United Kingdom 240V
- Significantly more cost-effective than bottled gas heaters
- 2 different steps of energy use plus timer function of 1,2 or 4 hour.
Step 1 ON-H, HEATSTRIP works at full power: 100%
Step 2 ON-L, HEATSTRIP works at 70 % power, so it uses less energy.
- Convenient DIY installation of 1800W and 2400W models, 3600W model must be hard wired
- The minimum mounting height is 2.10 m for safety reasons (the radiation surface reaches a temperature of about 350°C)
- The heaters are certified IP55 waterproof. This means that the Heatstrips are 100% rain and weatherproof
- 4 year residential warranty and 2 year commercial warranty
- Tuya smart app is compatible with Iphone / Android, Alexa and Google Hub

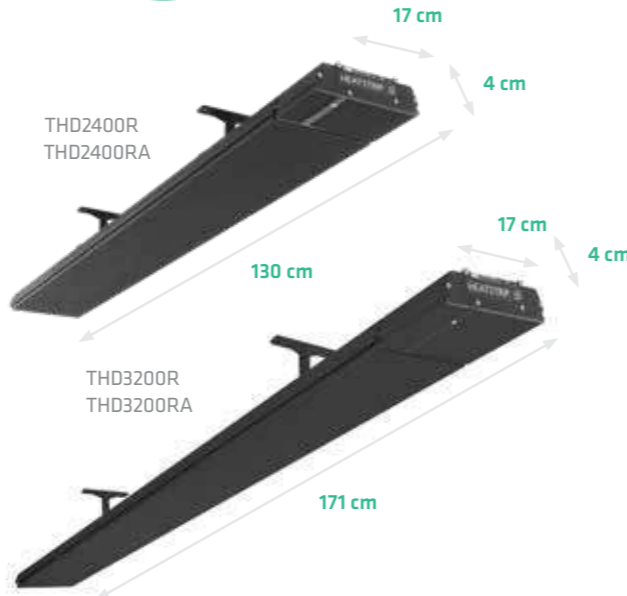

Compatible with
Iphone / Android
Alexa, Google Hub



2400W/3200W
(remote)

| Type | Surface area of covered patio | Surface area of enclosed space | Power (watts) | Current (Amps) | Dimensions (LxWxH) | Weight (Kg) | Lead Length (mm) | Plug | Minimum mounting height | Maximum mounting height |
|-----------|-------------------------------|--------------------------------|---------------|----------------|--------------------|-------------|------------------|------|-------------------------|-------------------------|
| THD2400R | 4 m² | 6 m² | 2400 | 10 | 1306 x 170 x 43 | 6 | 3000 | Yes | 2.1 m | 2.7 m |
| THD3200R | 5 m² | 8 m² | 3200 | 13 | 1710 x 170 x 43 | 9 | 3000 | No | 2.1 m | 2.7 m |
| THD2400RA | 4 m² | 6 m² | 2400 | 10 | 1306 x 170 x 43 | 6 | 3000 | Yes | 2.1 m | 2.7 m |
| THD3200RA | 5 m² | 8 m² | 3200 | 13 | 1710 x 170 x 43 | 9 | 3000 | No | 2.1 m | 2.7 m |

Accessories



Extension mounting bracket
30 cm, 60 cm, 90 cm & 120 cm



Wall mounting bracket




Standard mounting bracket




Flush mount enclosure

Table settings

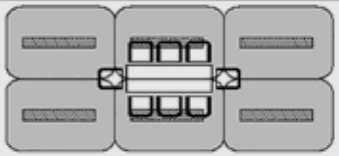


6x2400 Watt

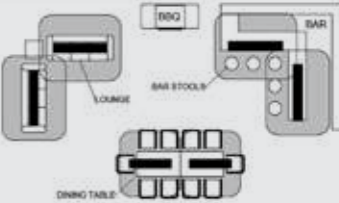


Mounting options


Mounting

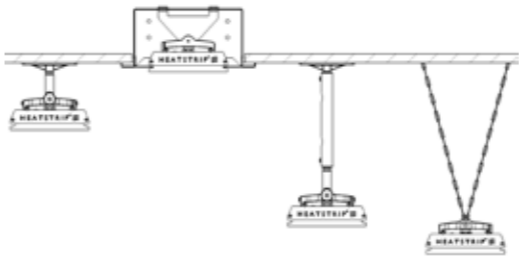

Extension mounting bracket

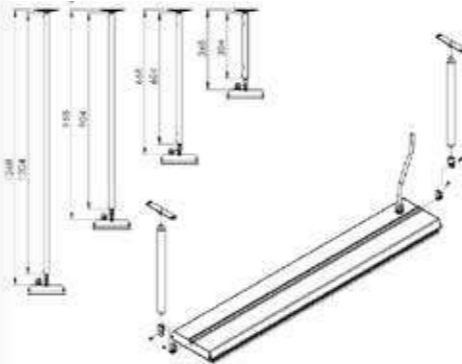

Flush mount enclosure

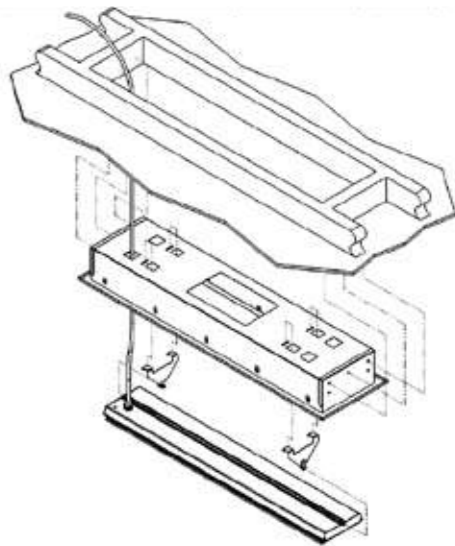

| Suitable for model | Part No | Hole cutout dimensions (mm) | Overall dimensions (mm) |
|--------------------|-----------|-----------------------------|-------------------------|
| THD2400R | THDAC-058 | 1385 x 235 | 1439 x 290 x 125 |
| THD3200R | THDAC-059 | 1785 x 235 | 1839 x 290 x 125 |
| THD2400RA | THDAC-058 | 1385 x 235 | 1439 x 290 x 125 |
| THD3200RA | THDAC-059 | 1785 x 235 | 1839 x 290 x 125 |



HEATSTRIP® Stand

The HEATSTRIP free-standing heater, Model THAC-100 is the classy and refined solution, for when a portable, easy DIY electric heating option is required. Incorporating a sleek and robust stand, it is ideal for heating of tables, lounges, entertaining areas and work stations, both indoors and outdoors. The THAC-100 is suitable for all types up to 2400 watt, except the indoor.

Features:

- Stylish, high quality portable, free- standing outdoor heater stand
- Ideal for alfresco areas, balconies, apartments & hospitality (indoor & outdoor use)
- Voltage 230V, for United Kingdom 240V
- Components are easy for DIY installation
- In-build wheels for easy portability, perfect for residential and commercial applications
- Corrosion protected by special e-coating treatment
- 2 year residential and 1 year commercial warranty




HEATSTRIP Intense 2200



HEATSTRIP Max 2400



HEATSTRIP Elegance 1800

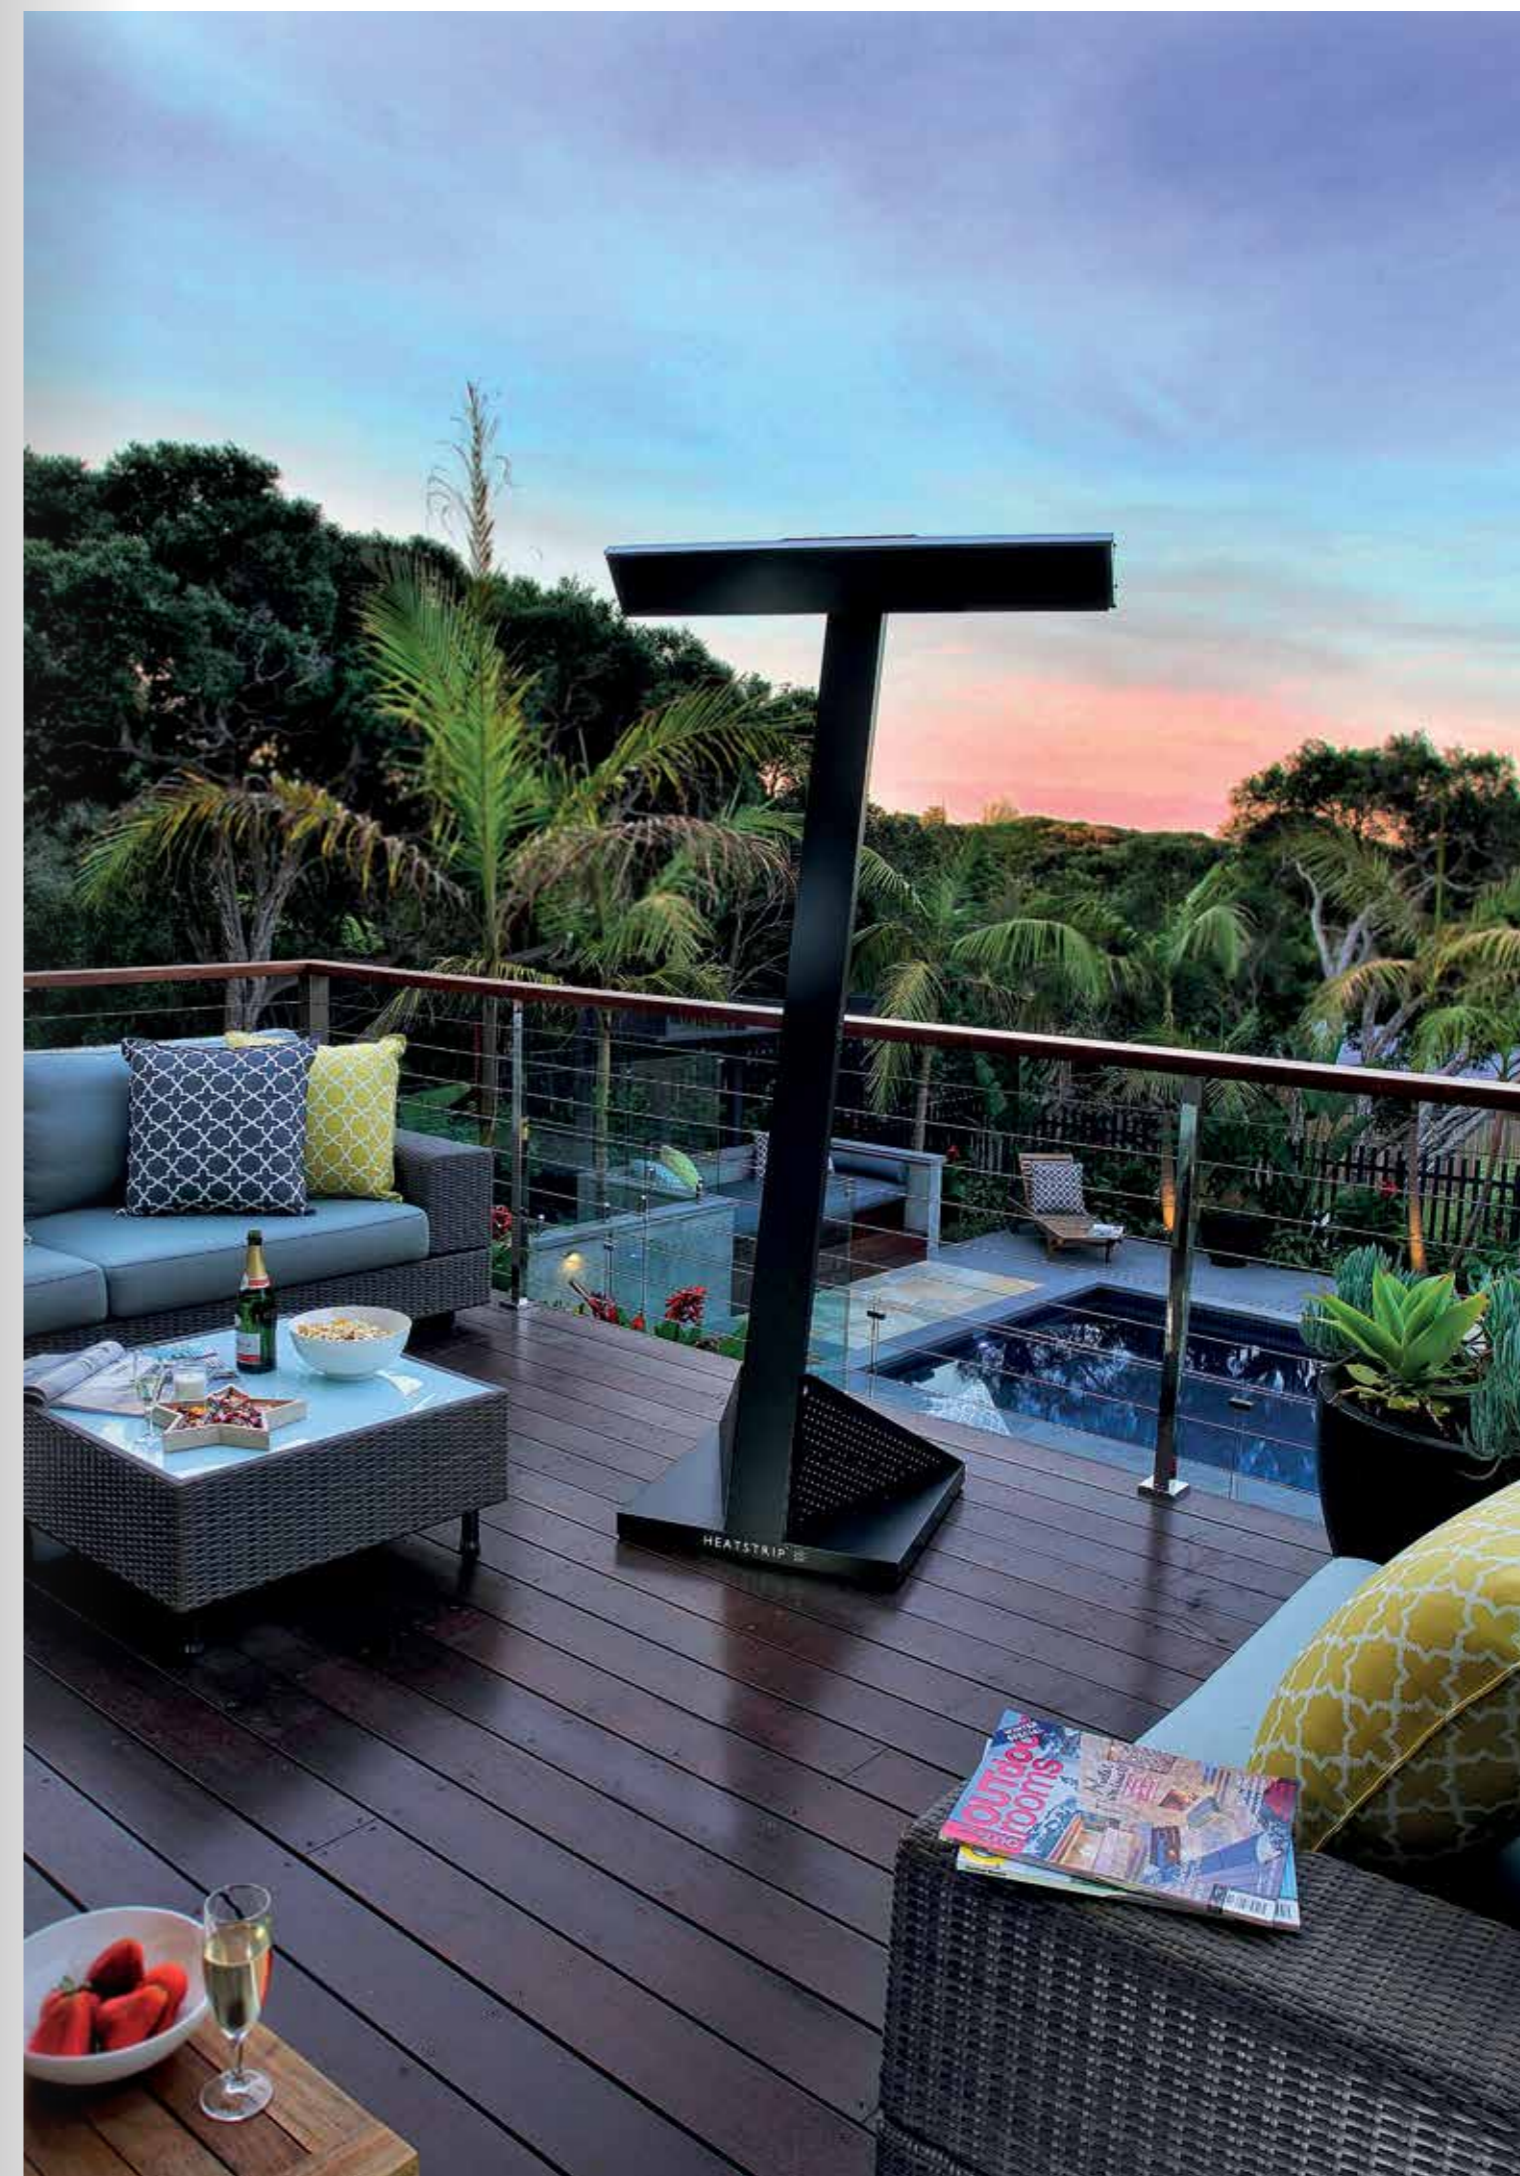

HEATSTRIP® Indoor






HEATSTRIP® Indoor


Unique, modern, slimline conservatory heater, heating the immediate area to a pleasant temperature within ten minutes. It is also economical in its energy consumption. The HEATSTRIP Indoor is only suitable for indoor applications, for instance in conservatories, living rooms, garages, etc.

Features:

- Water protection rating of IP45 and specifically
- Designed for indoor heating
- The device comes with an electric lead and plug (1200W + 2400W)
- Voltage 230V, for United Kingdom 240V
- Enhanced HEATSTRIP performance
- Suitable for multiple applications – commercial & residential
- Multiple mounting options allows for easy installation
- Low maintenance
- 4 year residential warranty and 2 year commercial warranty
- Standard mounting brackets are already included

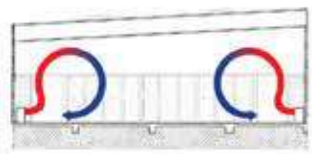


Convective heat can be lost in uninsulated areas or naturally rise towards the roof in high ceiling locations.

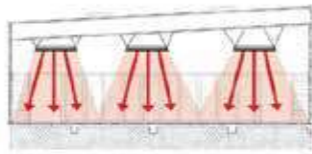


Radiant heat is directed downwards to where it is required, and can be zoned to heat only those areas that are occupied.

| Type | Surface area of covered patio | Power (watts) | Current (Amps) | Dimensions (LxWxH) | Weight (Kg) | Lead Length (mm) | Plug | Minimum mounting height | Maximum mounting height |
|----------|-------------------------------|---------------|----------------|--------------------|-------------|------------------|------|-------------------------|-------------------------|
| THS1200A | 8 m ² | 1200 | 5.0 | 924 x 235 x 48 | 6 | 1000 | Yes | 2.1 m | 3.0 m |
| THS2400A | 16 m ² | 2400 | 10 | 1834 x 235 x 48 | 11 | 1000 | Yes | 2.1 m | 3.0 m |

Accessories

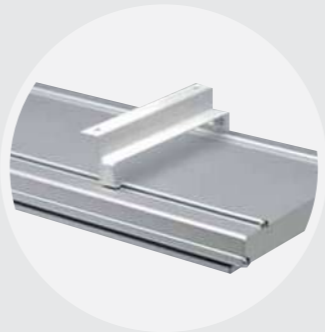

Standard mounting bracket



With mounting brackets




Angle mounting bracket




Flush mount enclosure

Table setting

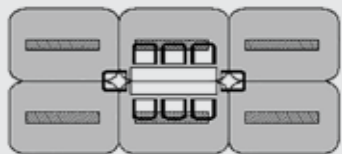


6x2400W

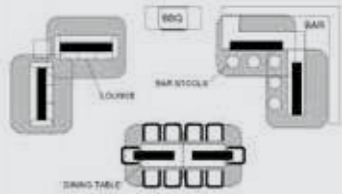


6x2400W

Mounting options


Mounting

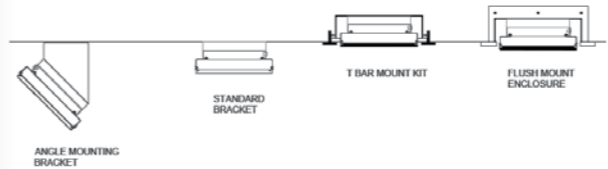

Angle mounting bracket

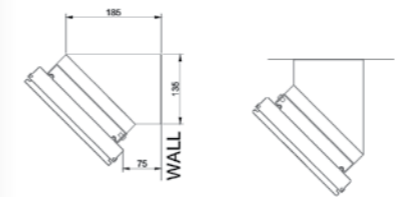

Flush mount enclosure

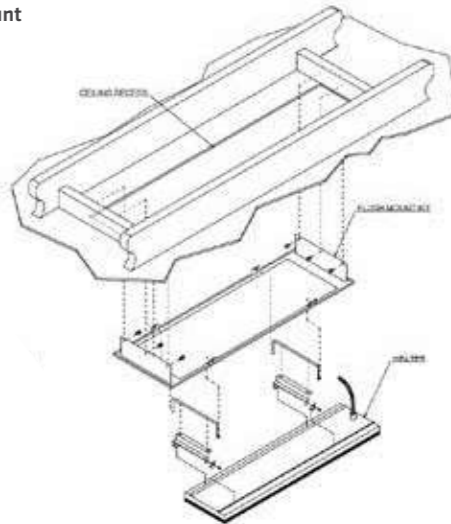

| Suitable for model | Part No | Hole cutout dimensions (mm) | Overall dimensions (mm) |
|--------------------|-----------|-----------------------------|-------------------------|
| THS1200A | THSAC-026 | 1020 x 325 | 1040 x 345 x 100 |
| THS2400A | THSAC-028 | 1930 x 325 | 1950 x 345 x 100 |




HEATSTRIP® Wall Mounted Gas Heater

The HEATSTRIP Wall Mounted Gas heater, Model TGH34PL-2EU30 (LPG 30MB) and TGH34WNEU-2 (NG) are a stylish addition to any outdoor area, where mains Naturel Gas is preferred. World class design aesthetics, heat output and performance, for both residential and commercial applications.

Features:

- 34MJ (9,44 kWh), 4 tile commercial quality ceramic burners, for connection to mains gas
- The heater head unit is now full stainless steel with ultra high temperature paint finish
- The operation system is by finger pull tabs, with fully earthed thermocouple
- Protective grille and reflector included as standard, to guarantee safe Operation. Reflector design ensures that only a minimum of 500mm overhead clearance is required
- Wall mounting bracket allows for mounting angle, and is extremely robust to provide strength and support
- 2 year residential and 1 year commercial warranty

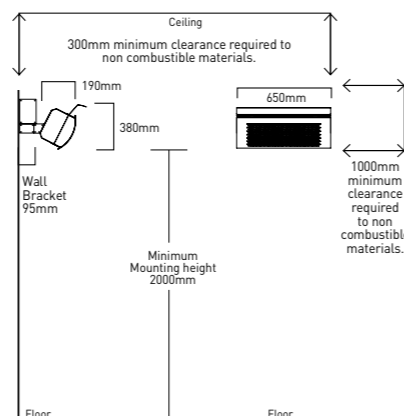

| Type | Tiles | kWh | Ignition | Dimensions (LxWxH) |
|---------------|-------|------|------------|--------------------|
| TGH34PL-2EU30 | 4 | 9,44 | Electronic | 650 x 190 x 380 |
| TGH34WNEU-2 | 4 | 9,44 | Electronic | 650 x 190 x 380 |




HEATSTRIP® Gas Portable LPG Heater

The HEATSTRIP Gas portable LPG heater, Model TGH34PL incorporates world leading design, quality, heat performance and efficiency to provide a stylish, robust and elegant solution for your outdoor and open indoor alfresco areas, balcony, patio, halls & warehouses.

Features:

- 34 MJ (9,44 kWh) and 4 tile commercial quality ceramic burners To be used with 9kg LPG bottle (not included)
- The operation system is by finger pull tabs, with fully earthed thermocouple
- Integrated wheels for easy portability and storage, allows you to heat exactly where you want it. Perfect for residential and commercial applications
- Components are sub-assembled for easy DIY installation
- Protective grille and reflector included as standard, to guarantee safe operation
- 2 year residential and 1 year commercial warranty
- Tilt switch: Gas supply stops as soon as the heater falls over


| Type | Tiles | kWh | Ignition | Dimensions (LxWxH) |
|-----------|-------|------|------------|--------------------|
| TGH34PL30 | 4 | 9,44 | Electronic | 650 x 670 x 2118 |
| TGHCOVER | | | | 650 x 670 x 2118 |

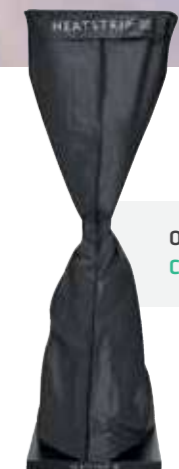

Optional:
Cover



Heating output

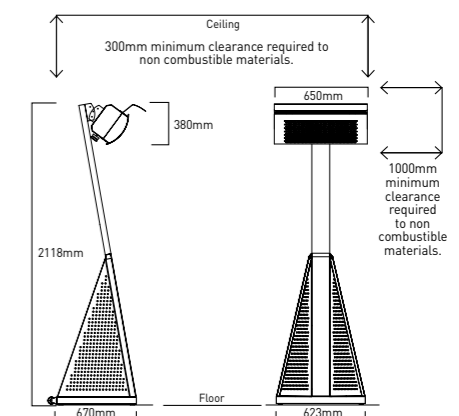

| Article number | EAN | Description | Packaging size LxBxH (mm) | Net Weight | Gross Weight |
|---------------------------|---------------|---|------------------------------|---------------|-----------------|
| HEATSTRIP INTENSE | | | | | |
| THY22003EU | 9334038004381 | HEATSTRIP Intense 2200 watt 3M Cord | 1110 x 160 x 160 | 5.2 kg | 6.1 kg |
| THY2200P-EU | 9334038004435 | HEATSTRIP Intense 3M Cord + Stand | 1150 x 350 x 300 | 19.4 kg | 22.1 kg |
| HEATSTRIP MAX | | | | | |
| THX2400EU | 9334038002806 | HEATSTRIP Max 2400 watt | 920 x 210 x 150 | 4.7 kg | 6.0 kg |
| THX3600EU | 9334038002820 | HEATSTRIP Max 3600 watt | 1250 x 210 x 150 | 6.2 kg | 7.7 kg |
| HEATSTRIP ELEGANCE | | | | | |
| THE1800EU | 9334038003551 | HEATSTRIP Elegance 1800 watt | 1045 x 200 x 100 | 4.3 kg | 5.3 kg |
| THE2400EU | 9334038003568 | HEATSTRIP Elegance 2400 watt | 1275 x 200 x 100 | 5.2 kg | 6.3 kg |
| THE3600EU | 9334038003575 | HEATSTRIP Elegance 3600 watt | 1875 x 200 x 100 | 7.4 kg | 8.9 kg |
| THE2400EUR | 9334038004633 | HEATSTRIP Elegance 2400 watt remote | 1390 x 200 x 100 | 6.0 kg | 7.2 kg |
| THE3200EUR | 9334038004640 | HEATSTRIP Elegance 3200 watt remote | 1790 x 200 x 100 | 7.6 kg | 9.0 kg |
| THE2400EURA | 9334038004749 | HEATSTRIP Elegance 2400 watt remote & app | 1390 x 200 x 100 | 6.0 kg | 7.2 kg |
| THE3200EURA | 9334038004756 | HEATSTRIP Elegance 3200 watt remote & app | 1790 x 200 x 100 | 7.6 kg | 9.0 kg |
| HEATSTRIP DESIGN | | | | | |
| THH1500AEU | 9334038002059 | HEATSTRIP Design 1500 watt | 1000 x 200 x 100 | 4.4 kg | 5.3 kg |
| THH2400AEU | 9334038002097 | HEATSTRIP Design 2400 watt | 1440 x 200 x 100 | 6.0 kg | 6.9 kg |
| THH2400AEU3 | 9334038004060 | HEATSTRIP Design 2400 watt 3M Cord | 1440 x 200 x 100 | 6.9 kg | 7.4 kg |
| THH3200AEU | 9334038008529 | HEATSTRIP Design 3200 watt | 1840 x 200 x 100 | 7.3 kg | 8.7 kg |
| THD2400EUR | 9334038004688 | HEATSTRIP Design 2400 watt remote | 1390 x 200 x 100 | 6.2 kg | 7.4 kg |
| THD3200EUR | 9334038004695 | HEATSTRIP Design 3200 watt remote | 1790 x 200 x 100 | 7.6 kg | 9.0 kg |
| THD2400EURA | 9334038004732 | HEATSTRIP Design 2400 watt remote & app | 1390 x 200 x 100 | 6.2 kg | 7.4 kg |
| THD3200EURA | 9334038004763 | HEATSTRIP Design 3200 watt remote & app | 1790 x 200 x 100 | 7.6 kg | 9.0 kg |
| HEATSTRIP INDOOR | | | | | |
| THS1200AEU | 9334038002844 | HEATSTRIP Indoor 1200 watt | 1000 x 260 x 100 | 5.6 kg | 6.6 kg |
| THS2400AEU | 9334038002882 | HEATSTRIP Indoor 2400 watt | 1905 x 260 x 100 | 10.4 kg | 12.4 kg |
| HEATSTRIP GAS HEATER | | | | | |
| TGH34WNEU-2 | 9334038005197 | Wall Mounted Naturel Gas Heater | 720 x 340 x 385 | 11.3 kg | 13.4 kg |
| TGH34PL-2EU30 | 9334038005494 | Heatstrip Gasheater HEAD LPG 30MB | 720 x 340 x 385 | 11.3 kg | 13.2 kg |
| TGHCOVER | 9334038003711 | Cover Portable Heater | 420 x 310 x 60 | 1.8 kg | 2.0 kg |
| HEATSTRIP STAND | | | | | |
| THAC-100 | 9334038004411 | Portable Electric Heaterstand | 120 x 355 x 305 | 14.3 kg | 17.7 kg |
| TGH30PL2STAND | 9334038005586 | Portable Gas Heaterstand | 1115 x 720 x 250 | 14.3 kg | 26.1 kg |
| HEATSTRIP WALL CONTROLLER | | | | | |
| TT-MTR | 9334038002837 | Wall controller / timer / remote | 150 x 100 x 55 | 0.2 kg | 0.3 kg |
| TT-MTM | 9334038002400 | Wall controller / timer / remote / heat options | 175 x 105 x 55 | 0.2 kg | 0.3 kg |

| Article number | EAN | Description | Packaging size LxBxH (mm) | Net Weight | Gross Weight |
|--|---------------|--|------------------------------|---------------|-----------------|
| HEATSTRIP FLUSH MOUNT ENCLOSURE | | | | | |
| THYAC-053 | 9334038004152 | Flush Mount Enclosure THY2200EU | 1260 x 310 x 260 | 7.7 kg | 9.6 kg |
| THXAC-030 | 9334038002868 | Flush Mount Enclosure THX2400EU | 1060 x 420 x 250 | 6.3 kg | 8.6 kg |
| THXAC-031 | 9334038002875 | Flush Mount Enclosure THX3600EU | 1380 x 420 x 250 | 8.0 kg | 10.6 kg |
| THEAC-040 | 9334038003612 | Flush Mount Enclosure THE1800EU | 1150 x 340 x 190 | 5.4 kg | 6.7 kg |
| THEAC-041 | 9334038003629 | Flush Mount Enclosure THE2400EU | 1390 x 340 x 190 | 6.8 kg | 8.0 kg |
| THEAC-042 | 9334038003636 | Flush Mount Enclosure THE3600EU | 2070 x 340 x 190 | 9.4 kg | 12.0 kg |
| THERAC-056 | 9334038004558 | Flush Mount Enclosure THE2400EUR(A) | 1480 x 340 x 190 | 7.0 kg | 9.0 kg |
| THERAC-057 | 9334038004565 | Flush Mount Enclosure THE3200EUR(A) | 1885 x 340 x 190 | 9.0 kg | 11.0 kg |
| THHAC-009 | 9334038002417 | Flush Mount Enclosure THH1500EU | 1105 x 340 x 190 | 5.4 kg | 6.7 kg |
| THHAC-011 | 934038002332 | Flush Mount Enclosure THH2400EU | 1545 x 340 x 190 | 7.5 kg | 9.3 kg |
| THHAC-012 | 9334038002349 | Flush Mount Enclosure THH3200EU | 1960 x 340 x 190 | 9.3 kg | 11.5 kg |
| THHAC-009MB | 8719324696647 | Flush Mount Enclosure THH1500EU (matt black) | 1105 x 340 x 190 | 5.4 kg | 6.7 kg |
| THHAC-011MB | 8719324696654 | Flush Mount Enclosure THH2400EU (matt black) | 1545 x 340 x 190 | 7.5 kg | 9.3 kg |
| THHAC-012MB | 8719324696661 | Flush Mount Enclosure THH3200EU (matt black) | 1960 x 340 x 190 | 11.5 kg | 9.3 kg |
| THDAC-058 | 9334038005623 | Flush Mount Enclosure THD2400EUR(A) | 1490 x 340 x 190 | 7.0 kg | 8.8 kg |
| THDAC-059 | 9334038005630 | Flush Mount Enclosure THD3200EUR(A) | 1890 x 340 x 190 | 9.0 kg | 11.1 kg |
| THSAC-026 | 9334038002721 | Flush Mount Enclosure THS1200EU | 1100 x 420 x 200 | 3.5 kg | 4.8 kg |
| THSAC-028 | 9334038002745 | Flush Mount Enclosure THS2400EU | 2020 x 420 x 200 | 5.0 kg | 7.2 kg |
| HEATSTRIP BRACKET / EXTENSION BRACKET INTENSE | | | | | |
| ZBRAK-132W | 9334038004626 | Bracket Mounting Kit THY New (Black) | 150 x 155 x 40 | 0.2 kg | 0.3 kg |
| THYAC-047B | 9334038004336 | Extension Pole 300mm Black 2pack | 345 x 55 x 30 | 0.3 kg | 0.4 kg |
| THYAC-048B | 9334038004343 | Extension Pole 600mm Black 2pack | 645 x 55 x 30 | 0.5 kg | 0.6 kg |
| THYAC-049B | 9334038004350 | Extension Pole 900mm Black 2pack | 940 x 55 x 30 | 0.7 kg | 0.8 kg |
| THYAC-050B | 9334038004367 | Extension Pole 1200mm Black 2pack | 1310 x 55 x 30 | 1.0 kg | 1.1 kg |
| HEATSTRIP BRACKET / EXTENSION BRACKET ELEGANCE | | | | | |
| ZBRAK-113W | 9334038003742 | Bracket Mounting Kit THE New (White) | 150 x 155 x 40 | 0.2 kg | 0.3 kg |
| THEAC-058 | 9334038005173 | Wall mount bracket THE (White) | 600 x 400 x 240 | 3.3 kg | 4.2 kg |
| THEAC-043W | 9334038003643 | Extension Pole 300mm White 2pack | 345 x 55 x 30 | 0.2 kg | 0.3 kg |
| THEAC-044W | 9334038003650 | Extension Pole 600mm White 2pack | 645 x 55 x 30 | 0.5 kg | 0.6 kg |
| THEAC-045W | 9334038003667 | Extension Pole 900mm White 2pack | 940 x 55 x 30 | 0.7 kg | 0.8 kg |
| THEAC-046W | 9334038003674 | Extension Pole 1200mm White 2pack | 1310 x 55 x 30 | 1.0 kg | 1.1 kg |
| HEATSTRIP BRACKET / EXTENSION BRACKET DESIGN / MAX | | | | | |
| ZBRAK-113S | 9334038003735 | Bracket Mounting Kit THH New (Silver) | 150 x 155 x 40 | 0.2 kg | 0.3 kg |
| ZBRAK-113B | 9334038003728 | Bracket Mounting Kit THD (Black) | 150 x 155 x 40 | 0.2 kg | 0.3 kg |
| ZBRAK-132S | 9334038004466 | Bracket Mounting Kit THX (Silver) | 150 x 155 x 40 | 0.2 kg | 0.3 kg |
| THHAC-028 | 9334038004176 | Wall mount bracket THH / THE (Silver) | 545 x 170 x 260 | 3.2 kg | 3.7 kg |
| THDAC-060 | 9334038005548 | Wall mount bracket THH (Black) | 600 x 400 x 240 | 3.3 kg | 4.2 kg |
| THHAC-005S | 9334038002288 | Extension Pole 300mm Silver 2pack | 345 x 55 x 30 | 0.2 kg | 0.3 kg |
| THHAC-006S | 9334038002295 | Extension Pole 600mm Silver 2pack | 645 x 55 x 30 | 0.5 kg | 0.6 kg |
| THHAC-007S | 9334038002301 | Extension Pole 900mm Silver 2pack | 940 x 55 x 30 | 0.7 kg | 0.8 kg |
| THHAC-008S | 9334038002318 | Extension Pole 1200mm Silver 2pack | 1310 x 55 x 30 | 1 kg | 1.1 kg |
| HEATSTRIP BRACKET / EXTENSION BRACKET INDOOR | | | | | |
| ZBRAK-92 | 9334038004619 | Bracket Mounting Kit THS New (White) | 210 x 55 x 60 | 0.2 kg | 0.3 kg |
| THSAC-020 | 9334038002660 | Angle mounting brackets THS | 190 x 135 x 30 | 0.3 kg | 0.4 kg |



Hotel Arts



Starbucks

HEATSTRIP FOR HOSPITALITY LEADING HEATING TECHNOLOGY

The HEATSTRIP® is an attractive outdoor heating solution, providing high output, instant heat. HEATSTRIP has successfully enabled many entertainment venues such as restaurants, pubs and clubs to utilise their outdoor dining areas day and night, through all seasons.

HEATSTRIP® 
LEADING HEATING TECHNOLOGY



Pooye restaurant



Columbia Beach Cyprus



Cruise ship



For more information about the HEATSTRIP and possibilities, visit our website.



www.heatstrip.eu
www.heatstrips.co.uk

© HEATSTRIP