# **BEVERAGE-AIR**

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

# DRAFT BEER EQUIPMENT-DIRECT DRAW DISPENSER

DD94HC Solid Door Dual Towers With Dual Faucets Hydrocarbon Series



# **OPTIONS & ACCESSORIES**

- Twelve tap tower
- Stainless steel interior lining
- Stainless steel back
- · Glass door
- Shelves
- Shelf clips
- Custom tower hole location
- Drip tray location option
- Wine models
- Faucet locks
- Glass rinser
- Right or left hinged door
- 2"- 3" Casters or 6" black legs
- 1-6 Tap tower
- 2, 3 & 4 way manifolds
- Dual tap placement option
- No draft/hole cover option
- Remote option\* (see note on back on page)





3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com

## **3 Year Parts/Labor Warranty**

#### Additional 4 Year Compressor Warranty

#### **CABINET CONSTRUCTION**

- Exterior features durable black painted steel with galvanized steel back
- Top and drip tray are heavy-duty stainless steel
- Interior is galvanized steel on walls and ceiling, reinforced floor is heavy-duty stainless steel
- Full electronic control
- Dual towers with dual faucets

- 3-in-1 Draft solution uses a single stainless-steel tap to serve different beverages, such as wine, beer, and coffee (or other non-alcoholic beverages) through silver-lined, anti-microbial tubing that is 100% effective against the top 4 beverage spoiling bacteria
- 3" Stainless steel insulated dispensing tower
- Drain tube located at bottom front of cooler for connection to floor drain
- Door locks
- Self-closing doors with 120° stay-open feature
- Magnetic gaskets provide positive door seal
- Field reversible doors (hinge kit not included)
- · Compressor available on left or right, specify at time of unit order

### **REFRIGERATION SYSTEM**

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil
- Maintains product temperatures between 36°F and 38°F


MODEL:

DD94HC-1-B




MODEL	DD94HC-1-B
EXTERNAL DIMENSIONAL DATA	
Width Overall	95"
Depth Overall	29"
Height Overall (floor to top of tap)	52 ½"
Number of Doors	3
Depth with Door Open 90°	50 ½"
Door Opening (in)	21" X 30"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	37.82
Internal Width Overall (in)	82 ¼"
Internal Depth Overall (in)	23 1⁄8"
Internal Height Overall (in)	27 ¼"
Number of 1/2 Kegs	5
ELECTRICAL DATA	
Full Load Amperes	5.5
REFRIGERATION DATA	
Horsepower	1/3
Capacity (BTU/Hr)	2392
Heat Rejection (BTU/Hr)	3588
Charge (lbs/grams)	0.2535/115
SHIPPING DATA	
Gross Weight - Crated	458 lbs
Height - Crated	45"
Width - Crated	97"
Depth - Crated	32"
NOTE: Remote units are field wired and come with 6" leas.	

\*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.



# Bar Equipment-Direct Draw Beer Dispenser Model: DD94HC-1-B

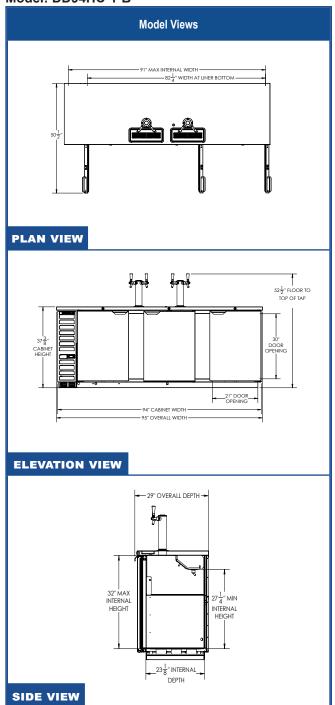

#### **ELECTRICAL CONNECTION**



Unit pre-wired at factory and include 8' long cord and plug set.



3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com

an Ali Group Compar

