

Halco®

LIGHTING TECHNOLOGIES

LED PRODUCT GUIDE



LED Retrofit Downlights




LED Direct Fit Slim Downlights



Next Generation
A19, BR, PAR Lamps



LED SekTor
Area Lights

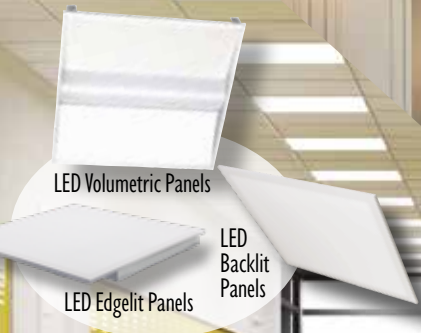

LED Volumetric Panels

LED Backlit
Panels

LED Edgelit Panels



LED Commercial Downlights



LED SekTor Flood Lights



2', 3', 4', 8'
LED T8s



LED HID Retrofits



LED Wallpacks



LED Round Highbays



LED Linear Highbays

2022

Table of Contents

OUTDOOR LUMINAIRES

ProLED Vaportight Series	4
ProLED Select WPFS Wallpack Series	4
ProLED Select WPS Wallpack Series	4
ProLED Select SekurPak Wallpack Series	5
ProLED Adjustable Full-Cutoff Wallpack	5
ProLED Select Flood Light Series	6
LED High Lumen Flood Light	6
ProLED Select SekTor Floodlight Series	6
Patrol Security Floodlight.....	7
Mini Bullet Flood Light	7
ProLED CSP Series Slim Parking Garage Canopy	7
ProLED SekTor Area Lights	8

INDOOR LUMINAIRES

Evade Exit Series	9
Combination Exit & Emergency Fixtures	9
Emergency Light	9
Emergency Wallpack	9
ProLED Select Strip Fixture	10
ProLED Linear Strip	10
ProLED Linear Wrap	10
ProLED Lamp Ready Fixture Strip	11
ProLED Lamp Ready Fixture Wrap	11
ProLED Select Linear Vaportight	11
ProLED HLVT Series Linear Vaportight	11
ProLED Select HoverBay Round Highbay Series	12
ProLED Premium Linear High Bay Series	12
ProLED Select Linear High Bay Series	13
ProLED Select Edgelit Flat Panel: Field Selectable Light Output & CCT	14
ProLED Edgelit Flat Panel	14
Surface Mount Kit	14
ProLED Select Backlit Panel	14
ProLED Select Troffer Retrofit Kit RVMV Series: Field Selectable Light Output.....	15
ProLED Select Volumetric Panel Series	15
ProLED Select Commercial Downlight Retrofit: Field Selectable Wattage and CCT	15
ProLED Commercial Downlight Retrofit	16
ProLED High Performance Commercial Downlight Series	16
ProLED Select Retrofit Downlight Series	17
ProLED Select Gimbal Downlight Series.....	18
ProLED Surface Downlight Retrofit Series	18
ProLED Select Slim Downlight Series	18
ProLED Select Direct Fit Slim Downlights	19
ProLED Square Downlights	20

LAMPS

ProLED HID High Bay Retrofit Series	20
ProLED HID Wallpack Retrofit Series	20
ProLED HID Omni Retrofit Series	21
ProLED Select HID Retrofit Series	21
ProLED Temporary Work Light	21
ProLED Linear Type A T8 Series	22

ProLED U-Bend Type A T8 Series	22
ProLED T5 High Output Type A Direct Fit Replacement Series	22
ProLED T5 Single End Bypass Series	22
ProLED T8 Linear Single End Bypass Series	22
ProLED T8 Linear 8' Double Ended Bypass Series	23
ProLED T8 Linear Type B Double Ended Bypass Series ...	23
ProLED T8 Linear Type B Double Single Ended Bypass ...	23
ProLED Linear T8 Hybrid Type A/B	23
ProLED T8 Lamps	23
ProLED ECO A19 Series	24
ProLED A19 Contractor Series 6 Pack	24
ProLED A19 Omnidirectional A-Shape Series-GU24 Base	24
ProLED A19 Omnidirectional A-Shape Series	25
ProLED Performance A-Shape Lamp - Title 20.....	25
ProLED Performance Reflector Lamps.....	25
ProLED Performance PAR Lamps	26
ProLED BR40	26
ProLED BR30	26
ProLED BR30 Contractor Series 6 Pack	26
ProLED R20	26
ProLED Prime PAR Series	27
ProLED ECO PAR Series	28
ProLED PAR36 / AR111 Indoor	28
ProLED PL Bypass Series	29
ProLED PL Direct Series	29
ProLED PL Hybrid Series	29
ProLED B11 Chandelier	30
ProLED Decorative Chandelier	30
ProLED G25 Series Globe	30
ProLED Filament LED Series	31
ProLED Sign Lamp Series	32
ProLED Elevator Lamp	32
ProLED MR16 GU10	32
ProLED MR16	33
ProLED Commercial MR16 / MR11	34

OUTDOOR LAMPS

ProLED MR16 RGB-W Series	34
ProLED MR16 Black	34
ProLED MR11	35
ProLED Outdoor PAR36	35
ProLED Outdoor PAR36 RGB-W Series	35
ProLED IP Rated LED JC Series	36
ProLED Omnidirectional IP65 JC Lamps	36
ProLED Traditional JC Series	37
ProLED Traditional LED Series: JC3 G4	37

SOLLOS LANDSCAPE PRODUCTS


Up and Accent Lights	38
Path Lights	38
Well Lights	38
Transformers	38
Lamps & Fixture	38

About Halco Lighting Technologies

Established in 1974, Halco Lighting Technologies is a leader in lamp, luminaire and ballast solutions. We are dedicated to providing you with the latest in energy efficient technologies, illustrated by our ProLED luminaires and full offering of ProLED lamps. Halco's luminaire offering features indoor recessed solutions such as ProLED Panel, Volumetric Panel and Downlight Retrofit luminaires. Our broad selection of long life, energy efficient ProLED lamps is available in popular shapes with an array of color temperatures and beam spreads. Halco is your single source for LED lamps for replacement and retrofit applications.

Service

We measure our success by one standard - your satisfaction. Halco carries inventory of a broad SKU offering to assure we have what you need when you need it. With strategically located warehouses in Atlanta, Chicago, Cleveland, Houston, Los Angeles and Phoenix, orders placed by 2:00 PM local warehouse time ship the same day. Will-call and courier service is also available for your convenience.

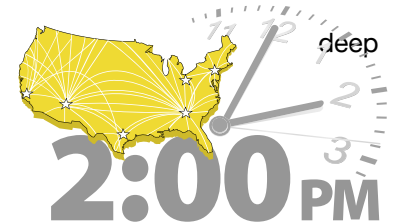

How to Read Ordering Information

Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	CBCP	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®] /DLC Qualified ³
81074	PAR36WFL4/827/IP67/LED	Wide Flood	4.5W	MP Term	10-15V	2700K	82	300	700	40,000	Yes	1/6	32°	2.40"	20W	No
81075	PAR36WFL6/827/IP67/LED	Wide Flood	6.5W	MP Term	10-15V	2700K	82	450	1100	40,000	Yes	1/6	32°	2.40"	35W	No
81076	PAR36WFL12/827/IP67/LED	Wide Flood	12.5W	MP Term	10-15V	2700K	82	800	2000	40,000	Yes	1/6	32°	2.40"	50W	No

Product Number
Use this product number when placing an order

Description
Light Distribution or other important information

Color Temp.
A term used to describe the color of a light source and is expressed in degrees Kelvin (K)

Base
Indicates base type

Lumens
Represents average light output

Useful Life
Rated at L70

Package Quantity
Indicates minimum sell quantity and smallest shipping carton

MOL
Indicates maximum overall length in inches

ENERGY STAR[®]/DLC Qualified
Designates a qualified product

SPEC SHEET AVAILABLE HERE.

Spec Sheet Available Here.
Link to corresponding Product spec sheet.

Product Code
Abbreviated product description can also be used for ordering

Wattage
Indicates the power consumed by the lamp during operation

Voltage
Indicates the product's design voltage of operation

CRI
Lamps ability to render an object's color

CBCP
Luminous intensity at the center of the beam

Dimmable
Designates if product can be dimmed

Beam Spread
Indicates the beam angle or beam spread of a bulb, measured in degrees

Eq. Wattage
Typical wattage of Incandescent or Halogen lamp of comparable light output

Customer Support

Our customer support team is available assist for project and volume pricing. Contact your local rep for more information 1-800-677-3334.

¹ Useful Life is defined as the point in time at which the LED will maintain at least 70% of its initial lumens. The LED will continue to operate past this point at decreased light levels.

² May not be compatible with all Dimming systems, Dimming performance may vary by system. Please check www.halcolighting.com for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life.

³ To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/qpl.



SPEC SHEET AVAILABLE HERE.

ProLED Vaportight Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Wet Location	Eq. Wattage	ENERGY STAR [®]
10455	VPT-20-4K-U	20W	120-277V	4000K	>80	1915	50,000	Yes	100W PSMH	Yes
10456	VPT-20-5K-U	20W	120-277V	5000K	>80	2198	50,000	Yes	100W PSMH	Yes

SPEC SHEET AVAILABLE HERE.

ProLED Select WPFS Wallpack Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life	Equivalent Wattage	DLC Qualified
20352	WPFS1-WS-CS-U	30W-40W-50W-60W	120-347V	3000K, 4000K, 5000K	80	4,110-7,866	100,000	100W - 250W MH	5.1 Standard
20353	WPFS2-WS-CS-U	70W-80W-90W-100W	120-347V	3000K, 4000K, 5000K	80	9,656-13,344	100,000	250W - 400W MH	5.1 Standard

Available Accessories

Product #	Product Code	Product Description
10141	PC/120277	Button Photocell, 120-277V

SPEC SHEET AVAILABLE HERE.

ProLED Select WPS Wallpack Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	DLC Qualified ³
10390	WPS-28-4K-U	28W	120-277V	4000K	80	3514	50,000	No	Standard
10391	WPS-28-5K-U	28W	120-277V	5000K	80	3609	50,000	No	Standard
10392	WPS-40-4K-U	40W	120-277V	4000K	80	4885	50,000	No	Standard
10393	WPS-40-5K-U	40W	120-277V	5000K	80	4948	50,000	No	Standard
10394	WPS-80-4K-U	80W	120-277V	4000K	80	9797	50,000	No	Standard
10395	WPS-80-5K-U	80W	120-277V	5000K	80	9865	50,000	No	Standard
10396	WPS-120-4K-U	120W	120-277V	4000K	80	14228	50,000	No	Standard
10397	WPS-120-5K-U	12W	120-277V	5000K	80	14465	50,000	No	Standard

Available Accessories

Product #	Product Code	Description
10141	PC/120-277	BUTTON PHOTOCELL; 120-277VAC

OUTDOOR LUMINAIRES

ProLED Select SekurPak Wallpack Series, ProLED Adjustable Full-Cutoff Wallpack

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Select SekurPak Wallpack Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified ³
10450	SKWP-15-FS-U	15W	120-277V	3000K,4000K, 5000K	80	1941,2061, 2024	50,000	No	100W MH	Standard
10451	SKWP-20-FS-U	20W	120-277V	3000K, 4000K, 5000K	80	2456, 2651, 2551	50,000	No	150W PSMH	Standard
10452	SKWP-26-FS-U	26W	120-277V	3000K, 4000K, 5000K	80	3239, 3484, 3263	50,000	No	175W MH	Standard

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Adjustable Full-Cutoff Wallpack



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified ³
10275	WP-FCA12U30	12W	120-277V	3000K	70	1440	100,000	No	50W MH	Premium
10334	WP-FCA12U40	12W	120-277V	4000K	70	1458	100,000	No	50W MH	Premium
10279	WP-FCA12U50	12W	120-277V	5000K	70	1458	100,000	No	50W MH	Premium
10276	WP-FCA24U30	24W	120-277V	3000K	70	2718	100,000	No	100W MH	Premium
10335	WP-FCA24U40	24W	120-277V	4000K	70	2716	100,000	No	100W MH	Premium
10280	WP-FCA24U50	24W	120-277V	5000K	70	2716	100,000	No	100W MH	Premium
10277	WP-FCA50U30	50W	120-277V	3000K	70	5515	100,000	0-10V	150W MH	Premium
10336	WP-FCA50U40	50W	120-277V	4000K	70	6111	100,000	0-10V	150W MH	Premium
10281	WP-FCA50U50	50W	120-277V	5000K	70	6111	100,000	0-10V	150W MH	Premium
10278	WP-FCA75U30	75W	120-277V	3000K	70	7960	100,000	0-10V	250W MH	Standard
10337	WP-FCA75U40	75W	120-277V	4000K	70	8683	100,000	0-10V	250W MH	Standard
10282	WP-FCA75U50	75W	120-277V	5000K	70	8683	100,000	0-10V	250W MH	Standard

Available Accessories

Product #	Product Code	Description
10141	PC/120277	Button Photocell, 120-277V

SPEC SHEET AVAILABLE HERE.

ProLED Select Flood Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified ³
10339	FLFS12/3CCTU/KN	12W	120-277V	3000K, 4000K, 5000K	70	1560	100,000	No	50W MH	Standard
10340	FLFS12/3CCTU/YK	12W	120-277V	3000K, 4000K, 5000K	70	1560	100,000	No	50W MH	Standard
10341	FLFS30/3CCTU/KN	30W	120-277V	3000K, 4000K, 5000K	70	3900	100,000	No	100W MH	Standard
10342	FLFS30/3CCTU/YK	30W	120-277V	3000K, 4000K, 5000K	70	3900	100,000	No	100W MH	Standard
10343	FLFS50/3CCTU/KN	50W	120-277V	3000K, 4000K, 5000K	70	6500	100,000	No	150W MH	Standard
10344	FLFS50/3CCTU/YK	50W	120-277V	3000K, 4000K, 5000K	70	6500	100,000	No	150W MH	Standard
10345	FLFS70/3CCTU/SF	7W	120-277V	3000K, 4000K, 5000K	70	9100	100,000	0-10V	175W MH	Standard
10346	FLFS70/3CCTU/YK	70W	120-277V	3000K, 4000K, 5000K	70	9100	100,000	0-10V	175W MH	Standard
10347	FLFS100/3CCTU/SF	100W	120-277V	3000K, 4000K, 5000K	>70	13000	100,000	0-10V	250W PSMH	Standard
10348	FLFS100/3CCTU/YK	100W	120-277V	3000K, 4000K, 5000K	>70	13000	100,000	0-10V	250W PSMH	Standard

SPEC SHEET AVAILABLE HERE.

ProLED High Lumen Flood Light



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified ³
10349	FL150/U50/SF	150W	120-277V	5000K	>70	19500	>100,000	0-10V	400W MH	Premium
10350	FL150/U50/YK	150W	120-277V	5000K	>70	19500	>100,000	0-10V	400W MH	Premium

Available Accessories

Product #	Product Code	Description
10141	PC/120277	Button Photocell, 120-277V

SPEC SHEET AVAILABLE HERE.

ProLED Select SekTor Floodlight Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	DLC Qualified ³
24900	SFL-150-CS-U-TR	150W	120-277V	3000K, 4000K, 5000K	70	18, 236-20, 552	50,000	Yes	Premium
24901	SFL-150-CS-U-KN	150W	120-277V	3000K, 4000K, 5000K	70	18, 236-20, 552	50,000	Yes	Premium
24902	SFL-200-CS-U-TR	200W	120-277V	3000K, 4000K, 5000K	70	25, 162-28, 382	50,000	Yes	Premium
24903	SFL-200-CS-U-KN	200W	120-277V	3000K, 4000K, 5000K	70	25, 162-28, 382	50,000	Yes	Premium
24904	SFL-300-40-U-TR	300W	120-277V	4000K	70	42,761	50,000	Yes	Premium
24905	SFL-300-40-U-KN	300W	120-277V	5000K	70	42,761	50,000	Yes	Premium
24906	SFL-300-50-U-TR	300W	120-277V	4000K	70	43,184	50,000	Yes	Premium
24907	SFL-300-50-U-KN	300W	120-277V	5000K	70	43,184	50,000	Yes	Premium

OUTDOOR LUMINAIRES

Patrol Security Floodlights, Mini Bullet Flood Light, & Slim Parking Garage/Canopy

ProLED Select SekTor Floodlight Series

Fixture Options

Product #	Product Code	Description
24910	SEK-SPD	SekTor 10 KVA Surge Protection Device
24911	SFL-3PR	SekTor Flood 3 Pin Photocell Extension & Shorting Cap

Available Accessories

Product #	Product Code	Description
24915	SFL-VSR-M	SekTor Visor 150W & 200W Fixture
24916	SFL-VSR-L	SekTor Visor 300W Fixture
24917	SFL-WGD-M	SekTor Wireguard 150W & 200W Fixture
24918	SFL-WGD-L	SekTor Wireguard 300W Fixture
10231	PC/JL205C	Photocell twist lock 120 277VAC JL 205C

[SPEC SHEET AVAILABLE HERE.](#)

Patrol Security Floodlight



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life	Dimmable	Equivalent Wattage
24954	PFL-20-30-U-BZ	20W	120-277V	3000K	80	2000	30,000	No	100W MH
24955	PFL-20-30-U-WH	20W	120-277V	3000K	80	2000	30,000	No	100W MH
24956	PFL-20-50-U-BZ	20W	120-277V	5000K	80	2000	30,000	No	100W MH
24957	PFL-20-50-U-WH	20W	120-277V	5000K	80	2000	30,000	No	100W MH

[SPEC SHEET AVAILABLE HERE.](#)

Mini Bullet Flood Light



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life	Dimmable	Equivalent Wattage
24950	MBUL-10-30-U-BZ	10W	120-277V	3000K	80	1050	30,000	No	50W MH
24951	MBUL-10-30-U-BL	10W	120-277V	3000K	80	1050	30,000	No	50W MH
24952	MBUL-10-50-U-BZ	10W	120-277V	5000K	80	1050	30,000	No	50W MH
24953	MBUL-10-50-U-BL	10W	120-277V	5000K	80	1050	30,000	No	50W MH

[SPEC SHEET AVAILABLE HERE.](#)

ProLED CSP Series Slim Parking Garage Canopy



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified ³
Parking Garage Distribution										
10284	CSP/28U40	28W	120-277V	4000K	70	3267	100,000	0-10V	150W MH	Premium
10290	CSP/28U40/MS	28W	120-277V	4000K	70	3267	100,000	0-10V	150W MH	Premium
10287	CSP/28U50	28W	120-277V	5000K	70	3364	100,000	0-10V	150W MH	Premium
10293	CSP/28U50/MS	28W	120-277V	5000K	70	3364	100,000	0-10V	150W MH	Premium
10285	CSP/40U40	40W	120-277V	4000K	70	4718	100,000	0-10V	175W MH	Premium
10291	CSP/40U40/MS	40W	120-277V	4000K	70	4718	100,000	0-10V	175W MH	Premium
10288	CSP/40U50	40W	120-277V	5000K	70	4760	100,000	0-10V	175W MH	Premium
10294	CSP/40U50/MS	40W	120-277V	5000K	70	4760	100,000	0-10V	175W MH	Premium
10286	CSP/60U40	60W	120-277V	4000K	70	7088	100,000	0-10V	250W MH	Premium
10292	CSP/60U40/MS	60W	120-277V	4000K	70	7088	100,000	0-10V	250W MH	Premium
10289	CSP/60U50	60W	120-277V	5000K	70	7088	100,000	0-10V	250W MH	Premium
10295	CSP/60U50/MS	60W	120-277V	5000K	70	7088	100,000	0-10V	250W MH	Premium

Available Accessories

Product #	Product Code	Description
10296	CSC/LENS	Slim Canopy; Lens Canopy Distribution
10297	CSBBU/KIT	Slim Canopy; Emergency Battery Backup Kit, 8W, 120-277V
10141	PC/120277	Button Photocell, 120-277V

SPEC SHEET AVAILABLE HERE.

ProLED **SekTor** Area Lights



Ordering Logic EX: SAL-200-T3-40-U-7PR

Series	Wattage	Distribution	CCT	Voltage	Options
SAL = SekTor Area Light	100 = 100 Watts 150 = 150 Watts 200 = 200 Watts 240 = 240 Watts 300 = 300 Watts	T2 = Type II* T3 = Type III T4 = Type IV* T5 = Type V	40 = 4000K 50 = 5000K	U = 120 277 VAC H = 347-480 VAC*	7PR = 7 Pin Receptacle w/Photocell* SPD = 10kVA Surge Suppression*

* For Options and Non-Stock Items - Lead Times Apply ** Mounting Ordered Separately

Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified
24850	SAL-100-T3-40-U	100W	100-277V	4000/5000K	70	14,556-14,851	100,000	No	250W	Yes
24851	SAL-100-T5-40-U	100W	100-277V	4000/5000K	70	14,556-14,851	100,000	No	250W	Yes
24852	SAL-100-T3-50-U	100W	100-277V	4000/5000K	70	14,556-14,851	100,000	No	250W	Yes
24853	SAL-100-T5-50-U	100W	100-277V	4000/5000K	70	14,556-14,851	100,000	No	250W	Yes
24854	SAL-150-T3-40-U	150W	100-277V	4000/5000K	70	21,641-21,935	100,000	No	400W	Yes
24855	SAL-150-T5-40-U	150W	100-277V	4000/5000K	70	21,641-21,935	100,000	No	400W	Yes
24856	SAL-150-T3-50-U	150W	100-277V	4000/5000K	70	21,641-21,935	100,000	No	400W	Yes
24857	SAL-150-T5-50-U	150W	100-277V	4000/5000K	70	21,641-21,935	100,000	No	400W	Yes
24858	SAL-200-T3-40-U	200W	100-277V	4000/5000K	70	29,112-29,886	100,000	No	400W	Yes
24859	SAL-200-T5-40-U	200W	100-277V	4000/5000K	70	29,112-29,886	100,000	No	400W	Yes
24860	SAL-200-T3-50-U	200W	100-277V	4000/5000K	70	29,112-29,886	100,000	No	400W	Yes
24861	SAL-200-T5-50-U	200W	100-277V	4000/5000K	70	29,112-29,886	100,000	No	400W	Yes
24862	SAL-240-T3-40-U	240W	100-277V	4000/5000K	70	34,601-35,076	100,000	No	750W	Yes
24863	SAL-240-T5-40-U	240W	100-277V	4000/5000K	70	34,601-35,076	100,000	No	750W	Yes
24864	SAL-240-T3-50-U	240W	100-277V	4000/5000K	70	34,601-35,076	100,000	No	750W	Yes
24865	SAL-240-T5-50-U	240W	100-277V	4000/5000K	70	34,601-35,076	100,000	No	750W	Yes
24866	SAL-300-T3-40-U	300W	100-277V	4000/5000K	70	43,734-43,884	100,000	No	1000W	Yes
24867	SAL-300-T5-40-U	300W	100-277V	4000/5000K	70	43,734-43,884	100,000	No	1000W	Yes
24868	SAL-300-T3-50-U	300W	100-277V	4000/5000K	70	43,734-43,884	100,000	No	1000W	Yes
24869	SAL-300-T5-50-U	300W	100-277V	4000/5000K	70	43,734-43,884	100,000	No	1000W	Yes

Available Accessories

Product #	Product Code	Description
Fixture Accessories*		
24875	DCMS	DC Motion Bi-Level Motion Sensor
24876	DCMS-REM	DC Motion Bi-Level Motion Sensor Remote
24878	SAL-BLS-SM	SekTor Backlight Shield (100W-150W)
24879	SAL-BLS-L	SekTor Backlight Shield (200W-300W)
24880	SAL-SS-SM	SekTor Side Shield (100W-150W)
24881	SAL-SS-L	SekTor Side Shield (200W-300W)
Mounting Arms		
24870	SEK-SF	SekTor Slipfit Knuckle Mount
24871	SEK-QM	SekTor Straight Arm Quick Mount
24872	SEK-TR	SekTor Trunnion Mount
24908	SEK-PM	SekTor Adjustable Pole Mount

SPEC SHEET AVAILABLE HERE.

Evade Exit Series



Product #	Product Code	Product Description
Exit Signs		
95000	EV-EXE-GR	Evade Exit Green Lettering
95001	EV-EXE-RD	Evade Exit Red Lettering
95002	EV-EXE-GR-RC	Evade Exit Green Lettering with Remote Capability
95003	EV-EXE-RD-RC	Evade Exit Red Lettering with Remote Capability
Remote Heads		
95015	EV-RHE-1-IND	Evade Exit Single Remote Indoor Head
95016	EV-RHE-2-IND	Evade Exit Double Remote Indoor Head
95012	EV-RH-1-OUT	Evade Single Remote Outdoor Head
95013	EV-RH-2-OUT	Evade Double Remote Outdoor Head

SPEC SHEET AVAILABLE HERE.

Combination Exit & Emergency Fixtures



Product #	Product Code	Product Description
Exit Signs		
95004	EV-EXC-GR	Evade Exit & EM Combo Green Lettering
95005	EV-EXC-RD	Evade Exit & EM Combo Red Lettering
95006	EV-EXC-GR-RC	Evade Exit & EM Combo Green Lettering with Remote Capability
95007	EV-EXC-RD-RC	Evade Exit & EM Combo Red Lettering with Remote Capability
Remote Heads		
95010	EV-RHE-1-IND	Evade Single Remote Indoor Head
95011	EV-RHE-2-IND	Evade Dual Remote Indoor Head
95012	EV-RH-1-OUT	Evade Single Remote Outdoor Head
95013	EV-RH-2-OUT	Evade Double Remote Outdoor Head

SPEC SHEET AVAILABLE HERE.

Emergency Light



Product #	Product Code	Product Description
Exit Signs		
95008	EV-EME-R	Evade Emergency Unit
95009	EV-EME-R-RC	Evade Emergency with Remote Capability
Remote Heads		
95010	EV-RHE-1-IND	Evade Single Remote Indoor Head
95011	EV-RHE-2-IND	Evade Dual Remote Indoor Head
95012	EV-RH-1-OUT	Evade Single Remote Outdoor Head
95013	EV-RH-2-OUT	Evade Double Remote Outdoor Head

SPEC SHEET AVAILABLE HERE.

Emergency Wallpack



Product #	Product Code	Product Description
Exit Signs		
95014	EV-EME-R-RC	Evade Emergency with Remote Capability

INDOOR LUMINAIRES

ProLED Select Strip Fixture, & Linear Strip, & Linear Wrap

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Select Strip Fixture



Product #	Product Code	Wattage	Voltage	Color Temp	CRI	Lumens	Useful Life	Dimmable	DLC Qualified
90241	LS4-WS-CS-U	30W, 40W, 50W	120-277VAC	3500K, 4000K, 5000K	80	4532-6997	50,000	0-10V	PREMIUM
90242	LS8-WS-CS-U	50W, 60W, 70W	120-277VAC	3500K, 4000K, 5000K	80	7504-9712	50,000	0-10V	PREMIUM

Available Accessories

Product #	Product Code	Description
90243	LS-SK-1	ProLED Select Linear Strip Suspension Kit Size 1 2FT and 4FT
90244	LS-SK-2	ProLED Select Linear Strip Suspension Kit Size 2 8FT
90245	LS-SM-CK-1	ProLED Select Linear Strip Surface Mount Connector Kit Size 1 2FT and 4FT
90246	LS-SM-CK-2	ProLED Select Linear Strip Surface Mount Connector Kit Size 2 8FT
90247	LS-SK-CK-1	ProLED Select Linear Strip Suspension Connector Kit Size 1 2FT and 4FT
90248	LS-SK-CK-2	ProLED Select Linear Strip Suspension Connector Kit Size 2 8FT
90249	MWMS-HN035	Microwave Motion Sensor Haisen HN035-01VR
10310	BBU/EM8WU	Emergency Battery Back Up 8W 120-277V

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Linear Strip



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Equivalent Wattage	DLC Qualified ³
10240	LS4/36U40	36	120-277V	4000K	80	4903	100,000	0-10V	(2) 32W T8	Premium
10241	LS4/36U50	36	120-277V	5000K	80	4910	100,000	0-10V	(2) 32W T8	Premium
10243	LS8/72U40	72	120-277V	4000K	80	9806	100,000	0-10V	(2) 59W T8	Premium
10244	LS8/72U50	72	120-277V	5000K	80	9820	100,000	0-10V	(2) 59W T8	Premium

Available Accessories

Product #	Product Code	Description	Price
10228	LS4/LENS	Linear Strip; 4 Foot Acrylic Lens	
10229	LS8/LENS	Linear Strip; 8 Foot Acrylic Lens	
10309	LS-LCK	Linear Strip; Linear Connection Kit	
10310	BBU/EM8WU	Battery Backup; Emergency 8W, 120-277V, LIFEP04 Battery, 90 Minute Backup	
10311	ACC/12IN	Aircraft Cable; 12 inches, 1 set	
10318	MWMS/IB/MC601V	Microwave Motion Sensor; Installation Bracket; Merrytek MC601V	
10313	MWMS/MC601V	Microwave Motion Sensor; Merrytek MC601V	

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Linear Wrap



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Equivalent Wattage	DLC Qualified ³
Traditional Prismatic Lens										
10302	LWA-P20U2-40	20	120-277V	4000K	80	2442	50,000	0-10V	(2) 17W T8	Standard
10307	LWA-P20U2-50	20	120-277V	5000K	80	2466	50,000	0-10V	(2) 17W T8	Standard
10299	LWA-P40U4-40	40	120-277V	4000K	80	4944	50,000	0-10V	(2) 32W T8	Standard
10304	LWA-P40U4-50	40	120-277V	5000K	80	5008	50,000	0-10V	(2) 32W T8	Standard
Architctural Diffused Lens										
10300	LWA-D23U2-40	23	120-277V	4000K	80	3073	100,000	0-10V	(2) 17W T8	Premium
10305	LWA-D23U2-50	23	120-277V	5000K	80	3125	100,000	0-10V	(2) 17W T8	Premium
10301	LWA-D46U4-40	46	120-277V	4000K	80	6242	100,000	0-10V	(2) 32W T8	Premium
10306	LWA-D46U4-50	46	120-277V	5000K	80	6293	100,000	0-10V	(2) 32W T8	Premium

Continue to next page for additional product information

INDOOR LUMINAIRES ProLED Lamp Ready Fixture Strip, Wrap, & ProLED Select Linear Vaportight, & HLVT Series Linear Vaportight

Available Accessories

Product #	Product Code	Description
10310	BBU/EM8WU	Battery Backup; Emergency 8W, 120-277V, LIFEP04 Battery, 90 Minute Backup
10311	ACC/12IN	Aircraft Cable; 12 inches, 1 set
10312	LWA-D/JB	Linear Wrap; Architectural Diffused Lens; Joiner Bracket, 1 pair (2pcs)
10313	MWMS/MC601V	Microwave Motion Sensor; Merrytek MC601V
10318	MWMS/IB/MC601V	Microwave Motion Sensor; Installation Bracket; Merrytek MC601V

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Lamp Ready Fixture Strip Series



Product #	Product Code	Description
90510	LRS2-2L-T8DE	Lamp Ready Fixture Strip 2ft 2 Lamp Double End Bypass Lamp
90511	LRS4-2L-T8DE	Lamp Ready Fixture Strip 4ft 2 Lamp Double End Bypass Lamp

Available Accessories

Product #	Product Code	Description
90514	LRS-JB	Lamp Ready Fixture Strip Joiner Bracket

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Lamp Ready Fixture Wrap Series



Product #	Product Code	Description
90512	LRW2-2L-T8DE	Lamp Ready Fixture Wrap 2ft 2 Lamp Double End Bypass Lamp
90513	LRW4-2L-T8DE	Lamp Ready Fixture Wrap 4ft 2 Lamp Double End Bypass Lamp

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Select Linear Vaportight Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Wet Location	DLC Qualified ³
28090	LVPT-2-WS-CS-U	20W, 25W, 30W	120-277V	3000K, 4000K, 5000K	80	2780, 3600, 4140	75,000	0-10V	Yes	Premium
28091	LVPT-4-WS-CS-U	40W, 50W, 60W	120-277V	3000K, 4000K, 5000K	80	5600, 7300, 8280	75,000	0-10V	Yes	Premium
28092	LVPT-8-WS-CS-U	60W, 75W, 80W	120-277V	3000K, 4000K, 5000K	80	8340, 10875, 12450	75,000	0-10V	Yes	Premium

Available Accessories

Product #	Product Code	Description
28094	LVPT-MS-RC	LVPT DC Microwave Motion Sensor Remote Control
28095	LVPT-ACC	LVPT Suspended Aircraft Cable Mounting Accessory, 9 Foot Length
28096	LVPT-RPL-LENS-2	LVPT Replacement Lens 2 Foot Length
28097	LVPT-RPL-LENS-4	LVPT Replacement Lens 4 Foot Length
28098	LVPT-RPL-LENS-8	LVPT Replacement Lens 8 Foot Length
28099	LVPT-MTG-HDWR	LVPT Spare Mounting Hardware

ProLED HLVT Series Linear Vaportight

[SPEC SHEET AVAILABLE HERE.](#)



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified ³
10316	HLVT4/40U40	40W	120-277V	4000K	80	5200	100,000	0-10V	3 x 32W T8	Premium
10317	HLVT4/40U50	40W	120-277V	5000K	80	5200	100,000	0-10V	3 x 32W T8	Premium

Available Accessories

Product #	Product Code	Description
90310	BBU/EM8WU	Battery Backup; Emergency 8W, 120-277V, LIFEP04 Battery, 90 Minute Backup
10311	ACC/12IN	Aircraft Cable; 12 inches, 1 set
10318	MWMS/IB/MC601V	Microwave Motion Sensor; Installation Bracket; Merrytek MC601V
10313	MWMS/MC601V	Microwave Motion Sensor; Merrytek MC601V

INDOOR LUMINAIRES

ProLED Select HoverBay Round Highbay Series, & ProLED Premium Linear High Bay

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Select HoverBay Round Highbay Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life	Dimmable	Equivalent Wattage	DLC Qualified
30250	HRHB-100-CS-U-WH	100	120-277V	4000K, 5000K	80	14,703-14,280	100,000	0-10V	250W MH	5.1 Premium
30251	HRHB-100-CS-U-BL	100	120-277V	4000K, 5000K	80	14,703-14,280	100,000	0-10V	250W MH	5.1 Premium
30252	HRHB-150-CS-U-WH	150	120-277V	4000K, 5000K	80	20,831-20,940	100,000	0-10V	400W MH	5.1 Premium
30253	HRHB-150-CS-U-BL	150	120-277V	4000K, 5000K	80	20,831-20,940	100,000	0-10V	400W MH	5.1 Premium
30254	HRHB-200-CS-U-WH	200	120-277V	4000K, 5000K	80	28,942-29,179	100,000	0-10V	600W MH	5.1 Premium
30255	HRHB-200-CS-U-BL	200	120-277V	4000K, 5000K	80	28,942-29,179	100,000	0-10V	600W MH	5.1 Premium
30256	HRHB-240-CS-U-WH	240	120-277V	4000K, 5000K	80	33,212-33,282	100,000	0-10V	750W MH	5.1 Premium
30257	HRHB-240-CS-U-BL	240	120-277V	4000K, 5000K	80	33,212-33,282	100,000	0-10V	750W MH	5.1 Premium

Available Accessories

Product #	Product Code	Description
24875	DCMS	DC Bi-Level Motion Sensor
24876	DCMS-REM	DC Bi-Level Motion Sensor Remote
30258	HRHB-YB-SM-B	HoverBay Round Highbay Yoke Mount Bracket - 100W & 150W Fixtures (Black)
30259	HRHB-YB-LG-B	HoverBay Round Highbay Yoke Mount Bracket - 200W & 240W Fixtures (Black)
30274	HRHB-YB-SM-W	HoverBay Round Highbay Yoke Mount Bracket - 100W & 150W Fixtures (White)
30275	HRHB-YB-LG-W	HoverBay Round Highbay Yoke Mount Bracket - 200W & 240W Fixtures (White)
30260	HRHB-JBM	HoverBay Round Highbay Junction Box Mount
30269	HRHB-PA	HoverBay Round Highbay Pendant Adapter
30273	HRHB-BBU-30	HoverBay Round Highbay EM Pack 30 Watt
30261	HRHB-AR-SM	HoverBay Round Highbay Aluminum Reflector - 100W & 150W Fixtures
30262	HRHB-AR-LG	HoverBay Round Highbay Aluminum Reflector - 200W & 240W Fixtures
30263	HRHB-PC-SM	HoverBay Round Highbay Polycarbonate Reflector - 100W & 150W Fixtures
30264	HRHB-PC-LG	HoverBay Round Highbay Polycarbonate Reflector - 200W & 240W Fixtures
30265	HRHB-FL-SM	HoverBay Round Highbay 110 Degree Frosted Lens - 100W & 150W Fixtures
30266	HRHB-FL-LG	HoverBay Round Highbay 110 Degree Frosted Lens - 200W & 240W Fixtures
30278	HRHB-110-SM	HoverBay Round Highbay 110 Degree Clear Lens - 100W & 150W Fixtures
30279	HRHB-110-LG	HoverBay Round Highbay 110 Degree Clear Lens - 200W & 240W Fixtures
30267	HRHB-60-SM	HoverBay Round Highbay 60 Degree Lens - 100W & 150W Fixtures
30268	HRHB-60-LG	HoverBay Round Highbay 60 Degree Lens - 200W & 240W Fixtures
30276	HRHB-WG-SM	HoverBay Round Highbay Wire Guard - 100W & 150W Fixtures
30277	HRHB-WG-LG	HoverBay Round Highbay Wire Guard - 200W & 240W Fixtures

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Premium Linear High Bay Series

Quick Ship Product



Product Code	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	DLC Qualified ³
10419	HLHB1/101U50	101W	120-277V	5000K	80	14,604	100,000	0-10V	Premium
10420	HLHB2/161U50	161W	120-277V	5000K	80	22,862	100,000	0-10V	Premium
10421	HLHB2/201U50	201W	120-277V	5000K	80	28,602	100,000	0-10V	Premium
10422	HLHB2/241U50	241W	120-277V	5000K	80	35,427	100,000	0-10V	Premium
10423	HLHB2/301U50	301W	120-277V	5000K	80	44,247	100,000	0-10V	Premium

Continue to next page for additional product information

ProLED Premium Linear High Bay Series

Quick Ship Product
Available Accessories

Product #	Product Code	Description
99986	LHB/MC	Motion Control Sensor LSXR 610 HL
10425	HLHB1/WG	Halco Premier Linear High Bay; Size 1 Wire Guard Set
10426	HLHB2/WG	Halco Premier Linear High Bay; Size 2 Wire Guard Set
10427	HLHB3/WG	Halco Premier Linear High Bay; Size 3 Wire Guard Set
10428	HLHB/PMK	Halco Premier Linear High Bay; Pendant Mount Kit
10429	HLHB/FRSTLENS	Halco Premier Linear High Bay; Size 1 & 2 & 3 Frosted Lens
10431	HLHB/45DOPTIC	Halco Premier Linear High Bay; 45 Degree Narrow Optic
10432	ASS/DRVR/VEL80170HVHDA	Assembly Component: 480v Driver, Oem Model Vel80170hvda-10v-35
10433	ASS/DRVR/VEL100240HVHDA	Assembly Component: 480v Driver, Oem Model Vel100240hvda-10v-1

SPEC SHEET AVAILABLE HERE.

ProLED Select Linear High Bay Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life	Dimmable	Equivalent Wattage	DLC Qualified
30280	LHB-1-WS-40-U	70W-90W-110W	120-277V	4000K	80	9,700-14,500	>100,000 Hrs	0-10VDC	4-lamp (T8), 175W HID	5.1 Premium
30281	LHB-1-WS-50-U	70W-90W-110W	120-277V	5000K	80	9,700-14,500	>100,000 Hrs	0-10VDC	4-lamp (T8), 175W HID	5.1 Premium
30282	LHB-2-WS-40-U	110W-135W-160W	120-277V	4000K	80	16,300-22,000	>100,000 Hrs	0-10VDC	4-lamp (T5HO), 6-lamp (T8), 250W-400W HID	5.1 Premium
30283	LHB-2-WS-50-U	110W-135W-160W	120-277V	5000K	80	16,300-22,000	>100,000 Hrs	0-10VDC	4-lamp (T5HO), 6-lamp (T8), 250W-400W HID	5.1 Premium
30284	LHB-3-WS-40-U	180W-200W-220W	120-277V	4000K	80	25,500-30,100	>100,000 Hrs	0-10VDC	6-lamp (T5HO), 8-lamp (T8), 400W-750W HID	5.1 Premium
30285	LHB-3-WS-50-U	180W-200W-220W	120-277V	5000K	80	25,500-30,100	>100,000 Hrs	0-10VDC	6-lamp (T5HO), 8-lamp (T8), 400W-750W HID	5.1 Premium
30286	LHB-4-WS-40-U	240W-280W-320W	120-277V	4000K	80	35,300-45,000	>100,000 Hrs	0-10VDC	8-lamp (T5HO) 750W-1000W HID	5.1 Premium
30287	LHB-4-WS-50-U	240W-280W-320W	120-277V	5000K	80	35,300-45,000	>100,000 Hrs	0-10VDC	8-lamp (T5HO) 750W-1000W HID	5.1 Premium

Available Accessories

Product #	Product Code	Description
30288	LHB-PMA	LHB pendant mounting assembly for wattage selectable LHB
30289	LHB-SMK-1	LHB surface mount kit assembly for wattage selectable LHB1, LHB2, LHB4
30290	LHB-SMK-2	LHB surface mount kit assembly for wattage selectable LHB3
30291	LHB-MWMS	LHB microwave motion control sensor
30292	LHB-MS-RC	LHB microwave motion control sensor remote
99986	LHB/MC	Motion control sensor LSXR 610 HL
99654	LHB1&2-WG	Linear high bay wire guard for LHB1 & LHB2
99655	LHB3-WG	Linear high bay wire guard for LHB3
99656	LHB4-WG	Linear high bay wire guard for LHB4

INDOOR LUMINAIRES

ProLED Select Edgelit Flat Panel, & ProLED Edgelit Flat Panel, & Surface Mount Kit, & ProLED Select Backlit Panel

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Select Edgelit Flat Panel: Field Selectable Light Output & CCT



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified ³
1' x 4'										
10330	14FSEPL/8DU	20W, 25W, 30W	120-277V	3000K, 4000K, 5000K	80	3300-5000	50,000	0-10V	(2) 32W T8	Standard
2' x 2'										
10331	22FSEPL8DU	40W, 50W, 60W	120-277V	3000K, 4000K, 5000K	80	3300-5000	50,000	0-10V	(2) 32W T8	Premium
2' x 4'										
10332	24FSEPL/8DU	60W, 75W, 80W	120-277V	3000K, 4000K, 5000K	80	3300-5000	50,000	0-10V	(4) 32W T8	Standard

Available Accessories

Product #	Product Code	Description
81981	VPL/EM/LED3	Emergency Battery; 16W, 120-277V

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Edgelit Flat Panel



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified ³
2' x 2'										
81963	22EPL30/835/LED	30W	120-277V	3500K	82	3000	50,000	0-10V	(2) 32W T8	Standard
81964	22EPL30/840/LED	30W	120-277V	4000K	82	3050	50,000	0-10V	(2) 32W T8	Standard
81965	22EPL30/850/LED	30W	120-277V	5000K	82	3150	50,000	0-10V	(2) 32W T8	Standard
2' x 4'										
81966	24EPL50/835/LED	50W	120-277V	3500K	82	5000	50,000	0-10V	(4) 32W T8	Standard
81967	24EPL50/840/LED	50W	120-277V	4000K	82	5100	50,000	0-10V	(4) 32W T8	Standard
81968	24EPL50/850/LED	50W	120-277V	5000K	82	5300	50,000	0-10V	(4) 32W T8	Standard

[SPEC SHEET AVAILABLE HERE.](#)

Surface Mount Kit



Product #	Product Code	Description
81985	14EPL/SMK	1' x 4' Surface Mount Kit for LED Panels, White (48.12" x 12.06" x 4.5")
81986	22EPL/SMK	2' x 2' Surface Mount Kit for LED Panels, White (24.06" x 24.06" x 4.5")
81987	24EPL/SMK	2' x 4' Surface Mount Kit for LED Panels, White (48.12" x 24.06" x 4.5")

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Select Backlit Panel



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable	DLC Qualified
90363	BPL-14-WS-CS-U	20W, 30W, 35W	120-277VAC	3500K, 4000K, 5000K	80	2548-4217	50,000	0-10V	STANDARD
90364	BPL-22-WS-CS-U	20W, 30W, 35W	120-277VAC	3500K, 4000K, 5000K	80	2454-4044	50,000	0-10V	STANDARD
90365	BPL-24-WS-CS-U	30W, 35W, 45W	120-277VAC	3500K, 4000K, 5000K	80	3864-5544	50,000	0-10V	STANDARD

Continue to next page for additional product information

INDOOR LUMINAIRES

ProLED Select Volumetric Panels, & Select Troffer Retrofit Kit RVMV, & Commercial Downlight Retrofit

ProLED Select Backlit Panel

Available Accessories

Product #	Product Code	Description
90366	BPL-14-SMK	Proled Select Back Lit Panel 1x4 Surface Mount Kit
90367	BPL-22-SMK	Proled Select Back Lit Panel 2x2 Surface Mount Kit
90368	BPL-24-SMK	Proled Select Back Lit Panel 2x4 Surface Mount Kit
90369	BPL-14-FMK	Proled Select Back Lit Panel 1x4 Flange Mount Kit
90370	BPL-22-FMK	Proled Select Back Lit Panel 2x2 Flange Mount Kit
90371	BPL-24-FMK	Proled Select Back Lit Panel 2x4 Flange Mount Kit
81981	VPL-EM-LED3	Led Panel Gen 3 Emergency Battery 16w
90372	BPL-EMMB1	Proled Select Back Lit Panel 1x4 Emergency Battery Back Up Mounting Bridge Size 1
90373	BPL-EMMB2	Proled Select Back Lit Panel 1x4 Emergency Battery Back Up Mounting Bridge Size 2

ProLED Select Troffer Retrofit Kit RVMV Series: Field Selectable Light Output

[SPEC SHEET AVAILABLE HERE.](#)



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified ³
2' x 2'										
10400	RVMW22/29U35	19W, 24W, 29W	120-277V	3500K	80	2643-4126	100,000	0-10V	(3) 17W T8	Premium
10402	RVMW22/29U50	19W, 24W, 29W	120-277V	5000K	80	2643-4126	100,000	0-10V	(3) 17W T8	Premium
2' x 4'										
10403	RVMW24/39U35	24W, 32W, 39W	120-277V	3500K,	80	3335-5526	100,000	0-10V	(3) 32W T8	Standard

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Select Volumetric Panel Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified ³
1' x 4'										
81779	14FSVPL/8DU	15W, 19W, 24W, 29W	120-277V	3500K, 4000K, 5000K	80	2190-4437	50,000	0-10V	(2) 32W T8	Premium
2' x 2'										
81780	22FSVPL/8DU	15W, 19W, 24W, 29W	120-277V	3500K, 4000K, 5000K	80	2175-4379	50,000	0-10V	(2) 32W T8	Premium
2' x 4'										
81781	24FSVPL/8DU	24W, 29W, 32W, 39W	120-277V	3500K, 4000K, 5000K	80	3384-5889	50,000	0-10V	(4) 32W T8	Premium

Available Accessories

Product #	Product Code	Description
81782	14VPL/SMK	1x4 Surface Mount Kit for Volumetric Panels
81783	22VPL/SMK	2x2 Surface Mount Kit for Volumetric Panels
81784	24VPL/SMK	2x4 Surface Mount Kit for Volumetric Panels
10310	BBU/EM8WU	Emergency Battery Backup 8W 120-277V

ProLED Select Commercial Downlight Retrofit: Field Selectable Wattage and CCT

[SPEC SHEET AVAILABLE HERE.](#)



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable	Pkg. Qty.	Fixture Size	ENERGY STAR [®]
82985	FSCDL6/MV/01V/LED	10W, 15W, 22W	120-277V	3000K, 4000K, 5000K	90	900-1950	50,000	0-10V	1/6	6"	Yes
82986	FSCDL8/MV/01V/LED	12W, 20W, 30W	120-277V	3000K, 4000K, 5000K	90	1050-2300	50,000	0-10V	1/6	8"	Yes

Available Accessories

Product #	Product Code	Description
90313	BBU/EM9WU	Battery Backup Emergency 9W 120-277V 90 Minute 0-10V Dimming

INDOOR LUMINAIRES

ProLED Select Commercial Downlight Retrofit, & Commercial Downlight Retrofit, & High Performance Commercial Downlight

[SPEC SHEET AVAILABLE HERE.](#)



ProLED Commercial Downlight Retrofit

Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	Fixture Size	Eq. Wattage	ENERGY STAR [®]
4" Commercial Downlight Retrofit												
99610	CDL4FR10/927/RTJB/LED	10W	120-277V	2700K	90	700	50,000	120V Only	1/12	4"	65W	Yes
99611	CDL4FR10/930/RTJB/LED	10W	120-277V	3000K	90	700	50,000	120V Only	1/12	4"	65W	Yes
99612	CDL4FR10/940/RTJB/LED	10W	120-277V	4000K	90	700	50,000	120V Only	1/12	4"	65W	Yes
99613	CDL4FR10/950/RTJB/LED	10W	120-277V	5000K	90	700	50,000	120V Only	1/12	4"	65W	Yes
6" Commercial Downlight Retrofit												
99614	CDL6FR15/927/RTJB/LED	15W	120-277V	2700K	90	1000	50,000	120V Only	1/12	6"	120W	Yes
99615	CDL6FR15/930/RTJB/LED	15W	120-277V	3000K	90	1000	50,000	120V Only	1/12	6"	120W	Yes
99616	CDL6FR15/940/RTJB/LED	15W	120-277V	4000K	90	1000	50,000	120V Only	1/12	6"	120W	Yes
99617	CDL6FR15/950/RTJB/LED	15W	120-277V	5000K	90	1000	50,000	120V Only	1/12	6"	120W	Yes
8" Commercial Downlight Retrofit												
99618	CDL8FR30/927/RTJB/LED	30W	120-277V	2700K	90	2000	50,000	120V Only	1/6	8"	200W	Yes
99619	CDL8FR30/930/RTJB/LED	30W	120-277V	3000K	90	2000	50,000	120V Only	1/6	8"	200W	Yes
99620	CDL8FR30/940/RTJB/LED	30W	120-277V	4000K	90	2000	50,000	120V Only	1/6	8"	200W	Yes
99621	CDL8FR30/950/RTJB/LED	30W	120-277V	5000K	90	2000	50,000	120V Only	1/6	8"	200W	Yes

ProLED High Performance Commercial Downlight Series

[SPEC SHEET AVAILABLE HERE.](#)



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	Fixture Size	Eq. Wattage	ENERGY STAR [®]
8" High Performance Commercial Downlight												
99831	CDLH8AR30/827/LED	30W	120-277V	2700K	80	2810	50,000	0-10V	1	8"	(2) 32W CFL	Yes
99832	CDLH8AR30/830/LED	30W	120-277V	3000K	80	2810	50,000	0-10V	1	8"	(2) 32W CFL	Yes
99833	CDLH8AR30/840/LED	30W	120-277V	4000K	80	2810	50,000	0-10V	1	8"	(2) 32W CFL	Yes
99834	CDLH8AR30/850/LED	30W	120-277V	5000K	80	2810	50,000	0-10V	1	8"	(2) 32W CFL	Yes
99835	CDLH8AR40/827/LED	40W	120-277V	2700K	80	3615	50,000	0-10V	1	8"	(2) 42W CFL	Yes
99836	CDLH8AR40/830/LED	40W	120-277V	3000K	80	3615	50,000	0-10V	1	8"	(2) 42W CFL	Yes
99837	CDLH8AR40/840/LED	40W	120-277V	4000K	80	3995	50,000	0-10V	1	8"	(2) 42W CFL	Yes
99838	CDLH8AR40/850/LED	40W	120-277V	5000K	80	3995	50,000	0-10V	1	8"	(2) 42W CFL	Yes

Continue to next page for additional product information

INDOOR LUMINAIRES

ProLED High Performance Commercial Downlight, & Select Retrofit Downlight Series

ProLED High Performance Commercial Downlight Series

Available Accessories

Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	Fixture Size	Eq. Wattage	ENERGY STAR [®]
10" High Performance Commercial Downlight												
99847	CDLH10AR30/827/LED	30W	120-277V	2700K	80	2810	50,000	0-10V	1	10"	(2) 32W CFL	Yes
99848	CDLH10AR30/830/LED	30W	120-277V	3000K	80	2810	50,000	0-10V	1	10"	(2) 32W CFL	Yes
99849	CDLH10AR30/840/LED	30W	120-277V	4000K	80	2810	50,000	0-10V	1	10"	(2) 32W CFL	Yes
99850	CDLH10AR30/850/LED	30W	120-277V	5000K	80	2810	50,000	0-10V	1	10"	(2) 32W CFL	Yes
99851	CDLH10AR40/827/LED	40W	120-277V	2700K	80	3615	50,000	0-10V	1	10"	(2) 42W CFL	Yes
99852	CDLH10AR40/830/LED	40W	120-277V	3000K	80	3615	50,000	0-10V	1	10"	(2) 42W CFL	Yes
99853	CDLH10AR40/840/LED	40W	120-277V	4000K	80	3995	50,000	0-10V	1	10"	(2) 42W CFL	Yes
99854	CDLH10AR40/850/LED	40W	120-277V	5000K	80	3995	50,000	0-10V	1	10"	(2) 42W CFL	Yes

SPEC SHEET AVAILABLE HERE.

ProLED Select Retrofit Downlight Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable	ENERGY STAR [®]
87983	RDL4-8-CS-BT	8W	120V	2700K, 3000K, 3500K, 4000K, 5000K	92+	707lm - 791lm	50,000	Yes	Yes
87984	RDL6-10.5-CS-BT	10.5W	120V	2700K, 3000K, 3500K, 4000K, 5000K	92+	926lm - 1078lm	50,000	Yes	Yes
87985	RDL6-14-CS-BT	14W	120V	2700K, 3000K, 3500K, 4000K, 5000K	92+	1219lm - 1318lm	50,000	Yes	Yes
87986	RDL4-8-CS-ST	8W	120V	2700K, 3000K, 3500K, 4000K, 5000K	92+	757lm - 849lm	50,000	Yes	Yes
87987	RDL6-10.5-CS-ST	10.5W	120V	2700K, 3000K, 3500K, 4000K, 5000K	92+	965lm - 1084lm	50,000	Yes	Yes
87988	RDL6-14-CS-ST	14W	120V	2700K, 3000K, 3500K, 4000K, 5000K	92+	1276lm - 1380lm	50,000	Yes	Yes

Available Accessories

Product #	Product Code	Description
87960	RDL4-RT-BT-BK	ProLED Select Retrofit Downlight 4" Round Replaceable Baffle Trim Black
87961	RDL6-RT-BT-BK	ProLED Select Retrofit Downlight 6" Round Replaceable Baffle Trim Black
87962	RDL4-RT-ST-BK	ProLED Select Retrofit Downlight 4" Round Replaceable Smooth Trim Black
87963	RDL6-RT-ST-BK	ProLED Select Retrofit Downlight 6" Round Replaceable Smooth Trim Black
87964	RDL4-RT-BT-BN	ProLED Select Retrofit Downlight 4" Round Replaceable Baffle Trim Brushed Nickel
87965	RDL6-RT-BT-BN	ProLED Select Retrofit Downlight 6" Round Replaceable Baffle Trim Brushed Nickel
87966	RDL4-RT-ST-BN	ProLED Select Retrofit Downlight 4" Round Replaceable Smooth Trim Brushed Nickel
87967	RDL6-RT-ST-BN	ProLED Select Retrofit Downlight 6" Round Replaceable Smooth Trim Brushed Nickel
87968	RDL4-RT-BT-BZ	ProLED Select Retrofit Downlight 4" Round Replaceable Baffle Trim Bronze
87969	RDL6-RT-BT-BZ	ProLED Select Retrofit Downlight 6" Round Replaceable Baffle Trim Bronze
87970	RDL4-RT-ST-BZ	ProLED Select Retrofit Downlight 4" Round Replaceable Smooth Trim Bronze
87971	RDL6-RT-ST-BZ	ProLED Select Retrofit Downlight 6" Round Replaceable Smooth Trim Bronze
87972	RDL6-RB	ProLED Select Retrofit Downlight 6" Friction Installation Band
87973	RDL4-GR	ProLED Select Retrofit Downlight 4" Goof Ring 4"-6"
87974	RDL6-GR	ProLED Select Retrofit Downlight 6" Goof Ring 6"-8"

INDOOR LUMINAIRES

ProLED Select Gimbal Downlight, & Surface Downlight Retrofit, & Select Slim Downlight Series

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Select Gimbal Downlight Series



Product #	Product Code	Wattage	Voltage	Color Temp.	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified	ENERGY STAR [®]
83986	FSDLG4FR8/CCT/LED	8W	120VAC	2700K/3000K/3500K/4000K/5000K	741-815	50,000	Yes	60W	No	No
83987	FSDLG6FR10/CCT/LED	10W	120VAC	2700K/3000K/3500K/4000K/5000K	969-1067	50,000	Yes	100W	No	No
83988	FSDLG6FR11/CCT/LED	11W	120VAC	2700K/3000K/3500K/4000K/5000K	1126-1184	50,000	Yes	120W	No	No

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Surface Downlight Retrofit Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Pkg. Qty.	Fixture Size	EQ Wattage	Dimmable	ENERGY STAR [®]
82989	SDL6FR15/927/LED3	15W	120V	2700K	90	1200	50,000	1/12	6"	85W	Yes	Yes
82990	SDL6FR15/930/LED3	15W	120V	3000K	90	1200	50,000	1/12	6"	85W	Yes	Yes
82991	SDL6FR15/940/LED3	15W	120V	4000K	90	1200	50,000	1/12	6"	85W	Yes	Yes
82992	SDL6FR15/950/LED3	15W	120V	5000K	90	1200	50,000	1/12	6"	85W	Yes	Yes

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Select Slim Downlight Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable	ENERGY STAR [®]
89093	FSDLS4FR10/CCT/LED	10W	120V	2700K, 3000K, 3500K, 4000K, 5000K	90+	773lm - 827lm	50,000	Yes	Yes
89094	FSDLS6FR12/CCT/LED	12W	120V	2700K, 3000K, 3500K, 4000K, 5000K	90+	954lm - 1024lm	50,000	Yes	Yes
89095	FSDLS6FR15/CCT/LED	15W	120V	2700K, 3000K, 3500K, 4000K, 5000K	90+	1116lm - 1242lm	50,000	Yes	Yes
89106	FSDLS8FR18/CCT/LED	18W	120V	2700K, 3000K, 3500K, 4000K, 5000K	90+	1506lm - 1607lm	50,000	Yes	Yes
89096	FSDLS4FR10/SQ/CCT/LED	10W	120V	2700K, 3000K, 3500K, 4000K, 5000K	90+	686lm - 740lm	50,000	Yes	Yes
89097	FSDLS6FR12/SQ/CCT/LED	12W	120V	2700K, 3000K, 3500K, 4000K, 5000K	90+	1036lm - 1107lm	50,000	Yes	Yes
89098	FSDLS6FR15/SQ/CCT/LED	15W	120V	2700K, 3000K, 3500K, 4000K, 5000K	90+	1130lm - 1235lm	50,000	Yes	Yes

Continue to next page for additional product information

ProLED Select Slim Downlight Series

Available Accessories

Product #	Product Code	Description
89129	DFDLS-RP-468-RD	ProLED Select Direct Fit Slim Downlight Adjustable Rough In Pan 4", 6", 8"
89120	DFDLS4-RT-RD-BK	ProLED Select Direct Fit Slim Downlight 4" Round Replaceable Trim Black
89121	DFDLS6-RT-RD-BK	ProLED Select Direct Fit Slim Downlight 6" Round Replaceable Trim Black
89122	DFDLS8-RT-RD-BK	ProLED Select Direct Fit Slim Downlight 8" Round Replaceable Trim Black
89123	DFDLS4-RT-RD-SN	ProLED Select Direct Fit Slim Downlight 4" Round Replaceable Trim Satin Nickel
89124	DFDLS6-RT-RD-SN	ProLED Select Direct Fit Slim Downlight 6" Round Replaceable Trim Satin Nickel
89125	DFDLS8-RT-RD-SN	ProLED Select Direct Fit Slim Downlight 8" Round Replaceable Trim Satin Nickel
89126	DFDLS4-RT-RD-BZ	ProLED Select Direct Fit Slim Downlight 4" Round Replaceable Trim Bronze
89127	DFDLS6-RT-RD-BZ	ProLED Select Direct Fit Slim Downlight 6" Round Replaceable Trim Bronze
89128	DFDLS8-RT-RD-BZ	ProLED Select Direct Fit Slim Downlight 8" Round Replaceable Trim Bronze
89099	FSDLS/EXT12	Select Slim Downlight Extension Cable 12"
89104	DLS/RP4RD	ProLED Direct Fit Slim Downlight Rough In Pan 4" Round
89088	DLS/FK4SQ	Slim Downlight New Construction Frame - 4" Square
89105	DLS/RP6RD	ProLED Direct Fit Slim Downlight Rough In Pan 6" Round
89090	DLS/FK6SQ	Slim Downlight New Construction Frame - 6" Square
89129	DFDLS-RP-468-RD	ProLED Select Direct Fit Slim Downlight Adjustable Rough In Pan 4" 6" 8" Round

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Select Direct Fit Downlight Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable	ENERGY STAR [®]
89107	DFDLS4-10-CS-BT	10W	120V	2700K, 3000K, 3500K, 4000K, 5000K	90+	725lm - 728lm	50,000	Yes	Yes
89108	DFDLS6-12-CS-BT	12W	120V	2700K, 3000K, 3500K, 4000K, 5000K	90+	918lm - 1020lm	50,000	Yes	Yes
89109	DFDLS6-15-CS-BT	15W	120V	2700K, 3000K, 3500K, 4000K, 5000K	90+	1122lm - 1314lm	50,000	Yes	Yes
89110	DFDLS8-18-CS-BT	18W	120V	2700K, 3000K, 3500K, 4000K, 5000K	90+	1619lm - 1741lm	50,000	Yes	Yes

Available Accessories

Product #	Product Code	Description
89111	DFDLS4-RT-RD-RC-BK	ProLED Select Direct Fit Slim Downlight 4" Round Replaceable Recessed Trim Black
89112	DFDLS6-RT-RD-RC-BK	ProLED Select Direct Fit Slim Downlight 6" Round Replaceable Recessed Trim Black
89113	DFDLS8-RT-RD-RCBK	ProLED Select Direct Fit Slim Downlight 8" Round Replaceable Recessed Trim Black
89114	DFDLS4-RT-RD-RC-SN	ProLED Select Direct Fit Slim Downlight 4" Round Replaceable Recessed Trim Satin Nickel
89115	DFDLS6-RT-RD-RC-SN	ProLED Select Direct Fit Slim Downlight 6" Round Replaceable Recessed Trim Satin Nickel
89116	DFDLS8-RT-RD-RC-SN	ProLED Select Direct Fit Slim Downlight 8" Round Replaceable Recessed Trim Satin Nickel
89117	DFDLS4-RT-RD-RC-BZ	ProLED Select Direct Fit Slim Downlight 4" Round Replaceable Recessed Trim Bronze
89118	DFDLS6-RT-RD-RC-BZ	ProLED Select Direct Fit Slim Downlight 6" Round Replaceable Recessed Trim Bronze
89119	DFDLS8-RT-RD-RC-BZ	ProLED Select Direct Fit Slim Downlight 8" Round Replaceable Recessed Trim Bronze
89129	DFDLS-RP-468-RD	ProLED Select Direct Fit Slim Downlight Adjustable Rough In Pan 4", 6", 8"
89104	FSDLS/RP4RD	ProLED Select Direct Fit Slim Downlight Rough In Pan 4"
89105	FSDLS/RP6RD	ProLED Select Direct Fit Slim Downlight Rough In Pan 6"
89102	FSDLS/EXT12	ProLED Select Direct Fit Slim Downlight Extension Cable 12"

INDOOR LUMINAIRES ProLED Square Downlights



[SPEC SHEET AVAILABLE HERE.](#)

ProLED Square Downlights



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	Fixture Size	Eq. Wattage	ENERGY STAR [®]
99952	QDL4FR10/927/LED	10W	120V	2700K	90	560	50,000	Yes	1/12	4"	50W	Yes
99953	QDL4FR10/930/LED	10W	120V	3000K	90	560	50,000	Yes	1/12	4"	50W	Yes
99954	QDL4FR10/940/LED	10W	120V	4000K	90	590	50,000	Yes	1/12	4"	50W	Yes
99955	QDL4FR10/950/LED	10W	120V	5000K	90	630	50,000	Yes	1/12	4"	50W	Yes
99956	QDL6FR15/927/LED	15W	120V	2700K	90	900	50,000	Yes	1/12	6"	65W	Yes
99957	QDL6FR15/930/LED	15W	120V	3000K	90	930	50,000	Yes	1/12	6"	65W	Yes
99958	QDL6FR15/940/LED	15W	120V	4000K	90	1000	50,000	Yes	1/12	6"	65W	Yes
99959	QDL6FR15/950/LED	15W	120V	5000K	90	1040	50,000	Yes	1/12	6"	65W	Yes

LAMPS ProLED HID High Bay Retrofit, & HID Wallpack Retrofit Series



[SPEC SHEET AVAILABLE HERE.](#)

ProLED HID High Bay Retrofit Series



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	DLC Qualified ³
84113	HID90/840/EX39/LED	90W	EX39	120-277V	4000K	84	11,970	50,000	No	1/4	9.24"	400W MH/HPS	Standard
84114	HID90/850/EX39/LED	90W	EX39	120-277V	5000K	84	12,150	50,000	No	1/4	9.24"	400W MH/HPS	Standard
84115	HID120/840/EX39/LED	120W	EX39	120-277V	4000K	84	17,760	50,000	No	1/4	9.24"	600W MH/HPS	Standard
84116	HID120/850/EX39/LED	120W	EX39	120-277V	5000K	84	18,000	50,000	No	1/4	9.24"	600W MH/HPS	Standard

[SPEC SHEET AVAILABLE HERE.](#)

ProLED HID Wallpack Retrofit Series



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	DLC Qualified ³
84027	HID40/840/MV/EX39/LED	40W	EX39	120-277V	4000K	82	6000	50,000	No	1/8	8.46"	175W MH/HPS	Standard
84030	HID60/840/MV/LED	60W	E26	120-277V	4000K	82	9000	50,000	No	1/8	9.96"	250W MH/HPS	No
84032	HID60/850/MV/LED	60W	E26	120-277V	5000K	82	9000	50,000	No	1/8	9.96"	250W MH/HPS	No

LAMPS ProLED HID Omni Retrofit, & Select HID Retrofit Series, Temporary Work Light


[SPEC SHEET AVAILABLE HERE.](#)



ProLED HID Omni Retrofit Series

Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	DLC Qualified ³
84318	HID20/OMNI/830/LED	20W	E26	120-277V	3000K	84	2780	50,000	No	1/24	5.26"	80W MH/HPS	No
84319	HID20/OMNI/850/LED	20W	E26	120-277V	5000K	84	2865	50,000	No	1/24	5.26"	80W MH/HPS	No
84320	HID25/OMNI/830/LED	25W	E26	120-277V	3000K	84	3500	50,000	No	1/24	6.28"	100W MH/HPS	No
84321	HID25/OMNI/850/LED	25W	E26	120-277V	5000K	84	3612	50,000	No	1/24	6.28"	100W MH/HPS	No
84322	HID25/OMNI/830/EX39/LED	25W	EX39	120-277V	3000K	84	3500	50,000	No	1/24	6.28"	100W MH/HPS	Standard
84323	HID25/OMNI/850/EX39/LED	25W	EX39	120-277V	5000K	84	3612	50,000	No	1/24	6.28"	100W MH/HPS	Standard
84324	HID35/OMNI/830/EX39/LED	35W	EX39	120-277V	3000K	84	4620	50,000	No	1/12	7.25"	150W MH/HPS	Standard
84325	HID35/OMNI/850/EX39/LED	35W	EX39	120-277V	5000K	84	4760	50,000	No	1/12	7.25"	150W MH/HPS	Standard

[SPEC SHEET AVAILABLE HERE.](#)



ProLED Select HID Retrofit Series

Product #	Product Code	Wattage	Voltage	Color Temp.	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified	ENERGY STAR [®]
82361	HID12-CS-E26-LED	12W	100-277V	3000/4000/5000K	1680-1800	50,000	No	50W	Yes	No
82362	HID18-CS-E26-LED	18W	100-277V	3000/4000/5000K	2520-2700	50,000	No	70W	Yes	No
82363	HID36-CS-E26-LED	36W	100-277V	3000/4000/5000K	2520-5652	50,000	No	150W	Yes	No
82364	HID36-CS-EX39-LED	36W	100-277V	3000/4000/5000K	2520-5652	50,000	No	150W	Yes	No
82365	HID45-CS-E26-LED	45W	100-277V	3000/4000/5000K	3780-7065	50,000	No	150W	Yes	No
82366	HID45-CS-EX39-LED	45W	100-277V	3000/4000/5000K	3780-7065	50,000	No	150W	Yes	No
82367	HID54-CS-E26-LED	54W	100-277V	3000/4000/5000K	5040-8478	59,000	No	175W	Yes	No
82368	HID54-CS-EX39-LED	54W	100-277V	3000/4000/5000K	5040-8478	50,000	No	175W	Yes	No
82369	HID80-CS-EX39-LED	80W	100-277V	3000/4000/5000K	7560-12560	50,000	No	250W	Yes	No
82370	HID100-CS-EX39-LED	100W	100-277V	3000/4000/5000K	8820-15700	50,000	No	250W	Yes	No
82371	HID120-CS-EX39-LED	120W	100-277V	3000/4000/5000K	11200-18840	50,000	No	400W	Yes	No

[SPEC SHEET AVAILABLE HERE.](#)



ProLED Temporary Work Light

Product #	Product Code	Wattage	Voltage	Color Temp	CRI	Lumens	Useful Life	Beam Angle
82378	WKL60-850-LED	60W	120-277V	5000K	80	7,200	50,000	360
82379	WKL100-850-LED	100W	120-277V	5000K	80	12,000	50,000	360
82380	WKL150-850-LED	150W	120-277V	5000K	80	18,000	50,000	360

Available Accessories

Product #	Product Code	Description
82381	WKL-Tripod	LED temporary work light tripod stand accessory

LAMPS

T8/T5 Linear, U-bend Direct Fit, & T8 Linear Single Bypass

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Linear Type A T8 Series



Product #	Product Code	Description	Watt	System Watt	Base	Voltage	CCT	CRI	Lumens	Useful Life	Pkg. Qty.	MOL	Eq. Wattage	End Cap
84068	T824FR8/835/DIR2/LED	T8 Linear QuickConnect 3500K	8W	10W	G13	120-277V	3500K	82	1250	50,000	1/25	24"	17W	PC
84069	T824FR8/840/DIR2/LED	T8 Linear QuickConnect 4000K	8W	10W	G13	120-277V	4000K	82	1250	50,000	1/25	24"	17W	PC
84070	T824FR8/850/DIR2/LED	T8 Linear QuickConnect 5000K	8W	10W	G13	120-277V	5000K	82	1250	50,000	1/25	24"	17W	PC
83171	T836FR10/835/DIR/LED	T8 Linear QuickConnect 3500K	10W	13W	G13	120-277V	3500K	82	1400	50,000	1/25	36"	25W	PC
82359	T836FR11/840/DIR3/LED	T8 Linear QuickConnect 4000K	11W	13W	G13	120-277V	4000K	82	1400	50,000	1/25	36"	25W	Metal
83173	T836FR10/850/DIR/LED	T8 Linear QuickConnect 5000K	10W	13W	G13	120-277V	5000K	82	1400	50,000	1/25	36"	25W	PC
83880	T8FR12/835/DIR4/LED	T8 Linear QuickConnect 3500K	12W	14W	G13	120-277V	3500K	82	1800	50,000	1/25	48"	32W	Metal
83881	T8FR12/840/DIR4/LED	T8 Linear QuickConnect 4000K	12W	14W	G13	120-277V	4000K	82	1900	50,000	1/25	48"	32	Metal
83882	T8FR12/850/DIR4/LED	T8 Linear QuickConnect 5000K	12W	14W	G13	120-277V	5000K	82	2000	50,000	1/25	48"	32W	Metal

Must be operated with an ambient luminaire temperature between -4°F (-20°C) and 122°F (50°C). Specifications are based on use with normal ballast factor ballasts (0.88). For LBF and HBF ballast performance, see the ProLED® Linear Direct T8 Specifications Sheet.

ProLED U-bend Type A T8 Series



Product #	Product Code	Product Description
6.5" MOD		
82375	T8U6-FR13-835-HYB-LED	T86 U-Bend 13W 3500K QuickConnect Type A/B
82376	T8U6-FR13-840-HYB-LED	T86 U-Bend 13W 4000K QuickConnect Type A/B
82377	T8U6-FR13-850-HYB-LED	T86 U-Bend 13W 5000K QuickConnect Type A/B

Must be operated with an ambient luminaire temperature between 32°F(0°C) and 113°F(45°C). Specifications are based on use with normal ballast factor ballasts (0.88). For LBF and HBF ballast performance, see the ProLED® Linear Direct T5 Specifications Sheet.

[SPEC SHEET AVAILABLE HERE.](#)

ProLED T5 High Output Type A Direct Fit Replacement Series



Product #	Product Code	Wattage	System Wattage ¹	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ²	Dimmable ³	Pkg. Qty.	Beam Spread	MOL	THD	Eq. Wattage	DLC Qualified ⁴
84080	T5FR25/840/DIR2/HO/LED	25W	28W	G5	120-277V	4000K	82	3500	50,000	No	1/25	270°	45.2"	<20%	54W	Standard
84081	T5FR25/850/DIR2/HO/LED	25W	28W	G5	120-277V	5000K	82	3500	50,000	No	1/25	270°	45.2"	<20%	54W	Standard

Must be operated with an ambient luminaire temperature between 32°F(0°C) and 113°F(45°C). Specifications are based on use with normal ballast factor ballasts (0.88). For LBF and HBF ballast performance, see the ProLED® Linear Direct T5 Specifications Sheet.

[SPEC SHEET AVAILABLE HERE.](#)

ProLED T5 Single End Bypass Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg Qty	Beam Spread	MOL	THD	Equivalent Wattage	DLC Qualified ³
82987	T5FR25/840/BYP/HO/LED	25W	120-277V	4000	80	3300	50,000	No	1/25	270	45.2"	<20	54W	Standard
82988	T5FR25/850/BYP/HO/LED	25W	120-277V	5000	80	3400	50,000	No	1/26	271	45.2"	<20	54W	Standard

Must be operated with an ambient luminaire temperature between 32°F(0°C) and 113°F(45°C). Specifications are based on use with normal ballast factor ballasts (0.88). For LBF and HBF ballast performance, see the ProLED® Linear Direct T5 Specifications Sheet.

[SPEC SHEET AVAILABLE HERE.](#)

ProLED T8 Linear Single End Bypass Series



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ²	Dimmable ³	Pkg. Qty.	Beam Spread	MOL	THD	Eq. Wattage	DLC Qualified ⁴
82883	T8FR15/835/BYP3/LED	15	G13	120-277	3500K	82	2000	50,000	No	25	270°	48"	<20%	32	Standard

Must be operated with an ambient luminaire temperature between -4°F (-20°C) and 122°F (50°C). Warning Halco ProLED® Linear Bypass T8 will not operate on a linear fluorescent ballast or with shunted lamp holders. Please re-wire the luminaire as shown in the installation instructions included with the product and ensure non-shunted lamp holders are installed in the luminaire before installing this product.

LAMPS

T8 Linear Single, & Double End Bypass, & Linear T8 Hybrid

ProLED T8 Linear 8' Double Ended Bypass Series

[SPEC SHEET AVAILABLE HERE.](#)



Product #	Product Code	Lamp Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ²	Dimmable ³	Pkg. Qty.	Beam Spread	MOL	THD	Eq. Wattage	DLC Qualified ⁴
82875	T896FR42/840/BYP2/SP/LED	42W	Fa8	120-277V	4000K	82	5500	50,000	No	10	270°	96"	<20%	86W	Standard
82876	T896FR42/850/BYP2/SP/LED	42W	Fa8	120-277V	5000K	82	5500	50,000	No	10	270°	96"	<20%	86W	Standard
82877	T896FR42/840/BYP2/RDC/LED	42W	R17d	120-277V	4000K	82	5500	50,000	No	10	270°	96"	<20%	86W	Standard
82878	T896FR42/850/BYP2/RDC/LED	42W	R17d	120-277V	5000K	82	5500	50,000	No	10	270°	96"	<20%	86W	Standard
82879	T896FR42/865/BYP2/RDC/LED	42W	R17d	120-277V	6500K	82	5500	50,000	No	10	270°	96"	<20%	86W	Standard

Must be operated with an ambient luminaire temperature between 32°F(0°C) and 113°F(45°C). Warning Halco ProLED® Linear Bypass T8 will not operate on a linear fluorescent ballast or with shunted lamp holders. Please re-wire the luminaire as shown in the installation instructions included with the product and ensure non-shunted lamp holders are installed in the luminaire before installing this product.

ProLED T8 Linear Type B Double Ended Bypass Series

[SPEC SHEET AVAILABLE HERE.](#)



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ²	Dimmable ³	Pkg. Qty.	Beam Spread	MOL	THD	Eq. Wattage	DLC Qualified ⁴
83886	T8FR14/835/BYP2/DE/LED	12W	G13	120-277V	3500K	82	1700	50,000	No	1/25	270°	48"	<20%	32W	Standard

Must be operated with an ambient luminaire temperature between 32°F(0°C) and 113°F(45°C). Warning Halco ProLED® Linear Bypass T8 will not operate on a linear fluorescent ballast or with shunted lamp holders. Please re-wire the luminaire as shown in the installation instructions included with the product and ensure non-shunted lamp holders are installed in the luminaire before installing this product.

ProLED T8 Linear Type B Double Single Ended Bypass Series

[SPEC SHEET AVAILABLE HERE.](#)



Product #	Product Code	Wattage	Base	Voltage	CCT	CRI	Lumens	Useful Life	Beam Spread	Pkg. Qty.	MOL	PF	Eq. Wattage
84886	T848FR12/835/BYP4/DSE/LED	12.5W	Medium Bi Pin	120-277V	3500	83	1650	50,000	160	25	48"	0.98	32W
84887	T848FR12/840/BYP4/DSE/LED	12.5W	Medium Bi Pin	120-277V	4000	83	1750	50,000	160	25	48"	0.98	32W
84888	T848FR12/850/BYP4/DSE/LED	12.5W	Medium Bi Pin	120-277V	5000	83	1800	50,000	160	25	48"	0.98	32W
84889	T848FR12/865/BYP4/DSE/LED	12.5W	Medium Bi Pin	120-277V	6500	83	1650	50,000	160	25	48"	0.98	32W
84875	T836FR12/835/BYP4/DSE/LED	12W	Medium Bi Pin	120-277V	3500	83	1450	50,000	160	25	36"	0.98	25W
84876	T836FR12/840/BYP4/DSE/LED	12W	Medium Bi Pin	120-277V	4000	83	1500	50,000	160	25	36"	0.98	25W
84877	T836FR12/850/BYP4/DSE/LED	12W	Medium Bi Pin	120-277V	5000	83	1550	50,000	160	25	36"	0.98	25W
84878	T836FR12/865/BYP4/DSE/LED	12W	Medium Bi Pin	120-277V	6500	83	1450	50,000	160	25	36"	0.98	25W
84871	T824FR7/835/BYP4/DSE/LED	7W	Medium Bi Pin	120-277V	3500	83	900	50,000	160	25	24"	0.98	17W
84872	T824FR7/840/BYP4/DSE/LED	7W	Medium Bi Pin	120-277V	4000	83	950	50,000	160	25	24"	0.98	17W
84873	T824FR7/850/BYP4/DSE/LED	7W	Medium Bi Pin	120-277V	5000	83	1000	50,000	160	25	24"	0.98	17W
88474	T824FR7/865/BYP4/DSE/LED	7W	Medium Bi Pin	120-277V	6500	83	900	50,000	160	25	24"	0.98	17W

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Linear T8 Hybrid Type A/B



Product #	Product Code	Type A Watt.	Type A System Watt.	Type B Watt.	Base Type	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg Qty	Beam Spread	MOL	THD	Eq. Watt.	DLC Qualified ³
85000	T8FR12/835/HYB/LED	12W	15.5W	13W	G13	120-277V	3500	80	1800	50,000	No	1/25	270	48"	<20	32W	Standard
85001	T8FR12/840/HYB/LED	12W	15.5W	13W	G13	120-277V	4000	80	1900	50,000	No	1/25	270	48"	<20	32W	Standard
85002	T8FR12/850/HYB/LED	12W	15.5W	13W	G13	120-277V	5000	80	1900	50,000	No	1/25	270	48"	<20	32W	Standard

[SPEC SHEET AVAILABLE HERE.](#)

ProLED T8 Lamps



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified
82359	T836FR11/840/DIR3/LED	11W	100-277V	4000K	82	1400	50,000	Yes	25W	Yes

LAMPS

ProLED ECO A19, A19 Contractor Series 6 Pack, & A19 Omnidirectional A-Shape Series - GU24 Base

[SPEC SHEET AVAILABLE HERE.](#)

ProLED ECO A19 Series



Product #	Product Code	Wattage	Base	Voltage	Color Temp	CRI	Lumens	Useful Life	Dimmable	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR®
88000	A19FR6-827-ECO-LED4	5.5W	E26	120V	2700K	80	450	15,000	No	1/48	4.13"	40W	Yes
88001	A19FR6-830-ECO-LED4	5.5W	E26	120V	3000K	80	450	15,000	No	1/48	4.13"	40W	Yes
88002	A19FR6-840-ECO-LED4	5.5W	E26	120V	4000K	80	450	15,000	No	1/48	4.13"	40W	Yes
88003	A19FR6-850-ECO-LED4	5.5W	E26	120V	5000K	80	450	15,000	No	1/48	4.13"	40W	Yes
88004	A19FR9-827-ECO-LED4	9W	E26	120V	2700K	80	800	15,000	No	1/48	4.13"	60W	Yes
88005	A19FR9-830-ECO-LED4	9W	E26	120V	3000K	80	800	15,000	No	1/48	4.13"	60W	Yes
88006	A19FR9-840-ECO-LED4	9W	E26	120V	4000K	80	800	15,000	No	1/48	4.13"	60W	Yes
88007	A19FR9-850-ECO-LED4	9W	E26	120V	5000K	80	800	15000	No	1/48	4.13"	60W	Yes
88054	A19FR15-850-ECO-LED4	15W	E26	120V	5000K	80	1600	15000	No	1/48	4.64"	100W	Yes

15,000 hour useful life rating is based on a maximum ambient temperature of 45°C. Exceeding this ambient temperature rating may result in reduced life.

[SPEC SHEET AVAILABLE HERE.](#)

ProLED A19 Contractor Series 6 Pack



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR®
Non-Dimmable													
88036	A19FR9-827-ECO-LED4-6pk	9W	E26	120	2700K	80	800	15,000	No	6/48	4.13"	60W	Yes
88037	A19FR9-830-ECO-LED4-6pk	9W	E26	120	3000K	80	800	15,000	No	6/48	4.13"	60W	Yes
88038	A19FR9-840-ECO-LED4-6pk	9W	E26	120	4000K	80	800	15,000	No	6/48	4.13"	60W	Yes
88039	A19FR9-850-ECO-LED4-6pk	9W	E26	120	5000K	80	800	15,000	No	6/48	4.13"	60W	Yes
Dimmable													
88040	A19FR9-827-DIM-LED4-6pk	9W	E26	120	2700K	80	800	15,000	Yes	6/48	4.13"	60W	Yes
88041	A19FR9-830-DIM-LED4-6pk	9W	E26	120	3000K	80	800	15,000	Yes	6/48	4.13"	60W	Yes
88042	A19FR9-840-DIM-LED4-6pk	9W	E26	120	4000K	80	800	15,000	Yes	6/48	4.13"	60W	Yes
88043	A19FR9-850-DIM-LED4-6pk	9W	E26	120	5000K	80	800	15000	Yes	6/48	4.13"	60W	Yes
Dimmable-Title 20													
88044	A19FR9-927-DIM-LED4-T20-6pk	9W	E26	120	2700K	90+	800	15,000	Yes	6/48	4.33"	60W	Yes
88045	A19FR9-930-DIM-LED4-T20-6pk	9W	E26	120	3000K	90+	800	15,000	Yes	6/48	4.33"	60W	Yes
88046	A19FR9-940-DIM-LED4-T20-6pk	9W	E26	120	4000K	90+	800	15,000	Yes	6/48	4.33"	60W	Yes
88047	A19FR9-950-DIM-LED4-T20-6pk	9W	E26	120	5000K	90+	800	15000	Yes	6/48	4.33"	60W	Yes

15,000 hour useful life rating is based on a maximum ambient temperature of 45°C. Exceeding this ambient temperature rating may result in reduced life.

[SPEC SHEET AVAILABLE HERE.](#)

ProLED A19 Omnidirectional A-Shape Series - GU24 Base



Product #	Product Code	Wattage	Base	Voltage	Color Temp	CRI	Lumens	Useful Life	Dimmable	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR®
88055	A19FR9-827-GU24-LED	9W	GU24	120	2700K	80	800	15,000	No	1/48	4.17"	60W	Yes
88056	A19FR9-830-GU24-LED	9W	GU24	120	3000K	80	800	15,000	No	1/48	4.17"	60W	Yes
88057	A19FR9-840-GU24-LED	9W	GU24	120	4000K	80	800	15,000	No	1/48	4.17"	60W	Yes
88058	A19FR9-850-GU24-LED	9W	GU24	120	5000K	80	800	15,000	No	1/48	4.17"	60W	Yes
88059	A19FR11-827-GU24-LED	11W	GU24	121	2700K	80	1100	15,000	No	1/48	4.17"	75W	Yes
88060	A19FR15-840-GU24-LED	15W	GU24	122	4000K	80	1600	15,000	No	1/48	4.64"	100W	Yes

LAMPS ProLED A19 Omni, & Title 20, & Performance Reflector, & Performance PAR

SPEC SHEET AVAILABLE HERE.

ProLED A19 Omnidirectional A-Shape Series



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR [®]
A15													
88008	A15FR5-827-DIM-LED4	5.5W	E26	120	2700K	80	450	25,000	Yes	1/48	3.26"	40W	Yes
88009	A15FR5-830-DIM-LED4	5.5W	E26	120	3000K	80	450	25,000	Yes	1/48	3.26"	40W	Yes
88010	A15FR5-840-DIM-LED4	5.5W	E26	120	4000K	80	450	25,000	Yes	1/48	3.26"	40W	Yes
88011	A15FR5-850-DIM-LED4	5.5W	E26	120	5000K	80	450	25,000	Yes	1/48	3.26"	40W	Yes
A19													
88012	A19FR6-827-DIM-LED4	5.5W	E26	120	2700K	80	450	15,000	Yes	1/48	4.33"	40W	Yes
88013	A19FR6-830-DIM-LED4	5.5W	E26	120	3000K	80	450	15,000	Yes	1/48	4.33"	40W	Yes
88014	A19FR6-840-DIM-LED4	5.5W	E26	120	4000K	80	450	15,000	Yes	1/48	4.33"	40W	Yes
88015	A19FR6-850-DIM-LED4	5.5W	E26	120	5000K	80	450	15,000	Yes	1/48	4.33"	40W	Yes
88016	A19FR9-827-DIM-LED4	9W	E26	120	2700K	80	800	15,000	Yes	1/48	4.33"	60W	Yes
88017	A19FR9-830-DIM-LED4	9W	E26	120	3000K	80	800	15,000	Yes	1/48	4.33"	60W	Yes
88018	A19FR9-840-DIM-LED4	9W	E26	120	4000K	80	800	15,000	Yes	1/48	4.33"	60W	Yes
88019	A19FR9-850-DIM-LED4	9W	E26	120	5000K	80	800	15,000	Yes	1/48	4.33"	60W	Yes
88020	A19FR11-827-DIM-LED4	11W	E26	120	2700K	80	1100	15,000	Yes	1/48	4.56"	75W	Yes
88021	A19FR11-830-DIM-LED4	11W	E26	120	3000K	80	1100	15,000	Yes	1/48	4.56"	75W	Yes
88022	A19FR11-840-DIM-LED4	11W	E26	120	4000K	80	1100	15,000	Yes	1/48	4.56"	75W	Yes
88023	A19FR11-850-DIM-LED4	11W	E26	120	5000K	80	1100	15,000	Yes	1/48	4.56"	75W	Yes
A21													
88048	A21FR17-827-DIM-LED4	17W	E26	120	2700K	80	2000	15,000	Yes	1/30	4.92"	125W	Yes
88049	A21FR17-830-DIM-LED4	17W	E26	120	3000K	80	2000	15,000	Yes	1/30	4.92"	125W	Yes
88050	A21FR17-840-DIM-LED4	17W	E26	120	4000K	80	2000	15,000	Yes	1/30	4.92"	125W	Yes
88051	A21FR17-850-DIM-LED4	17W	E26	120	5000K	80	2000	15,000	Yes	1/30	4.92"	125W	Yes

ProLED Performance A Shape Lamp - Title 20



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR [®]
88024	A19FR6-927-DIM-LED4-T20	5W	E26	120	2700K	90+	450	15,000	Yes	1/48	4.33"	40W	Yes
88025	A19FR6-930-DIM-LED4-T20	5W	E26	120	3000K	90+	450	15,000	Yes	1/48	4.33"	40W	Yes
88026	A19FR6-940-DIM-LED4-T20	5W	E26	120	4000K	90+	450	15,000	Yes	1/48	4.33"	40W	Yes
88027	A19FR6-950-DIM-LED4-T20	5W	E26	120	5000K	90+	450	15,000	Yes	1/48	4.33"	40W	Yes
88028	A19FR9-927-DIM-LED4-T20	9W	E26	120	2700K	90+	800	15,000	Yes	1/48	4.33"	60W	Yes
88029	A19FR9-930-DIM-LED4-T20	9W	E26	120	3000K	90+	800	15,000	Yes	1/48	4.33"	60W	Yes
88030	A19FR9-940-DIM-LED4-T20	9W	E26	120	4000K	90+	800	15,000	Yes	1/48	4.33"	60W	Yes
88031	A19FR9-950-DIM-LED4-T20	9W	E26	120	5000K	90+	800	15,000	Yes	1/48	4.33"	60W	Yes
88032	A19FR12-927-DIM-LED4-T20	11W	E26	120	2700K	90+	1100	15,000	Yes	1/48	4.56"	75W	Yes
88033	A19FR12-930-DIM-LED4-T20	11W	E26	120	3000K	90+	1100	15,000	Yes	1/48	4.56"	75W	Yes
88034	A19FR12-940-DIM-LED4-T20	11W	E26	120	4000K	90+	1100	15,000	Yes	1/48	4.56"	75W	Yes
88035	A19FR12-950-DIM-LED4-T20	11W	E26	120	5000K	90+	1100	15,000	Yes	1/48	4.56"	75W	Yes
88052	A21-FR21-930-DIM-LED-T20	21W	E26	120	5000K	90+	2600	15,000	Yes	1/30	4.92"	150W	Yes
88053	A21-FR21-950-DIM-LED-T20	21W	E26	120	5000K	90+	2600	15,000	Yes	1/30	4.92"	150W	Yes

ProLED Performance Reflector Lamps



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR [®]
84985	BR30FL8/927/T20/LED	8W	E26	120V	2700K	90	720	25,000	Yes	1/48	3.11"	65W	Yes
84986	BR30FL8/930/T20/LED	8W	E26	120V	3000K	90	720	25,000	Yes	1/48	3.11"	65W	Yes

LAMPS ProLED Performance PAR, BR40, BR30, & BR30 Contractor Series 6 Pack, & R20

ProLED Performance PAR Lamps



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR®
84987	PAR30FL12S/927/T20/LED	12W	E26	120V	2700K	94	975	25,000	Yes	1/48	3.74"	75W	Yes
84988	PAR30FL12S/930/T20/LED	12W	E26	120V	3000K	94	975	25,000	Yes	1/48	3.74"	75W	Yes
84989	PAR30FL12S/940/T20/LED	12W	E26	120V	4000K	94	975	25,000	Yes	1/48	3.74"	75W	Yes
84990	PAR30FL12S/950/T20/LED	12W	E26	120V	5000K	94	975	25,000	Yes	1/48	3.74"	75W	Yes
84991	PAR30FL12L/927/T20/LED	12W	E26	120V	2700K	94	975	25,000	Yes	1/48	4.41"	75W	Yes
84992	PAR30FL12L/930/T20/LED	12W	E26	120V	3000K	94	975	25,000	Yes	1/48	4.41"	75W	Yes
84993	PAR30FL12L/940/T20/LED	12W	E26	120V	4000K	94	975	25,000	Yes	1/48	4.41"	75W	Yes
84994	PAR30FL12L/950/T20/LED	12W	E26	120V	5000K	94	975	25,000	Yes	1/48	4.41"	75W	Yes
84995	PAR38FL15/927/T20/LED	15W	E26	120V	2700K	94	1250	25,000	Yes	1/30	4.88"	90W	Yes
84996	PAR38FL15/930/T20/LED	15W	E26	120V	3000K	94	1250	25,000	Yes	1/30	4.88"	90W	Yes
84997	PAR38FL15/940/T20/LED	15W	E26	120V	4000K	94	1250	25,000	Yes	1/30	4.88"	90W	Yes
84998	PAR38FL15/950/T20/LED	15W	E26	120V	5000K	94	1250	25,000	Yes	1/30	4.88"	90W	Yes

[SPEC SHEET AVAILABLE HERE.](#)

ProLED BR40



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR®
80981	BR40FL11/827/LED	11.5W	E26	120V	2700K	82	940	25,000	Yes	1/6	6.46"	75W	Yes
80980	BR40FL11/830/LED	11.5W	E26	120V	3000K	82	940	25,000	Yes	1/6	6.46"	75W	Yes
80983	BR40FL16/827/LED	16.5W	E26	120V	2700K	82	1200	25,000	Yes	1/6	6.46"	85W	Yes
80982	BR40FL16/830/LED	16.5W	E26	120V	3000K	82	1200	25,000	Yes	1/6	6.46"	85W	Yes
80984	BR40FL16/840/LED	16.5W	E26	120V	4000K	82	1200	25,000	Yes	1/6	6.46"	85W	Yes
80985	BR40FL16/850/LED	16.5W	E26	120V	5000K	82	1200	25,000	Yes	1/6	6.46"	85W	Yes

[SPEC SHEET AVAILABLE HERE.](#)

ProLED BR30



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR®
80990	BR30FL8/827ECO/LED	8W	E26	120V	2700K	82	650	25,000	Yes	1/6	5.12"	65W	Yes
80991	BR30FL8/830/ECOLED	8W	E26	120V	3000K	82	650	25,000	Yes	1/6	5.12"	65W	Yes
80988	BR30FL8/PNK/LED	8W	E26	120V	Pink	82	-	40,000	Yes	1/6	5.12"	65W	No
80976	BR30FL10/827/LED	9.5W	E26	120V	2700K	82	750	25,000	Yes	1/6	5.12"	65W	Yes
80977	BR30FL10/830/LED	9.5W	E26	120V	3000K	82	750	25,000	Yes	1/6	5.12"	65W	Yes
80978	BR30FL10/840/LED	9.5W	E26	120V	4000K	82	750	25,000	Yes	1/6	5.12"	65W	Yes
80979	BR30FL10/850/LED	9.5W	E26	120V	5000K	82	750	25,000	Yes	1/6	5.12"	65W	Yes

Not for use in enclosed luminaires.

[SPEC SHEET AVAILABLE HERE.](#)

ProLED BR30 Contractor Series 6 Pack



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR®
82172	BR30FL8/827/ECO/LED/6	8W	E26	120V	2700K	82	650	15,000	Yes	6/24	5.20"	65W	Yes
82170	BR30FL8/830/ECO/LED/6	8W	E26	120V	3000K	82	650	15,000	Yes	6/24	5.20"	65W	Yes

15,000 hour useful life rating is based on a maximum ambient temperature of 45°C. Exceeding this ambient temperature rating may result in reduced life.

[SPEC SHEET AVAILABLE HERE.](#)

ProLED R20



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR®
80989	R20FL6/827/LED	6.5W	E26	120V	2700K	82	525	25,000	Yes	1/6	3.94"	50W	Yes
80986	R20FL6/830/LED	6.5W	E26	120V	3000K	82	525	25,000	Yes	1/6	3.94"	50W	Yes
81164	R20FL6/840/LED	6.5W	E26	120V	4000K	82	525	25,000	Yes	1/6	3.94"	50W	Yes
80987	R20FL6/850/LED	6.5W	E26	120V	5000K	82	525	25,000	Yes	1/6	3.94"	50W	Yes



SPEC SHEET AVAILABLE HERE.



ProLED Prime PAR Series

Table with columns: Product #, Product Code, Description, Wattage, Base, Voltage, Color Temp., CRI, Lumens, CBCP, Useful Life, Dimmable, Pkg. Qty., Beam Spread, MOL, Eq. Wattage, ENERGY STAR. Rows are categorized by PAR20, PAR30 Long Neck, PAR30 Short Neck, and PAR38.

For details on ProLED PAR16, see ProLED Commercial MR16/PAR16 Series Sell Sheet. Not for use in enclosed fixtures.

LAMPS ProLED ECO PAR & PAR36

[SPEC SHEET AVAILABLE HERE.](#)

ProLED ECO PAR Series



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	CBCP	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®]
PAR20																
82963	PAR20FL7/827/ECO2/LED	Flood	7W	E26	120V	2700K	82	500	600	25,000	Yes	1/20	40°	3.39"	50W	Yes
82964	PAR20FL7/830/ECO2/LED	Flood	7W	E26	120V	3000K	82	530	600	25,000	Yes	1/20	40°	3.39"	50W	Yes
82965	PAR20FL7/840/ECO2/LED	Flood	7W	E26	120V	4000K	82	550	600	25,000	Yes	1/20	40°	3.39"	50W	Yes
82966	PAR20FL7/850/ECO2/LED	Flood	7W	E26	120V	5000K	82	570	600	25,000	Yes	1/20	40°	3.39"	50W	Yes
PAR30L																
82958	PAR30FL10L/827/ECO2/LED	Flood	10W	E26	120V	2700K	82	760	1120	25,000	Yes	1/15	40°	4.61"	60W	Yes
82959	PAR30FL10L/830/ECO2/LED	Flood	10W	E26	120V	3000K	82	800	1120	25,000	Yes	1/15	40°	4.61"	60W	Yes
82960	PAR30FL10L/840/ECO2/LED	Flood	10W	E26	120V	4000K	82	840	1120	25,000	Yes	1/15	40°	4.61"	60W	Yes
82967	PAR30FL10L/850/ECO2/LED	Flood	10W	E26	120V	5000K	82	880	1120	25,000	Yes	1/15	40°	4.61"	60W	Yes
82968	PAR30NFL10L/830/ECO2/LED	Narrow Flood	10W	E26	120V	3000K	82	800	1120	25,000	Yes	1/15	25°	4.61"	60W	Yes
PAR30S																
81961	PAR30FL10S/827/ECO2/LED	Flood	10W	E26	120V	2700K	82	760	960	25,000	Yes	1/15	40°	3.35"	75W	Yes
81962	PAR30FL10S/830/ECO2/LED	Flood	10W	E26	120V	3000K	82	800	960	25,000	Yes	1/15	40°	3.35"	75W	Yes
81969	PAR30FL10S/840/ECO2/LED	Flood	10W	E26	120V	4000K	82	840	960	25,000	Yes	1/15	40°	3.35"	75W	Yes
82970	PAR30FL10S/850/ECO2/LED	Flood	10W	E26	120V	5000K	82	880	960	25,000	Yes	1/15	40°	3.35"	75W	Yes
82971	PAR30NFL10S/830/ECO2/LED	Narrow Flood	10W	E26	120V	3000K	82	800	960	25,000	Yes	1/15	25°	3.35"	75W	Yes
PAR38																
81953	PAR38FL15/827/ECO2/LED	Flood	15W	E26	120V	2700K	82	1150	1800	25,000	Yes	1/15	40°	5.08"	90W	Yes
81954	PAR38FL15/830/ECO2/LED	Flood	15W	E26	120V	3000K	82	1200	1800	25,000	Yes	1/15	40°	5.08"	90W	Yes
81955	PAR38FL15/840/ECO2/LED	Flood	15W	E26	120V	4000K	82	1250	1800	25,000	Yes	1/15	40°	5.08"	90W	Yes
81956	PAR38FL15/850/ECO2/LED	Flood	15W	E26	120V	5000K	82	1200	1800	25,000	Yes	1/15	40°	5.08"	90W	Yes
81957	PAR38NFL15/830/ECO2/LED	Narrow Flood	15W	E26	120V	3000K	82	1200	3600	25,000	Yes	1/15	25°	5.08"	90W	Yes
82972	PAR38NFL15/850/ECO2/LED	Narrow Flood	15W	E26	120V	3000K	82	1200	3600	25,000	Yes	1/15	25°	5.08"	90W	Yes

[SPEC SHEET AVAILABLE HERE.](#)

ProLED PAR36/AR111 Indoor



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	CBCP	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®]
81097	PAR36FL11/827/LED	Flood	11.5W	MP Term	12V	2700K	82	870	2000	40,000	Yes	1/6	32°	1.97"	50W	No
80863	PAR36FL17/827/LED	Flood	17W	MP Term	12V	2700K	82	1000	2300	40,000	Yes	1/6	32°	1.97"	75W	No

Not for use in enclosed luminaires. May not be compatible with all electronic transformers. Rated for indoor use only

SPEC SHEET AVAILABLE HERE.

ProLED PL Bypass Series



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	DLC Qualified ³
Vertical													
81141	PL10V/835/BYP/LED	10W	G24q/GX24q/G24d/GX24d	120-277V	3500K	82	1000	50,000	No	1/10	4.60"	26W	No
81142	PL10V/841/BYP/LED	10W	G24q/GX24q/G24d/GX24d	120-277V	4100K	82	1000	50,000	No	1/10	4.60"	26W	No
81143	PL10V/850/BYP/LED	10W	G24q/GX24q/G24d/GX24d	120-277V	5000K	82	1000	50,000	No	1/10	4.60"	26W	No
Horizontal													
81144	PL10H/835/BYP/LED	10W	G24q/GX24q/G24d/GX24d	120-277V	3500K	82	1000	50,000	No	1/10	5.20"	26W	No
81145	PL10H/841/BYP/LED	10W	G24q/GX24q/G24d/GX24d	120-277V	4100K	82	1000	50,000	No	1/10	5.20"	26W	No
81146	PL10H/850/BYP/LED	10W	G24q/GX24q/G24d/GX24d	120-277V	5000K	82	1000	50,000	No	1/10	5.20"	26W	No

Must be operated with an ambient luminaire temperature between -4°F(-20°C) and 122°F(50°C). Specifications are based on use with normal ballast factor ballasts (0.88).

SPEC SHEET AVAILABLE HERE.

ProLED PL Direct Series



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	DLC Qualified ³
Vertical													
82112	PL12V/835/DIR/LED2	12W	G24q/GX24q	120-277V	3500K	82	1200	50,000	No	1/10	4.60"	26W	Standard
82113	PL12V/840/DIR/LED2	12W	G24q/GX24q	120-277V	4000K	82	1200	50,000	No	1/10	4.60"	26W	Standard
82114	PL12V/850/DIR/LED2	12W	G24q/GX24q	120-277V	5000K	82	1200	50,000	No	1/10	4.60"	26W	Standard
Horizontal													
82117	PL12H/835/DIR/LED2	12W	G24q/GX24q	120-277V	3500K	82	1200	50,000	No	1/10	5.20"	26W	Standard
82118	PL12H/840/DIR/LED2	12W	G24q/GX24q	120-277V	4000K	82	1200	50,000	No	1/10	5.20"	26W	Standard
82119	PL12H/850/DIR/LED2	12W	G24q/GX24q	120-277V	5000K	82	1200	50,000	No	1/10	5.20"	26W	Standard

SPEC SHEET AVAILABLE HERE.

ProLED PL Hybrid Series*



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	DLC Qualified ³
81159	PL6H/827/HYB/LED	6W	GX23	120-277V	2700K	82	520	50,000	No	1/10	5.50"	13W	No
81160	PL6H/830/HYB/LED	6W	GX23	120-277V	3000K	82	520	50,000	No	1/10	5.50"	13W	No
81161	PL6H/835/HYB/LED	6W	GX23	120-277V	3500K	82	520	50,000	No	1/10	5.50"	13W	No
81162	PL6H/840/HYB/LED	6W	GX23	120-277V	4000K	82	520	50,000	No	1/10	5.50"	13W	No
81163	PL6H/850/HYB/LED	6W	GX23	120-277V	5000K	82	520	50,000	No	1/10	5.50"	13W	No

* Can be mounted vertical / works with or without ballast / ICAT Rated

SPEC SHEET AVAILABLE HERE.

ProLED B11 Chandelier



Cream 3W



Cream 5W Med.

Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR [®]
80094	B11CL3/827/LED	Cream Finish	3W	E12	120V	2700K	82	180	25,000	Yes	1/10	3.78"	25W	No
80789	B11CL3/827/BR/LED	Brass Finish	3W	E12	120V	2700K	82	180	25,000	Yes	1/10	3.78"	25W	No
80790	B11CL3/827/CHR/LED	Chrome Finish	3W	E12	120V	2700K	82	180	25,000	Yes	1/10	3.78"	25W	No
80185	B11CL3/830/LED	Cream Finish	3W	E12	120V	3000K	82	180	25,000	Yes	1/10	3.78"	25W	No
80820	B11CL5/827/LED	Cream Finish	4.5W	E12	120V	2700K	82	300	25,000	Yes	1/10	3.78"	40W	Yes
80168	B11CL5/827/E26/LED	Cream Finish	4.5W	E26	120V	2700K	82	300	25,000	Yes	1/10	3.78"	40W	Yes
80183	B11CL5/830/E26/LED	Cream Finish	4.5W	E26	120V	3000K	82	300	25,000	Yes	1/10	3.78"	40W	Yes
80184	B11CL5/830/LED	Cream Finish	4.5W	E12	120V	3000K	82	300	25,000	Yes	1/10	3.78"	40W	Yes

SPEC SHEET AVAILABLE HERE.

ProLED Decorative Chandelier



B10 2400K



B10 2700K



CA10 2400K



CA10 2700K

Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR [®]
B10														
80173	B10CL1/724/LED	Clear Torpedo	1W	E12	120V	2400K	72	20	25,000	Yes	1/25	3.77"	7.5W	No
80172	B10CL1/827/LED	Clear Torpedo	1W	E12	120V	2700K	82	25	25,000	Yes	1/25	3.77"	7.5W	No
CA10														
80175	CA10CL1/724/LED	Clear Flame Tip	1W	E12	120V	2400K	72	20	25,000	Yes	1/25	4.01"	7.5W	No
80174	CA10CL1/827/LED	Clear Flame Tip	1W	E12	120V	2700K	82	25	25,000	Yes	1/25	4.01"	7.5W	No

Not for use in enclosed luminaires.

SPEC SHEET AVAILABLE HERE.

ProLED G25 Series Globe



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR [®]
80180	G25FR6/830/LED	Globe	6W	E26	120V	3000K	82	470	25,000	Yes	1/6	4.25"	40W	Yes

Use on incompatible systems may shorten lamp life.

SPEC SHEET AVAILABLE HERE.

ProLED Sign Lamp Series



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®]
S11															
80525	S11CL1C/827/INT/LED	Clear, IP65 Rated	1.2W	E17	120V	2700K	82	35	40,000	Yes	1/25	2.24"		11W	No
80524	S11CL1C/827/LED	Clear, IP65 Rated	1.2W	E26	120V	2700K	82	35	40,000	Yes	1/25	2.24"		11W	No
80526	S11WH1C/LED	White, IP65 Rated	1.2W	E26	120V	White	-	-	40,000	Yes	1/25	2.24"		11W	No
S14															
80522	S14CL1C/827/LED	Clear, IP65 Rated	1.4W	E26	120V	2700K	82	35	40,000	Yes	1/25	3.35"		11W	No
80517	S14RED1C/LED	Red, IP65 Rated	1.4W	E26	120V	Red	-	-	40,000	Yes	1/25	3.35"		11W	No
80518	S14BLU1C/LED	Blue, IP65 Rated	1.4W	E26	120V	Blue	-	-	40,000	Yes	1/25	3.35"		11W	No
80519	S14GRN1C/LED	Green, IP65 Rated	1.4W	E26	120V	Green	-	-	40,000	Yes	1/25	3.35"		11W	No
80520	S14YEL1C/LED	Yellow, IP65 Rated	1.4W	E26	120V	Yellow	-	-	40,000	Yes	1/25	3.35"		11W	No
80521	S14WH1C/LED	White, IP65 Rated	1.4W	E26	120V	White	-	-	40,000	Yes	1/25	3.35"		11W	No
80523	S14ORG1C/LED	Orange, IP65 Rated	1.4W	E26	120V	Orange	-	-	40,000	Yes	1/25	3.35"		11W	No

Not for use in enclosed luminaires.

SPEC SHEET AVAILABLE HERE.

ProLED Elevator Lamp



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	CBCP	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®]
80756	GBF/3WW/LED	Flood	2.6W	BA15d	10-18V	2700K	82	410	145	40,000	No	1/10	31°	2.52"	20W	No
80701	1383/3WW/LED	Flood	2.6W	BA15s	10-18V	2700K	82	410	145	40,000	No	1/10	31°	2.52"	20W	No

SPEC SHEET AVAILABLE HERE.

ProLED MR16 GU10



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	CBCP	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®]
80529	MR16FL4/827/GU10/LED	Flood	4.5W	GU10	120V	2700K	82	360	525	25,000	Yes	1/10	40°	2.70"	35W	No
80887	MR16FL4/830/GU10/LED	Flood	4.5W	GU10	120V	3000K	82	370	525	25,000	Yes	1/10	40°	2.17"	35W	Yes
80531	MR16FL4/840/GU10/LED	Flood	4.5W	GU10	120V	4000K	82	360	525	25,000	Yes	1/10	40°	2.70"	35W	No
80533	MR16FL4/850/GU10/LED	Flood	4.5W	GU10	120V	5000K	82	360	525	25,000	Yes	1/10	40°	2.70"	35W	No
80528	MR16FL6/827/GU10/LED	Flood	6.5W	GU10	120V	2700K	82	500	730	25,000	Yes	1/10	40°	2.17"	50W	No
80888	MR16FL6/830/GU10/LED	Flood	6.5W	GU10	120V	3000K	82	520	730	25,000	Yes	1/10	40°	2.17"	50W	Yes
80530	MR16FL6/840/GU10/LED	Flood	6.5W	GU10	120V	4000K	82	500	730	25,000	Yes	1/10	40°	2.17"	50W	No
80532	MR16FL6/850/GU10/LED	Flood	6.5W	GU10	120V	5000K	82	500	730	25,000	Yes	1/10	40°	2.17"	50W	Yes

SPEC SHEET AVAILABLE HERE.

ProLED MR16



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	CBCP	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR®
81055	MR16NFL10/827/LED	Narrow Flood	2.5W	GU5.3	10-18V	2700K	82	200	800	40,000	Yes	1/10	20°	1.97"	10W	No
81079	MR16NFL10/830/LED	Narrow Flood	2.5W	GU5.3	10-18V	3000K	82	210	830	40,000	Yes	1/10	20°	1.97"	10W	No
81056	MR16FL10/827/LED	Flood	2.5W	GU5.3	10-18V	2700K	82	200	300	40,000	Yes	1/10	40°	1.97"	10W	No
81077	MR16FL10/830/LED	Flood	2.5W	GU5.3	10-18V	3000K	82	210	320	40,000	Yes	1/10	40°	1.97"	10W	No
81058	MR16FL10/850/LED	Flood	2.5W	GU5.3	10-18V	5000K	82	230	350	40,000	Yes	1/10	40°	1.97"	10W	No
81057	MR16WFL10/827/LED	Wide Flood	2.5W	GU5.3	10-18V	2700K	82	200	200	40,000	Yes	1/10	60°	1.97"	10W	No
81080	MR16WFL10/830/LED	Wide Flood	2.5W	GU5.3	10-18V	3000K	82	210	220	40,000	Yes	1/10	60°	1.97"	10W	No
81059	MR16BBF/827/LED	Narrow Flood	4W	GU5.3	10-18V	2700K	82	270	900	40,000	Yes	1/10	20°	1.97"	20W	Yes
81081	MR16BBF/830/LED	Narrow Flood	4W	GU5.3	10-18V	3000K	82	280	1100	40,000	Yes	1/10	20°	1.97"	20W	Yes
81060	MR16BAB/827/LED	Flood	4W	GU5.3	10-18V	2700K	82	270	440	40,000	Yes	1/10	40°	1.97"	20W	Yes
81062	MR16BAB/830/LED	Flood	4W	GU5.3	10-18V	3000K	82	280	500	40,000	Yes	1/10	40°	1.97"	20W	Yes
81063	MR16BAB/850/LED	Flood	4W	GU5.3	10-18V	5000K	82	310	530	40,000	Yes	1/10	40°	1.97"	20W	Yes
81061	MR16WFL20/827/LED	Wide Flood	4W	GU5.3	10-18V	2700K	82	270	210	40,000	Yes	1/10	60°	1.97"	20W	No
81082	MR16WFL20/830/LED	Wide Flood	4W	GU5.3	10-18V	3000K	82	280	230	40,000	Yes	1/10	60°	1.97"	20W	No
81064	MR16FRA/827/LED	Narrow Flood	4.5W	GU5.3	10-18V	2700K	82	380	1700	40,000	Yes	1/10	20°	1.97"	35W	Yes
81083	MR16FRA/830/LED	Narrow Flood	4.5W	GU5.3	10-18V	3000K	82	390	1800	40,000	Yes	1/10	20°	1.97"	35W	Yes
81065	MR16FMW/827/LED	Flood	4.5	GU5.3	10-18V	2700K	82	380	600	40,000	Yes	1/10	40°	1.97"	35W	Yes
81067	MR16FMW/830/LED	Flood	4.5	GU5.3	10-18V	3000K	82	390	650	40,000	Yes	1/10	40°	1.97"	35W	Yes
81068	MR16FMW/850/LED	Flood	4.5	GU5.3	10-18V	5000K	82	430	700	40,000	Yes	1/10	40°	1.97"	35W	Yes
81066	MR16WFL35/827/LED	Wide Flood	4.5	GU5.3	10-18V	2700K	82	380	300	40,000	Yes	1/10	60°	1.97"	35W	No
81084	MR16WFL35/830/LED	Wide Flood	4.5	GU5.3	10-18V	3000K	82	390	320	40,000	Yes	1/10	60°	1.97"	35W	No
81069	MR16EXZ/827/LED	Narrow Flood	8W	GU5.3	10-18V	2700K	82	590	2700	40,000	Yes	1/10	20°	1.97"	50W	No
81085	MR16EXZ/830/LED	Narrow Flood	8W	GU5.3	10-18V	3000K	82	600	2800	40,000	Yes	1/10	20°	1.97"	50W	No
81070	MR16EXN/827/LED	Flood	8W	GU5.3	10-18V	2700K	82	590	1100	40,000	Yes	1/10	40°	1.97"	50W	No
81072	MR16EXN/830/LED	Flood	8W	GU5.3	10-18V	3000K	82	600	1200	40,000	Yes	1/10	40°	1.97"	50W	No
81073	MR16EXN/850/LED	Flood	8W	GU5.3	10-18V	5000K	82	660	1400	40,000	Yes	1/10	40°	1.97"	50W	No
81071	MR16FNV/827/LED	Wide Flood	8W	GU5.3	10-18V	2700K	82	590	500	40,000	Yes	1/10	60°	1.97"	50W	No
81086	MR16FNV/830/LED	Wide Flood	8W	GU5.3	10-18V	3000K	82	600	520	40,000	Yes	1/10	60°	1.97"	50W	No

Acceptable for use in sealed metal landscape luminaires when protected from the elements.

LAMPS

ProLED Commercial MR16/MR11

[SPEC SHEET AVAILABLE HERE.](#)



ProLED Commercial MR16/MR11

Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	CBCP	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®]
MR11																
80996	MR11NFL3/827/LED	Narrow Flood	3W	GU4	12V	2700K	82	210	700	25,000	No	1/10	20°	1.48"	20W	No
80997	MR11NFL3/830/LED	Narrow Flood	3W	GU4	12V	3000K	82	210	700	25,000	No	1/10	20°	1.48"	20W	No
80998	MR11NFL3/840/LED	Narrow Flood	3W	GU4	12V	4000K	82	210	700	25,000	No	1/10	20°	1.48"	20W	No
80999	MR11NFL3/850/LED	Narrow Flood	3W	GU4	12V	5000K	82	210	700	25,000	No	1/10	20°	1.48"	20W	No
MR16																
80534	MR16FL4/827/LED2	Flood	4.5W	GU5.3	12V	2700K	82	360	730	25,000	Yes	1/10	40°	1.77"	35W	No
80535	MR16FL4/830/LED2	Flood	4.5W	GU5.3	12V	3000K	82	370	750	25,000	Yes	1/10	40°	1.77"	35W	No
80536	MR16FL4/850/LED2	Flood	4.5W	GU5.3	12V	5000K	82	400	810	25,000	Yes	1/10	40°	1.77"	35W	No
80537	MR16FL6/827/LED2	Flood	6.5W	GU5.3	12V	2700K	82	500	1100	25,000	Yes	1/10	40°	1.77"	50W	Yes
80538	MR16FL6/830/LED2	Flood	6.5W	GU5.3	12V	3000K	82	500	730	25,000	Yes	1/10	40°	1.77"	50W	Yes
80539	MR16FL6/850/LED2	Flood	6.5W	GU5.3	12V	5000K	82	500	1190	25,000	Yes	1/10	40°	1.77"	50W	Yes
80540	MR16NFL6/830/LED2	Narrow Flood	6.5W	GU5.3	12V	3000K	82	520	2420	25,000	Yes	1/10	20°	1.77"	50W	Yes

Acceptable for use in sealed metal landscape luminaires when protected from the elements.

OUTDOOR LAMPS

ProLED MR16 RGBW Series, & ProLED MR16 Black

[SPEC SHEET AVAILABLE HERE.](#)



ProLED MR16 RGB-W Series

Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®]
82099	MR16FL6/RGBW/LED	RGB-W, White Finish	6W	GU5.3	10-15V	RGB-W Warm White	80	400	25,000	Yes	1/10	40°	1.97"	35W	No

[SPEC SHEET AVAILABLE HERE.](#)



ProLED MR16 Black

Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	CBCP	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®]
81103	MR16NFL4/827/LED	Narrow Flood, Black	4W	GU5.3	10-15V	2700K	82	250		30,000	Yes	1/10	20°	1.97"	20W	No
81098	MR16FL4/827/LED	Flood, Black	4W	GU5.3	10-15V	2700K	82	250		30,000	Yes	1/10	40°	1.97"	20W	No
81099	MR16WFL4/827/LED	Wide Flood, Black	4W	GU5.3	10-15V	2700K	82	250		30,000	Yes	1/10	60°	1.97"	20W	No
82094	MR16NFL4.5/827/LED	Narrow Flood, Black	4.5W	GU5.3	10-15V	2700K	82	390		30,000	Yes	1/10	20°	1.97"	35W	No
82095	MR16FL4.5/827/LED	Narrow Flood, Black	4.5W	GU5.3	10-15V	2700K	82	390		30,000	Yes	1/10	40°	1.97"	35W	No
82096	MR16WFL4.5/827/LED	Wide Flood, Black	4.5	GU5.3	10-15V	2700K	82	390		30,000	Yes	1/10	60°	1.97"	35W	No

Use on incompatible systems may shorten lamp life.

Acceptable for use in sealed metal landscape luminaires when protected from the elements.

OUTDOOR LAMPS

ProLED MR11, ProLED Outdoor PAR36, & ProLED Outdoor PAR36 RGB-W Series

[SPEC SHEET AVAILABLE HERE.](#)



ProLED MR11

Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	CBCP	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®]
81093	MR11FTD/827/LED	Flood	3W	GU4	10-18V	2700K	82	230	420	40,000	Yes	1/10	30°	1.42"	20W	No
81094	MR11FTD/827/BA15D/LED	Flood	3W	BA15d	10-15V	2700K	82	230	420	40,000	Yes	1/10	30°	1.42"	20W	No
81095	MR11FTD/850/LED	Flood	3W	GU4	10-18V	2700K	82	250	500	40,000	Yes	1/10	30°	1.42"	20W	No
81096	MR11FTC/827/LED	Narrow Flood	4.5W	GU4	10-18V	2700K	82	230	600	40,000	Yes	1/10	22°	1.42"	20W	No

Use on incompatible systems may shorten lamp life. Acceptable for use in sealed metal landscape luminaires when protected from the elements. May not be compatible with all electronic transformers. Magnetic transformers are recommended for Dimmable applications. Not for use in enclosed luminaires. Lamps should be tested in the application for compatibility prior to full installations on circuits using such devices.

[SPEC SHEET AVAILABLE HERE.](#)



ProLED Outdoor PAR36

Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	CBCP	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®]
81074	PAR36WFL4/827/IP67/1LED	Wide Flood	4.5W	MP Term	10-15V	2700K	82	300	700	40,000	Yes	1/6	32°	2.40"	20W	No
81075	PAR36WFL6/827/IP67/LED	Wide Flood	6.5W	MP Term	10-15V	2700K	82	450	1100	40,000	Yes	1/6	32°	2.40"	35W	No
81076	PAR36WFL12/827/IP67/LED	Wide Flood	12.5W	MP Term	10-15V	2700K	82	800	2000	40,000	Yes	1/6	32°	2.40"	50W	No

Not for use in enclosed luminaires. May not be compatible with all electronic transformers. Rated for outdoor use only.

[SPEC SHEET AVAILABLE HERE.](#)



ProLED Outdoor PAR36 RGB-W Series

Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®]
82142	PAR36WFL10/RGBW/IP165/LED	Wide Flood	10W	MP Term	10-15V	RGB-W + 2700K	80	800 (max)	40,000	Yes	1/6	32°	2.40"	50W	No

Not for use in enclosed luminaires. May not be compatible with all electronic transformers. Rated for outdoor use only.

May not be compatible with electronic transformers. Suitable for use in sealed metal landscape luminaires. IP65 rated lamps are rated for use outdoors where exposed directly to water from rain or irrigation. This lamp is not for submersible use. Warranty – Commercial / Industrial: This product is warranted for 5 years from the date of purchase. Not for use on dimmers, timing devices, photo sensors or occupancy sensors

OUTDOOR LAMPS

ProLED IP Rated LED JC Series, & ProLED Omnidirectional IP65 JC Lamps

SPEC SHEET AVAILABLE HERE.



ProLED IP Rated LED JC Series

Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL Eq.	Wattage	ENERGY STAR [®]
JC2S														
81091	JC2S/827/LED2	IP65 Rated	1.4W	G4	10-15V	2700K	82	140	40,000	No	1/10	0.98"	20W	No
81092	JC2S/830/LED2	IP65 Rated	1.4W	G4	10-15V	3000K	82	150	40,000	No	1/10	0.98"	20W	No
JC2														
81109	JC2/827/LED2	Omnidirectional, IP65 Rated	2.3W	G4	10-15V	2700K	82	250	40,000	No	1/10	1.57"	20W	No
81108	JC20/2WW/LED2	Omnidirectional, IP65 Rated	2.3W	G4	10-15V	3000K	82	250	40,000	No	1/10	1.57"	20	No
JC10														
80810	JC10/1WW/BA15S/LED2	IP65 Rated	1.5W	BA15s	10-18V	3000K	82	100	40,000	No	1/10	1.93"	10W	No
JC20														
81100	JC20/2WW/BA15S/LED2	IP65 Rated	2.3W	BA15s	10-15V	3000K	82	250	40,000	No	1/10	2.00"	20W	No
81102	912/1WW/LED2	IP65 Rated	1.2W	Wedge	10-15V	3000K	82	120	40,000	No	1/10	1.51"	10W	No
81101	3155/2WW/LED2	IP65 Rated	2.3W	Wedge	10-15V	3000K	82	250	40,000	No	1/10	1.67"	20W	No

SPEC SHEET AVAILABLE HERE.



ProLED Omnidirectional IP65 JC Lamps

Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL Eq.	Wattage	ENERGY STAR [®]
81998	JC1/830/OMNI/IP65/LED	IP65 Rated	1.2W	G4	10-15V	3000K	82	110	15,000	No	1/10	1.18"	10W	No
81999	JC2/830/OMNI/IP65/LED	IP65 Rated	2W	G4	10-15V	3000K	82	200	15,000	No	1/10	1.46"	20W	No
81996	JC3/830/OMNI/IP65/LED	IP65 Rated	2.5W	G4	10-15V	3000K	82	300	15,000	No	1/10	1.61"	20W	No

May not be compatible with electronic transformers. Suitable for use in sealed metal landscape luminaires. IP65 rated lamps are rated for use outdoors where exposed directly to water from rain or irrigation. This lamp is not for submersible use.

OUTDOOR LAMPS

ProLED Traditional JC Series, & ProLED Traditional LED Series: JC3 G4

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Traditional JC Series



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR [®]
Mini Wedge														
80791	912/1WW/LED	Omnidirectional	1 W	Wedge	10-18V	3000K	82	75	20,000	Yes	1/50	1.18"	10W	No
JC10														
80692	JC10/1WW/BA15S/LED	Omnidirectional	1.5 W	BA15s	10-24V	3000K	82	150	30,000	Yes	1/40	1.70"	10W	No
80693	JC10/1WW/LED	Omnidirectional	1.5 W	G4	10-24V	3000K	82	150	30,000	No	1/10	1.21"	10W	No
JC20														
80691	JC20/2WW/BA15S/LED	Omnidirectional	2.4 W	BA15s	10-24V	3000K	82	250	30,000	Yes	1/40	2.01"	20W	No
80833	JC2/827/LED	Omnidirectional	2.4 W	G4	10-24V	2700K	82	240	30,000	No	1/10	1.81"	20W	No
80690	JC20/2WW/LED	Omnidirectional	2.4 W	G4	10-24V	3000K	82	250	30,000	No	1/40	1.81"	20W	No
80815	JC20/2NW/LED	Omnidirectional	2.4 W	G4	10-24V	5000K	82	260	30,000	No	1/10	1.81"	20W	No
JC35														
80830	JC35/4WW/LED	Omnidirectional	4.5 W	GY6.35	10-18V	3000K	82	450	30,000	No	1/30	1.71"	35W	No
JC50														
81997	JC50/5WW/LED	Omnidirectional	5.5 W	GY6.35	10-18V	3000K	82	550	30,000	No	1/30	1.71"	50W	No

May not be compatible with all electronic transformers.
 Not for use in enclosed luminaires. Suitable for use in sealed metal landscape luminaires; standard JC lamps require protection from elements.
 The lamp is not submersible nor for use in enclosed luminaires. Suitable for use in sealed metal landscape luminaires.

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Traditional LED Series: JC3 G4



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR [®]
81078	JC3VWFL/827/LED	Very Wide Flood	3.3W	G4	12V	2700K	82	200	25,000	No	1/10	1.38"	20W	No

May not be compatible with all electronic transformers.
 Not for use in enclosed luminaires. Suitable for use in sealed metal landscape luminaires; standard JC lamps require protection from elements.
 IP65 rated lamps are rated for use outdoors where exposed directly to water from rain or irrigation. The lamp is not submersible nor for use in enclosed luminaires. Suitable for use in sealed metal landscape luminaires.

¹ Useful Life is defined as the point in time at which the LED will maintain at least 70% of its initial lumens. The LED will continue to operate past this point at decreased light levels.
² May not be compatible with all Dimming systems. Dimming performance may vary by system. Please check www.halcolighting.com for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life.
³ To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/qpl.

sollos®

A HALCO LIGHTING TECHNOLOGIES BRAND
LANDSCAPE LIGHTING

LANDSCAPE LIGHTING

The Art of Outdoor Illumination

Bringing over 40 years of experience in landscape lighting, Sollos offers a full portfolio of quality LED products engineered for the best performance offering dynamic functionality to provide safety, security and quality illumination. Whether you are looking for path lighting for a single walkway or a full portfolio of products for a complete transformation of your outdoor space – **Sollos has what you need!**



Product #	Product Code	Fixture Model	Finish	Lamp Supplied
UP AND ACCENT LIGHTS				
BCB065 Contemporary Bullet				
20080S	BCB065-AB-MR16FL4/827/LED	BCB065-AB	Antique Brass	MR16FL4/827/LED
27602S	BCB065-TZ-MR16FL4/827/LED	BCB065-TZ	Textured Bronze	MR16FL4/827/LED
BMB062 Modern Bullet				
27605S	BMB062-TB-MR16FL4/827/LED	BMB062-TB	Textured Black	MR16FL4/827/LED
27604S	BMB062-TZ-MR16FL4/827/LED	BMB062-TZ	Textured Bronze	MR16FL4/827/LED
PATH LIGHTS				
PTH075 Traditional Hat				
27613S	PTH055-AB-15-JC2/830/OMNI/IP65	PTH055-AB-15	Antique Brass	JC2/830/OMNI/IP65/LED
PSH040 Straight Hat				
27616S	PSH040-TZ-12-JC2/830/OMNI/IP65	PSH040-TZ-12	Textured Bronze	JC2/830/OMNI/IP65/LED
PSH075 Straight Hat				
27626S	PSH075-TZ-18-JC2/830/OMNI/IP65	PSH075-TZ-15	Textured Bronze	JC2/830/OMNI/IP65/LED
WELL LIGHTS				
932017S	WPO055-CB-PAR36WFL4/827/IP67/LED	WPO055-CB	Composite Black	PAR36WFL4/827/IP67/LED
TRANSFORMERS				
Commercial Series				
Intergrated Series Built-In Photocell and Timer				
997012	TR12PC-INT-100	100 VA	Black Polycarbonate	
997016	TR12SS-INT-200	120 VA	Stainless Steel	
Product #	Product Code	Wattage	Base	Materials
LAMPS & FIXTURE				
MR16 RGB-W LED Lamp				
82099	MR16FL6/RGBW/LED	6	GU5.3	
PAR36 RGB-W LED Lamp				
82142	PAR36WFL10/RGBW/IP68/LED	10	MP Term	
Ledge Light RGB-W LED Fixture				
27506	LLA055/RGBW/TB	2		Textured Black Aluminum
27509	LLA055/RGBW/TZ	2		Textured Bronze Aluminum



Contact your rep today to learn more about Sollos Landscape Lighting.

To find out more about the complete product portfolio, visit solloslighting.com.



Scan to view the digital guide



800.677.3334
FAX: 800.880.0822
www.halcolighting.com

Atlanta
2940 Pacific Drive
Norcross, GA 30071

Houston
6319 Brookhill Drive
Houston, TX 77087

Chicago
845 Lively Blvd
Wood Dale, IL 60191

Los Angeles
4820 Schaefer Avenue
Chino, CA 91710

Cleveland
3501 Croton Avenue
Cleveland, OH 44115

Phoenix
3103 E. Broadway, Ste 100
Phoenix, AZ 85040