

Exhibit - 6

Statement of Data Measured
and
Test Data of Modified

STATEMENT OF DATA MEASURED

1. General Information of EUT

The EUT, 15" supper VGA color monitor.

Model No. : D2826
 FCC ID : A3KM079
 Brand : HP

The monitor automatically scans horizontal frequencies between 30KHz and 54KHz, and vertical frequencies between 50Hz and 120Hz. This color monitor displays sharp and brilliant images of text and graphics with a maximum resolution up to 1024X768 pixels.

The monitor has 6 factory-preset modes as indicated in the following table:

	Resolution	H-Frequency	V-Frequency	Remark
M01	640 X 400	31.5KHz	70Hz	Non-interlaced
M02	640 X 480	37.5KHz	75Hz	Non-interlaced
M03	640 X 480	43.3KHz	85Hz	Non-interlaced
M04	800 X 600	46.9KHz	75Hz	Non-interlaced
M05	800 X 600	53.7KHz	85Hz	Non-interlaced
M06	1024 X 768	48.3KHz	60Hz	Non-interlaced

2. Test Equipment and Procedure

Test was performed by:

PHILIPS ELECTRONICS INDUSTRIES (TAIWAN) LTD.
 CONSUMER ELECTRONICS DIVISION
 EMI - LAB

5, Tze Chiang 1 Road, Chungli Industrial Park
 P.O. Box 123, Chungli, Taoyuan, Taiwan
 R. O. C.

Tel : 886-3-4549862 Fax : 886-3-4549887
 Internet: ronnie.yang@tw.cemail.philips.com

The test was performed in accordance with ANSI C63.4-1992. "AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC EQUIPMENT IN THE RANGE OF 9KHz TO 40GHz"

Test equipments used for line Conducted and Radiated emissions as following. All equipments were calibrated according to ANSI C63.4-1992 and ISO-9000 requirement unless otherwise specified.

Test Equipment	Model No.	Serial No.	Calibrated Date
Spectrum	HP8568B	2403A06961	12/03/1997
RF Preselector	HP85685A	2901A00964	12/03/1997
QP Adapter	HP85650A	2043A00366	12/03/1997
EMI Receiver	HP85460A	3441A00199	5/12/1997
RFI Filter Section	HP85460A	3330A00177	5/12/1997
EMI Receiver	R & S ESVS30	8419977/066	11/21/1997
Biconical Antenna	EMCO 3110B	2863	2/07/1998
Biconical Antenna	EMCO 3110B	2864	2/07/1998
Log-Periodic Antenna	EMCO 3146A	1377	2/07/1998
Log-Periodic Antenna	EMCO 3146A	1378	2/07/1998
LISN	EMCO 3825/2	9311-2153	9/17/1997
LISN	EMCO 3825/2	9311-2154	9/17/1997
Turn Table	EMCO 1060	1068	4/22/1997
Antenna Tower	EMCO 1050	1113	4/22/1997
RF Cable	M17/75-RG214-NE	N/A	4/22/1997
Computer	HP9000/300	2614A78610	N/A
Printer	HP2225A	2728S02586	N/A
Plotter	HP7440A	2539A40856	N/A

Traceability to R.O.C. and international standards is assured by using calibrated all equipment.

For system measurement, the EUT "15C2320W" was connected to:

Item	Model No.	Serial No.	FCC ID
1. Computer	HP D5250A	US72455810	FCC Logo
2. Keyboard	HP 5282-5521	E036331HLUS-C	CIGE03633
3. Mouse	HP M-S34	1CA54625637	DZI.210472
4. Printer	HP 2225C	3123S97227	DSI6XU2225
5. Modem	Hayes 07-00038	A29900153966	BFJ9D907-00038
6. Vide Card	Bulit-in		

The system was configured for testing in a typical fashion (as a customer would normally use it) according to ANSI C63.4-1992, please see the photographs for detail.

Both conducted and radiated testings were performed according to the procedure in ANSI C63.4-1992. Conducted testing was performed in screen room and radiated testing was performed in open site at an antenna to EUT distance of 3-meter on horizontal and vertical polarization.

First, pre-scan all modes in screen room then select 2 higher modes (worst case) were tested and reported.

The line conductive interference was tested with 110VAC and 220VAC receptively. Unshielded power cord was used during test.

Tested and reported modes as following:

Report No.	Resolution	Frequencies
EMC98-029	1024x768	48.3KHz/60Hz
EMC98-029A	800x600	53.7KHz/85Hz

3. Test Program and Test Results

Set up the EUT and all peripherals as chapter 6 of ANSI C63.4-1992 for AC power line conducted emissions testing and radiated emissions testing.

Turn on the power of EUT and all peripherals. select an appropriate displaying mode using the "setup" software. Then run an EMI test program "HTEST.FMI" as a basic software to execute the EUT operating under test.

- Step 1 : Run the "HTEST.FMI" on personal computer then sends "H" character to monitor continuously until full screen.
- Step 2 : Personal computer sends a complete line of continuously repeating "H" to HP 2225C printer.
- Step 3 : Personal computer sends a file of "H" pattern to floppy disk then read a file of "H" pattern from floppy disk.
- Step 4 : Personal computer sends a file of "H" pattern to hard disk then read a file of "H" pattern from hard disk.
- Step 5 : Personal computer sends a file of "H" patten to Hayes 07-00038 modem.
- Step 6 : Return to step 1

All data in this report are "PEAK" value within 15dB margin unless otherwise noted. The radiated (open site) data has included antenna and cable factors, sample calculation:

Final Value (dB μ v/m) = Reading (dB μ v) + Antenna Factor (dB) + Cable Loss (dB)

The measured data of radiated RF interference at open site and line conducted interference as attached.

The subject device is in compliance with the limits for a class B digital device, pursuant to part 15, subpart B of the FCC rules.



Ronnie Yang - Manager, Safety/Dev. PEI-BE
NVLAP Signatory


✓

1872

RFI EMISSION LEVEL dBuV/m

APR/14/1998

REPORT NO: EM198-029
MODEL NO: HP D2826

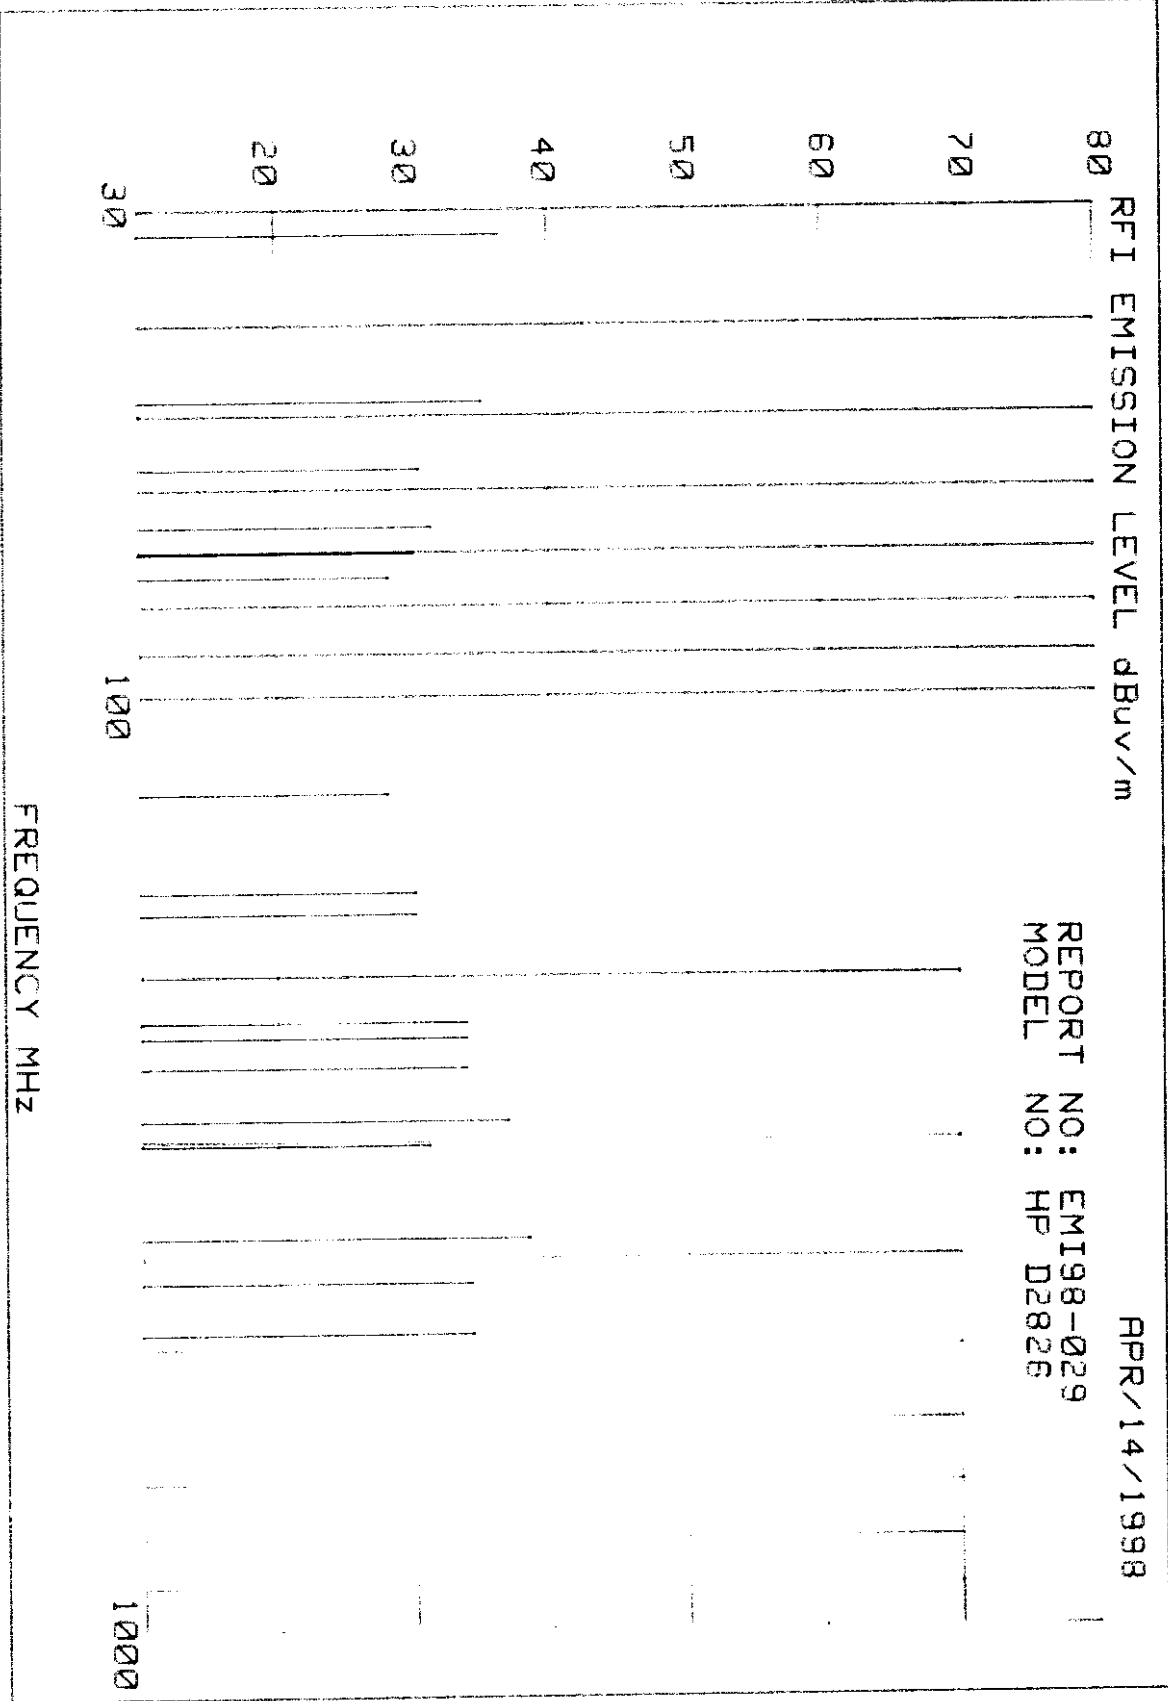


FREQUENCY MHZ

A3KM079 RUN 800X600/85HZ 53.6KHZ MODE AC110V MKR 450 KHZ
REF 107.0 DBμV ATTEN 10 DB 38.90 DBμV

HP

10 DB/

DL
48.0
DBμV

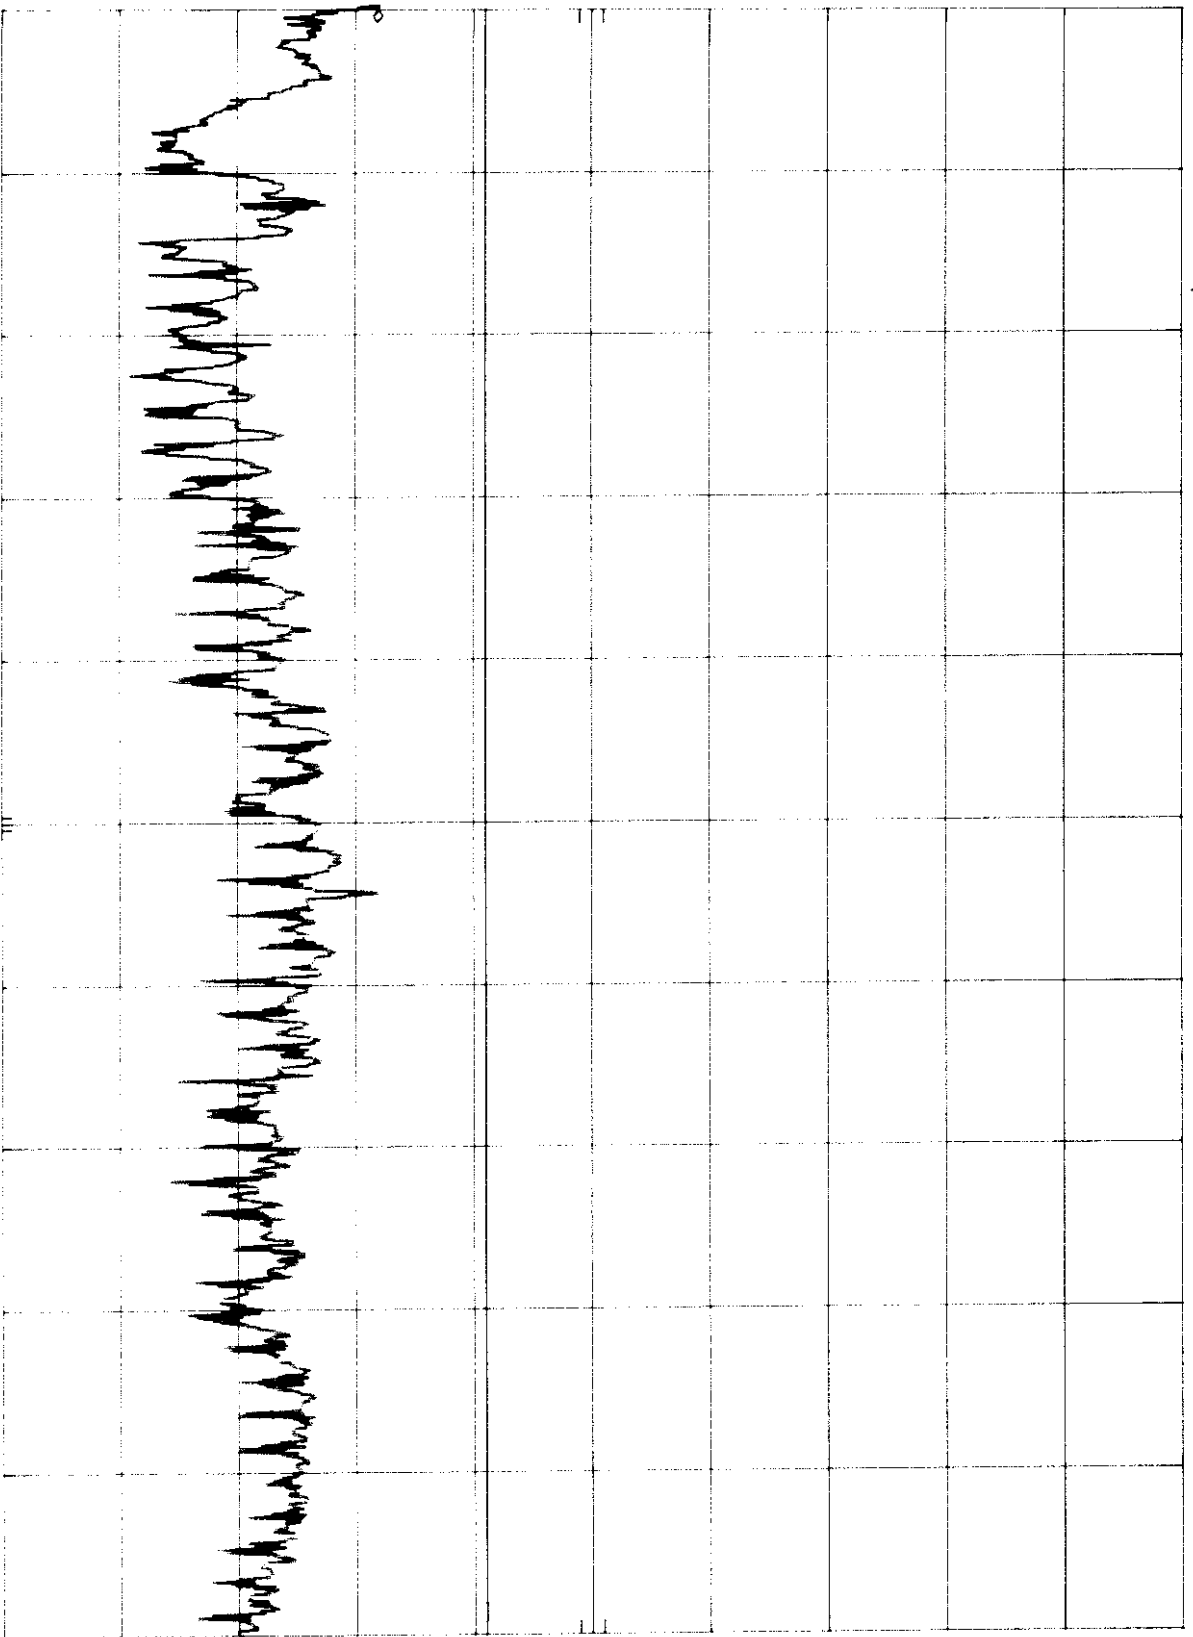


START 450 KHZ RES BW 10 KHZ VBW 10 KHZ STOP 30.00 MHZ
SMP 750 msec

A3KM079 RUN 800X600/85HZ 53.6KHZ MODE AC220V MKR 450 KHZ
REF 107.0 dBμV ATTEN 10 dB 44.50 dBμV

HP

10 dB/

DL
48.0
dBμV

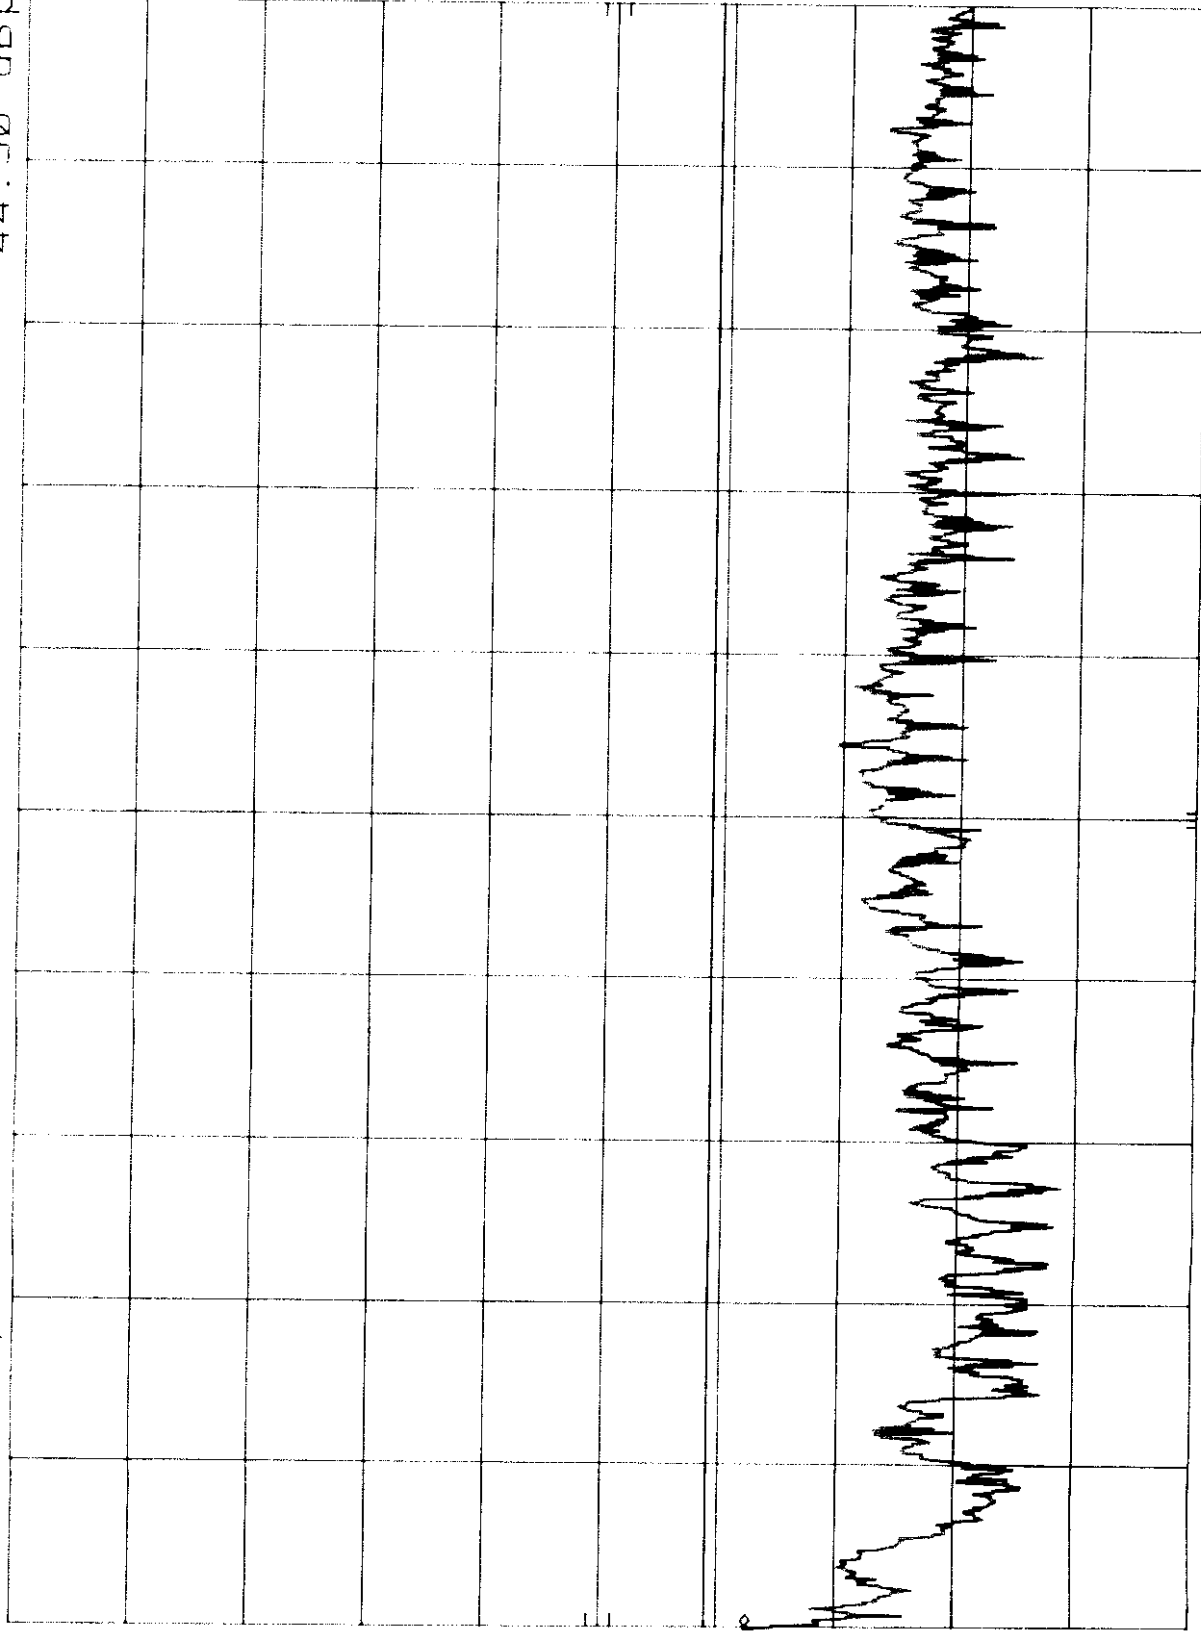

START 450 KHZ RES BW 10 KHZ VBW 10 KHZ STOP 30.00 MHz
SWP 750 msec

17756

17756

17756

17756

17756

17756

17756

17756

17756

17756

17756

17756

17756

17756

17756

17756


17756

17756

RFI EMISSION LEVEL dBuV/m

APR/15/1998

REPORT NO: EM198-029H
MODEL NO: HP D2826

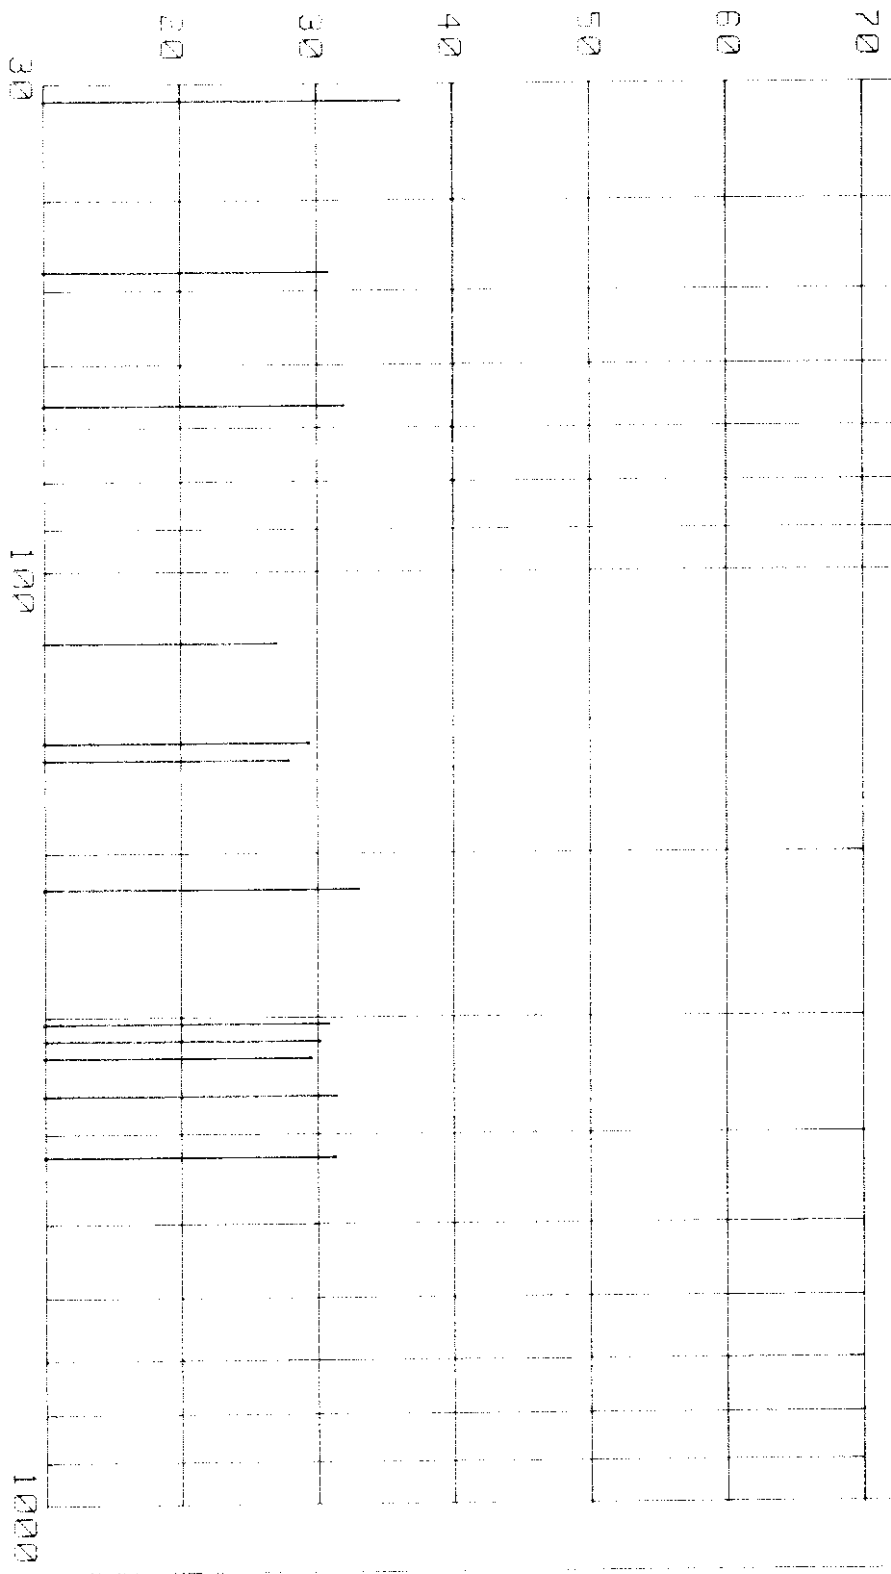


FREQUENCY MHZ

A3KM079 RUN 1024X768/60HZ 48.3KHZ MODE AC110V MKR 450 KHZ
REF 107.0 DBμV ATTEN 10 DB 39.60 DBμV

HP
10 DB/

DL
48.0
DBμV

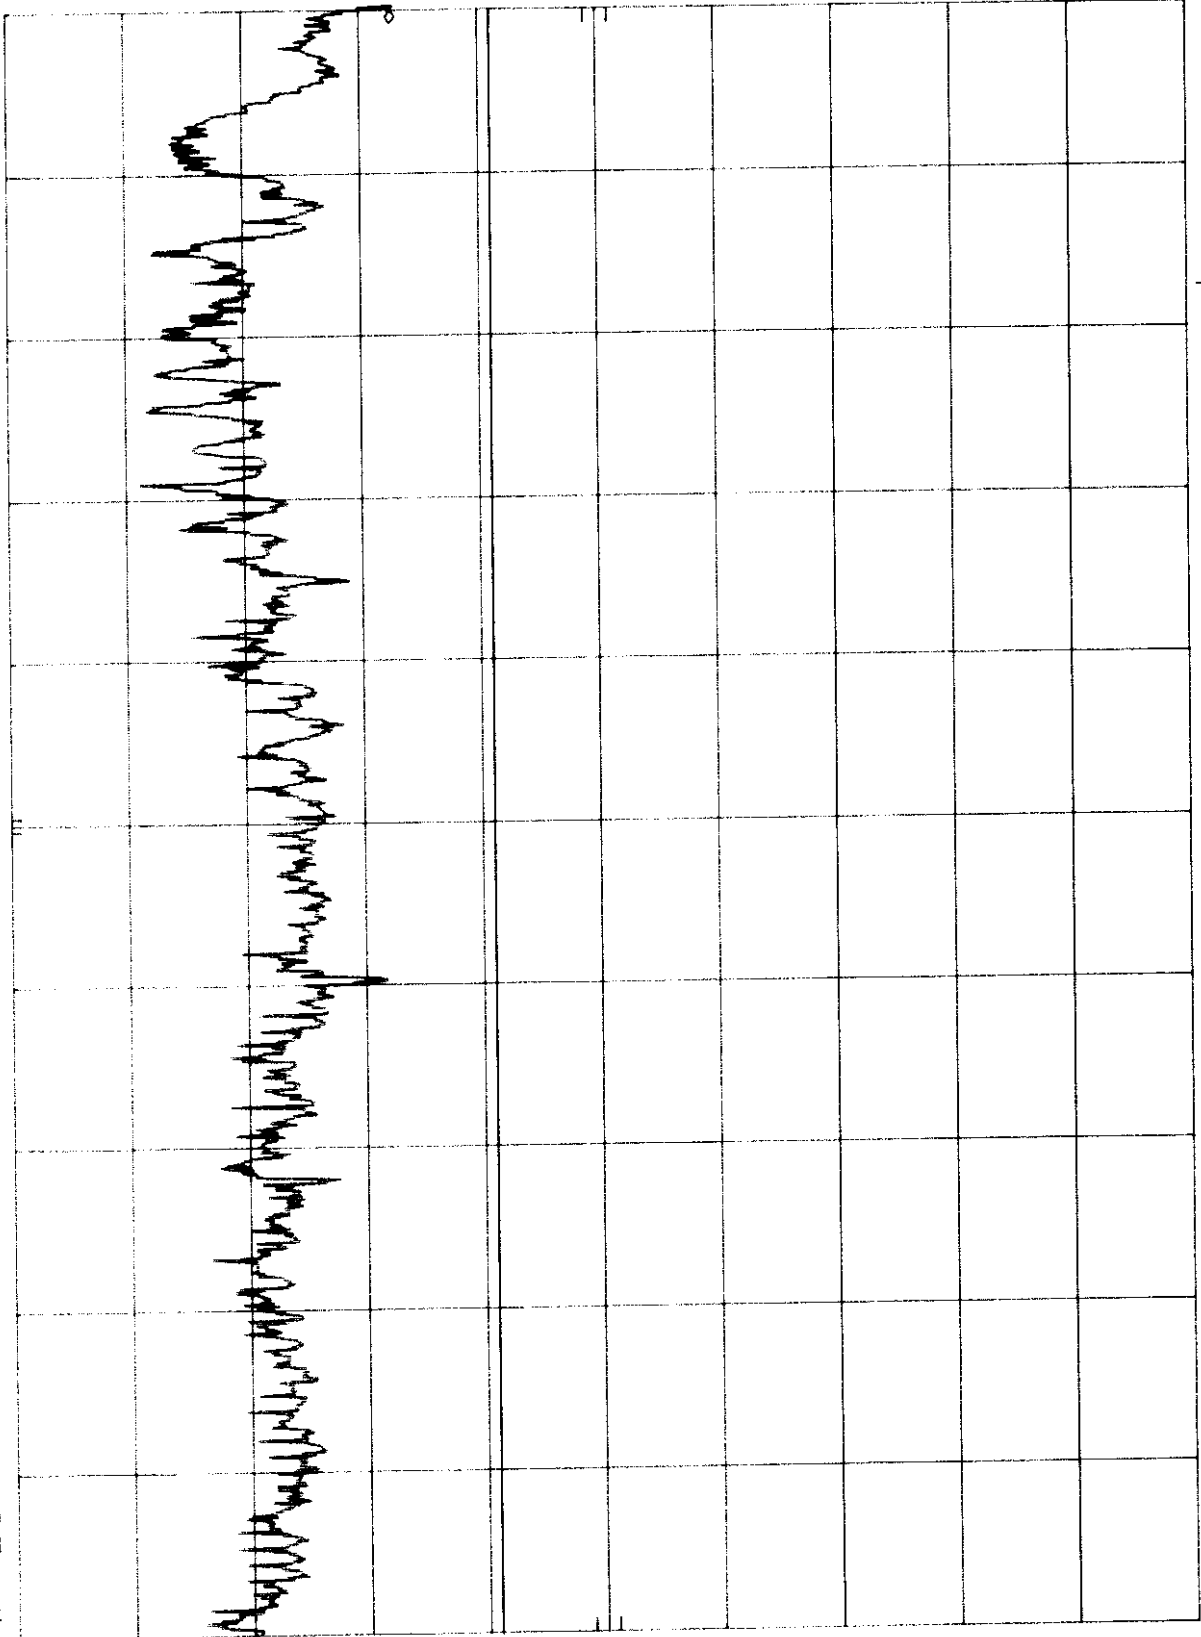

START 450 KHZ RES BW 10 KHZ VBW 10 KHZ STOP 30.00 MHz
SMP 750 msec

A3KM079 RUN 1024X768/60HZ 48.3KHZ MODE AC220V MKR 450 KHZ
REF 107.0 DBμV ATTEN 10 DB 44.80 DBμV

10 DB/

DL
48.0
DBμV

START 450 KHZ

RES BW 10 KHZ

VBW 10 KHZ

STOP 30.00 MHZ
SWP 750 msec

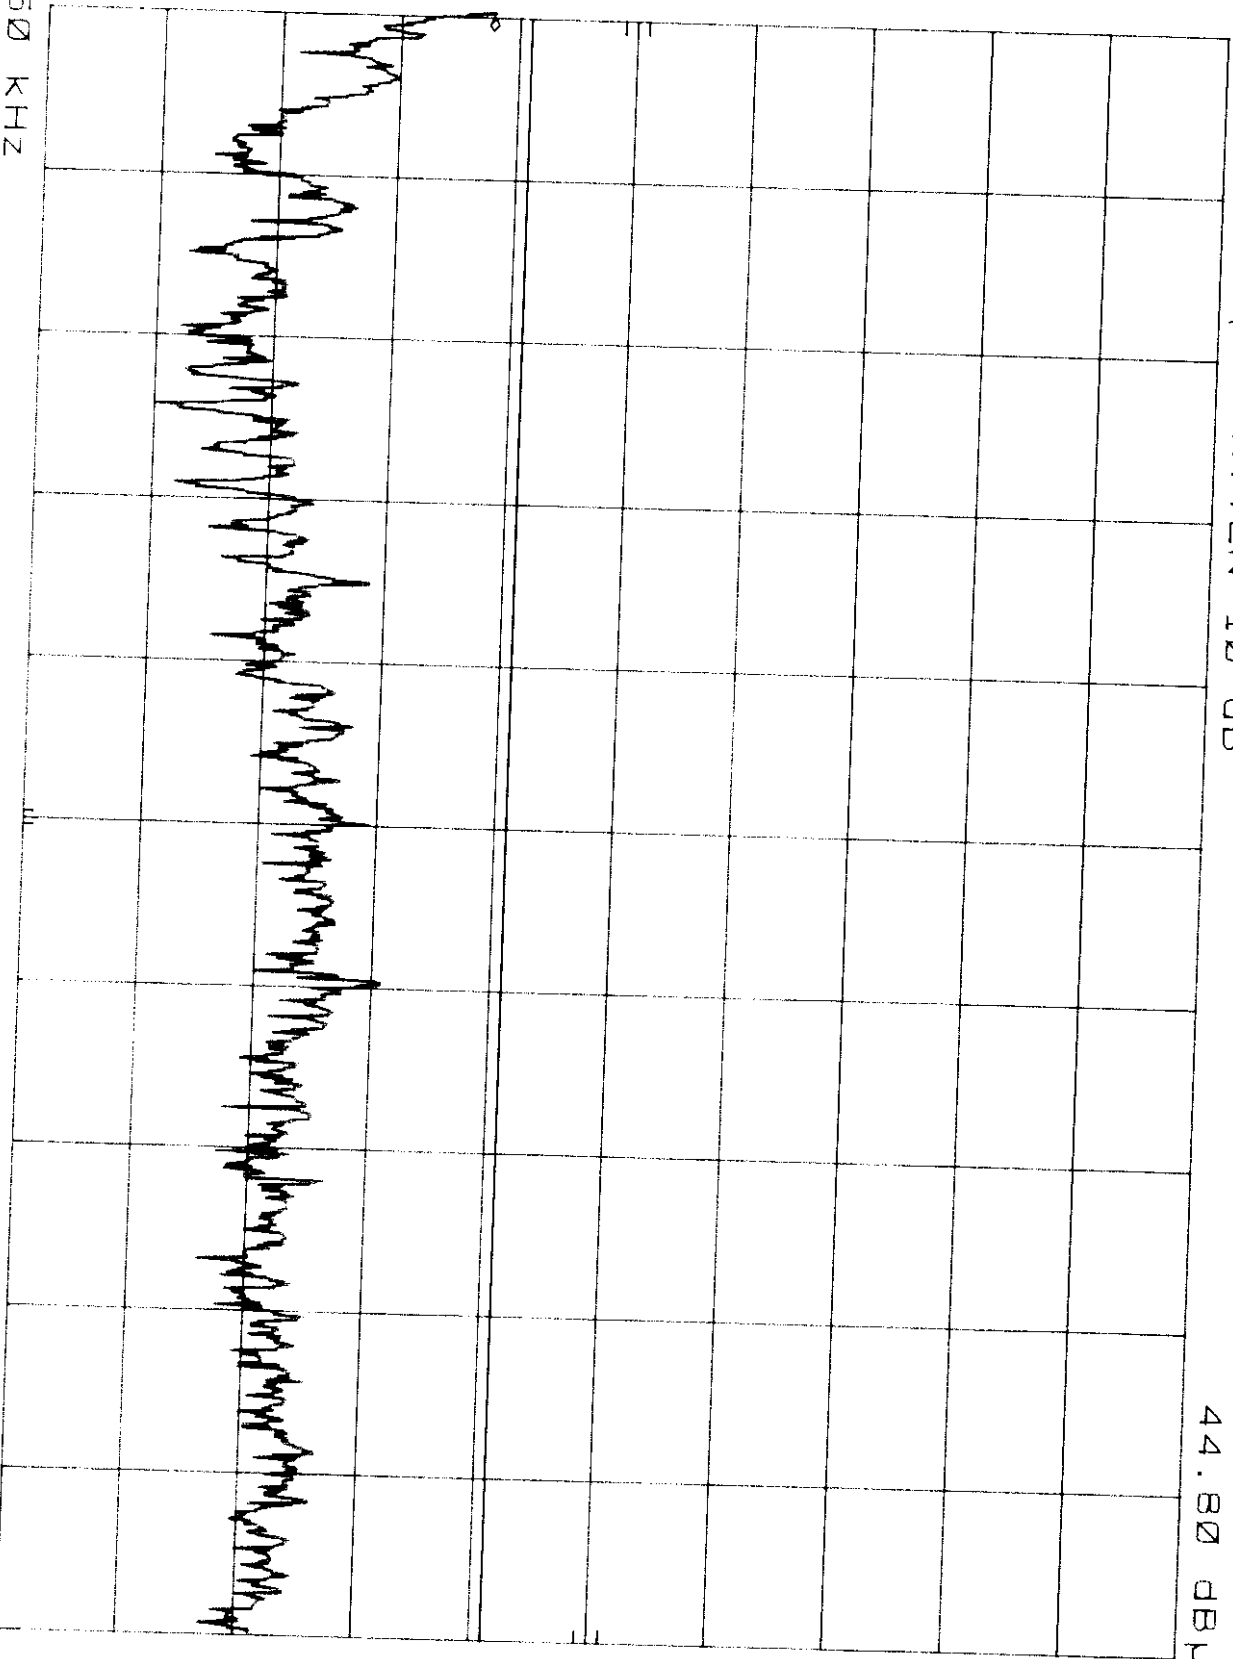


Exhibit - 5

Test Data of Original

FCC TEST REPORT

FCC ID : A38M070
 REPORT NO. : EM196-001
 TEST DATE : JAN. 21, 1998
 TEST SITE : ECUAW

TEST PERFORMED BY
 RAYOR ELECTRONIC INDUSTRIES, TAIWAN, P.R.
 RAYOR ELECTRONIC (THAILAND) P.L.C.
 SUKHOVIT
 SUKHOVIT
 SUKHOVIT, THAILAND, THAILAND, THAILAND
 TEL: 66-2-2600000 FAX: 66-2-2600000

EQUIPMENT : PS1111

EQUIPMENT

1. CPU : TSC 68000 COLOR MONITOR : 15" MON. 1P
 FCC ID : R3RMT08
2. COMPUTER : HP DESIGN 500 : HP 1044410
 FCC ID : F071440
3. PRINTER : HP COLOR : HP 4800119
 FCC ID : G155100L
4. MODEM : HANS VP 1000E : HP 480012986
 FCC ID : BE48001000E
5. MODEM : HP 1044410 : HP 480012987
 FCC ID : G155100T
6. KEYBOARD : HP 514C : HP 480012988
 FCC ID : G155100B
7. POWER CORD : ECUAW IN THAILAND

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE ANSI C83.4-1990 (AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC EQUIPMENT IN THE RANGE OF 9KHz TO 400KHz)

MONITOR WAS CONNECTED TO POWER MONITOR AC OUTLET.
 MODEM MODEL 1044766-75H3 WAS TESTED.
 INTERFACE CABLE WITH THREE FERRITE CORES ONE INSIDE WAS TESTED.
 INSTALLED MAINS CORD WAS USED DURING TEST.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

TESTING MACHINE

RAYOR ELECTRONIC INDUSTRIES, TAIWAN, P.R.
 RAYOR ELECTRONIC (THAILAND) P.L.C.

Frequency (MHz)	Measurement	Result (dBm)	Limit (dBm)
0.150	0.150	24.0	27
0.375	0.375	22.0	27
0.750	0.750	21.0	27
1.500	1.500	20.0	27
3.000	3.000	19.0	27
6.000	6.000	18.0	27
12.000	12.000	17.0	27

487.47	32.74	35.34	43.5
489.29	33.44	36.25	43.5
491.11	33.89	36.89	43.5
492.93	33.79	36.44	43.5
494.75	34.25	37.06	43.5
496.57	34	AMBIENT	46
498.39	34.85	37.68	46
500.21	34.65	37.89	46
502.03	34.861	38.256	46
503.85	34.86	38.41	46
505.67	34.862	38.571	46
507.49	34.7	38.4	46
509.31	34.7	38.57	46
511.13	34.702	38.721	46
512.95	34.844	39.145	46
514.77	34.896	39.236	46
516.59	34.702	38.282	46
518.41	34.804	38.900	46

- # REAR READINGS AND REAR READINGS WITH CABLE AND ANTENNA FACTORS INCLUDED. (REAR ANTENNA USED LEFT ONLY)
- REAR: 2000-0
- REAR: 2000-0
- # REAR REAR READINGS WERE TAKEN WITH MODEL 8 FORWARD LIMIT TEST RECEIVER (2000-000000000000)

APPROXIMATE LEVEL OF QUASI-PEAK VALUE

FREQUENCY (MHz)	HORIZONTAL (dBu/m)	VERTICAL (dBu/m)	FULL CRESTED LIMIT (dBu/m)
54.98	33.05	32.45	40
55.63	32.59	34.79	40
56.28	32.06	AMBIENT	43.5
56.93	AMBIENT	35.4	46

THE SPECTRUM WAS SCANNED FROM 30 TO 1000 MHz AND THE SIGNIFICANT EMISSIONS WERE RECORDED. TEST DISTANCE BETWEEN DEVICE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.


SAMPLE CALCULATION:

$$\text{TOTAL QUASI-PEAK VALUE} = \text{ANTENNA FACTOR} + \text{CABLE LOSS} + \text{READING (dBu/m)}$$

THE REAR QUASI-PEAK VALUE OF REAR ANTENNA FACTOR IS LISTED WITH THE WRITER.

THE REAR QUASI-PEAK VALUE OF REAR ANTENNA FACTOR IS LISTED WITH THE WRITER.

$$\text{TOTAL QUASI-PEAK VALUE} = \text{ANTENNA FACTOR} + \text{CABLE LOSS} + \text{READING (dBu/m)}$$

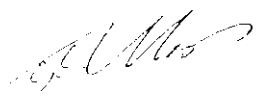
11/11/63


RFI EMISSION LEVEL dBuV/m

JAN./01/1998

REPORT NO: EMI98-001
MODEL NO: 15C2320W

FCC CLASS B

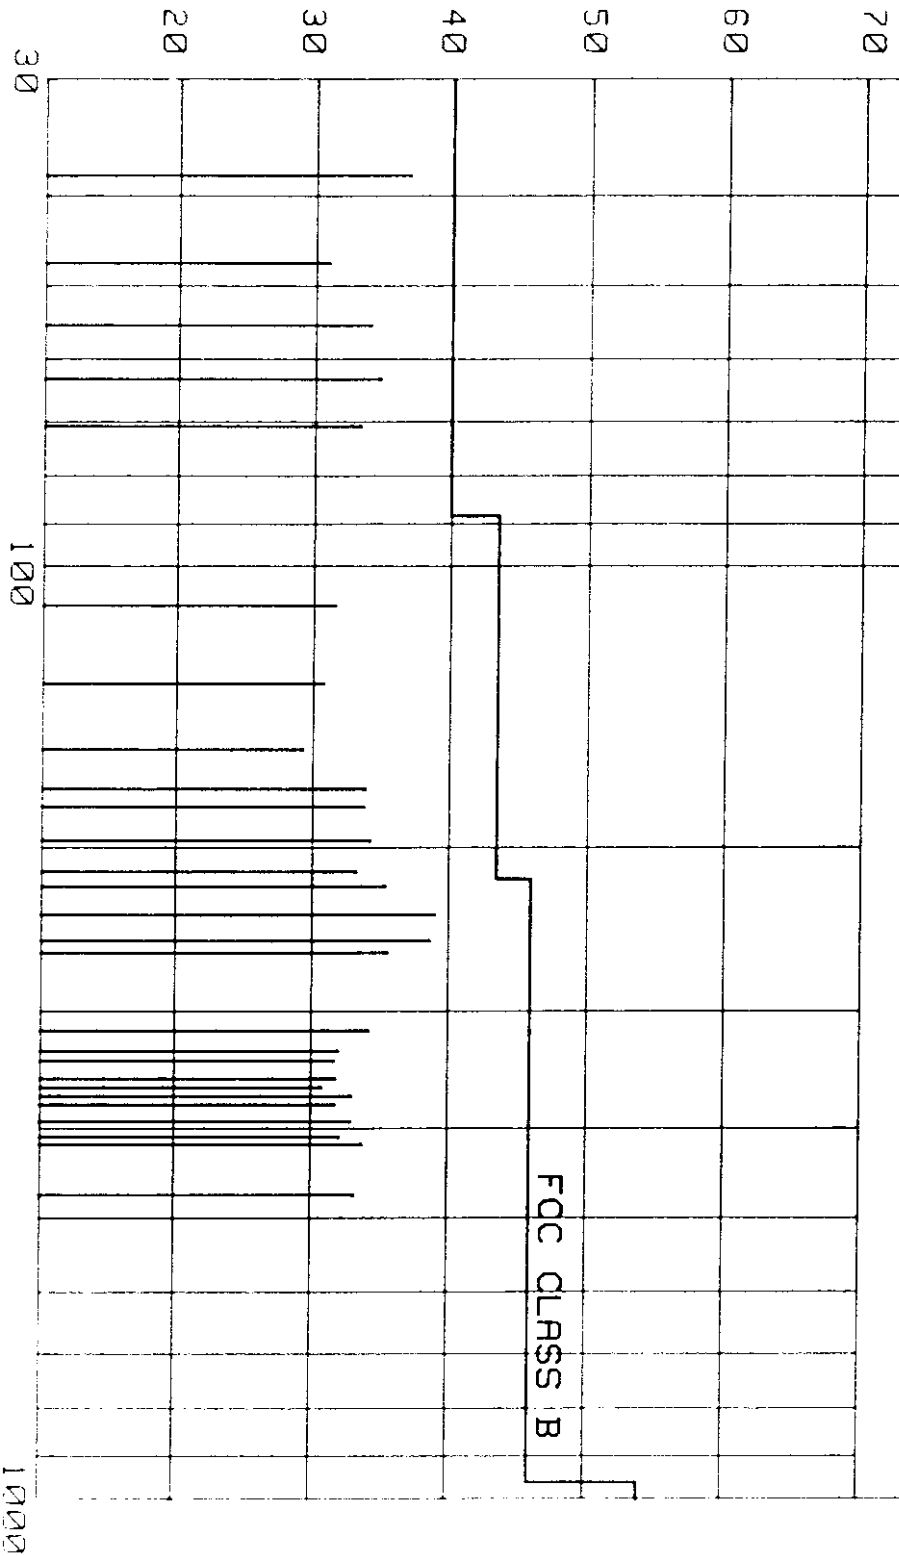


FREQUENCY MHZ

A3KM079 RUN 1024X768/75Hz 60KHz MODE AC110V MKR 15.73 MHz
HP REF 107.0 dBµV ATTEN 10 dB 39.90 dBµV

10 dB/

DL
48.0
dBµV

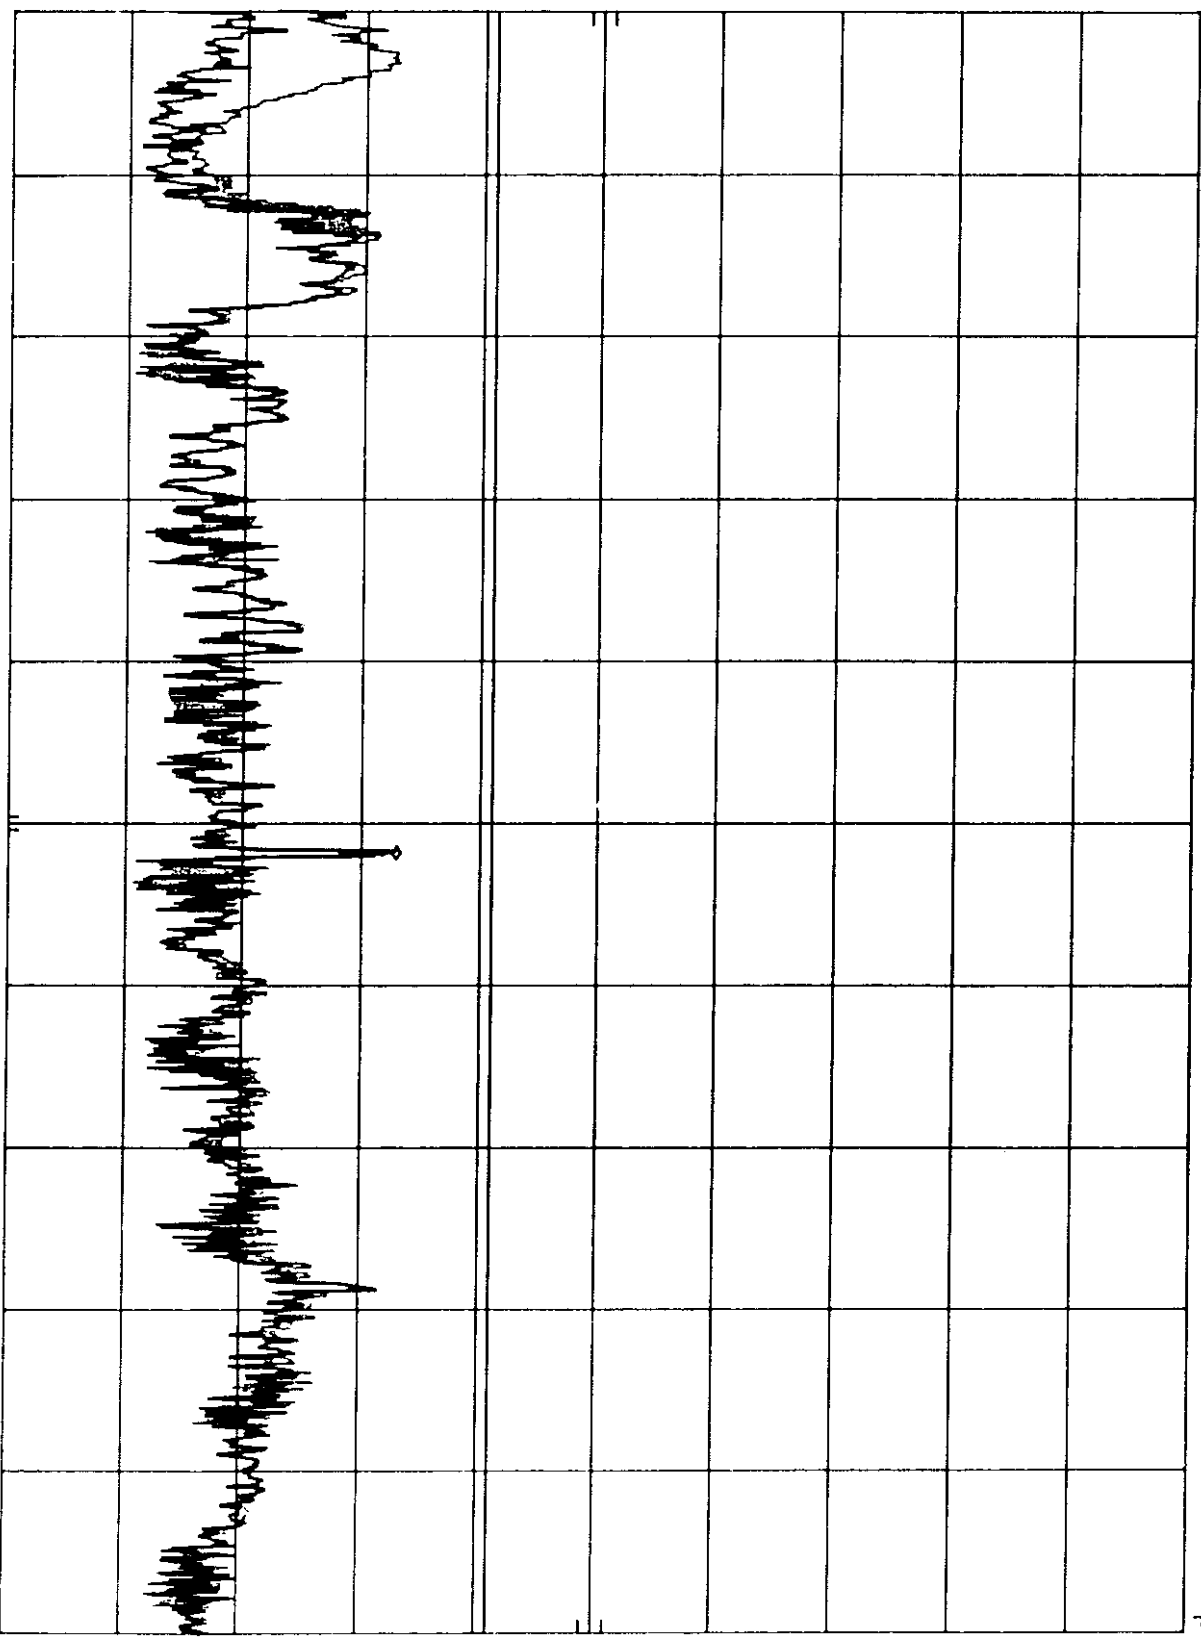


START 450 KHz RES BW 10 KHz VBW 10 KHz STOP 30.00 MHz
SWP 750 msec

A3KM079 RUN 1024X768/75HZ 60KHZ MODE AC220V MKR 1.40 MHZ
REF 107.0 dBμV ATTEN 10 dB 42.30 dBμV

0 dB/

48.0
3 μV

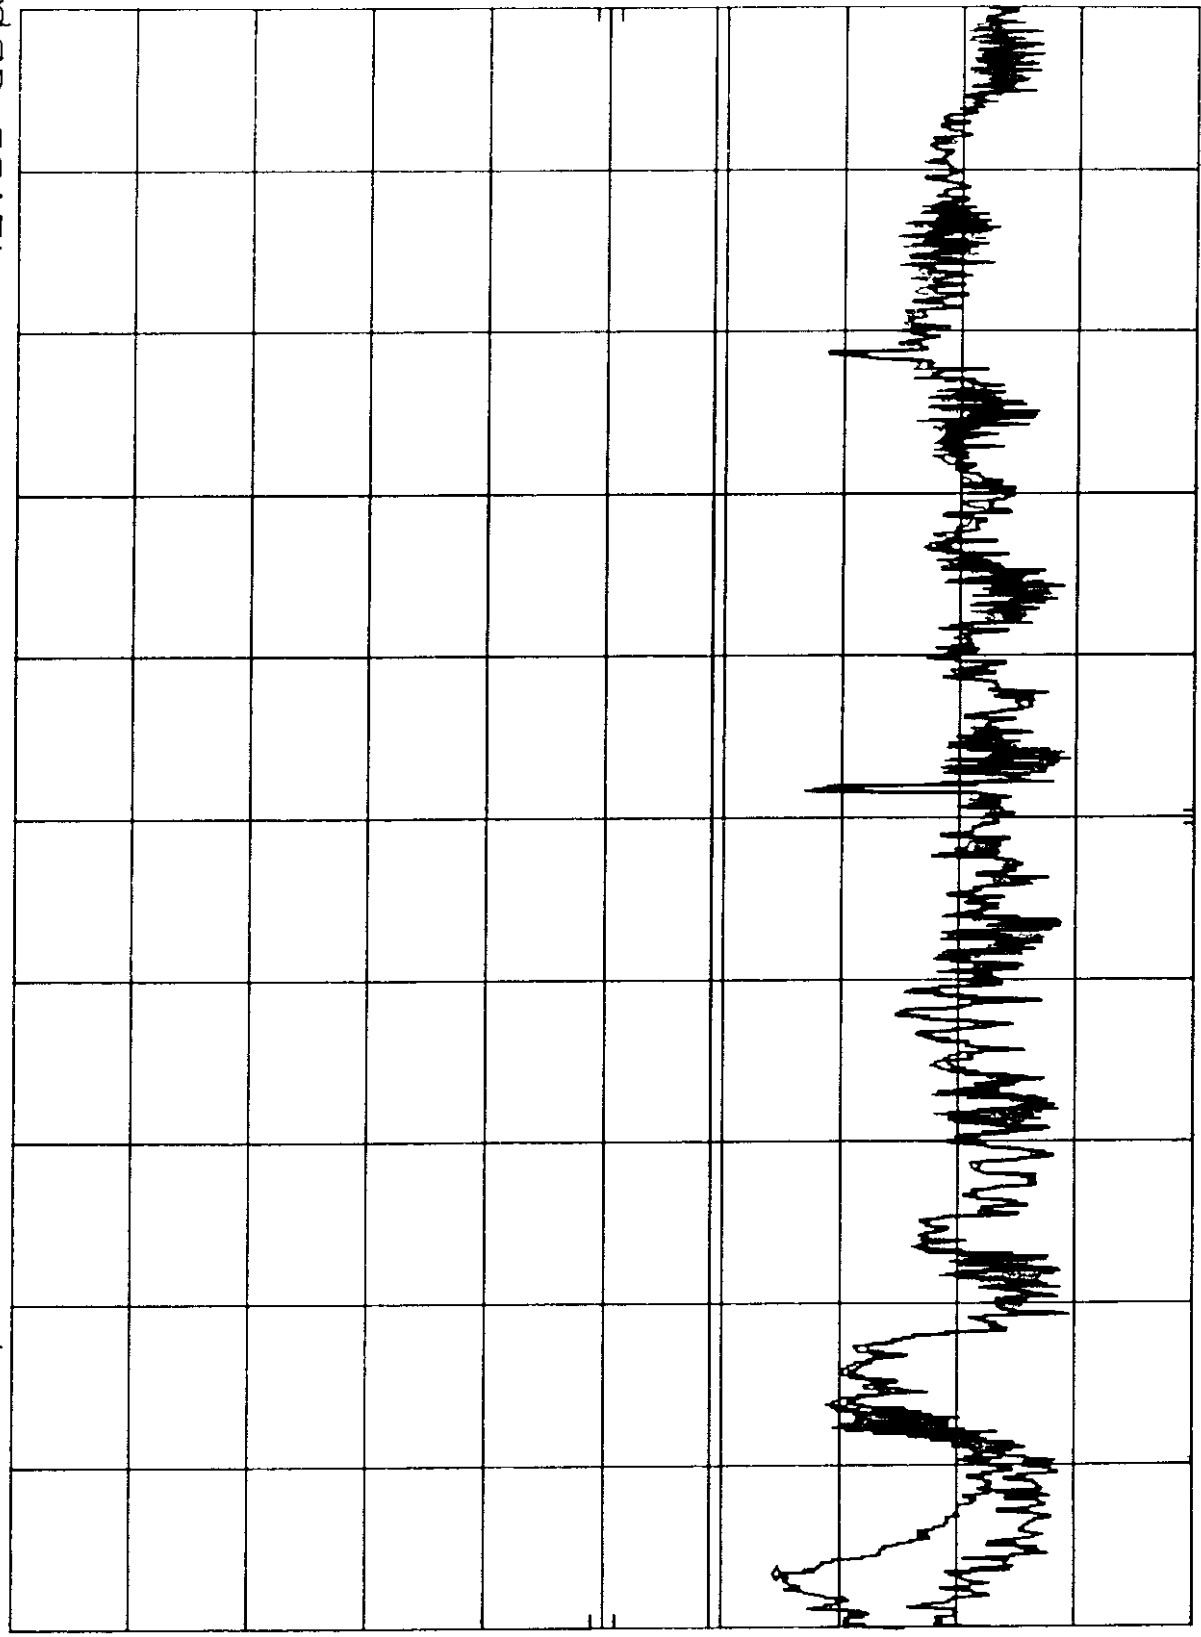

TART 450 KHZ RES BW 10 KHZ VBW 10 KHZ STOP 30.00 MHZ
SWP 750 msec

FCC TEST REPORT

FCC ID : R3RM079
 REPORT NO. : FM198-001A
 TEST DATE : JAN. 23, 1998
 TEST ENG. : C.L.W.

TEST PERFORMED BY
 PHILIP S. CHEN, P.E., ENGINEER - TAIWAN
 NATIONAL BUREAU OF STANDARDS, TAIPEI
 TAIPEI, TAIWAN
 (DATE OF TEST: JAN. 23, 1998)
 (DATE OF REPORT: FEB. 19, 1998)

TEST EQUIPMENT LIST

1. TEST SITE : NATIONAL BUREAU OF STANDARDS, TAIPEI
 FCC ID. : R3RM079
2. COMPUTER : IBM PC/486 (CPU: 33MHz)
 FCC ID. : R3RM079
3. MAINFRM. : HP 1170 (CPU: 33MHz) 00419
 FCC ID. : R3RM079
4. MONITOR : SAMSUNG 12" MONITOR MODEL: A1990010390
 FCC ID. : R3RM079
5. POWER SUPPLY : SAMSUNG 12" MONITOR MODEL: A1990010390
 FCC ID. : R3RM079
6. POWER SUPPLY : SAMSUNG 12" MONITOR MODEL: A1990010390
 FCC ID. : R3RM079
7. POWER SUPPLY : SAMSUNG 12" MONITOR MODEL: A1990010390
 FCC ID. : R3RM079
8. POWER SUPPLY : SAMSUNG 12" MONITOR MODEL: A1990010390
 FCC ID. : R3RM079

NOTE: TEST WAS PERFORMED IN ACCORDANCE WITH FCC MEASUREMENT PROCEDURE
 -FBI 15.14-1990 (AMERICAN NATIONAL STANDARD FOR MEASUREMENT OF
 RADIO-NOISE EMISSION FROM LOW-VOLTAGE ELECTRICAL AND ELECTRONIC
 EQUIPMENT IN THE RANGE OF 0.15-10 400kHz)

MONITOR WAS CONNECTED TO FLUX MOUNTED RE-ANTENNA.
 SAMSUNG MODEL: A1990010390 WAS TESTED.
 INTERFAC. CABLE WITH THREE FERRITE CORE (ONE INSIDE) WAS TESTED.
 UNSHIELDED MAINS CORD WAS USED DURING TEST.

THE TEST EQUIPMENT PLEASE REFER TO EQUIPMENT LIST AS ATTACHED.

TESTING NO: 446

TEST NO.	TEST DATE	TEST ENG.	TEST RESULT
446	JAN. 23, 1998	C.L.W.	43
447	JAN. 23, 1998	C.L.W.	47
448	JAN. 23, 1998	C.L.W.	49
449	JAN. 23, 1998	C.L.W.	50

171.97	23.08	29.98	43.5
172.48	26.98	33.79	43.5
173.14	29.38	36.41	43.5
181.26	22.04	29.04	43.5
184.17	22.13	28.98	43.5
187.07	21.44	28.64	43.5
194.17	26.14	33	46
197.07	28.04	35.14	46
200.14	27.04	34.14	46
203.14	27.28	34.48	46

ALL READINGS ARE FROM 100 CM WITH 30 DB ANTENNA FACTOR INCLUDED.
 (SEE TABLE FOR ANTENNA FACTOR)

REMARKS:
 1. 100 CM

LIMIT VALUE (RECEIVED) WAS TAKEN WITH 30 DB 5.0 M WARD SMP TEST RECEIVER
 (SEE TABLE FOR LIMIT)

RECEIVED VALUE (LIMIT) VALUE

FREQUENCY (MHz)	RECEIVED VALUE (dBm)	LIMIT VALUE (dBm)	CLASS B LIMIT (dBm)
171.97	23.08	31.14	40
181.26	22.04	31.14	40
187.07	21.44	31.14	40
197.07	26.14	34.14	40

THE RECEIVER WAS 1 METER FROM THE SOURCE AND THE SIGNIFICANT EMISSIONS
 ARE REPORTED.
 TEST DISTANCE BETWEEN SOURCE UNDER TEST AND RECEIVING ANTENNA WAS 3-METER.

SAMPLE CALCULATION:
 EIRP (W/m²) = dBW/m² - ANTENNA GAIN (DB) + GAINLE (dB) + READING (dBW/m²)

THIS REPORT SHALL NOT BE REPRODUCED EXCEPT BY FCC, WITHOUT THE WRITTEN
 APPROVAL OF THE LABORATORY

THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT ENDORSEMENT
 BY INFLUENCE ANY AGENCY OF THE U.S. GOVERNMENT

THE TEST RESULT WAS RAD FCC CLASS B LIMIT.

REPORT NO: 833-114

DATE: 1/11

TECHNICIAN: [Signature]


11/11/83

RFI EMISSION LEVEL dBuV/m

JAN./02/1998

REPORT NO: EM198-001A
MODEL NO: 15C2320M

FCC CLASS B

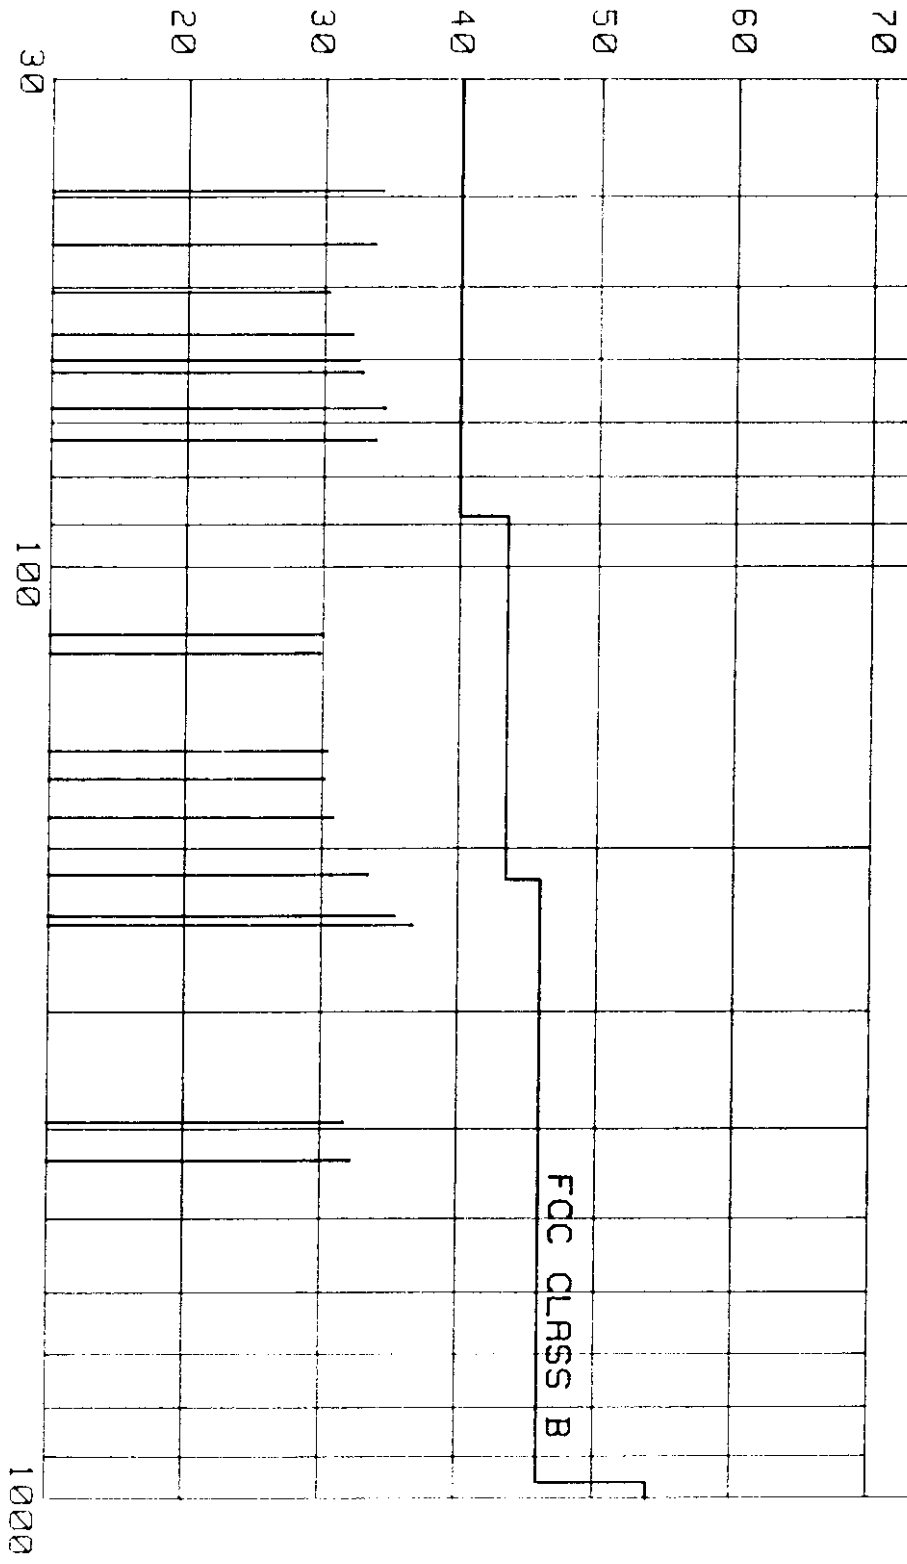


FREQUENCY MHZ

A3KM079 RUN 800X600/85HZ 53.6KHZ MODE AC110V MKR 1.37 MHZ
REF 107.0 dBμV ATTEN 10 dB 39.80 dBμV

dB/

8.0
μV

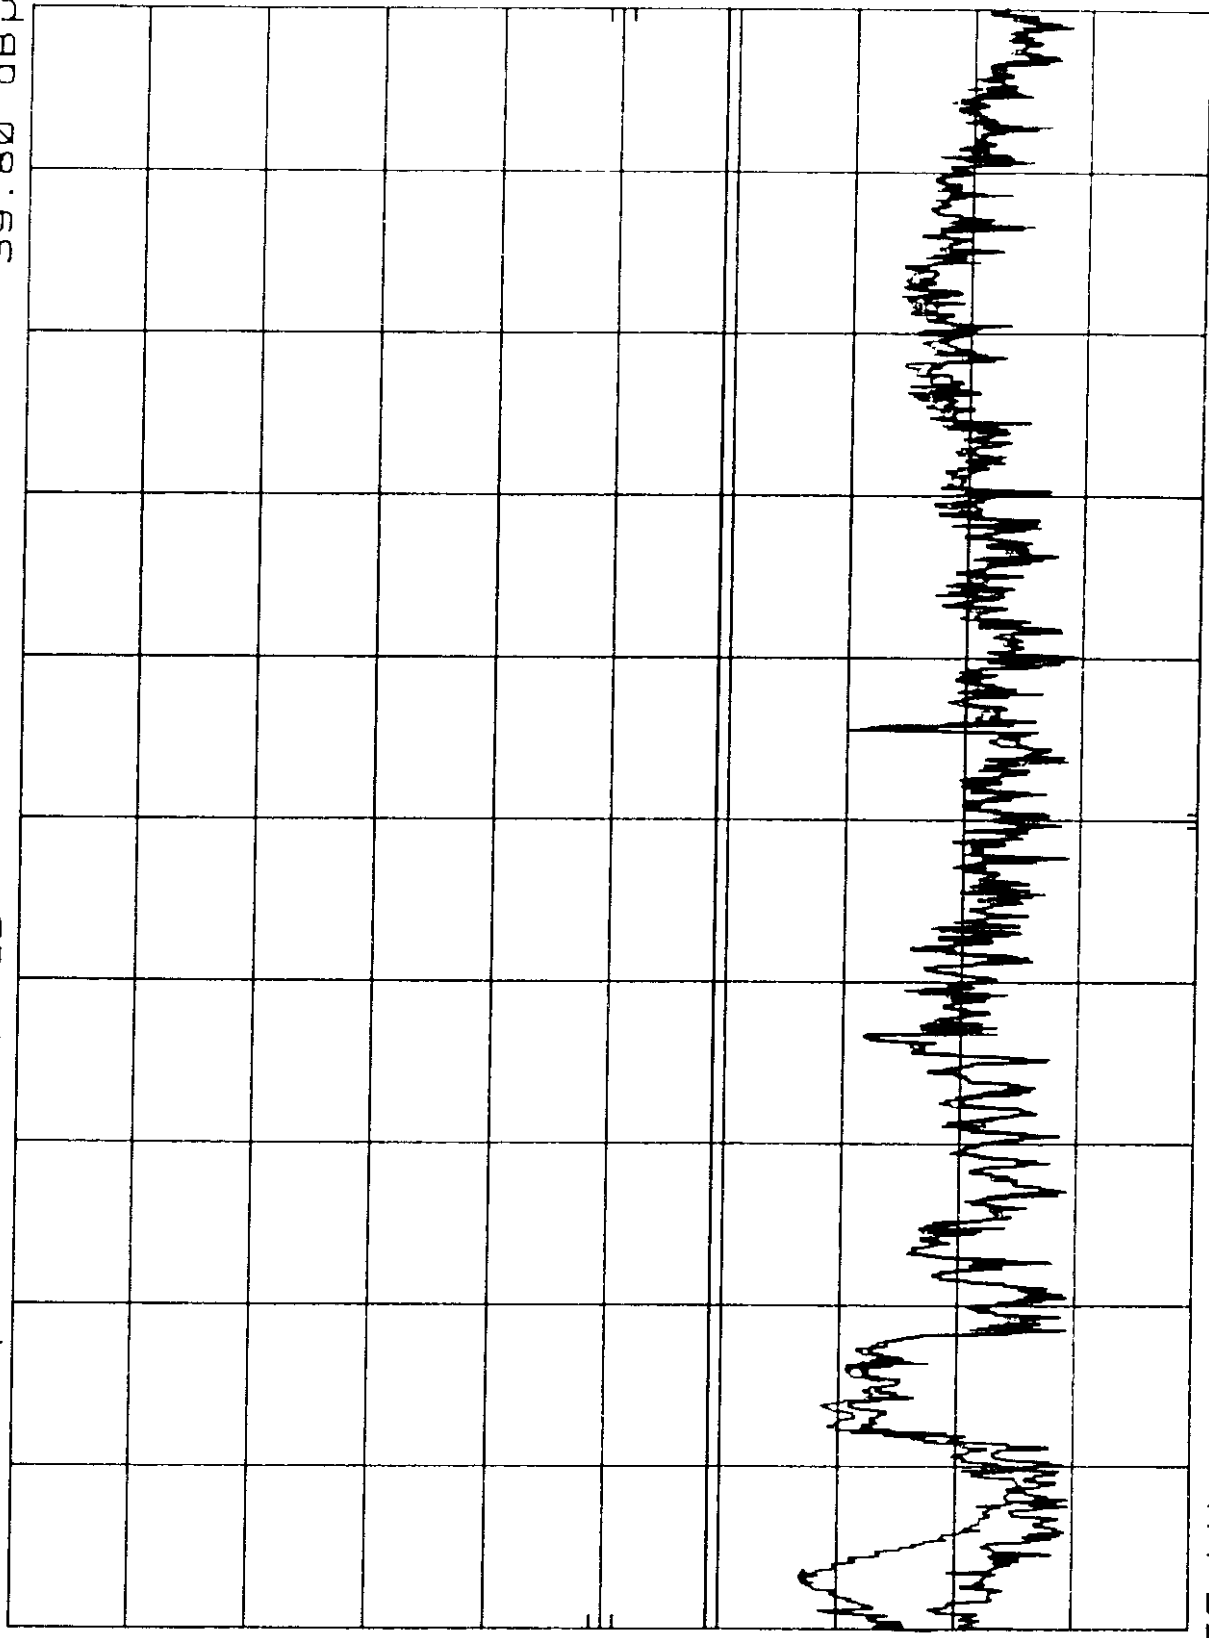


ART 450 KHZ RES BW 10 KHZ VBW 10 KHZ STOP 30.00 MHZ
SWP 750 msec

A3KM079 RUN 800X600/85HZ 53.6KHZ MODE AC220V MKR 1.40 MHZ
REF 107.0 dBμV ATTEN 10 dB 42.00 dBμV

0 dB/

L
48.0
BμV

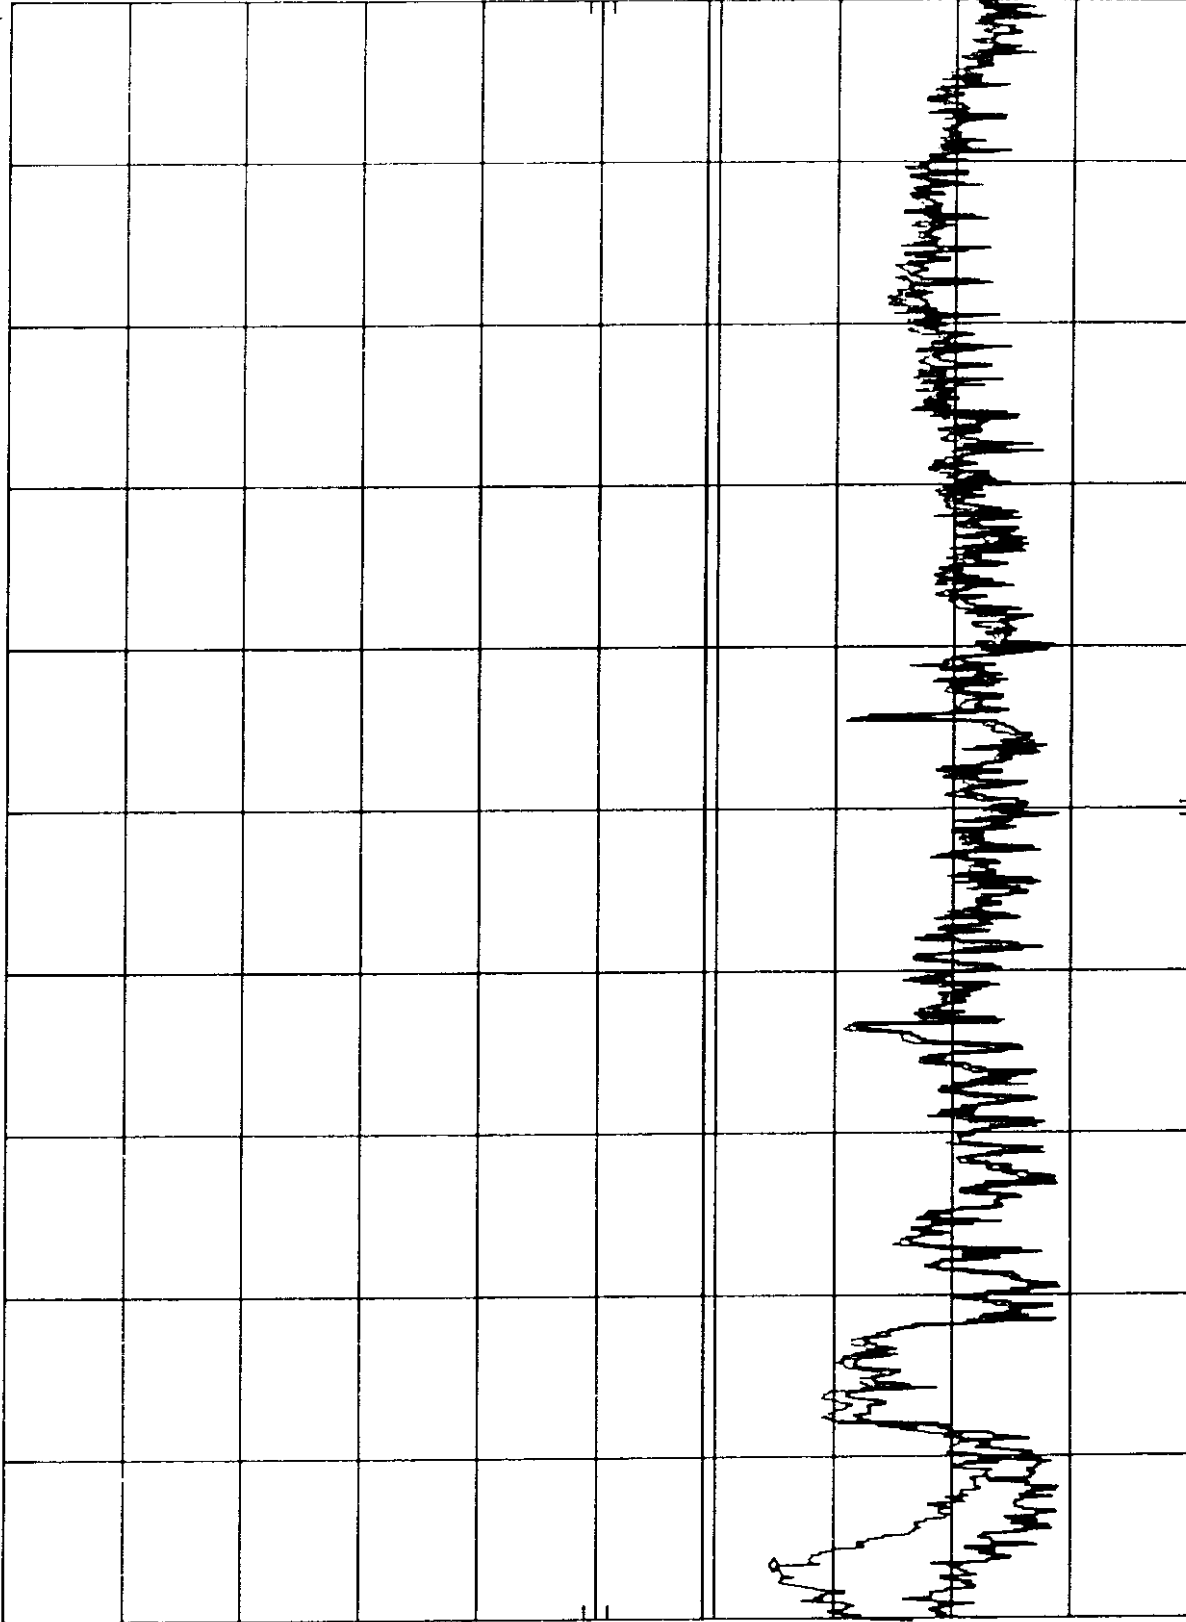

START 450 KHZ RES BW 10 KHZ VBW 10 KHZ STOP 30.00 MHZ
SWP 750 msec