

Harman International Industries, Inc.

RF TEST REPORT

Report Type:

FCC Part 15.407 RF report

Model:

AP72598V

REPORT NUMBER:

220201028SHA-002

ISSUE DATE:

April 12, 2022

DOCUMENT CONTROL NUMBER:

TTRF15.407_V1 © 2018 Intertek





Total Quality. Assured.

TEST REPORT

Intertek Testing Services Shanghai
Building No.86, 1198 Qinzhou Road (North)
Caohejing Development Zone
Shanghai 200233, China

Telephone: 86 21 6127 8200
www.intertek.com

Report no.: 220201028SHA-002

Applicant: Harman International Industries, Inc.
8500 Balboa Blvd, Northridge, CA 91329, USA

Manufacturer: Dalian Golden Hualu Digital Technology Co., Ltd.
No.1 Hua Road,Qixianling,High-Tech Industrial Zone,Dalian,Liaoning, China

Manufacturing site: Dalian Golden Hualu Digital Technology Co., Ltd.
No.1 Hua Road,Qixianling,High-Tech Industrial Zone,Dalian,Liaoning, China

Product Name: WiFi & BT Platform Module

Type/Model: AP72598V

FCC ID: APIAP72598V

IC: 6132A-AP72598V

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2020): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

RSS-247 Issue 2 (February 2017): Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

RSS-Gen Issue 5 (February 2021) Amendment 2: General Requirements for Compliance of Radio Apparatus

PREPARED BY:

Project Engineer
Erick Liu

REVIEWED BY:

Reviewer
Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT**Contents**

REVISION HISTORY.....	5
MEASUREMENT RESULT SUMMARY	6
1 GENERAL INFORMATION	7
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	7
1.2 TECHNICAL SPECIFICATION	7
1.3 ANTENNA INFORMATION.....	8
1.4 DESCRIPTION OF TEST FACILITY	9
2 TEST SPECIFICATIONS.....	10
2.1 STANDARDS OR SPECIFICATION	10
2.2 MODE OF OPERATION DURING THE TEST.....	10
2.3 TEST SOFTWARE LIST	13
2.4 TEST PERIPHERALS LIST	13
2.5 TEST ENVIRONMENT CONDITION:.....	13
2.6 INSTRUMENT LIST	14
2.7 MEASUREMENT UNCERTAINTY	15
3 26 DB BANDWIDTH & 99% OCCUPIED BANDWIDTH	16
3.1 LIMIT	16
3.2 MEASUREMENT PROCEDURE	16
3.3 TEST CONFIGURATION	17
3.4 THE RESULTS OF 26 DB BANDWIDTH & 99% OCCUPIED BANDWIDTH	17
4 MINIMUM 6DB BANDWIDTH.....	18
4.1 LIMIT	18
4.2 MEASUREMENT PROCEDURE	18
4.3 TEST CONFIGURATION	18
4.4 THE RESULTS OF MINIMUM 6DB BANDWIDTH	18
5 MAXIMUM CONDUCTED OUTPUT POWER	19
5.1 LIMIT	19
5.2 MEASUREMENT PROCEDURE	20
5.3 TEST CONFIGURATION	20
5.4 TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER.....	20
6 POWER SPECTRUM DENSITY	21
6.1 LIMIT	21
6.2 MEASUREMENT PROCEDURE	22
6.3 TEST CONFIGURATION	23
6.4 TEST RESULTS OF POWER SPECTRUM DENSITY	23
7 RADIATED EMISSIONS	24
7.1 LIMIT	24
7.2 MEASUREMENT PROCEDURE	25
7.3 TEST CONFIGURATION	26
7.4 TEST RESULTS OF RADIATED EMISSIONS	28
8 POWER LINE CONDUCTED EMISSION.....	50
8.1 LIMIT	50
8.2 TEST CONFIGURATION	50
8.3 MEASUREMENT PROCEDURE	51

TEST REPORT

8.4 TEST RESULTS OF POWER LINE CONDUCTED EMISSION.....	52
9 FREQUENCY STABILITY.....	54
9.1 LIMIT	54
9.2 TEST RESULT.....	54
10 ANTENNA REQUIREMENT.....	55

TEST REPORT**Revision History**

Report No.	Version	Description	Issued Date
220201028SHA-002	Rev. 01	Initial issue of report	April 12, 2022

TEST REPORT

Measurement result summary

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
26 dB Bandwidth & 99% Occupied Bandwidth	15.407(a)	RSS-247 Issue 2 Clause 6	Pass
Minimum 6dB Bandwidth	15.407(e)	RSS-247 Issue 2 Clause 6	Pass
Maximum Conducted Output Power	15.407(a)	RSS-247 Issue 2 Clause 6	Pass
Power spectral density	15.407(a)	RSS-247 Issue 2 Clause 6	Pass
Radiated emission	15.407(b) 15.205 15.209	RSS-247 Issue 2 Clause 6 RSS-Gen Issue 5 Clause 8.9&8.10	Pass
Power line conducted emission	15.407(b) 15.207	RSS-Gen Issue 5 Clause 8.8	Pass
Frequency Stability	15.407(g)	RSS-Gen Issue 5 Clause 8.11	Pass
Antenna requirement	15.203	-	Pass

Notes: 1: NA =Not Applicable

2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.

TEST REPORT**1 GENERAL INFORMATION****1.1 Description of Equipment Under Test (EUT)**

Product name:	WiFi & BT Platform Module
Type/Model:	AP72598V
Description of EUT:	The EUT is wireless module with WiFi and Bluetooth function, it has only one model.
Rating:	4.5-5.5V DC
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Software Version:	/
Hardware Version:	/
Sample received date:	January 17, 2022
Date of test:	January 17, 2022 ~ March 17, 2022

1.2 Technical Specification

Frequency Range:	5150 ~ 5250MHz 5250 ~ 5350MHz 5470 ~ 5725MHz 5725 ~ 5850MHz
Support Standards:	802.11a, 802.11n(HT20), 802.11n(HT40), 802.11ac (VHT20), 802.11ac (VHT40), 802.11ac (VHT80)
Type of Modulation:	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Channel Number:	For 5150 ~ 5250MHz band: Channel 36 - 48 For 5250 ~ 5350MHz Band: Channel 52 - 64 For 5470 ~ 5725MHz Band: Channel 100 - 140 For 5725 ~ 5850MHz band: Channel 149 - 165

TEST REPORT**1.3 Antenna information**

Antenna information:			
No.	Antenna Type	Gain	Note
0	PCB Antenna	3.94dBi	
1	PCB Antenna	3.94dBi	

Note: After technology evaluation, the max gain antenna 1 was choose as external antenna for all test.

Mode	Tx/Rx Function	Beamforming function	CDD function	Directional gain (dBi)
802.11a	2Tx/2Rx	NO	YES	-
802.11n(HT20) 802.11ac (VHT20)	2Tx/2Rx	NO	NO	-
802.11n(HT40) 802.11ac (VHT40)	2Tx/2Rx	NO	NO	-
802.11ac (VHT80)	2Tx/2Rx	NO	NO	-

Note: For 802.11n and 802.11ac modes, it can support 2TX, all the two transmit signals are completely uncorrelated with each other, so the directional gain = $10 \log ((10^{G1/10} + 10^{G2/10} + \dots + 10^{Gn/10}) / N_{ANT})$

TEST REPORT**1.4 Description of Test Facility**

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0051
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

Name:	Shenzhen UnionTrust Quality and Technology Co., Ltd.
Address:	Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China, China 518109
Telephone:	+86 (0) 755 2823 0888
Telefax:	+86 (0) 755 2823 0886

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L9069
	FCC Accredited Lab Designation Number: CN1194
	IC Registration Lab CAB identifier.: CN0032
	A2LA Accreditation Lab Certificate Number: 4312.01

TEST REPORT**2 TEST SPECIFICATIONS****2.1 Standards or specification**

47CFR Part 15 (2020)
ANSI C63.10 (2013)
KDB 662911 D01 (v02r01)
KDB 558074 (v05r02)
RSS-247 Issue 2 (February 2017)
RSS-Gen Issue 5 (February 2021) Amendment 2

2.2 Mode of operation during the test

While testing transmitting mode of EUT, the continuously transmission was applied by following software.

Software name	Manufacturer	Version	Supplied by
SecureCRT.exe	Vandyke	6.5.0.380	Applicant

The lowest, middle and highest channel for the following modes were tested as representatives.

Frequency Band (MHz)	Mode	Lowest (MHz)	Middle (MHz)	Highest (MHz)
5150 - 5250	802.11a	5180	5220	5240
	802.11n(HT20)	5180	5220	5240
	802.11n(HT40)	5190	/	5230
	802.11ac (VHT20)	5180	5220	5240
	802.11ac (VHT40)	5190	/	5230
	802.11ac (VHT80)	5210	/	/
5250 - 5350	802.11a	5260	5300	5320
	802.11n(HT20)	5260	5300	5320
	802.11n(HT40)	5270	/	5310
	802.11ac (VHT20)	5260	5300	5320
	802.11ac (VHT40)	5270	/	5310
	802.11ac (VHT80)	5290	/	/
5470 - 5725	802.11a	5500	5600	5700
	802.11n(HT20)	5500	5600	5700
	802.11n(HT40)	5510	5590	5670
	802.11ac (VHT20)	5500	5600	5700
	802.11ac (VHT40)	5510	5590	5670
	802.11ac (VHT80)	5530	/	5610

TEST REPORT

5725 - 5850	802.11a	5745	5785	5825
	802.11n(HT20)	5745	5785	5825
	802.11n(HT40)	5755	/	5795
	802.11ac (VHT20)	5745	5785	5825
	802.11ac (VHT40)	5755	/	5795
	802.11ac (VHT80)	5775	/	/

Data rate and Power setting:

The pre-scan for the conducted power with all data rates in each modulation and band was used, and the worst case was found and used in all test cases. After this pre-scan, we choose the following table of the data rates as the worst case.

Frequency Band (MHz)	Mode	Worst case data rate
5150 - 5250	802.11a	6Mbps
	802.11n(HT20)	MCS8
	802.11n(HT40)	MCS8
	802.11ac (VHT20)	MCS8
	802.11ac (VHT40)	MCS8
	802.11ac (VHT80)	MCS8
5250 - 5350	802.11a	6Mbps
	802.11n(HT20)	MCS8
	802.11n(HT40)	MCS8
	802.11ac (VHT20)	MCS8
	802.11ac (VHT40)	MCS8
	802.11ac (VHT80)	MCS8
5500 - 5725	802.11a	6Mbps
	802.11n(HT20)	MCS8
	802.11n(HT40)	MCS8
	802.11ac (VHT20)	MCS8
	802.11ac (VHT40)	MCS8
	802.11ac (VHT80)	MCS8
5725 - 5850	802.11a	6Mbps
	802.11n(HT20)	MCS8
	802.11n(HT40)	MCS8
	802.11ac (VHT20)	MCS8
	802.11ac (VHT40)	MCS8
	802.11ac (VHT80)	MCS8

TEST REPORT**Duty cycle:**

Duty cycle	Duty cycle (%)	Duty cycle factor
802.11a	93.17	0.31
802.11n(HT20)	93.16	0.31
802.11ac (VHT20)	92.77	0.31
802.11n(HT40)	92.66	0.33
802.11ac (VHT40)	86.77	0.62
802.11ac (VHT80)	76.42	1.17

TEST REPORT**2.3 Test software list**

Test Items	Software	Manufacturer	Version
Conducted emission	e3	Audix	9.160323
Radiated emission	e3	Audix	9.160323

2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	Laptop computer	DELL 5480	-
2	RF cable	/	0.2m length; 0.5dB loss

2.5 Test environment condition:

Test items	Temperature	Humidity
26 dB Bandwidth & 99% Occupied Bandwidth	25.2°C	49% RH
Minimum 6dB Bandwidth		
Maximum Conducted Output Power		
Power spectral density		
Radiated Emissions in restricted frequency bands	24.7°C	52%RH
Power line conducted emission	25.3°C	45%RH

TEST REPORT
2.6 Instrument list

Radiated Emission Test Equipment List							
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)	
<input checked="" type="checkbox"/>	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	N/A	Jan. 22, 2021	Jan. 21, 2024	
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	Nov. 05, 2021	Nov. 04, 2022	
<input checked="" type="checkbox"/>	Loop Antenna	ETS-LINDGREN	6502	00202525	Nov. 11, 2021	Nov. 10, 2023	
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	Nov. 11, 2021	Nov. 10, 2023	
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	Nov. 11, 2021	Nov. 10, 2023	
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	Nov. 05, 2022	Nov. 04, 2022	
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201874	Apr. 30, 2021	Apr. 29, 2023	
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	Nov. 14, 2020	Nov. 13, 2022	
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A	
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323			

Conducted Emission Test Equipment List							
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)	
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	1316.3003K07-101181-K3	Nov. 05, 2021	Nov. 04, 2022	
<input checked="" type="checkbox"/>	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	Nov. 05, 2021	Nov. 04, 2022	
<input checked="" type="checkbox"/>	LISN	R&S	ESH2-Z5	860014/024	Nov. 05, 2021	Nov. 04, 2022	
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323			

Conducted RF test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	Apr. 22, 2021	14-Apr-2023
<input checked="" type="checkbox"/>	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	Nov. 05, 2021	Nov. 04, 2022

TEST REPORT**2.7 Measurement uncertainty**

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9kHz-150kHz	±3.2 dB
2	Conducted emission 150kHz-30MHz	±2.7 dB
3	Radiated emission 9kHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.6 dB
5	Radiated emission 1GHz-18GHz	± 4.4 dB
6	Radiated emission 18GHz-26GHz	± 4.6 dB
7	Radiated emission 26GHz-40GHz	± 4.6 dB
8	RF Power, Conducted	± 0.9 dB
9	Transmission Time	± 0.19 %
10	Occupied Bandwidth	± 1.86 %
11	Power Spectral Density, conducted	± 0.6 dB
12	Radio Frequency	± 6.5 x 10-8
13	Conducted out of band emission	± 2.7 dB

TEST REPORT**3 26 dB Bandwidth & 99% Occupied Bandwidth**

Test result: Pass

3.1 Limit

None

3.2 Measurement Procedure

The EUT was tested according to test procedure of "KDB789033 D02 General UNII Test Procedures New Rules"

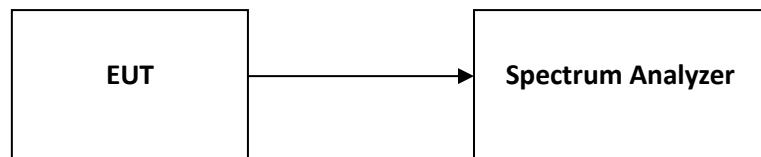
26 dB Bandwidth

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

99% Occupied Bandwidth

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

TEST REPORT**3.3 Test Configuration****3.4 The results of 26 dB Bandwidth & 99% Occupied Bandwidth**

Please refer to Appendix A, B, C, D.

TEST REPORT**4 Minimum 6dB Bandwidth**

Test result: Pass

4.1 Limit

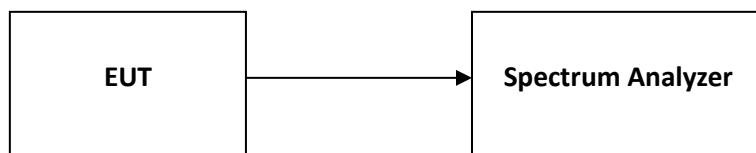
For systems using digital modulation techniques that may operate in the 5725 - 5850 MHz band, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.2 Measurement Procedure

The EUT was tested according to test procedure of “KDB789033 D02 General UNII Test Procedures New Rules”

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

4.3 Test Configuration**4.4 The results of Minimum 6dB Bandwidth**

Please refer to Appendix A, B, C, D.

TEST REPORT**5 Maximum conducted output power****Test result:** Pass**5.1 Limit**

For an outdoor access point operating in the band 5.15-5.25GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1W provided the maximum antenna gain does not exceed 6dBi.

The maximum e.i.r.p. at any elevation angle above 30 degrees from the horizon must not exceed 125mW (21 dBm).

For an indoor access point operating in the band 5.15-5.25GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6dBi.

For fixed point-to-point access points operating in the band 5.15-5.25GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1W.

For client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. (FCC Limit)

For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10\log B$, where B is the 26dB emission bandwidth in megahertz. (FCC limit)

For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1W. (FCC limit)

For Frequency Band 5150-5250 MHz, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. (IC limit)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 99% emission bandwidth in megahertz. (IC limit)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. (IC limit)

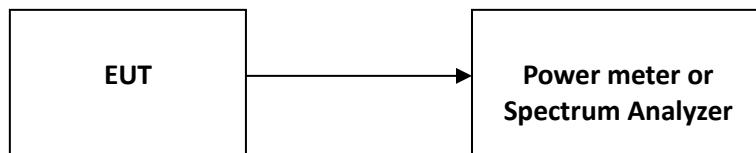
For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. (IC limit)

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

TEST REPORT**5.2 Measurement Procedure**

The EUT was tested according to test procedure of “KDB789033 D02 General UNII Test Procedures New Rules”

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW \geq 3 MHz.
- (iv) Number of points in sweep $\geq 2 \times$ span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.
- (vi) Detector = power averaging (rms), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98%, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle \geq 98%, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run.”
- (viii) Trace average at least 100 traces in power averaging (rms) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

5.3 Test Configuration**5.4 Test Results of Maximum conducted output power**

Please refer to Appendix A, B, C, D.

TEST REPORT**6 Power spectrum density****Test result:** Pass**6.1 Limit**

- For an outdoor access point operating in the band 5.15-5.25GHz, the maximum power spectral density shall not exceed 17dBm in any 1 megahertz band.
- For an indoor access point operating in the band 5.15-5.25GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.
- For client devices in the 5.15-5.25GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. (FCC limit)
- For the 5.25-5.35 GHz and 5.47-5.725GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. (FCC limit)
- For the band 5.725-5.85GHz, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. (FCC limit)
- For the 5.15-5.25GHz band, the e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band. (IC limit)
- For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. (IC limit)
- For the 5.725-5.85GHz band, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. (IC limit)

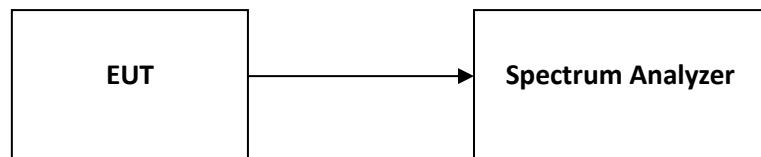
If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the less of original and original + (6 - antenna gain - beamforming gain).

TEST REPORT**6.2 Measurement Procedure**

The EUT was tested according to test procedure of “KDB789033 D02 General UNII Test Procedures New Rules”

1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power....” (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
3. Make the following adjustments to the peak value of the spectrum, if applicable:
 - a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.
 - b) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
4. The result is the Maximum PSD over 1 MHz reference bandwidth.
5. For devices operating in the bands 5.15 - 5.25 GHz, 5.25 - 5.35 GHz, and 5.47 - 5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725 - 5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:
 - a) Set RBW $\geq 1/T$, where T is defined in II.B.I.a).
 - b) Set VBW ≥ 3 RBW.
 - c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log(500 \text{ kHz}/\text{RBW})$ to the measured result, whereas RBW (<500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
 - d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log(1\text{MHz}/\text{RBW})$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
 - e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for steps 5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.

TEST REPORT**6.3 Test Configuration****6.4 Test Results of Power spectrum density**

Please refer to Appendix A, B, C, D.

TEST REPORT

7 Radiated Emissions

Test result: Pass

7.1 Limit

The radiated emissions which fall in the restricted bands, and the radiated emissions below 1GHz, must comply with the radiated emission limits specified showed as below:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

The radiated emissions which fall outside the restrict bands, should comply with the EIRP limit as below:

For transmitters operating in the 5.15 - 5.25 / 5.25 - 5.35 / 5.47 - 5.725GHz band:

Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength (3m) (dBμV/m)
<5150		
>5350		
<5470	-27	68.20
>5725		

For transmitters operating in the 5.725 - 5.85GHz band:

Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength (3m) (dBμV/m)
<5650	-27	68.20
5650 ~ 5700	-27 ~ 10	68.20 ~ 105.20
5700 ~ 5720	10 ~ 15.6	105.20 ~ 110.80
5720 ~ 5725	15.6 ~ 27	110.80 ~ 122.20
5850 ~ 5855	27 ~ 15.6	122.20 ~ 110.80
5855 ~ 5875	15.6 ~ 10	110.80 ~ 105.20
5875 ~ 5925	10 ~ -27	105.20 ~ 68.20
>5925	-27	68.20

TEST REPORT**7.2 Measurement Procedure****For Radiated emission below 30MHz:**

- a) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) Both X and Y axes of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to peak or quasi-peak detect function and specified bandwidth with maximum hold mode.

NOTE:

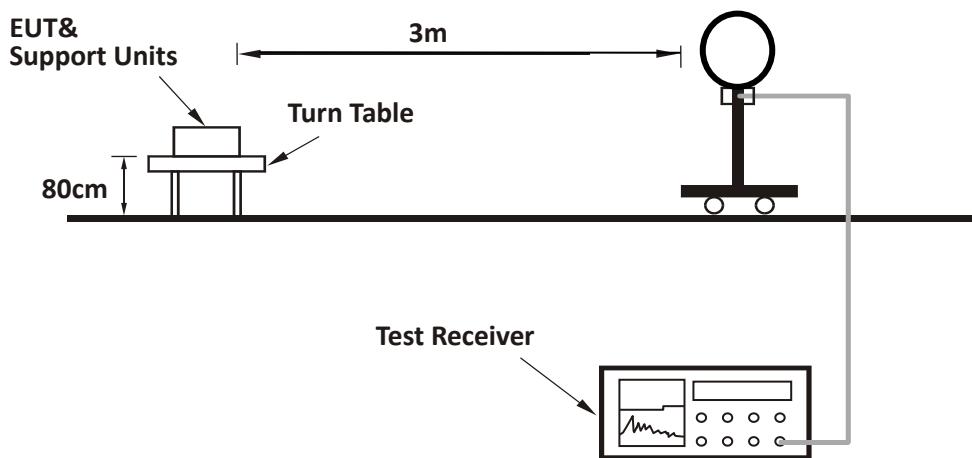
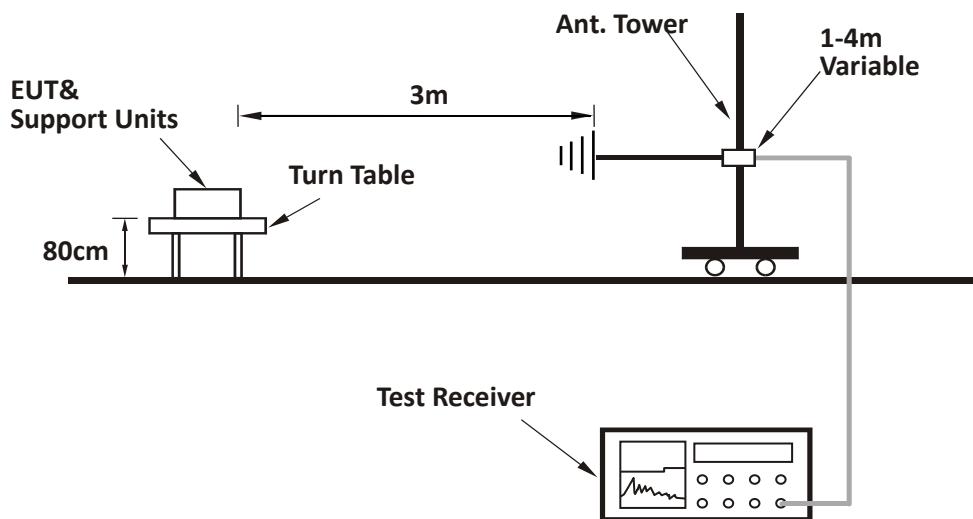
1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

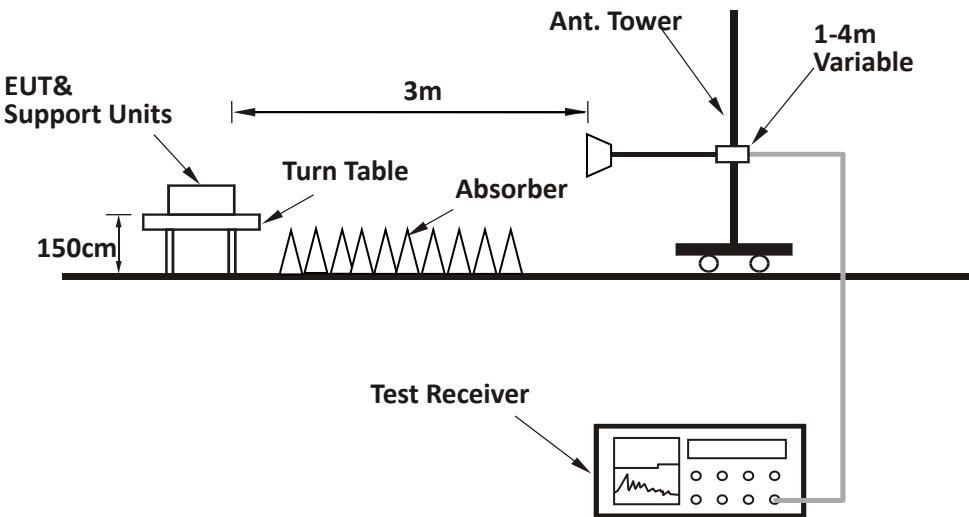
For Radiated emission above 30MHz:

- a) The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meters chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to peak or quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

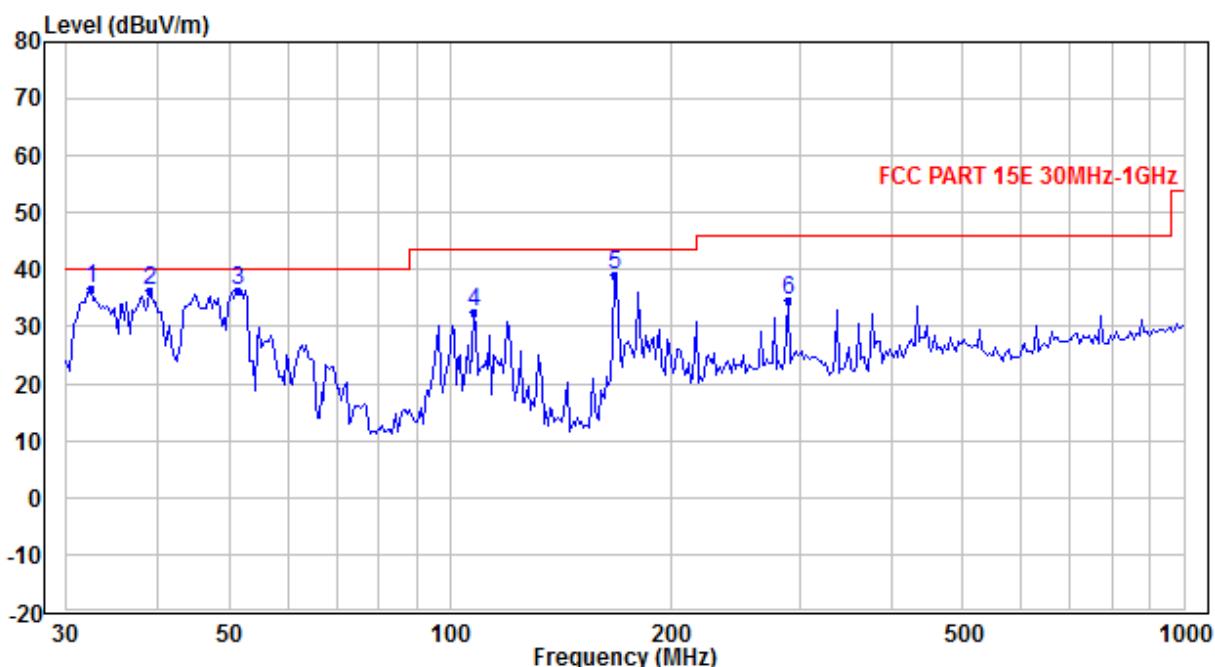
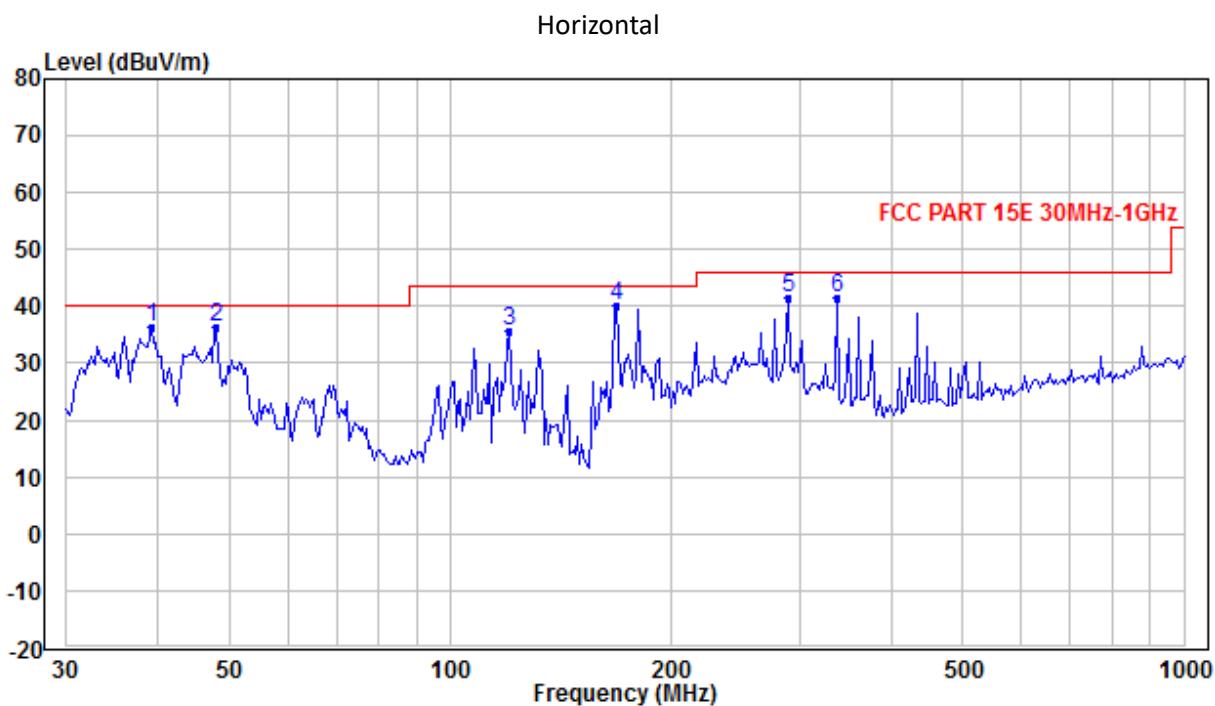
1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for peak or quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz at frequency above 1GHz for peak detection above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or $3 \times RBW$ (Duty cycle $\geq 98\%$) for average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

TEST REPORT**7.3 Test Configuration****For Radiated emission below 30MHz:****For Radiated emission 30MHz to 1GHz:**

TEST REPORT**For Radiated emission above 1GHz:**

TEST REPORT**7.4 Test Results of Radiated Emissions**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



Vertical

TEST REPORT**Test data below 1GHz**

Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	39.182	36.24	-7.81	40.00	-3.76	QP
H	48.039	36.47	-13.52	40.00	-3.53	QP
H	120.612	35.82	-16.02	43.50	-7.68	QP
H	168.997	40.08	-11.95	43.50	-3.42	QP
H	288.284	41.59	-7.06	46.00	-4.41	QP
H	336.482	41.50	-5.82	46.00	-4.50	QP
V	32.411	36.74	-4.99	40.00	-3.26	QP
V	38.908	36.45	-7.64	40.00	-3.55	QP
V	51.176	36.51	-15.25	40.00	-3.49	QP
V	107.785	32.52	-16.17	43.50	-10.98	QP
V	167.814	39.00	-12.21	43.50	-4.50	QP
V	288.284	34.79	-7.06	46.00	-11.21	QP

TEST REPORT
Test result above 1GHz:

The emission was conducted from 1GHz to 40GHz

U-NII-1 Band:

SISO_Chain 0_IIEEE 802.11a

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	5150.00	-1.67	66.84	74.00	-7.16	Peak
	H	5150.00	-1.67	42.96	54.00	-11.04	Average
	H	10360.00	6.24	45.36	74.00	-28.64	Peak
	H	15540.00	11.27	48.14	74.00	-25.86	Peak
	V	10360.00	6.24	46.50	74.00	-27.50	Peak
	V	15540.00	11.27	47.97	74.00	-26.03	Peak
M	H	10440.00	6.30	44.73	74.00	-29.27	Peak
	H	15660.00	11.40	47.62	74.00	-26.38	Peak
	V	10440.00	6.30	45.80	74.00	-28.20	Peak
	V	15660.00	11.40	47.76	74.00	-26.24	Peak
H	H	10480.00	6.33	48.41	74.00	-25.59	Peak
	H	15720.00	11.48	47.46	74.00	-26.54	Peak
	V	10480.00	6.33	48.67	74.00	-25.33	Peak
	V	15720.00	11.48	49.20	74.00	-24.80	Peak

SISO_Chain 1_IIEEE 802.11a

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	5150.00	-1.67	51.07	74.00	-22.93	Peak
	H	5150.00	-1.67	35.25	54.00	-18.75	Average
	H	10360.00	6.24	47.46	74.00	-26.54	Peak
	H	15540.00	11.27	47.69	74.00	-26.31	Peak
	V	10360.00	6.24	45.13	74.00	-28.87	Peak
	V	15540.00	11.27	48.28	74.00	-25.72	Peak

TEST REPORT

M	H	10440.00	6.30	45.09	74.00	-28.91	Peak
	H	15660.00	11.40	47.67	74.00	-26.33	Peak
	V	10440.00	6.30	44.79	74.00	-29.21	Peak
	V	15660.00	11.40	47.60	74.00	-26.40	Peak
H	H	10480.00	6.33	43.68	74.00	-30.32	Peak
	H	15720.00	11.48	48.40	74.00	-25.60	Peak
	V	10480.00	6.33	47.28	74.00	-26.72	Peak
	V	15720.00	11.48	48.24	74.00	-25.76	Peak

MIMO_Chain 0+1_802.11n20

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	5150.00	-1.67	67.46	74.00	-6.54	Peak
	H	5150.00	-1.67	47.40	54.00	-6.60	Average
	H	10360.00	6.24	45.32	74.00	-28.68	Peak
	H	15540.00	11.27	47.08	74.00	-26.92	Peak
	V	10360.00	6.24	45.32	74.00	-28.68	Peak
	V	15540.00	11.27	46.74	74.00	-27.26	Peak
M	H	10440.00	6.30	46.94	74.00	-27.06	Peak
	H	15660.00	11.40	47.80	74.00	-26.20	Peak
	V	10440.00	6.30	46.73	74.00	-27.27	Peak
	V	15660.00	11.40	48.19	74.00	-25.81	Peak
H	H	10480.00	6.33	46.42	74.00	-27.58	Peak
	H	15720.00	11.48	47.51	74.00	-26.49	Peak
	V	10480.00	6.33	46.68	74.00	-27.32	Peak
	V	15720.00	11.48	47.87	74.00	-26.13	Peak

TEST REPORT
MIMO_Chain 0+1_802.11n40

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	V	5150.00	-1.67	60.08	74.00	-13.92	Peak
	V	5150.00	-1.67	42.04	54.00	-11.96	Average
	H	10380.00	6.25	46.58	74.00	-27.42	Peak
	H	15570.00	11.29	46.44	74.00	-27.56	Peak
	V	10380.00	6.25	46.84	74.00	-27.16	Peak
	V	15570.00	11.29	49.22	74.00	-24.78	Peak
H	H	10460.00	6.32	47.05	74.00	-26.95	Peak
	H	15690.00	11.45	48.82	74.00	-25.18	Peak
	V	10460.00	6.32	46.85	74.00	-27.15	Peak
	V	15690.00	11.45	48.19	74.00	-25.81	Peak

MIMO_Chain 0+1_802.11ac VHT20

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	V	5150.00	-1.67	70.17	74.00	-3.83	Peak
	V	5150.00	-1.67	52.68	54.00	-1.32	Average
	H	10360.00	6.24	44.71	74.00	-29.29	Peak
	H	15540.00	11.27	46.86	74.00	-27.14	Peak
	V	10360.00	6.24	46.37	74.00	-27.63	Peak
	V	15540.00	11.27	46.34	74.00	-27.66	Peak
M	H	10440.00	6.30	45.37	74.00	-28.63	Peak
	H	15660.00	11.40	47.74	74.00	-26.26	Peak
	V	10440.00	6.30	44.89	74.00	-29.11	Peak
	V	15660.00	11.40	47.67	74.00	-26.33	Peak
H	H	10480.00	6.33	44.00	74.00	-30.00	Peak
	H	15720.00	11.48	47.49	74.00	-26.51	Peak
	V	10480.00	6.33	47.15	74.00	-26.85	Peak
	V	15720.00	11.48	47.30	74.00	-26.70	Peak

TEST REPORT
MIMO_Chain 0+1_802.11ac VHT40

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	V	5150.00	-1.67	72.18	74.00	-1.82	Peak
	V	5150.00	-1.67	52.27	54.00	-1.73	Average
	H	10380.00	6.25	45.32	74.00	-28.68	Peak
	H	15570.00	11.29	46.52	74.00	-27.48	Peak
	V	10380.00	6.25	45.91	74.00	-28.09	Peak
	V	15570.00	11.29	48.10	74.00	-25.90	Peak
H	H	10460.00	6.32	47.23	74.00	-26.77	Peak
	H	15690.00	11.45	46.97	74.00	-27.03	Peak
	V	10460.00	6.32	44.56	74.00	-29.44	Peak
	V	15690.00	11.45	47.21	74.00	-26.79	Peak

MIMO_Chain 0+1_802.11ac VHT80

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
M	V	5150.00	-1.67	71.02	74.00	-2.98	Peak
	V	5150.00	-1.67	52.22	54.00	-1.78	Average
	H	10420.00	6.32	46.31	74.00	-27.69	Peak
	H	15630.00	11.45	47.56	74.00	-26.44	Peak
	V	10430.00	6.32	47.07	74.00	-26.93	Peak
	V	15630.00	11.45	47.76	74.00	-26.24	Peak

TEST REPORT
U-NII-2A Band:

SISO_Chain 0_IEEE 802.11a

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	10520.00	6.39	49.16	74.00	-24.84	Peak
	H	15780.00	11.56	48.63	74.00	-25.37	Peak
	V	10520.00	6.39	47.48	74.00	-26.52	Peak
	V	15780.00	11.56	51.38	74.00	-22.62	Peak
M	H	10600.00	6.56	48.87	74.00	-25.13	Peak
	H	15900.00	11.71	49.19	74.00	-24.81	Peak
	V	10600.00	6.56	47.71	74.00	-26.29	Peak
	V	15900.00	11.71	49.94	74.00	-24.06	Peak
H	H	5350.00	-0.67	70.68	74.00	-3.32	Peak
	H	5350.00	-0.67	44.76	54.00	-9.24	Average
	H	10640.00	6.64	46.78	74.00	-27.22	Peak
	H	15960.00	11.77	48.94	74.00	-25.06	Peak
	V	10640.00	6.64	47.67	74.00	-26.33	Peak
	V	15960.00	11.77	50.83	74.00	-23.17	Peak

SISO_Chain 1_IEEE 802.11a

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	10520.00	6.39	45.67	74.00	-28.33	Peak
	H	15780.00	11.56	47.46	74.00	-26.54	Peak
	V	10520.00	6.39	46.93	74.00	-27.07	Peak
	V	15780.00	11.56	46.56	74.00	-27.44	Peak
M	H	10600.00	6.56	46.86	74.00	-27.14	Peak
	H	15900.00	11.71	46.87	74.00	-27.13	Peak
	V	10600.00	6.56	47.44	74.00	-26.56	Peak
	V	15900.00	11.71	47.78	74.00	-26.22	Peak

TEST REPORT

H	H	5350.00	-0.67	57.66	74.00	-16.34	Peak
	H	5350.00	-0.67	38.60	54.00	-15.40	Average
	H	10640.00	6.64	47.31	74.00	-26.69	Peak
	H	15960.00	11.77	48.14	74.00	-25.86	Peak
	V	10640.00	6.64	47.30	74.00	-26.70	Peak
	V	15960.00	11.77	47.99	74.00	-26.01	Peak

MIMO_Chain 0+1_802.11n20

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	10520.00	6.39	46.44	74.00	-27.56	Peak
	H	15780.00	11.56	47.44	74.00	-26.56	Peak
	V	10520.00	6.39	47.73	74.00	-26.27	Peak
	V	15780.00	11.56	47.28	74.00	-26.72	Peak
M	H	10600.00	6.56	44.23	74.00	-29.77	Peak
	H	15900.00	11.71	48.78	74.00	-25.22	Peak
	V	10600.00	6.56	46.29	74.00	-27.71	Peak
	V	15900.00	11.71	48.10	74.00	-25.90	Peak
H	H	5350.00	-0.67	70.35	74.00	-3.65	Peak
	H	5350.00	-0.67	50.94	54.00	-3.06	Average
	H	10640.00	6.64	46.19	74.00	-27.81	Peak
	H	15960.00	11.77	47.90	74.00	-26.10	Peak
	V	10640.00	6.64	46.34	74.00	-27.66	Peak
	V	15960.00	11.77	47.76	74.00	-26.24	Peak

TEST REPORT
MIMO_Chain 0+1_802.11n40

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	10540.00	6.42	45.04	74.00	-28.96	Peak
	H	15810.00	11.59	47.58	74.00	-26.42	Peak
	V	10540.00	6.42	45.10	74.00	-28.90	Peak
	V	15810.00	11.59	48.16	74.00	-25.84	Peak
H	V	5350.00	-0.67	66.73	74.00	-7.27	Peak
	V	5350.00	-0.67	44.06	54.00	-9.94	Average
	H	10620.00	6.61	46.49	74.00	-27.51	Peak
	H	15930.00	11.75	47.72	74.00	-26.28	Peak
	V	10620.00	6.61	44.57	74.00	-29.43	Peak
	V	15930.00	11.75	47.31	74.00	-26.69	Peak

MIMO_Chain 0+1_802.11ac VHT20

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	10520.00	6.39	44.04	74.00	-29.96	Peak
	H	15780.00	11.56	47.11	74.00	-26.89	Peak
	V	10520.00	6.39	43.93	74.00	-30.07	Peak
	V	15780.00	11.56	47.01	74.00	-26.99	Peak
M	H	10600.00	6.56	43.54	74.00	-30.46	Peak
	H	15900.00	11.71	47.27	74.00	-26.73	Peak
	V	10600.00	6.56	46.57	74.00	-27.43	Peak
	V	15900.00	11.71	48.63	74.00	-25.37	Peak
H	V	5350.00	-0.67	72.61	74.00	-1.39	Peak
	V	5350.00	-0.67	52.03	54.00	-1.97	Average
	H	10640.00	6.64	44.42	74.00	-29.58	Peak
	H	15960.00	11.77	47.87	74.00	-26.13	Peak
	V	10640.00	6.64	45.17	74.00	-28.83	Peak
	V	15960.00	11.77	47.62	74.00	-26.38	Peak

TEST REPORT
MIMO_Chain 0+1_802.11ac VHT40

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	10540.00	6.42	45.05	74.00	-28.95	Peak
	H	15810.00	11.59	46.81	74.00	-27.19	Peak
	V	10540.00	6.42	45.27	74.00	-28.73	Peak
	V	15810.00	11.59	47.53	74.00	-26.47	Peak
H	V	5350.00	-0.67	71.18	74.00	-2.82	Peak
	V	5350.00	-0.67	52.57	54.00	-1.43	Average
	H	10620.00	6.61	46.45	74.00	-27.55	Peak
	H	15930.00	11.75	48.01	74.00	-25.99	Peak
	V	10620.00	6.61	47.70	74.00	-26.30	Peak
	V	15930.00	11.75	47.62	74.00	-26.38	Peak

MIMO_Chain 0+1_802.11ac VHT80

Channel	Polarity	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	V	5350.00	-0.67	71.91	74.00	-2.09	Peak
	V	5350.00	-0.67	52.69	54.00	-1.31	Average
	H	10580.00	6.51	47.88	74.00	-26.12	Peak
	H	15870.00	11.67	47.65	74.00	-26.35	Peak
	V	10580.00	6.51	46.91	74.00	-27.09	Peak
	V	15870.00	11.67	47.08	74.00	-26.92	Peak

TEST REPORT
U-NII-2C Band:

SISO _ Chain 0 _ IEEE 802.11a

Channel	Polarity	Frequency	Correct Factor	Corrected Reading	Limit	Margin	Detector
		(MHz)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
L	V	5470.00	-0.02	63.93	68.20	-4.27	Peak
	V	5470.00	-0.02	41.14	68.20	-12.86	Average
	H	11000.00	7.42	46.58	74.00	-27.42	Peak
	H	16500.00	12.35	49.24	74.00	-24.76	Peak
	V	11000.00	7.42	47.27	74.00	-26.73	Peak
	V	16500.00	12.35	50.05	74.00	-23.95	Peak
M	H	11160.00	7.32	47.97	74.00	-26.03	Peak
	H	16740.00	12.55	48.80	74.00	-25.20	Peak
	V	11160.00	7.32	48.08	74.00	-25.92	Peak
	V	16740.00	12.55	51.66	74.00	-22.34	Peak
H	H	5725.00	-0.37	64.40	68.20	-3.80	Peak
	V	5725.00	-0.37	62.87	68.20	-5.33	Peak
	H	11400.00	7.15	46.90	74.00	-27.10	Peak
	H	17100.00	12.92	50.89	74.00	-23.11	Peak
	V	11400.00	7.15	47.25	74.00	-26.75	Peak
	V	17100.00	12.92	48.49	74.00	-25.51	Peak

SISO _ Chain 1 _ IEEE 802.11a

Channel	Polarity	Frequency	Correct Factor	Corrected Reading	Limit	Margin	Detector
		(MHz)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
L	H	5470.00	-0.02	59.52	68.20	-8.68	Peak
	H	5470.00	-0.02	40.53	68.20	-27.67	Average
	H	11000.00	7.42	46.63	74.00	-27.37	Peak
	H	16500.00	12.35	48.32	74.00	-25.68	Peak
	V	11000.00	7.42	48.64	74.00	-25.36	Peak
	V	16500.00	12.35	48.18	74.00	-25.82	Peak
M	H	11160.00	7.32	46.81	74.00	-27.19	Peak
	H	16740.00	12.55	49.02	74.00	-24.98	Peak

TEST REPORT

	V	11160.00	7.32	47.72	74.00	-26.28	Peak
	V	16740.00	12.55	50.08	74.00	-23.92	Peak
H	H	5725.00	-0.37	62.96	68.20	-5.24	Peak
	V	5725.00	-0.37	60.28	68.20	-7.92	Peak
	H	11400.00	7.15	45.02	74.00	-28.98	Peak
	H	17100.00	12.92	51.14	74.00	-22.86	Peak
	V	11400.00	7.15	47.52	74.00	-26.48	Peak
	V	17100.00	12.92	49.55	74.00	-24.45	Peak

MIMO_Chain 0+1_802.11n HT20

Channel	Polarity	Frequency	Correct Factor	Corrected Reading	Limit	Margin	Detector
		(MHz)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
L	V	5470.00	-0.02	66.82	68.20	-1.38	Peak
	V	5470.00	-0.02	51.25	68.20	-16.95	Average
	H	11000.00	7.42	48.31	74.00	-25.69	Peak
	H	16500.00	12.35	51.11	74.00	-22.89	Peak
	V	11000.00	7.42	46.61	74.00	-27.39	Peak
	V	16500.00	12.35	48.59	74.00	-25.41	Peak
M	H	11160.00	7.32	44.36	74.00	-29.64	Peak
	H	16740.00	12.55	50.30	74.00	-23.70	Peak
	V	11160.00	7.32	47.11	74.00	-26.89	Peak
	V	16740.00	12.55	50.37	74.00	-23.63	Peak
H	H	5725.00	-0.37	66.72	68.20	-1.48	Peak
	V	5725.00	-0.37	66.96	68.20	-1.24	Peak
	H	11400.00	7.15	47.49	74.00	-26.51	Peak
	H	17100.00	12.92	48.32	74.00	-25.68	Peak
	V	11400.00	7.15	44.44	74.00	-29.56	Peak
	V	17100.00	12.92	47.08	74.00	-26.92	Peak

TEST REPORT

MIMO_Chain 0+1_802.11n40

Channel	Polarity	Frequency	Correct Factor	Corrected Reading	Limit	Margin	Detector
		(MHz)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
L	V	5470.00	-0.02	66.15	68.20	-2.05	Peak
	V	5470.00	-0.02	52.17	68.20	-16.03	Average
	H	11020.00	7.41	46.16	74.00	-27.84	Peak
	H	16530.00	12.38	49.30	74.00	-24.70	Peak
	V	11020.00	7.41	46.76	74.00	-27.24	Peak
	V	16530.00	12.38	48.46	74.00	-25.54	Peak
H	H	5725.00	-0.37	55.84	68.20	-12.36	Peak
	V	5725.00	-0.37	65.99	68.20	-2.21	Peak
	H	11340.00	7.19	45.58	74.00	-28.42	Peak
	H	17010.00	12.80	48.50	74.00	-25.50	Peak
	V	11340.00	7.19	48.55	74.00	-25.45	Peak
	V	17010.00	12.80	50.49	74.00	-23.51	Peak

MIMO_Chain 0+1_802.11ac VHT20

Channel	Polarity	Frequency	Correct Factor	Corrected Reading	Limit	Margin	Detector
		(MHz)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
L	H	5470.00	-0.02	66.19	68.20	-2.01	Peak
	H	5470.00	-0.02	44.67	68.20	-23.53	Average
	H	11000.00	7.42	46.09	74.00	-27.91	Peak
	H	16500.00	12.35	47.92	74.00	-26.08	Peak
	V	11000.00	7.42	46.55	74.00	-27.45	Peak
	V	16500.00	12.35	48.46	74.00	-25.54	Peak
M	H	11160.00	7.32	45.28	74.00	-28.72	Peak
	H	16740.00	12.55	48.91	74.00	-25.09	Peak
	V	11160.00	7.32	44.50	74.00	-29.50	Peak
	V	16740.00	12.55	49.25	74.00	-24.75	Peak
H	H	5725.00	-0.37	66.15	68.20	-2.05	Peak
	V	5725.00	-0.37	65.95	68.20	-2.25	Peak

TEST REPORT

	H	11400.00	7.15	44.42	74.00	-29.58	Peak
	H	17100.00	12.92	47.63	74.00	-26.37	Peak
	V	11400.00	7.15	43.91	74.00	-30.09	Peak
	V	17100.00	12.92	46.79	74.00	-27.21	Peak

MIMO_Chain 0+1_802.11ac VHT40

Channel	Polarity	Frequency	Correct Factor	Corrected Reading	Limit	Margin	Detector
		(MHz)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
L	V	5470.00	-0.02	66.86	68.20	-1.34	Peak
	V	5470.00	-0.02	54.08	68.20	-14.12	Average
	H	11020.00	7.41	45.22	74.00	-28.78	Peak
	H	16530.00	12.38	47.27	74.00	-26.73	Peak
	V	11020.00	7.41	46.47	74.00	-27.53	Peak
	V	16530.00	12.38	50.18	74.00	-23.82	Peak
H	H	5725.00	-0.37	53.18	68.20	-15.02	Peak
	V	5725.00	-0.37	57.53	68.20	-10.67	Peak
	H	11340.00	7.10	44.58	74.00	-29.42	Peak
	H	17010.00	13.16	49.42	74.00	-24.58	Peak
	V	11340.00	7.19	44.78	74.00	-29.22	Peak
	V	17010.00	12.80	49.80	74.00	-24.20	Peak

TEST REPORT

MIMO_Chan 0+1_802.11ac VHT80

Channel	Polarity	Frequency	Correct Factor	Corrected Reading	Limit	Margin	Detector
		(MHz)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
L	V	5470.00	-0.02	65.77	68.20	-2.43	Peak
	V	5470.00	-0.02	51.00	68.20	-17.20	Average
	H	11060.00	7.38	48.70	74.00	-25.30	Peak
	H	16590.00	12.43	49.06	74.00	-24.94	Peak
	V	11060.00	7.38	45.76	74.00	-28.24	Peak
	V	16590.00	12.43	48.00	74.00	-26.00	Peak
H	H	5725.00	-0.37	53.27	68.20	-14.93	Peak
	V	5725.00	-0.37	56.53	68.20	-11.67	Peak
	H	11510.00	7.10	44.98	74.00	-29.02	Peak
	H	17265.00	13.16	48.15	74.00	-25.85	Peak
	V	11510.00	7.10	44.79	74.00	-29.21	Peak
	V	17265.00	13.16	48.33	74.00	-25.67	Peak

TEST REPORT
U-NII-3 Band:

SISO _ Chain 0 _ IEEE 802.11a

Channel	Polarity	Frequency	Correct Factor	Corrected Reading	Limit	Margin	Detector
		(MHz)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
L	H	11490.00	7.09	47.55	74.00	-26.45	Peak
	H	17235.00	13.12	49.03	74.00	-24.97	Peak
	V	11490.00	7.09	46.44	74.00	-27.56	Peak
	V	17235.00	13.12	47.50	74.00	-26.50	Peak
M	H	11570.00	7.19	48.28	74.00	-25.72	Peak
	H	17355.00	13.29	49.59	74.00	-24.41	Peak
	V	11570.00	7.19	47.72	74.00	-26.28	Peak
	V	17355.00	13.29	51.29	74.00	-22.71	Peak
H	H	11650.00	7.31	48.13	74.00	-25.87	Peak
	H	17475.00	13.46	49.04	74.00	-24.96	Peak
	V	11650.00	7.31	48.18	74.00	-25.82	Peak
	V	17475.00	13.46	48.36	74.00	-25.64	Peak

TEST REPORT

SISO _ Chain 1 _ IEEE 802.11a

Channel	Polarity	Frequency	Correct Factor	Corrected Reading	Limit	Margin	Detector
		(MHz)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
L	H	11490.00	7.09	45.48	74.00	-28.52	Peak
	H	17235.00	13.12	48.72	74.00	-25.28	Peak
	V	11490.00	7.09	46.60	74.00	-27.40	Peak
	V	17235.00	13.12	48.65	74.00	-25.35	Peak
M	H	11570.00	7.19	47.74	74.00	-26.26	Peak
	H	17355.00	13.29	49.94	74.00	-24.06	Peak
	V	11570.00	7.19	48.04	74.00	-25.96	Peak
	V	17355.00	13.29	50.33	74.00	-23.67	Peak
H	H	11650.00	7.31	45.46	74.00	-28.54	Peak
	H	17475.00	13.46	49.25	74.00	-24.75	Peak
	V	11650.00	7.31	45.33	74.00	-28.67	Peak
	V	17475.00	13.46	49.08	74.00	-24.92	Peak

TEST REPORT

MIMO_Chan 0+1_802.11n HT20

Channel	Polarity	Frequency	Correct Factor	Corrected Reading	Limit	Margin	Detector
		(MHz)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
L	H	11490.00	7.09	44.48	74.00	-29.52	Peak
	H	17235.00	13.12	48.15	74.00	-25.85	Peak
	V	11490.00	7.09	45.25	74.00	-28.75	Peak
	V	17235.00	13.12	47.64	74.00	-26.36	Peak
M	H	11570.00	7.19	44.61	74.00	-29.39	Peak
	H	17355.00	13.29	48.84	74.00	-25.16	Peak
	V	11570.00	7.19	46.53	74.00	-27.47	Peak
	V	17355.00	13.29	48.57	74.00	-25.43	Peak
H	H	11650.00	7.31	45.07	74.00	-28.93	Peak
	H	17475.00	13.46	49.71	74.00	-24.29	Peak
	V	11650.00	7.31	46.15	74.00	-27.85	Peak
	V	17475.00	13.46	51.69	74.00	-22.31	Peak

TEST REPORT
MIMO_Chain 0+1_802.11n HT40

Channel	Polarity	Frequency	Correct Factor	Corrected Reading	Limit	Margin	Detector
		(MHz)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
L	H	11510.00	7.10	44.36	74.00	-29.64	Peak
	H	17265.00	13.16	49.01	74.00	-24.99	Peak
	V	11510.00	7.10	44.70	74.00	-29.30	Peak
	V	17265.00	13.16	48.10	74.00	-25.90	Peak
H	H	11590.00	7.22	44.43	74.00	-29.57	Peak
	H	17385.00	13.33	49.13	74.00	-24.87	Peak
	V	11590.00	7.22	44.91	74.00	-29.09	Peak
	V	17385.00	13.33	48.37	74.00	-25.63	Peak

MIMO_Chain 0+1_802.11ac VHT20

Channel	Polarity	Frequency	Correct Factor	Corrected Reading	Limit	Margin	Detector
		(MHz)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
L	H	11490.00	7.09	44.10	74.00	-29.90	Peak
	H	17235.00	13.12	48.87	74.00	-25.13	Peak
	V	11490.00	7.09	44.28	74.00	-29.72	Peak
	V	17235.00	13.12	47.64	74.00	-26.36	Peak
M	H	11570.00	7.19	47.64	74.00	-26.36	Peak
	H	17355.00	13.29	48.55	74.00	-25.45	Peak
	V	11570.00	7.19	44.12	74.00	-29.88	Peak
	V	17355.00	13.29	48.37	74.00	-25.63	Peak
H	H	11650.00	7.31	45.09	74.00	-28.91	Peak
	H	17475.00	13.46	47.88	74.00	-26.12	Peak
	V	11650.00	7.31	46.01	74.00	-27.99	Peak
	V	17475.00	13.46	48.49	74.00	-25.51	Peak

TEST REPORT

MIMO_Chain 0+1_802.11ac VHT40

Channel	Polarity	Frequency	Correct Factor	Corrected Reading	Limit	Margin	Detector
		(MHz)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
L	H	11510.00	7.10	47.04	74.00	-26.96	Peak
	H	17265.00	13.16	49.08	74.00	-24.92	Peak
	V	11510.00	7.10	45.34	74.00	-28.66	Peak
	V	17265.00	13.16	50.50	74.00	-23.50	Peak
H	H	11590.00	7.22	44.41	74.00	-29.59	Peak
	H	17385.00	13.33	48.34	74.00	-25.66	Peak
	V	11590.00	7.22	45.21	74.00	-28.79	Peak
	V	17385.00	13.33	48.29	74.00	-25.71	Peak

MIMO_Chain 0+1_802.11ac VHT80

Channel	Polarity	Frequency	Correct Factor	Corrected Reading	Limit	Margin	Detector
		(MHz)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
L	H	11550.00	7.22	47.41	74.00	-26.59	Peak
	H	17325.00	13.33	49.41	74.00	-24.59	Peak
	V	11550.00	7.22	46.55	74.00	-27.45	Peak
	V	17325.00	13.33	49.04	74.00	-24.96	Peak

TEST REPORT

U-NII-3 Band Edge:

SISO_Chain 0_802.11a

Channel	Polarity	Frequency	Correct Factor	Corrected Reading	Limit	Margin	Detector
		(MHz)	(dB/m)	(dBm)	(dBm)	(dB)	
L	H	5725.00	11.54	-10.03	27.00	-37.03	Peak
	V	5725.00	11.37	-15.87	27.00	-42.87	Peak
H	H	5850.00	11.21	-21.99	27.00	-48.99	Peak
	V	5850.00	11.21	-26.72	27.00	-53.72	Peak

SISO_Chain 1_802.11a

Channel	Polarity	Frequency	Correct Factor	Corrected Reading	Limit	Margin	Detector
		(MHz)	(dB/m)	(dBm)	(dBm)	(dB)	
L	H	5725.00	11.54	-11.89	27.00	-38.89	Peak
	V	5725.00	11.37	-18.66	27.00	-45.66	Peak
H	H	5850.00	11.21	-23.40	27.00	-50.40	Peak
	V	5850.00	11.21	-29.45	27.00	-56.45	Peak

MIMO_Chain 0+1_802.11n20

Channel	Polarity	Frequency	Correct Factor	Corrected Reading	Limit	Margin	Detector
		(MHz)	(dB/m)	(dBm)	(dBm)	(dB)	
L	H	5725.00	11.54	-7.57	27.00	-34.57	Peak
	V	5725.00	11.37	-17.47	27.00	-44.47	Peak
H	H	5850.00	11.21	-24.04	27.00	-51.04	Peak
	V	5850.00	11.21	-26.62	27.00	-53.62	Peak

MIMO_Chain 0+1_802.11n40

Channel	Polarity	Frequency	Correct Factor	Corrected Reading	Limit	Margin	Detector
		(MHz)	(dB/m)	(dBm)	(dBm)	(dB)	
L	H	5725.00	11.54	-7.36	27.00	-34.36	Peak
	V	5725.00	11.37	-13.48	27.00	-40.48	Peak
H	H	5850.00	11.21	-24.01	27.00	-51.01	Peak
	V	5850.00	11.21	-29.94	27.00	-56.94	Peak

TEST REPORT

MIMO_Chain 0+1_802.11ac VHT 20

Channel	Polarity	Frequency	Correct Factor	Corrected Reading	Limit	Margin	Detector
		(MHz)	(dB/m)	(dBm)	(dBm)	(dB)	
L	H	5725.00	11.54	-17.48	27.00	-44.48	Peak
	V	5725.00	11.37	-7.83	27.00	-34.83	Peak
H	H	5850.00	11.21	-17.60	27.00	-44.60	Peak
	V	5850.00	11.21	-29.94	27.00	-56.94	Peak

MIMO_Chain 0+1_802.11ac VHT40

Channel	Polarity	Frequency	Correct Factor	Corrected Reading	Limit	Margin	Detector
		(MHz)	(dB/m)	(dBm)	(dBm)	(dB)	
L	H	5725.00	11.54	-31.70	27.00	-58.70	Peak
	V	5725.00	11.37	-19.03	27.00	-46.03	Peak
H	H	5850.00	11.21	-42.09	27.00	-69.09	Peak
	V	5850.00	11.21	-39.55	27.00	-66.55	Peak

MIMO_Chain 0+1_802.11ac VHT80

Channel	Polarity	Frequency	Correct Factor	Corrected Reading	Limit	Margin	Detector
		(MHz)	(dB/m)	(dBm)	(dBm)	(dB)	
L	H	5725.00	11.37	-23.13	27.00	-50.13	Peak
	H	5850.00	11.21	-32.62	27.00	-59.62	Peak
	V	5725.00	11.37	-10.42	27.00	-37.42	Peak
	V	5850.00	11.21	-19.23	27.00	-46.23	Peak

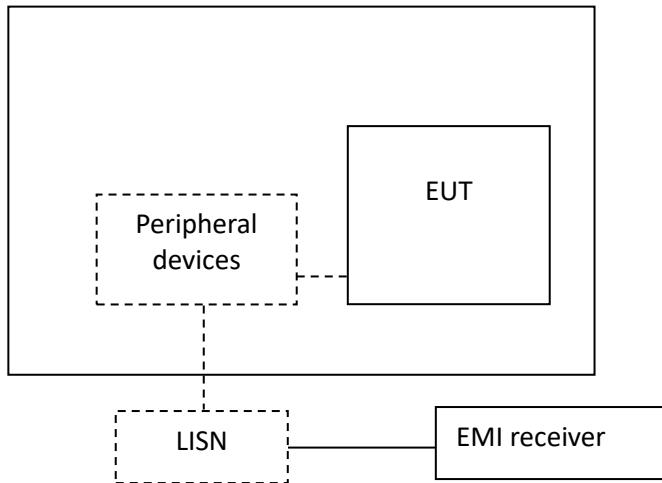
- Remark:
1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
Limit = 40.00dBuV/m.
Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20\text{dB}/\text{m}$;
Corrected Reading = $10\text{dBuV} + 0.20\text{dB}/\text{m} = 10.20\text{dBuV}/\text{m}$;
Margin = $40.00\text{dBuV}/\text{m} - 10.20\text{dBuV}/\text{m} = 29.80\text{dB}$.

TEST REPORT**8 Power line conducted emission****Test result:** Pass**8.1 Limit**

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

8.2 Test Configuration

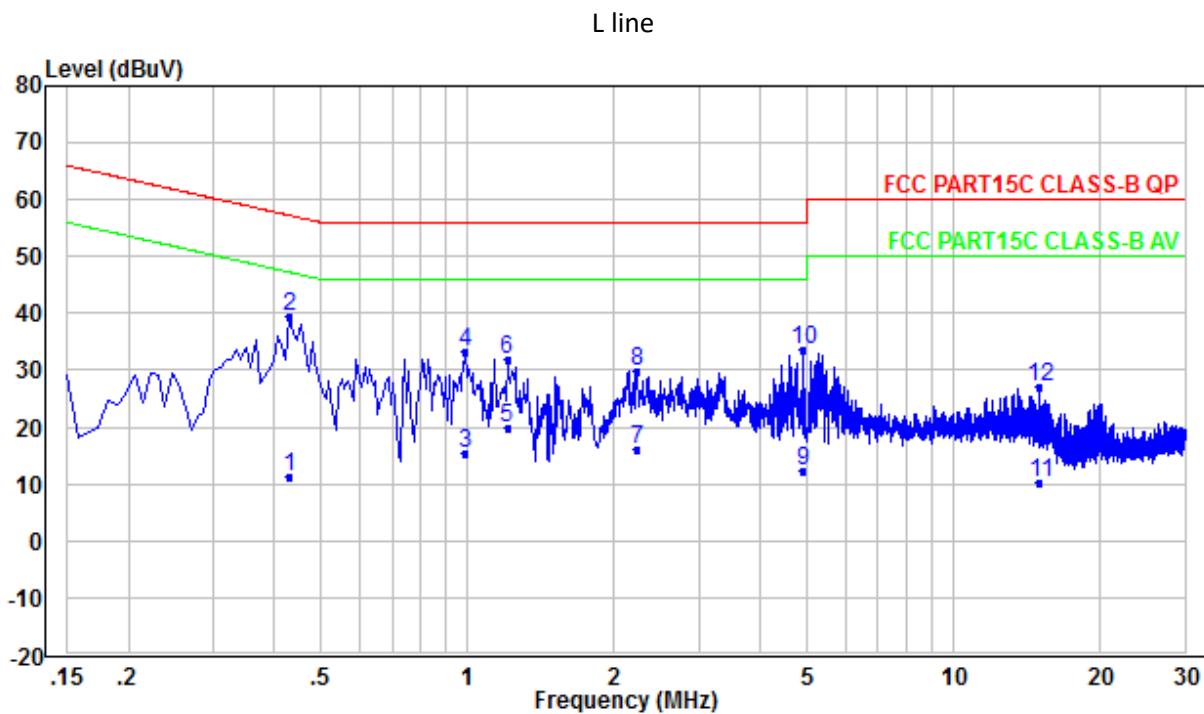
TEST REPORT

8.3 Measurement Procedure

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

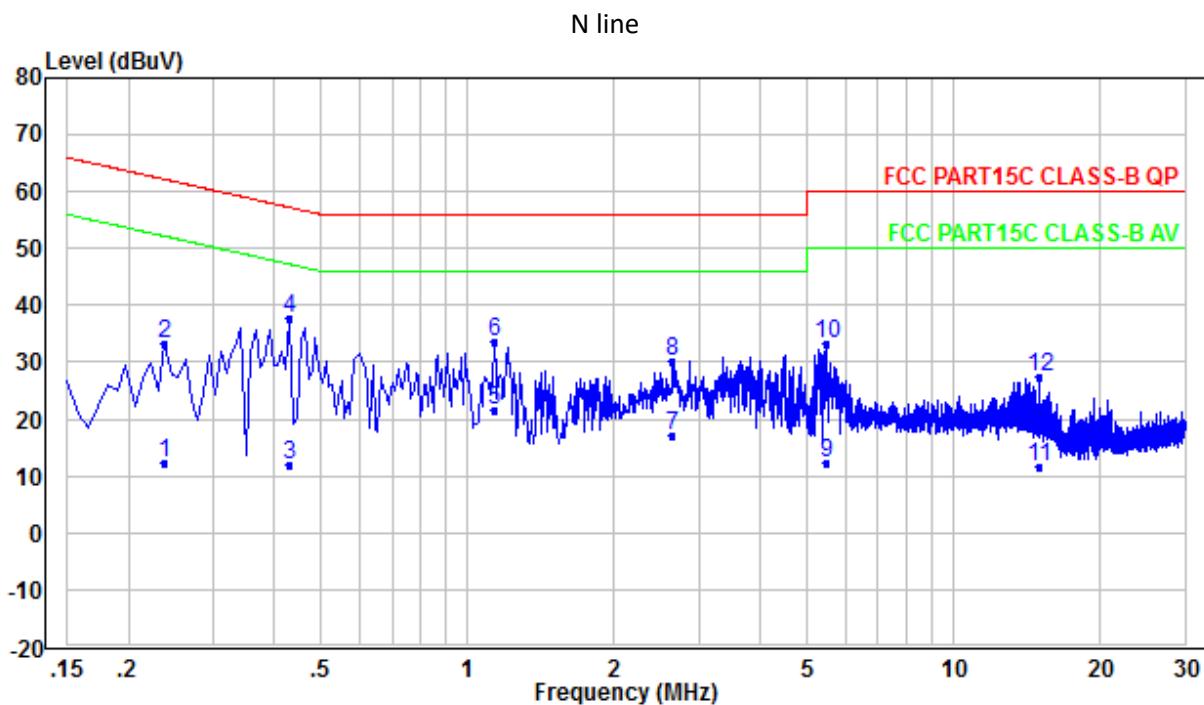
Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

TEST REPORT
8.4 Test Results of Power line conducted emission

Test Data:

Frequency (MHz)	Quasi-peak			Average		
	level dB(µV)	Limit dB(µV)	Margin (dB)	level dB(µV)	limit dB(µV)	Margin (dB)
0.430	39.37	57.25	-17.88	11.37	47.25	-35.88
0.990	33.29	56.00	-22.71	15.29	46.00	-30.71
1.206	31.88	56.00	-24.12	19.88	46.00	-26.12
2.238	29.93	56.00	-26.07	15.93	46.00	-30.07
4.909	33.44	56.00	-22.56	12.44	46.00	-33.56
15.099	27.16	60.00	-32.84	10.16	50.00	-39.84

TEST REPORT


Test Data:

Frequency (MHz)	Quasi-peak			Average		
	level dB(µV)	Limit dB(µV)	Margin (dB)	level dB(µV)	limit dB(µV)	Margin (dB)
0.238	33.19	62.17	-28.98	12.19	52.17	-39.98
0.430	37.84	57.25	-19.41	11.84	47.25	-35.41
1.134	33.67	56.00	-22.33	21.67	46.00	-24.33
2.638	30.22	56.00	-25.78	17.22	46.00	-28.78
5.461	33.40	60.00	-26.60	12.40	50.00	-37.60
15.011	27.59	60.00	-32.41	11.59	50.00	-38.41

Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

TEST REPORT**9 Frequency Stability****Test result:** Pass**9.1 Limit**

The frequency stability shall be sufficient to ensure that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

9.2 Test Result

Frequency Error - Temperature Variation

Supply Voltage DC (V)	Temperature (°C)	Frequency Deviation (ppm)
		Channel (5180MHz)
3.3	-20	-14
	-10	-11
	0	-7
	10	-6
	20	-5
	30	-4
	40	-6
	50	-8

Frequency Error - Voltage Variation

Supply Voltage DC (V)	Temperature (°C)	Frequency Deviation (ppm)
		Channel (5180MHz)
2.97	20	-5
3.30		-5
3.63		-5

TEST REPORT

10 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses a unique coupling to the intentional radiator, so it can comply with the provisions of this section.

***** END *****