



MODELS: GHL95, GHL795

cooktop dimensions

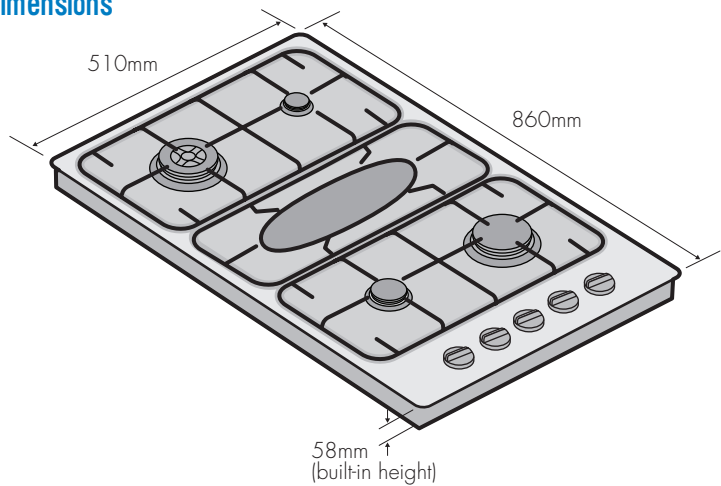

**Note: Electrical connection**  
Requires 240V 10AMP power outlet

building-in cut-out dimensions

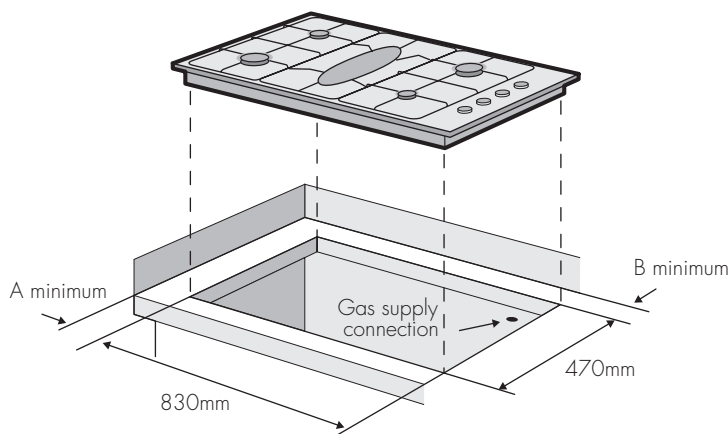

Walls around cooktop must be heat resistant for temperatures up to 90°C to a height of 150mm above the bench top.


These models are supplied with 10Amp plug and lead

	minimum distance to combustible vertical surface	minimum distance to non-combustible vertical surface*
A	135mm	50mm
B	120mm	50mm

\* Minimum height of non-combustible surface is 150mm  
**NOTE:** All appliances must be installed to Australian Standard AS5601


MODEL: PHL222

## cooktop dimensions

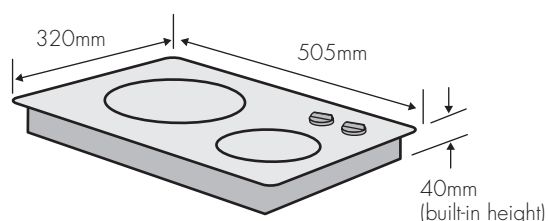

**Note:** Connection type - hardwired  
Maximum power load 3.0kW

## building-in cut-out dimensions

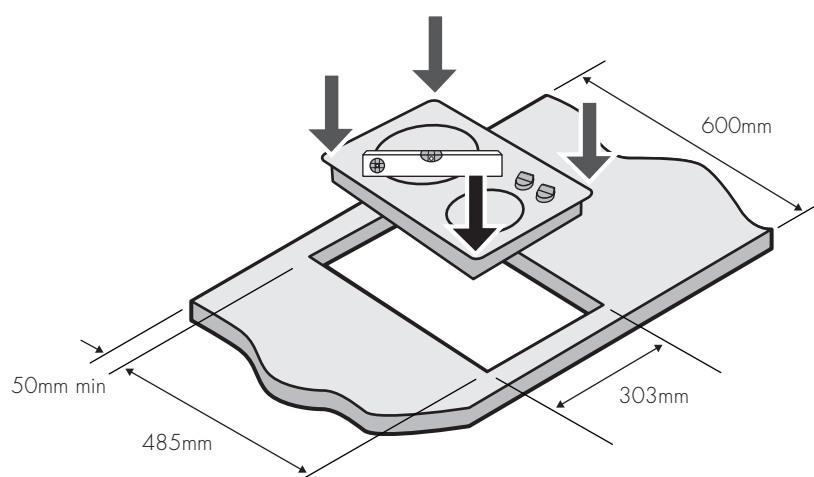


**Note:** Any walls surrounding the cooktop are to be heat resistant up to 90°C, up to 150mm high eg. ceramic tiles.

**Note:** If a barrier is not required, a minimum gap of 30mm is needed under the cooktop.

**Note:** If the base of the cooktop can be touched from inside a cupboard or drawer, a barrier **MUST** be installed to prevent contact. The material for the barrier must be capable of sustaining heat up to 70°C. Make sure the barrier is at least 50mm and not more than 75mm below the base of the cooktop. The barrier is to have ventilation holes evenly spaced in the one of the following configurations: 25 x 25mm diameter, 15 x 35mm diameter or 6 x 50mm diameter.


MODEL: PHL255

### cooktop dimensions

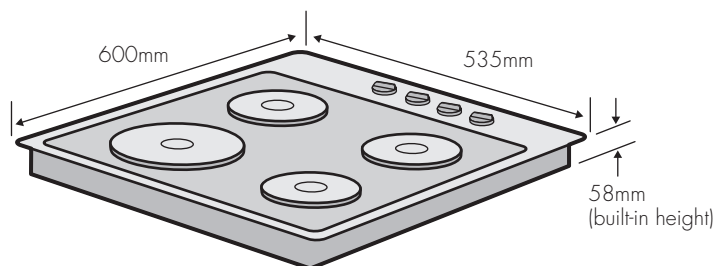

**Note:** Connection type requires 240V/20A power outlet


### building-in cut-out dimensions

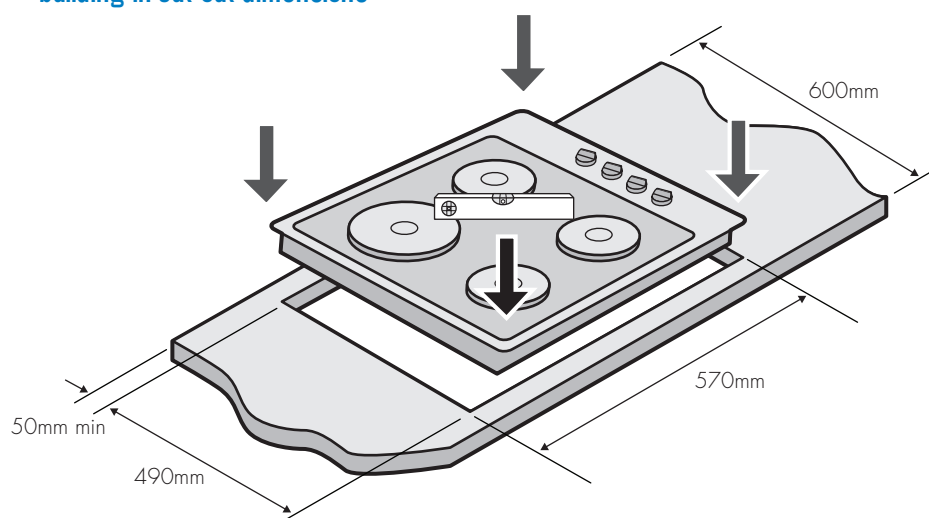

**Note:** Any walls surrounding the cooktop are to be heat resistant up to 90°C, up to 150mm high eg. ceramic tiles


MODEL: PHL284

## cooktop dimensions

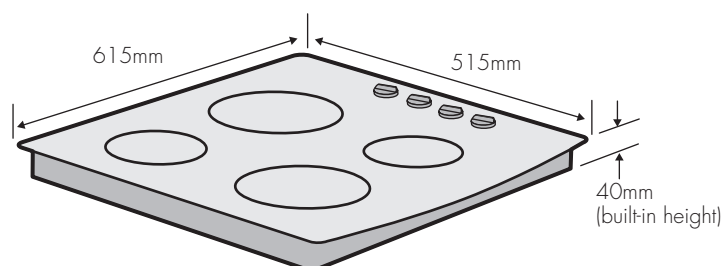

**Note:** Connection type - hardwired  
Maximum power load 6.0kW

## building-in cut-out dimensions

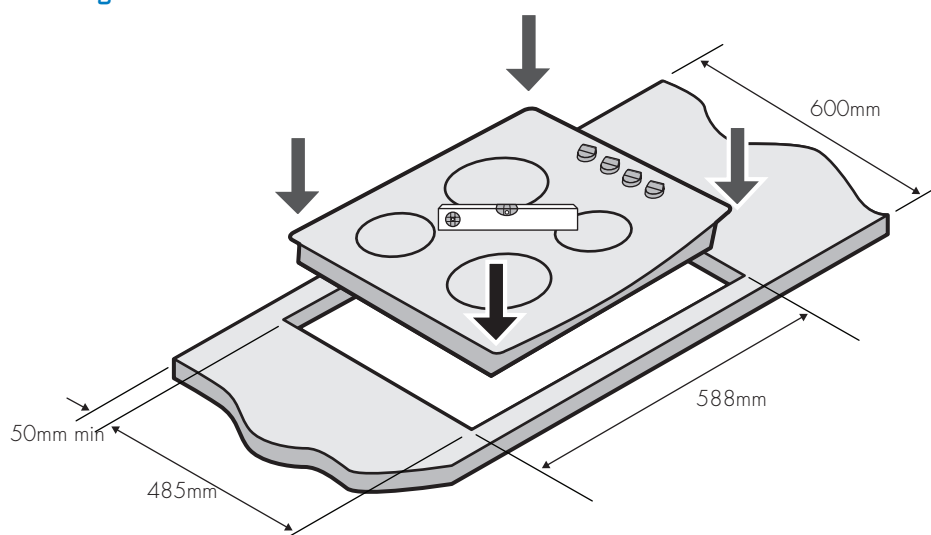


**Note:** Any walls surrounding the cooktop are to be heat resistant up to 90°C, up to 150mm high eg. ceramic tiles.

**Note:** If a barrier is not required, a minimum gap of 30mm is needed under the cooktop.

**Note:** If the base of the cooktop can be touched from inside a cupboard or drawer, a barrier **MUST** be installed to prevent contact. The material for the barrier must be capable of sustaining heat up to 70°C. Make sure the barrier is at least 50mm and not more than 75mm below the base of the cooktop. The barrier is to have ventilation holes evenly spaced in the one of the following configurations: 25 x 25mm diameter, 15 x 35mm diameter or 6 x 50mm diameter.


MODEL: PHL285

## cooktop dimensions

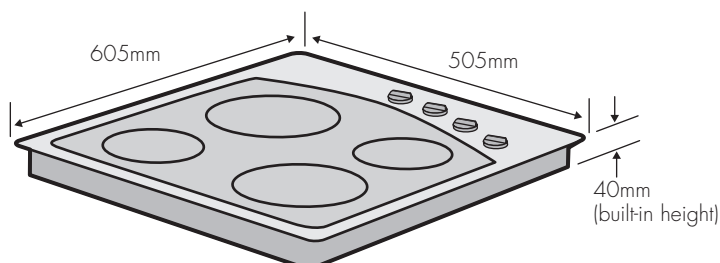

**Note:** Connection type - hardwired  
Maximum power load 6.4kW

## building-in cut-out dimensions

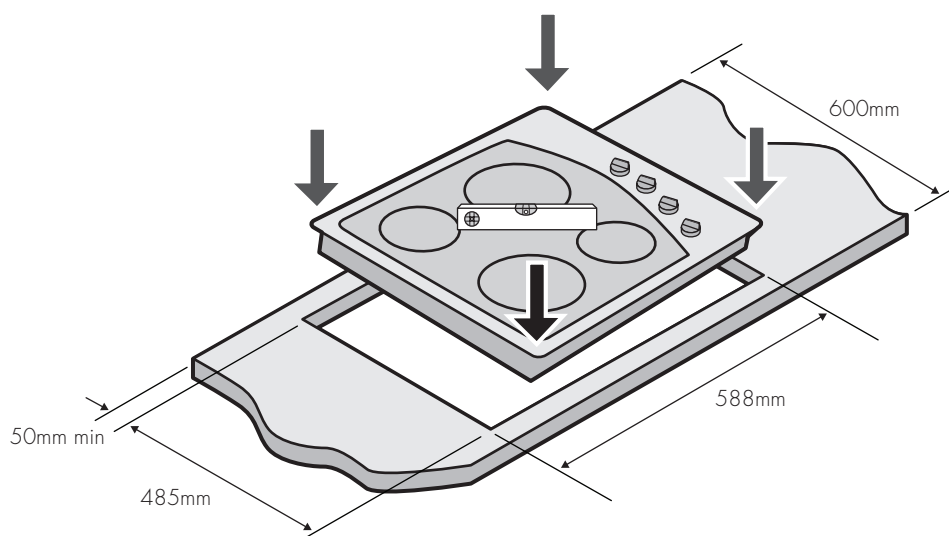


**Note:** Any walls surrounding the cooktop are to be heat resistant up to 90°C, up to 150mm high eg. ceramic tiles

**Note:** If a barrier is not required, a minimum gap of 30mm is needed under the cooktop.

**Note:** If the base of the cooktop can be touched from inside a cupboard or drawer, a barrier **MUST** be installed to prevent contact. The material for the barrier must be capable of sustaining heat up to 70°C. Make sure the barrier is at least 50mm and not more than 75mm below the base of the cooktop. The barrier is to have ventilation holes evenly spaced in the one of the following configurations: 25 x 25mm diameter, 15 x 35mm diameter or 6 x 50mm diameter.


## cooktop dimensions

## control panel dimensions

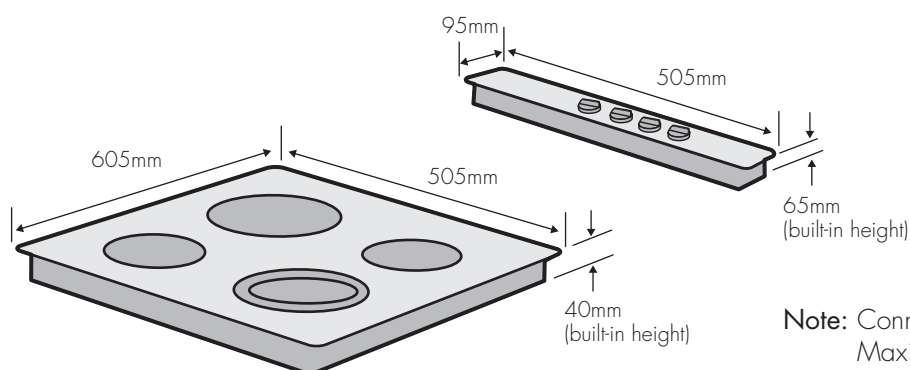

**Note:** Connection type - hardwired  
Maximum power load 6.4kW

## building-in cut-out dimensions

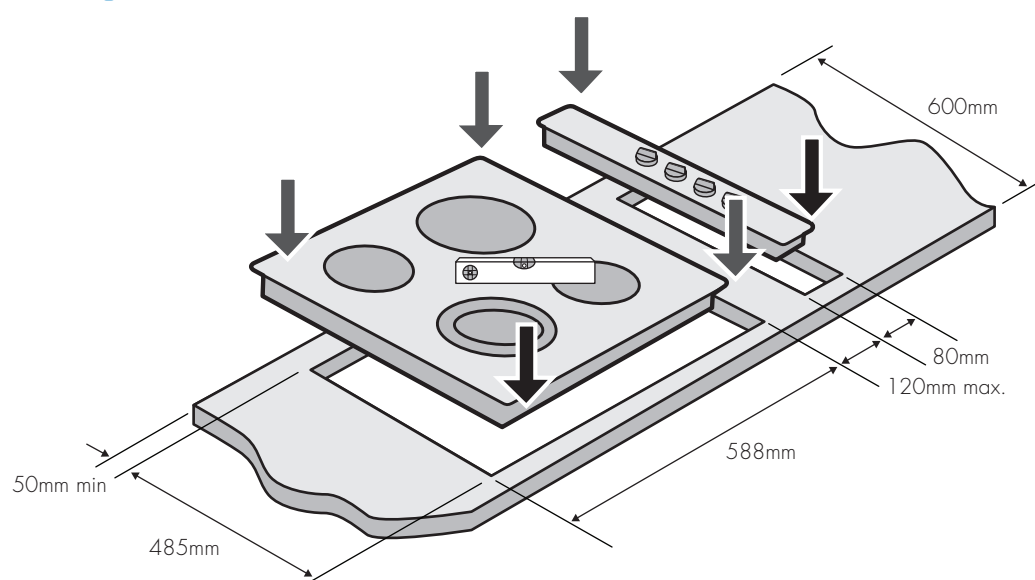


**Note:** Any walls surrounding the cooktop are to be heat resistant up to 90°C,  
up to 150mm high eg. ceramic tiles

**Note:** If a barrier is not required, a minimum gap of 30mm is needed under the cooktop.

**Note:** If the base of the cooktop can be touched from inside a cupboard or drawer, a barrier **MUST** be installed to prevent contact. The material for the barrier must be capable of sustaining heat up to 70°C. Make sure the barrier is at least 50mm and not more than 75mm below the base of the cooktop. The barrier is to have ventilation holes evenly spaced in the one of the following configurations: 25 x 25mm diameter, 15 x 35mm diameter or 6 x 50mm diameter.


MODEL: PHL365

### cooktop dimensions

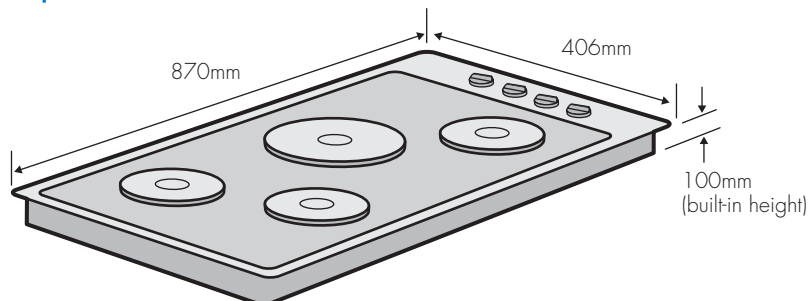

**Note:** Connection type requires 240V/20A power outlet


### building-in cut-out dimensions

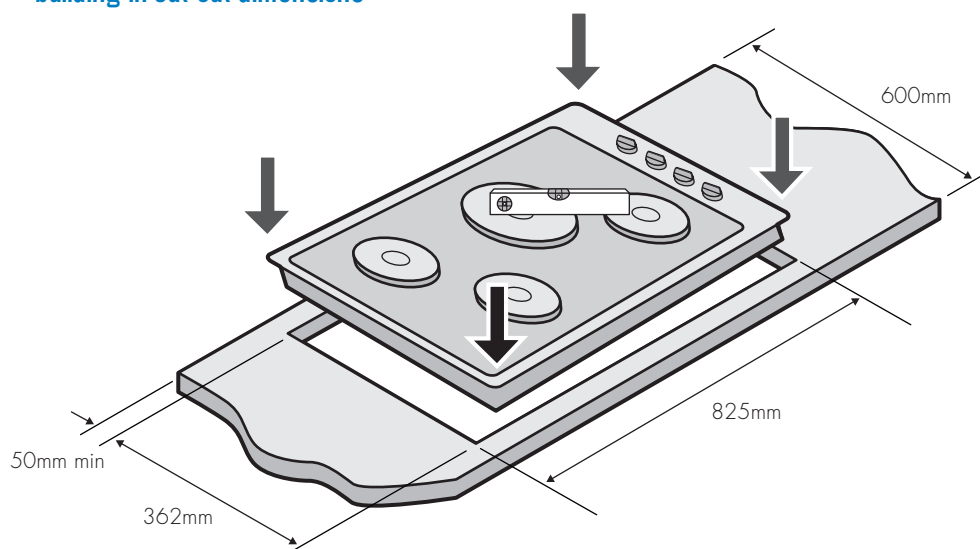

**Note:** Any walls surrounding the cooktop are to be heat resistant up to 90°C, up to 150mm high eg. ceramic tiles


MODEL: PHL668

## cooktop dimensions

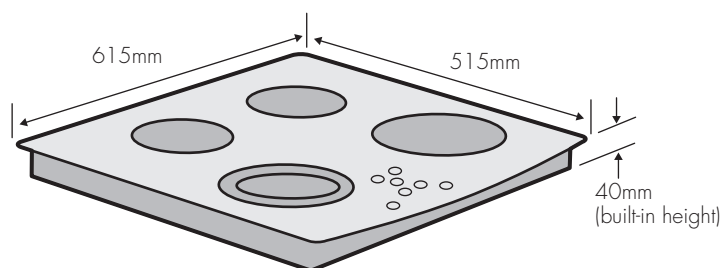

**Note:** Connection type - hardwired  
Maximum power load 5.9kW

## building-in cut-out dimensions

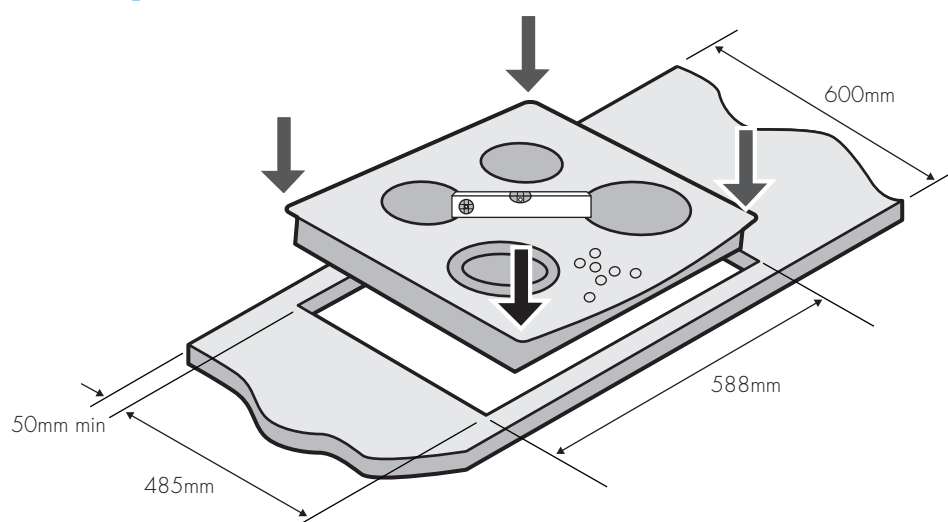

**Note:** Any walls surrounding the cooktop are to be heat resistant up to 90°C, up to 150mm high eg. ceramic tiles


**Note:** If a barrier is not required, a minimum gap of 30mm is needed under the cooktop.

**Note:** If the base of the cooktop can be touched from inside a cupboard or drawer, a barrier **MUST** be installed to prevent contact. The material for the barrier must be capable of sustaining heat up to 70°C. Make sure the barrier is at least 50mm and not more than 75mm below the base of the cooktop. The barrier is to have ventilation holes evenly spaced in the one of the following configurations: 25 x 25mm diameter, 15 x 35mm diameter or 6 x 50mm diameter.




MODEL: PHL768

## cooktop dimensions

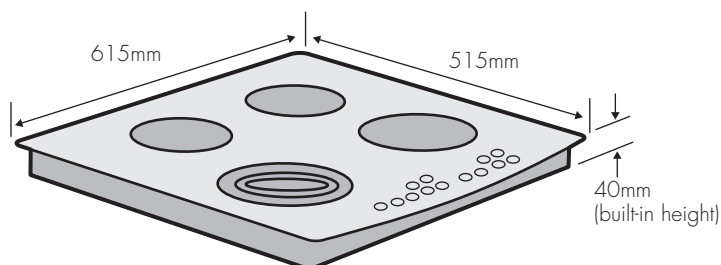

Note: Connection type - hardwired  
Maximum power load 6.5kW

## building-in cut-out dimensions

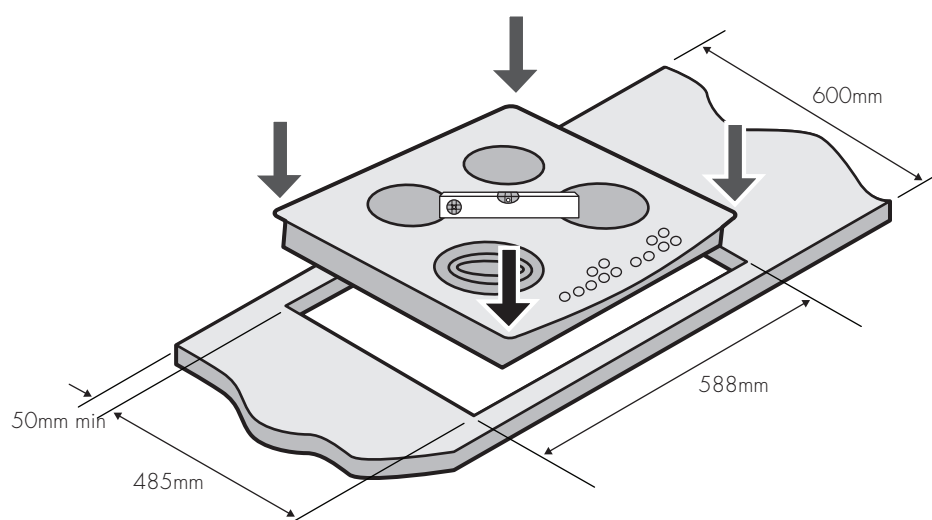


**Note:** Any walls surrounding the cooktop are to be heat resistant up to 90°C, up to 150mm high eg. ceramic tiles

**Note:** If a barrier is not required, a minimum gap of 30mm is needed under the cooktop.

**Note:** If the base of the cooktop can be touched from inside a cupboard or drawer, a barrier **MUST** be installed to prevent contact. The material for the barrier must be capable of sustaining heat up to 70°C. Make sure the barrier is at least 50mm and not more than 75mm below the base of the cooktop. The barrier is to have ventilation holes evenly spaced in the one of the following configurations: 25 x 25mm diameter, 15 x 35mm diameter or 6 x 50mm diameter.


MODEL: PHM394U

## cooktop dimensions

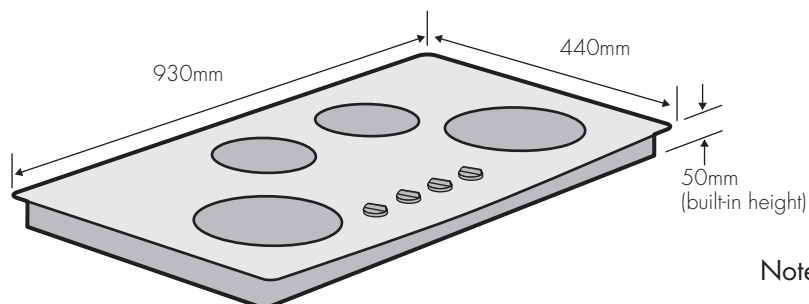

**Note:** Connection type - hardwired  
Maximum power load 6.2kW


## building-in cut-out dimensions

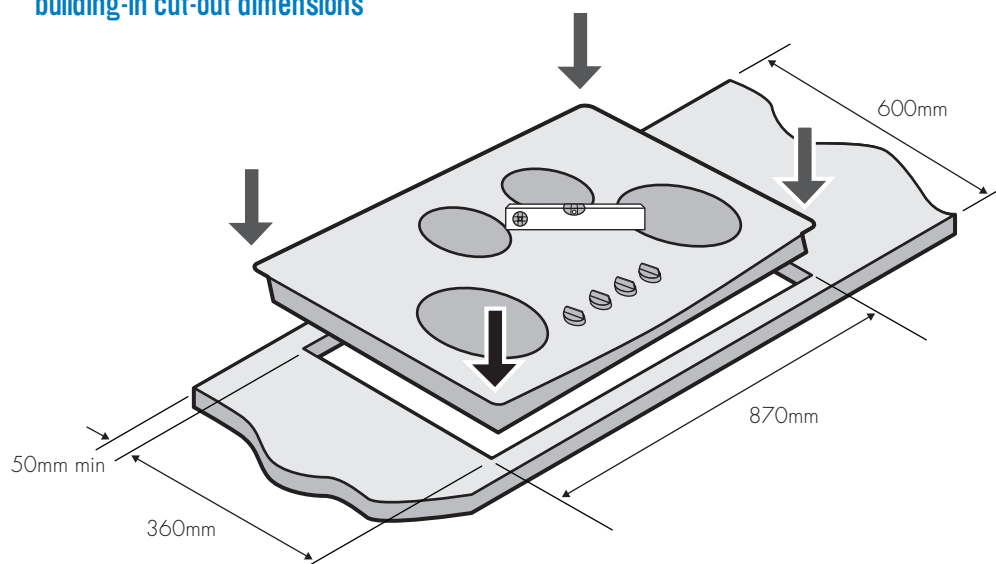

**Note:** Any walls surrounding the cooktop are to be heat resistant up to 90°C, up to 150mm high eg. ceramic tiles.


MODEL: PHM798

## cooktop dimensions

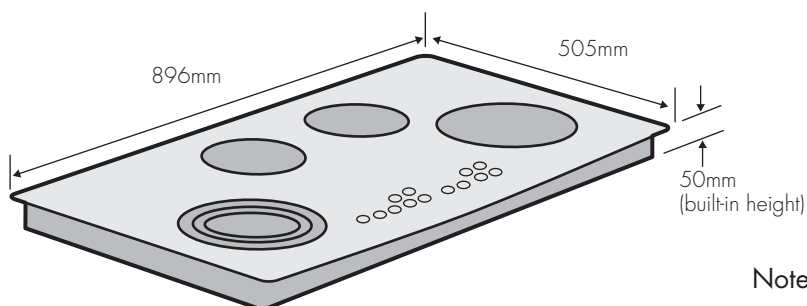

**Note:** Connection type - hardwired  
Maximum power load 6.5kW


## building-in cut-out dimensions

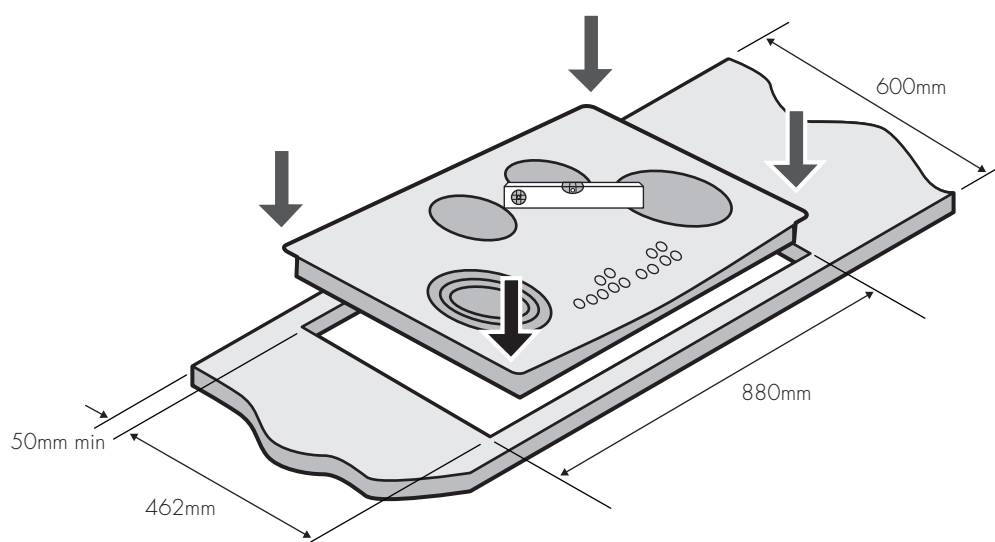

**Note:** Any walls surrounding the cooktop are to be heat resistant up to 90°C, up to 150mm high eg. ceramic tiles.


MODELS: GHL11, GHL12

cooktop dimensions

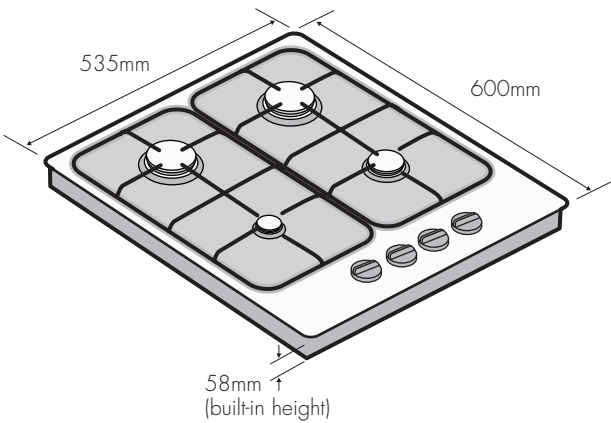

**Note: Electrical connection**  
GHL12 models require a 240V/10A power outlet.  
GHL11 models do not require an electrical connection.

building-in cut-out dimensions

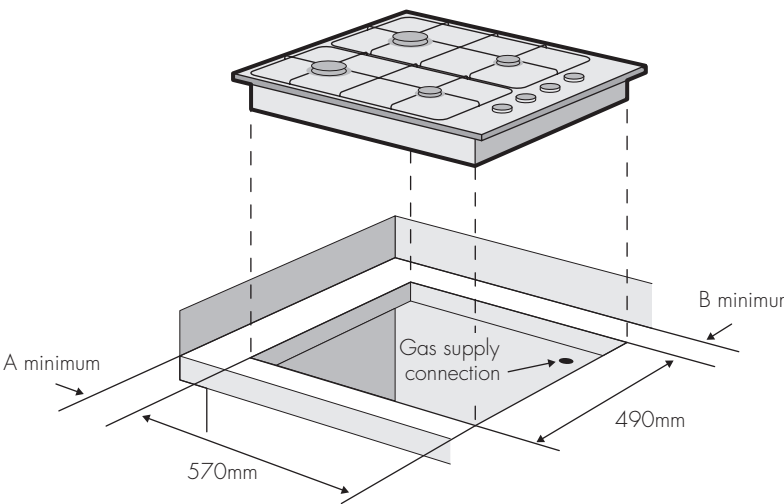

Walls around cooktop must be heat resistant for temperatures up to 90°C to a height of 150mm above the bench top.


GHL12 is supplied with 10Amp plug and lead

	minimum distance to combustible vertical surface	minimum distance to non-combustible vertical surface*
A	135mm	50mm
B	120mm	50mm

\* Minimum height of non-combustible surface is 150mm  
**NOTE:** All appliances must be installed to Australian Standard AS5601


MODELS: GHL16, GHL17, GHL765

cooktop dimensions

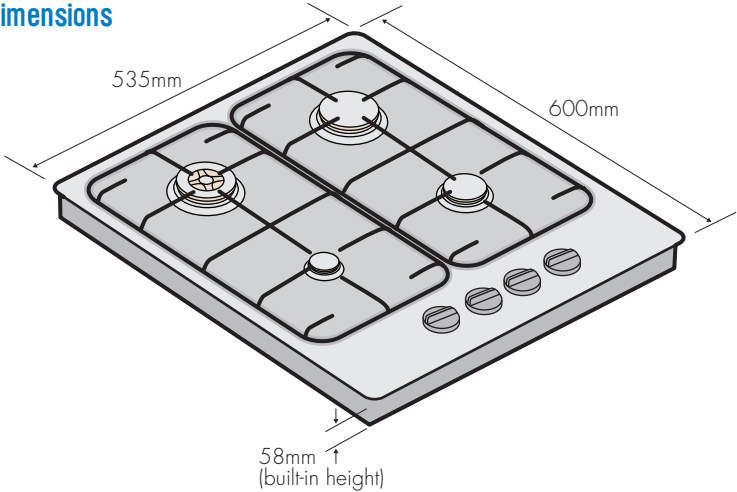

Note: Electrical connection  
Requires 240V 10AMP power outlet

building-in cut-out dimensions

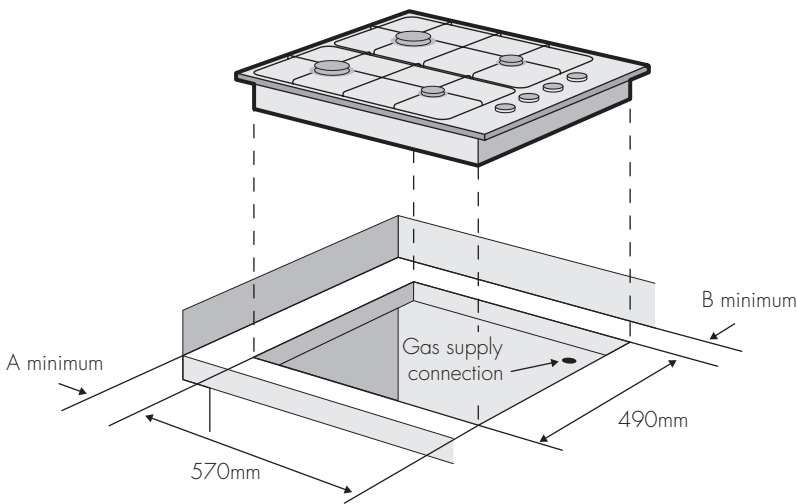

Walls around cooktop  
must be heat resistant for  
temperatures up to 90°C  
to a height of 150mm  
above the bench top.


These models are supplied  
with 10Amp plug and lead

	minimum distance to combustible vertical surface	minimum distance to non-combustible vertical surface*
A	135mm	50mm
B	120mm	50mm

\* Minimum height of non-combustible surface is 150mm  
NOTE: All appliances must be installed to Australian Standard AS5601


MODEL: GHL26

cooktop dimensions

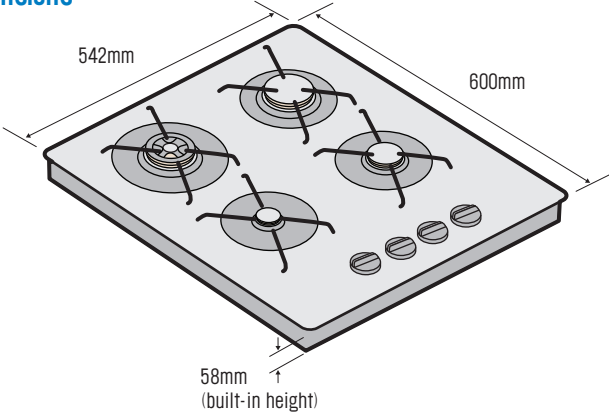

**Note: Electrical connection**  
Requires 240V 10AMP power outlet

building-in cut-out dimensions

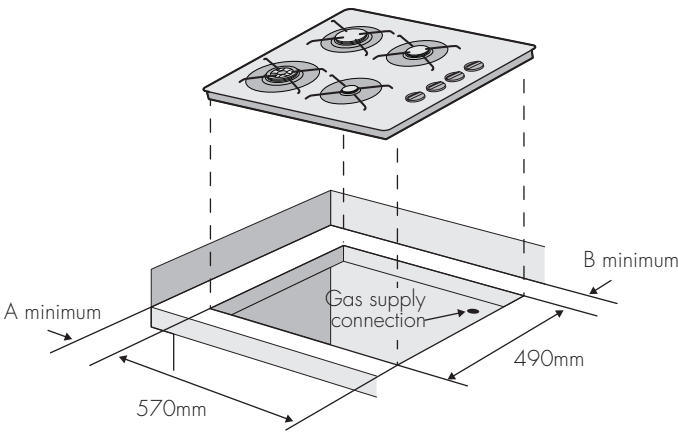

Walls around cooktop must be heat resistant for temperatures up to 90°C to a height of 150mm above the bench top.


These models are supplied with 10Amp plug and lead

	minimum distance to combustible vertical surface	minimum distance to non-combustible vertical surface*
A	135mm	50mm
B	120mm	50mm

\* Minimum height of non-combustible surface is 150mm  
**NOTE:** All appliances must be installed to Australian Standard AS5601


MODEL: GHL46

cooktop dimensions

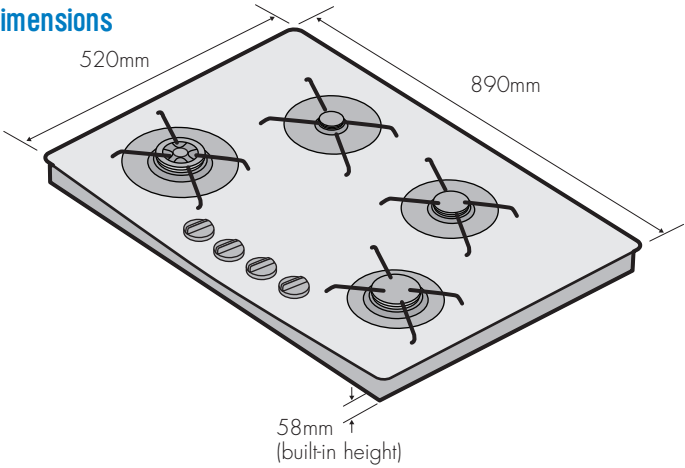

**Note: Electrical connection**  
Requires 240V 10AMP power outlet

building-in cut-out dimensions

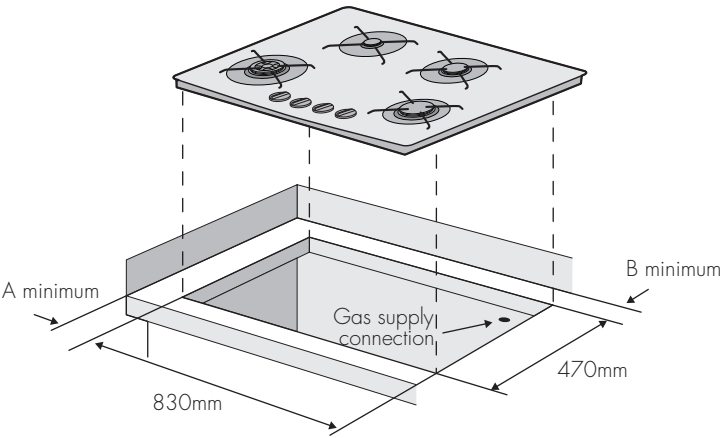

Walls around cooktop must be heat resistant for temperatures up to 90°C to a height of 150mm above the bench top.


These models are supplied with 10Amp plug and lead

	minimum distance to combustible vertical surface	minimum distance to non-combustible vertical surface*
A	135mm	50mm
B	120mm	50mm

\* Minimum height of non-combustible surface is 150mm  
**NOTE:** All appliances must be installed to Australian Standard AS5601


MODEL: GHL90

cooktop dimensions

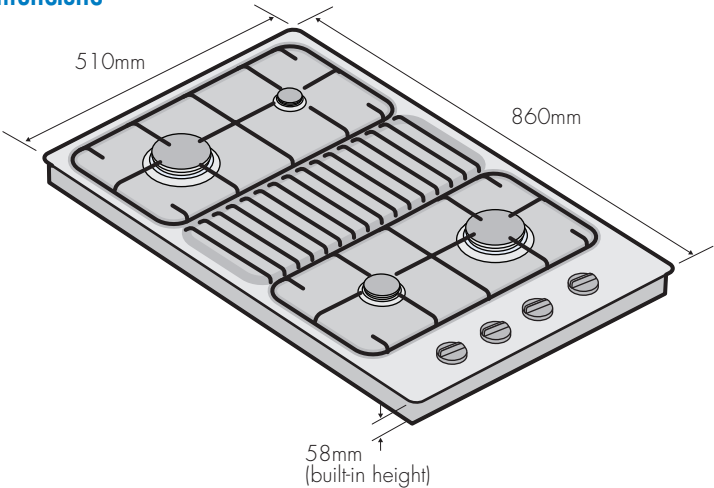

Note: Electrical connection  
Not required

building-in cut-out dimensions

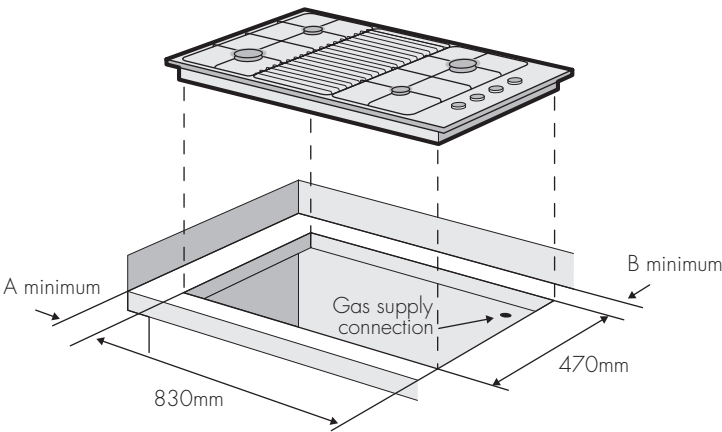

Walls around cooktop  
must be heat resistant for  
temperatures up to 90°C  
to a height of 150mm  
above the bench top.


	minimum distance to combustible vertical surface	minimum distance to non-combustible vertical surface*
A	135mm	50mm
B	120mm	50mm

\* Minimum height of non-combustible surface is 150mm  
NOTE: All appliances must be installed to Australian Standard AS5601




MODEL: GHL92

cooktop dimensions

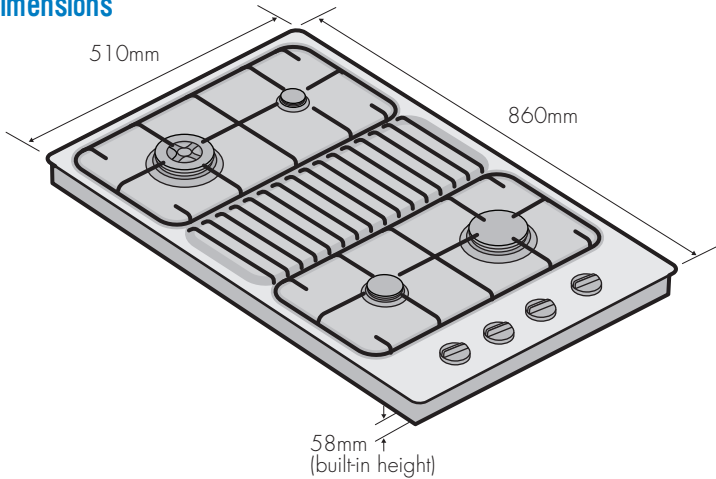

**Note: Electrical connection**  
Requires 240V 10AMP power outlet

building-in cut-out dimensions

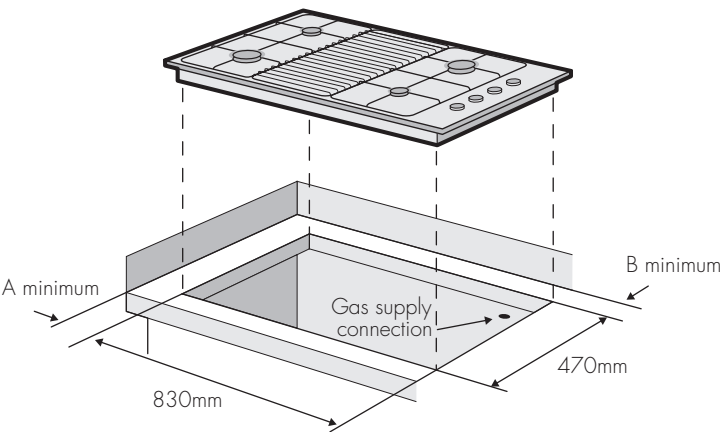

Walls around cooktop must be heat resistant for temperatures up to 90°C to a height of 150mm above the bench top.

These models are supplied with 10Amp plug and lead

	minimum distance to combustible vertical surface	minimum distance to non-combustible vertical surface*
A	135mm	50mm
B	120mm	50mm

\* Minimum height of non-combustible surface is 150mm  
**NOTE:** All appliances must be installed to Australian Standard AS5601