

# Test Report



## INTENTIONAL RADIATOR TESTS ACCORDING TO FCC PART 15 C AND ISED CANADA REQUIREMENTS

Equipment Under Test: Virtual Reality Headset

Model: Varjo Aero

Manufacturer: Varjo Technologies Oy  
Vuorikatu 20  
FI-00100, Helsinki  
Finland

Customer: Varjo Technologies Oy  
Vuorikatu 20  
FI-00100, Helsinki  
Finland

FCC Rule Part: 15.247  
IC Rule Part: RSS-247, Issue 2, 2017  
RSS-GEN Issue 5 Amendment 2, 2021  
KDB: 558074 D01 15.247 Meas Guidance v05r02  
Guidance for Compliance Measurements on Digital  
Transmission Systems, Frequency Hopping Spread  
Spectrum System, and Hybrid System Devices  
Operating Under §15.247 of the FCC rules  
(April 2, 2019)

- *partial testing; see Summary of Testing for details*

Date: 24 September 2021

Issued by:

A handwritten signature in blue ink, appearing to read 'Henri Mäki'.

Henri Mäki  
Testing Engineer

Date: 24 September 2021

Checked by:

A handwritten signature in blue ink, appearing to read 'Mikko Halonen'.

Mikko Halonen  
Development Engineer

## TABLE OF CONTENTS

TABLE OF CONTENTS .....	2
GENERAL REMARKS .....	3
Disclaimer .....	3
RELEASE HISTORY .....	4
PRODUCT DESCRIPTION .....	5
Equipment Under Test .....	5
General Description .....	5
Ratings and declarations .....	5
Power Supply .....	5
Mechanical Size of the EUT .....	5
Peripherals .....	6
SUMMARY OF TESTING .....	7
EUT Test Conditions during Testing .....	7
Test Facility .....	8
TEST RESULTS .....	9
Antenna requirement .....	9
Maximum Peak Conducted Output Power .....	10
Transmitter Radiated Spurious Emissions 9 kHz – 26.5 GHz .....	14
TEST EQUIPMENT .....	21

## GENERAL REMARKS

### Disclaimer

*This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>*

*Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.*

*Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.*

**RELEASE HISTORY**

Version	Changes	Issued
1.0	Initial release	24 September 2021

## PRODUCT DESCRIPTION

### Equipment Under Test

Trade mark:	Varjo
Model:	Varjo Aero
Type:	-
Serial no:	V0032D811AE0210076
FCC ID:	2AROD-004
IC:	24483-004

### General Description

The equipment under test is a virtual reality headset.

### Classification

Fixed device	<input type="checkbox"/>
Mobile Device (Human body distance > 20cm)	<input type="checkbox"/>
Portable Device (Human body distance < 20cm)	<input checked="" type="checkbox"/>

### Modifications Incorporated in the EUT

No modifications.

### Ratings and declarations

Operating Frequency Range (OFR):	2402 - 2480 MHz
Channels:	40
Channel separation:	2 MHz
Transmission technique:	DSSS
Modulation:	GFSK
Antenna type:	Integrated ceramic chip antennas
Antenna count:	2
Integral Antenna gain:	1.1 dBi

### Power Supply

Rated voltage:	12 V
Rated current:	3 A
Rated frequency:	DC

### Mechanical Size of the EUT

Height: 170 mm	Width: 200 mm	Length: 300 mm
----------------	---------------	----------------

**Peripherals**

VR adapter:	Power supply and data communication between laptop and EUT.
Laptop:	Razer Blade RZ09-0330. Device configuration.
AC/DC power supply:	Razer RC30-024801. Power supply to laptop.
AC/DC power supply:	Adapter Technology ATS036T-W120V. Power supply to EUT.

The peripherals were provided by the customer.

## SUMMARY OF TESTING

Test Specification	Description of Test	Result
§15.203	Antenna requirement	PASS
§15.207(a) / RSS-GEN 8.8	Conducted Emissions on Power Supply Lines	N/T
§15.247(b)(3) / RSS-247 5.4(d)	Maximum Peak Conducted Output Power	PASS
§15.247(a)(2) / RSS-247 5.2(a)	6 dB Bandwidth	N/T
§15.247(e) / RSS-247 5.2(b)	Power Spectral Density	N/T
RSS-GEN 6.7	99% Occupied Bandwidth	N/T
§15.247(d) / RSS-247 5.5	100 kHz Bandwidth of Frequency Band Edges and Conducted Spurious Emissions	N/T
§15.209(a), §15.247(d) / RSS-247 5.5	Radiated Emissions Within the Restricted Bands	PASS

The decision rule applied for the tests results stated in this test report is according to the requirements of section 1.3 of ANSI C63.10-2013.

## EUT Test Conditions during Testing

The EUT's radio was in continuous transmit mode during all the tests and was configured into the wanted channel using software provided by the manufacturer. During testing a test image was visible on the displays, the eye tracking cameras were running in test mode, Steam tracking was running, cooling fan was set to constant 10% running speed, white noise was played from the earphones, and internal logging of temperatures, voltage and current consumption was running.

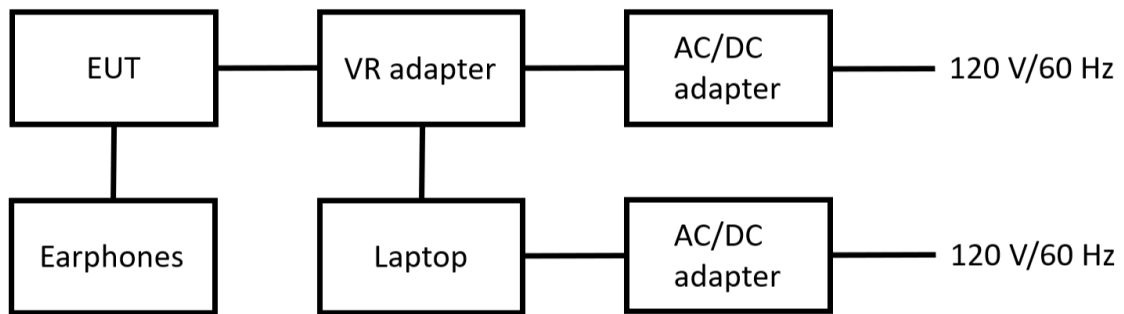


Figure 1: Test setup block diagram

Table 1: Test frequencies and settings

Channel	Frequency (MHz)
Low	2402
Mid	2440
High	2480

## Summary of Testing

### Test Facility

Testing Laboratory / address: FCC designation number: <b>FI0002</b> ISED CAB identifier: <b>T004</b>	SGS Fimko Ltd Takomotie 8 FI-00380, HELSINKI FINLAND
Test Site:	<input type="checkbox"/> K10LAB, ISED Canada registration number: <b>8708A-1</b> <input checked="" type="checkbox"/> K5LAB, ISED Canada registration number: <b>8708A-2</b> <input type="checkbox"/> T10LAB



## TEST RESULTS

### Antenna requirement

**Standard:** FCC Rule §15.203  
**Tested by:** HEM  
**Date:** 20 September 2021

#### FCC Rule: 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Specification	Requirement (at least one of the following shall be applied)	Conclusion
§15.203	<ol style="list-style-type: none"><li>1. Permanently attached antenna</li><li>2. Unique coupling to the intentional radiator</li><li>3. Professionally installed radio. The installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.</li></ol>	<b>PASS</b>
Note	Option 1 is used	

**Maximum Peak Conducted Output Power****Maximum Peak Conducted Output Power**

**Standard:** ANSI C63.10-2013  
**Tested by:** HEM  
**Date:** 20 September 2021  
**Temperature:** 22 °C  
**Humidity:** 30 %RH  
**Measurement uncertainty:**  $\pm 2.87\text{dB}$

Level of confidence 95 % ( $k = 2$ )

**FCC Rule: 15.247(b)(3)**  
**RSS-247 5.4(d)**

For systems using digital modulation in the 2400-2483.5 MHz bands the limit is 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.


Measured values are peak values.

**Results:**


**Table 2:** Maximum conducted output power

Channel	Left Antenna [dBm]	Right Antenna [dBm]	Left Antenna [W]	Right Antenna [W]	Sum [W]	Limit [W]	Result
Low	-1.3	-1.8	0.00074	0.00066	0.00140	1	PASS
Mid	-1.6	-2.6	0.00069	0.00055	0.00124	1	PASS
High	-2.6	-3.4	0.00055	0.00046	0.00101	1	PASS


## Maximum Peak Conducted Output Power

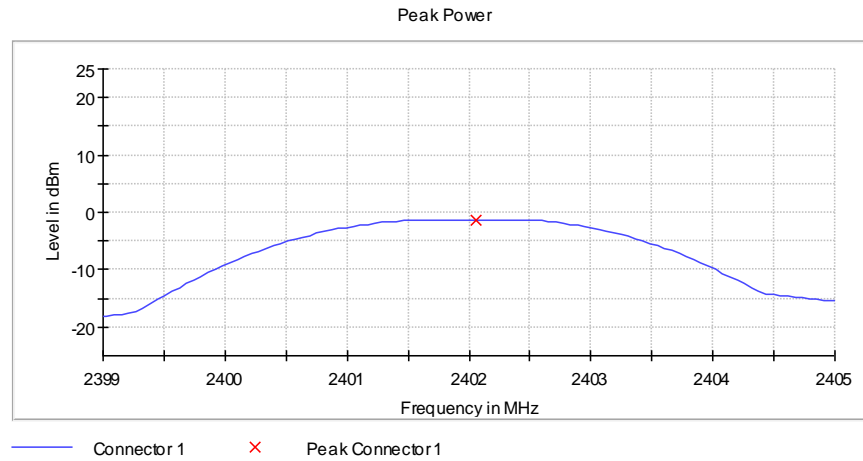

**Figure 2:** Conducted power, Channel LOW (left antenna)

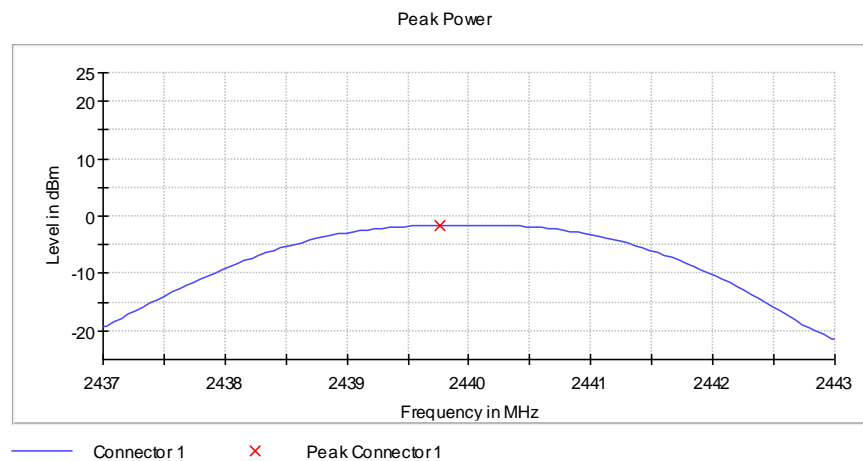


**Figure 3:** Conducted power, Channel MID (left antenna)

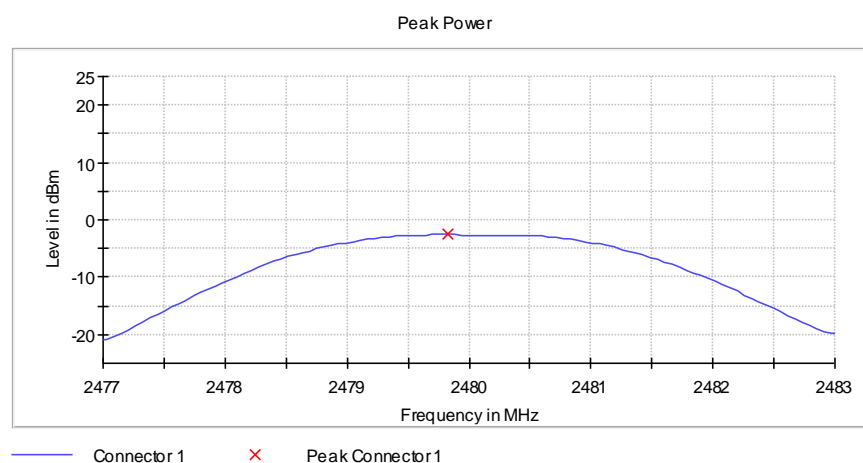


**Figure 4:** Conducted power, Channel HIGH (left antenna)


Maximum Peak Conducted Output Power

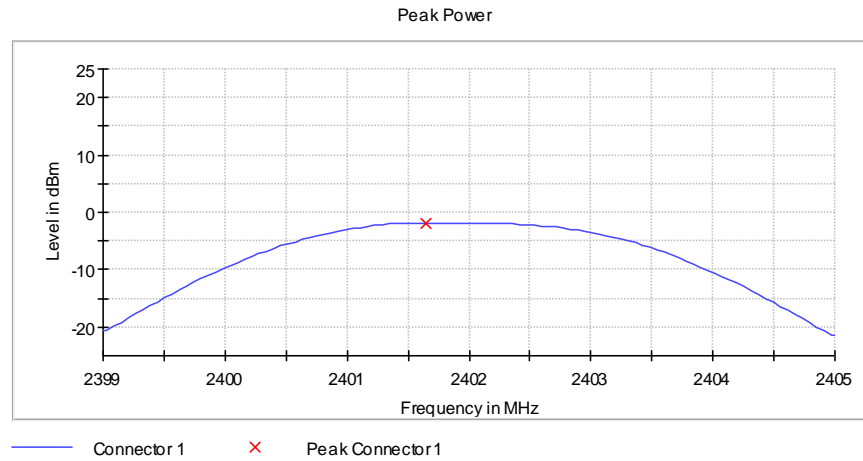

**Figure 5:** Conducted power, Channel LOW (right antenna)

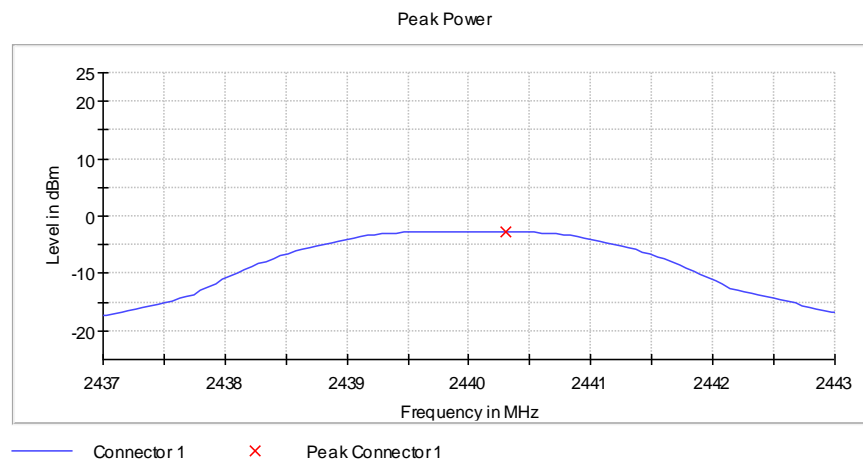

**Figure 6:** Conducted power, Channel LOW (right antenna)

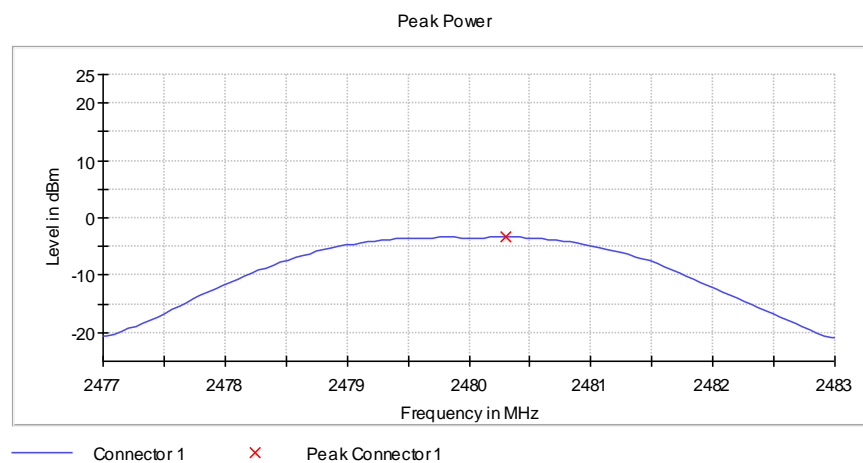

**Figure 7:** Conducted power, Channel HIGH (right antenna)

## Maximum Peak Conducted Output Power

**Table 3:** Measurement settings, Maximum Conducted Output Power

Setting	Instrument Value	Target Value
Span	6.000 MHz	6.000 MHz
RBW	2.000 MHz	$\geq 1.000$ MHz
VBW	10.000 MHz	$\geq 6.000$ MHz
SweepPoints	101	~ 101
SweepTime	953.450 ns	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.03 dB	0.50 dB

## Transmitter Radiated Spurious Emissions 9 kHz – 26.5 GHz

### Transmitter Radiated Spurious Emissions 9 kHz – 26.5 GHz

**Standard:** ANSI C63.10-2013  
**Tested by:** HEM, HEE  
**Date:** 20 September 2021  
**Temperature:** 23 °C  
**Humidity:** 27 %RH  
**Measurement uncertainty:**  $\pm 4.51$  dB

Level of confidence 95 % (k = 2)

**FCC Rule: 15.247(d), 15.209(a)**

**RSS-247 5.5**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

At the request of the customer the emissions below 1000 MHz are additionally compared to the general limits specified in Section 15.209(a), whether or not they fall in the restricted bands.


Frequency range [MHz]	Limit [ $\mu\text{V/m}$ ]	Limit [ $\text{dB}\mu\text{V/m}$ ]	Detector
0.009 - 0.490	2400/F(kHz)	48.5 - 13.8	Quasi-peak
0.490 - 1.705	24000/F(kHz)	33.8 - 22.97	Quasi-peak
1.705 - 30.0	30	29.54	Quasi-peak
30 - 80	100	40.0	Quasi-peak
88 - 216	150	43.5	Quasi-peak
216 - 960	200	46.0	Quasi-peak
960 - 1000	500	53.9	Quasi-peak
Above 1000	500	53.9	Average
Above 1000	5000	73.9	Peak

During testing both antennas were set to transmit at the same frequency.


The measurements below 30 MHz were performed with MID channel only.

## Transmitter Radiated Spurious Emissions 9 kHz – 26.5 GHz


### Results LOW channel

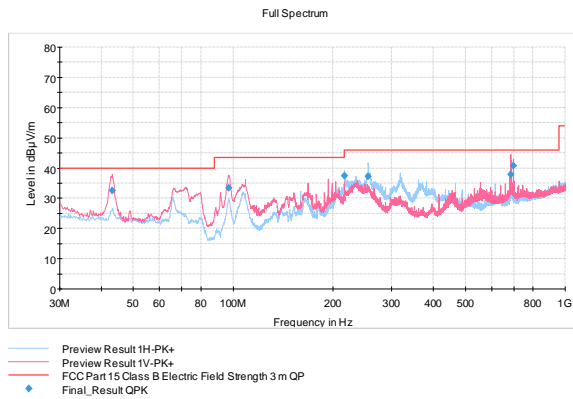


**Figure 8:** LOW channel (30 – 1000 MHz)

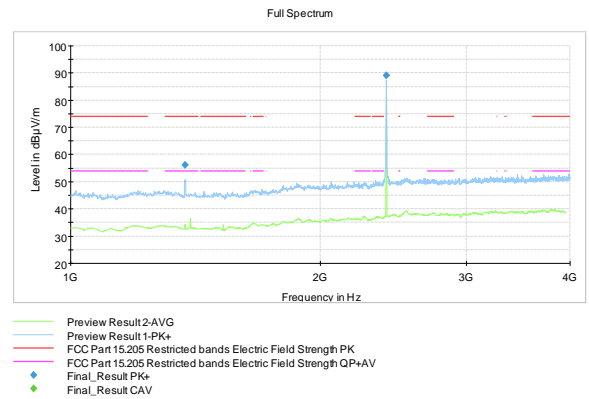

**Figure 9:** LOW channel (1 – 4 GHz)

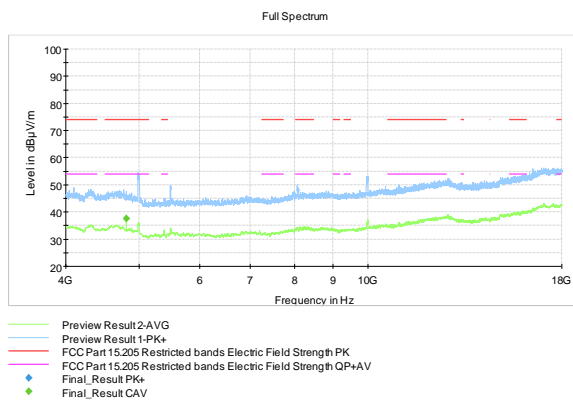

**Figure 10:** LOW channel (4 – 18 GHz)

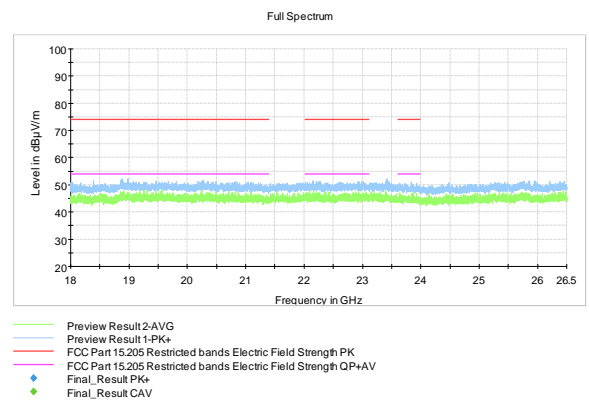

**Figure 11:** LOW channel (18 – 26.5 GHz)

## Transmitter Radiated Spurious Emissions 9 kHz – 26.5 GHz

**Table 4:** Quasi-peak results LOW channel

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
43.215000 *)	32.47	40.00	7.53	15 x 1000.0	120.000	118.0	V	151.0	17.5
96.935000 *)	33.39	43.50	10.11	15 x 1000.0	120.000	121.0	V	97.0	13.1
216.005000 *)	37.36	46.00	8.64	15 x 1000.0	120.000	162.0	H	83.0	15.5
255.115000	37.31	46.00	8.69	15 x 1000.0	120.000	114.0	H	285.0	17.7
686.365000 *)	37.89	46.00	8.11	15 x 1000.0	120.000	163.0	V	98.0	28.1
697.485000 *)	40.74	46.00	5.26	15 x 1000.0	120.000	105.0	V	193.0	28.3

\*) The emission not within a restricted band.

**Table 5:** Average results LOW channel

Frequency (MHz)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4803.975000	37.70	53.90	16.20	15 x 1000.0	1000.000	179.0	V	103.0	7.6

**Table 6:** Peak results LOW channel


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1372.625000	56.15	73.90	17.75	15 x 1000.0	1000.000	242.0	V	267.0	9.5
2401.675000	89.13	---	---	15 x 1000.0	1000.000	204.0	V	35.0	14.1

The correction factor (dB) in the final result tables contains the sum of the transducers (antenna + amplifier + cables). QuasiPeak, CAverage, and MaxPeak values are the measured values corrected with the correction factor.




## Transmitter Radiated Spurious Emissions 9 kHz – 26.5 GHz


### Results MID channel

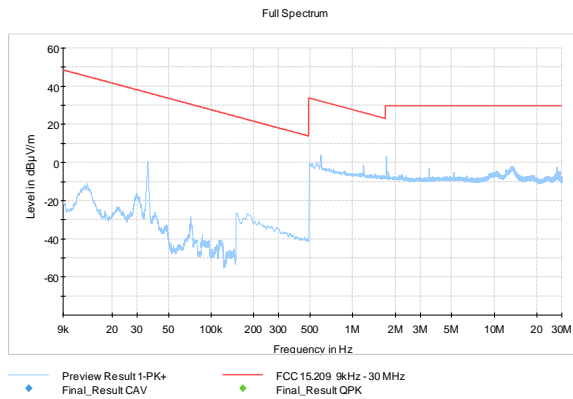


**Figure 12: MID channel (9 kHz – 30 MHz)**

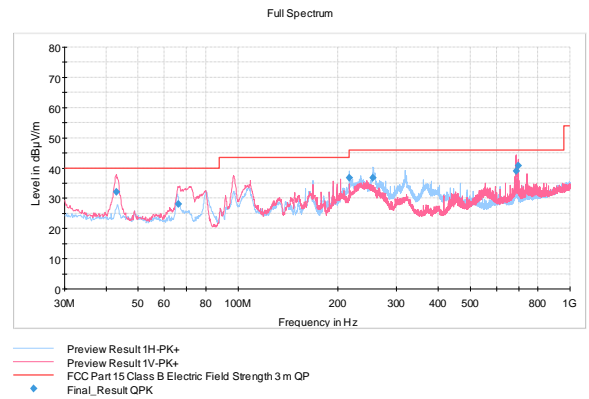


**Figure 13: MID channel (30 – 1000 MHz)**

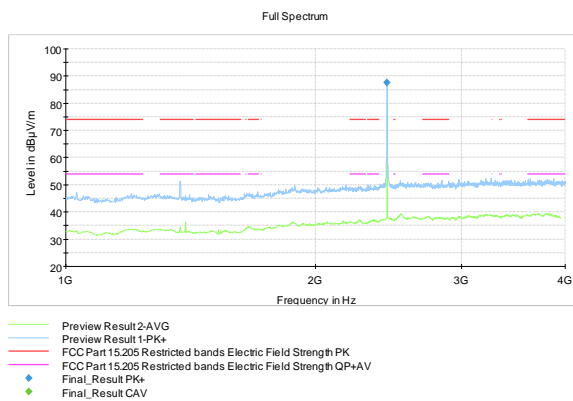

**Figure 14: MID channel (1 – 4 GHz)**

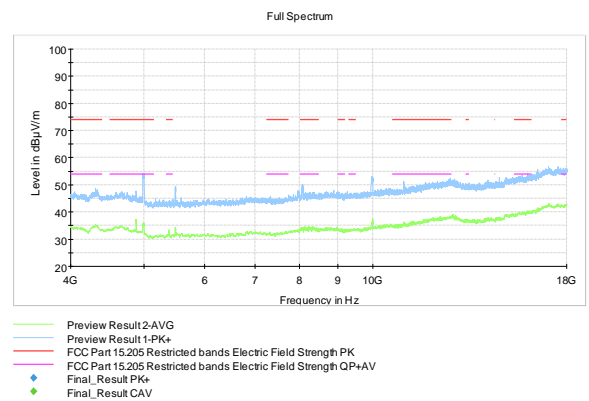

**Figure 15: MID channel (4 – 18 GHz)**

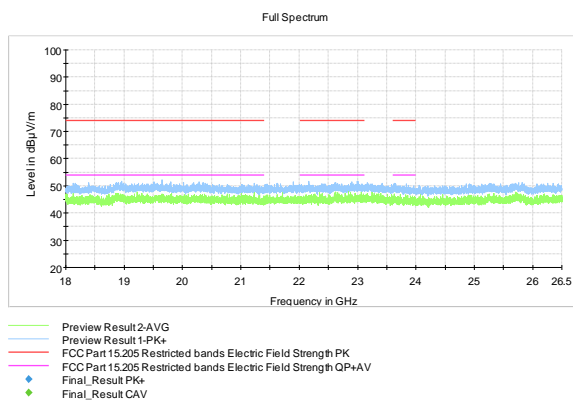

**Figure 16: MID channel (18 – 26.5 GHz)**

## Transmitter Radiated Spurious Emissions 9 kHz – 26.5 GHz

**Table 7:** Quasi-peak results MID channel

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
42.935000 *)	32.13	40.00	7.87	15 x 1000.0	120.000	111.0	V	112.0	17.4
66.095000 *)	28.01	40.00	11.99	15 x 1000.0	120.000	105.0	V	173.0	17.0
215.985000 *)	36.74	43.50	6.76	15 x 1000.0	120.000	157.0	H	80.0	15.5
255.115000	36.80	46.00	9.20	15 x 1000.0	120.000	111.0	H	55.0	17.7
687.545000 *)	39.01	46.00	6.99	15 x 1000.0	120.000	163.0	V	104.0	28.1
697.485000 *)	40.71	46.00	5.29	15 x 1000.0	120.000	105.0	V	193.0	28.3

\*) The emission not within a restricted band.


**Table 8:** Peak results MID channel

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2439.625000	87.53	---	---	15 x 1000.0	1000.000	100.0	H	13.0	13.8


The correction factor (dB) in the final result tables contains the sum of the transducers (antenna + amplifier + cables). QuasiPeak, CAverage, and MaxPeak values are the measured values corrected with the correction factor.

## Transmitter Radiated Spurious Emissions 9 kHz – 26.5 GHz


### Results HIGH channel

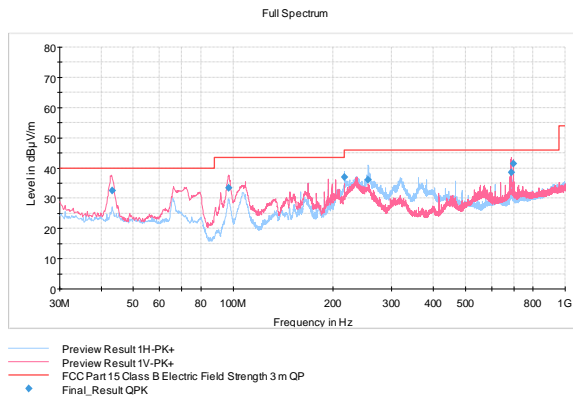


**Figure 17:** HIGH channel (30 – 1000 MHz)

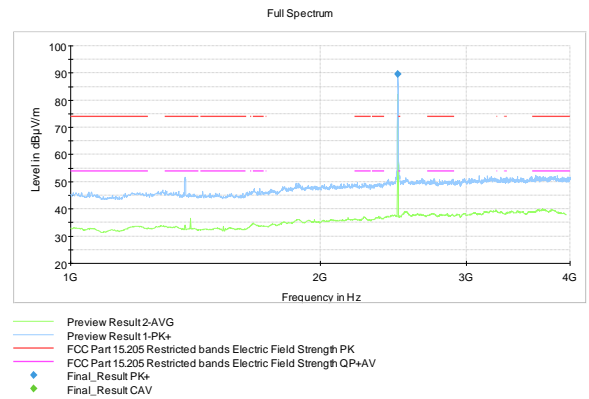

**Figure 18:** HIGH channel (1 – 4 GHz)

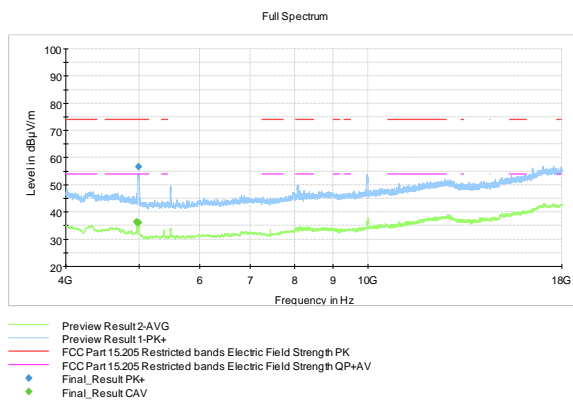

**Figure 19:** HIGH channel (4 – 18 GHz)

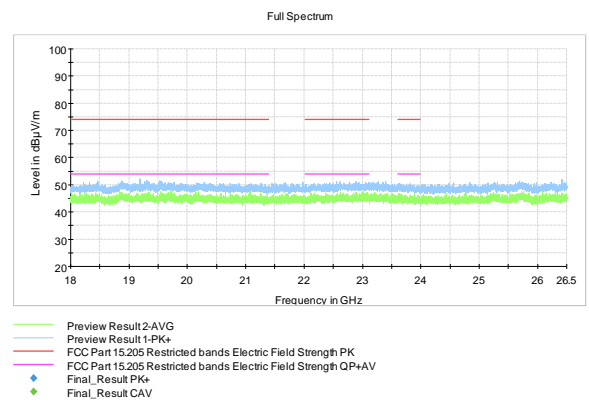

**Figure 20:** HIGH channel (18 – 26.5 GHz)

## Transmitter Radiated Spurious Emissions 9 kHz – 26.5 GHz

**Table 9:** Quasi-peak results HIGH channel

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
43.235000 *)	32.48	40.00	7.52	15 x 1000.0	120.000	124.0	V	188.0	17.5
96.715000 *)	33.34	43.50	10.16	15 x 1000.0	120.000	105.0	V	95.0	13.1
216.005000 *)	36.97	46.00	9.03	15 x 1000.0	120.000	154.0	H	75.0	15.5
255.155000	36.17	46.00	9.83	15 x 1000.0	120.000	139.0	H	291.0	17.7
687.505000 *)	38.63	46.00	7.37	15 x 1000.0	120.000	177.0	V	98.0	28.1
697.485000 *)	41.54	46.00	4.46	15 x 1000.0	120.000	100.0	V	191.0	28.3

\*) The emission not within a restricted band.

**Table 10:** Average results HIGH channel

Frequency (MHz)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4959.775000	36.42	53.90	17.58	15 x 1000.0	1000.000	320.0	V	58.0	7.5
4984.875000	36.10	53.90	17.90	15 x 1000.0	1000.000	157.0	V	58.0	7.3

**Table 11:** Peak results HIGH channel

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2479.625000	89.68	---	---	15 x 1000.0	1000.000	183.0	H	14.0	13.9
4990.975000	56.57	73.90	17.43	15 x 1000.0	1000.000	170.0	V	61.0	7.2

The correction factor (dB) in the final result tables contains the sum of the transducers (antenna + amplifier + cables). QuasiPeak, CAverage, and MaxPeak values are the measured values corrected with the correction factor.

## TEST EQUIPMENT

Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
ANTENNA	EMCO	3160-09, emi 18-26.5GHz	inv. 7294	2021-02-19	2022-02-19
ANTENNA	EMCO	3117, emi 1-18GHz	inv. 7293	2020-03-11	2022-03-11
ANTENNA	ROHDE & SCHWARZ	HFH2-Z2 , 335.4711.52	inv. 8013	2020-10-28	2022-10-28
ANTENNA	SCHWARZBECK	VULB 9168	inv. 8911	2020-11-04	2022-11-04
ANTENNA MAST	MATURO	TAM 4.0E	inv. 10181	NCR	NCR
ATTENUATOR	HUBER & SUHNER	6610.19.AA (10dB)	sn. A4	2021-01-25	2023-01-25
ATTENUATOR	PASTERNAK	PE 7004-4 (4Db)	inv. 10126	2021-03-26	2022-03-26
EMI TEST RECEIVER	ROHDE & SCHWARZ	ESW26	inv. 10679	2021-06-21	2022-06-21
FILTER	WAINWRIGHT	WHKX4.0/18G-10SS	inv. 10403	2021-01-29	2023-01-29
MAST & TURNTABLE CONTROLLER	MATURO	NCD	inv. 10183	NCR	NCR
OSP BASE UNIT	ROHDE & SCHWARZ	OSP120	inv. 10882	2021-03-24	2023-03-24
OSP-B157W 8 PORT	ROHDE & SCHWARZ	OSP-B157W8	inv. 10883	2021-03-19	2023-03-19
OSP-B157WX	ROHDE & SCHWARZ	OSP-B157WX	inv. 10884	2021-03-24	2023-03-24
POWER SUPPLY	CALIFORNIA INSTR.	5001 iX Series II	inv. 7826	-	-
RF PREAMPLIFIER	CIAO	CA118-3123	inv. 10278	2020-10-09	2021-10-09
RF PREAMPLIFIER	CIAO	CA1840-5019	inv. 10593	2020-10-09	2021-10-09
SPECTRUM ANALYZER	ROHDE & SCHWARZ	FSV40	inv. 10881	2021-06-22	2022-06-22
SWITCH UNIT	ROHDE & SCHWARZ	OSP 120	inv. 9289	2019-02-28	2022-02-28
TEST SOFTWARE	ROHDE & SCHWARZ	EMC-32	-	-	-
TURNTABLE	MATURO	DS430 UPGRADED	inv. 10182	NCR	NCR

NCR = No Calibration Required

END OF REPORT