Café[™] 36" Smart All-Gas Commercial-Style Range with 6 Burners (Natural Gas)

CGY366P2TS1 / CGY366P3TD1 / CGY366P4TW2



DISTINCT BY DESIGN™



ALSO AVAILABLE IN

CGY366P2TS1 Stainless Steel with Brushed Stainless handle and knobs







FEATURES & BENEFITS

Versatile Cooktop - The versatile cooktop on this commercial-style range features an entire arsenal of burners that give you the right amount of heat and control to perfectly cook anything from delicate sauces to expertly seared meats.

Gas Caterer Oven - A large 6.2 cu ft. capacity oven fits a full-size catering pan and has three racks, a Gas Bake and Dual Power Broil system for even heating and Precision Oven modes to help guarantee results for meals of any size.

Color-Matched Manifold with LCD Control - Get a coordinated look with a manifold that matches the range's finish and an LCD control panel that provides information like oven and probe temperatures and cooking time for perfect cooking results.

Superior Heat Distribution - The industry-exclusive Inspiral burner swirls the cooktop flame under cookware to more evenly spread heat from the center to the edges.

Multi-Ring Burner - A versatile burner offers different-sized flame rings on a single burner element, so it's like having multiple burners in one.

Two Griddle Burners - Cook more at once with two 12,000-BTU powerful burners that can be used together or separately with an optional griddle grill accessory.

Two High-Heat Burners - Boil water quickly with two 18,000-BTU Power Boil burners that give you more cooking power.

Precision Temperature Probe - An innovative temperature probe that helps you achieve the perfect level of doneness for oven favorites.

Three Baking Racks - Cook more at once with two low-profile racks and one partially extended rack, which is made from highly durable nickel.

WIFI-ENABLED FEATURES

Built-in WiFi - This smart oven features WiFi connection so you can control oven functions with the SmartHQ app on your smart device.

Precision Oven Modes - Simplify the cooking process with precision oven modes that automatically track progress, make time and temperature adjustments, and work with the SmartHQ $^{\sim}$ app.

FEATURES

TEATURES		
Configuration	6 Burners	
Cooking Technology	Convection	
Oven Cleaning Type	Steam Clean	
Burner - Left Front	21,000 BTU Multi-ring Burner	
Burner - Left Rear	18,000 BTU	
Burner - Right Front	10,000 BTU	
Burner - Right Rear	18,000 BTU	
Burner - Center	12,000 BTU Front / 12,000 BTU Rear	
Cooktop Burner Type	Sealed	
Cooktop Surface	Porcelain-Enamel	
	Gray	
Dishwasher Safe Knobs	Yes	
Control Location	Front controls	
Control Type	Digital Temperature Display Knob with Timer Display	
Valves (Degree of Turn)	270	
WiFi-Enabled Features	Remote Oven Control	
	Remote Notifications	
	Scan-to-Cook Voice Control	
	Precision Cooking Modes	
	Meat Probe (App-Based func)	
Connected Integrations	Amazon Alexa	
	DiGiorno	
	Drop	
	IFTTT Innit	
	Sonos	
	The Google Assistant	
Range Control Features	Audible Preheat Signal	
	Auto Oven Shut-Off with Override	
	Auto Self Clean	
	Chef Connect	
	Delay Clean Option Electronic Timer	
	Front Controls	
	In-Oven Broiling	
	Temperature Probe	
Oven Cooking Modes	Convection Bake Multi/Single Rack	
	Convection Roast	
	Proof Warming	
Cooktop Burner Grate Features	Continuous Grates	
Cooktop Burner Orate Features	Heavy-Cast Edge-to-Edge Grates	
Cooktop Burner Grate Material	Heavy Cast	
Cleaning Time	Variable	
Oven Rack Features	1 Nickel Roller Rack	
	2 Flat Nickel Racks	
	5 Rack Positions	
Fuel Type	Natural Gas (factory set)	
Ignition System	Electronic w/Auto Reignition	
Leveling System	4 Leveling Legs	
Style	Commercial	
Cooking System	Convection with Reverse Air	

CAPACITY

Total Capacity (cubic feet)	6.2 cu ft
-----------------------------	-----------

ACCESSORIES

LP Conversion Kit	Included WB28X39728: High Altitude Natural Gas WB28X39729: High Altitude LP
Backsplash	UX12B36PSS: 12" backsplash UXADJB36PSS: 36" backsplash with shelf
Toe Kicks	CXPR6TKPMWS: 36" Matte White Toe Kick CXPR6TKPMDS: 36" Matte Black Toe Kick CXPR6TKPMSS: 36" Stainless Steel Toe Kick
Griddle	UXPRRGG: Reversible grill/griddle

Café[™] 36" Smart All-Gas Commercial-Style Range with 6 Burners (Natural Gas)

CAFE

DISTINCT BY DESIGN™

CGY366P2TS1 / CGY366P3TD1 / CGY366P4TW2

WEIGHTS & DIMENSIONS

Depth with Door Open	48-1/4 in
Approximate Shipping Weight	462 lb
Net Weight	417 lb
Overall Height	35-1/4 in
Height to Cooking Surface (in.)	35-1/4 - 36-3/4
Overall Width	35-7/8 in
Cabinet Width	36 in
Overall Depth	31-1/8 in
Depth Without Handle	29-3/8 in
Oven Interior Dimensions (W x H x D) (in.)	28-1/4 x 16-3/8 x 19

APPEARANCE

Color Appearance	Matte White
Cooktop Burner Grate Color	Matte Black
Oven Door Features	Big Clear View Oven Window
Handle Design	Café Pro
Control Knobs	Brushed Bronze Consumer Removable Dishwasher Safe Commercial-Style

POWER / RATINGS

Top Burner BTU Rating - LP (000's BTU's)	(1) 18.0; (2) 15.0; (2) 12.0; (1) 9.1
Top Burner BTU Rating - Nat. Gas (000's BTU's)	(1) 21.0; (2) 18.0; (2) 12.0; (1) 10.0
Volts/Hertz/Amps	120v; 60Hz; 15A
Bake/Broiler BTU Rating - LP (000's BTU's)	21.5 Bake / 16.0 Broil
Bake/Broiler BTU Rating - Nat. Gas (000's BTU's)	23.5 Bake / 18.0 Broil

WARRANTY

Parts warranty	Limited 1-year entire appliance	
Labor warranty	Limited 1-year entire appliance	
Warranty notes	See written warranty for full details	

DIMENSIONS AND INSTALLATION

Electrical Requirements: Ranges must be hooked up to a 120V, 60Hz properly grounded dedicated circuit protected by a 15-amp circuit breaker or time-delay fuse.

Gas Pressure Regulator: You must use the gas pressure regulator supplied with this range. For proper operations the inlet pressure to the regulator should be as follows:

Natural Gas:

Minimum pressure: 6" of Water Column Maximum pressure: 13" of Water Column

Propane (LP) Gas:

Minimum pressure: 11" of Water Column Maximum pressure: 13" of Water Column See installation instructions for more detail

Optional Backsplash Accessories: The range requires a 12" minimum clearance to a vertical combustible surface at the rear. A backsplash is required for installations with less than 12" clearance. The following backsplash accessories are available, or a custom, non-combustible backsplash can be used.

Order one with a 36"-wide range backsplash

UX12B36PSS – 12" backsplash

UXADJB36PSS - 30"-36" adjustable-height backsplash with warming shelf

NOTE: Commercial-style ranges offer a number of choices in size and cooktop configurations. All commercial-style ranges are factory set for natural gas. Conversion kits are included with the range. High Altitude kit, High Altitude Natural Gas: WB28X39728; High Altitude LP: WB28X39729 are also available. The kits must be installed by a qualified service technician at additional cost.

Installation Information: Before installing, consult installation instructions packed with product or online at geappliances.com for current dimensional data.

A suitable 36" or wider vent hood is required for installation over ranges with a grill and recommended for all other ranges.

Advance Planning: Refer to dimensional drawings for appropriate placement and necessary clearances when planning the installation.


- Working areas adjacent to the range should have 18" minimum clearance

between countertop and cabinet bottom.

- Clearance between range and side wall or combustible material must be at least 12" on each side.
- Installation must conform with local codes. In the absence of local codes, the range must comply with the National Fuel Gas Code, ANSI Z223.1-1990.

WARNING: Installations without a hood require 60" minimum to combustibles. A custom hood installation with exposed horizontal combustible surfaces must have an Auto-On feature. Refer to hood installation instructions for specific hood clearances.

The surface of the entire back wall above the range and below the hood must be covered with a non-combustible material such as metal, ceramic tile, brick, marble or other stone.

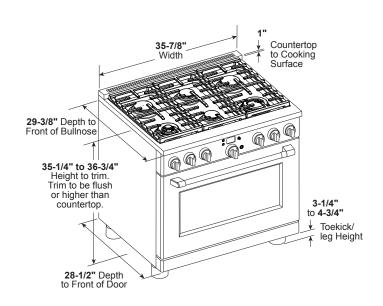


Café[™] 36" Smart All-Gas Commercial-Style Range with 6 Burners (Natural Gas)

DISTINCT BY DESIGN™


CAF


CGY366P2TS1 / CGY366P3TD1 / CGY366P4TW2

UTILITY LOCATIONS



SIDE VIEW WITH BACKSPLASH

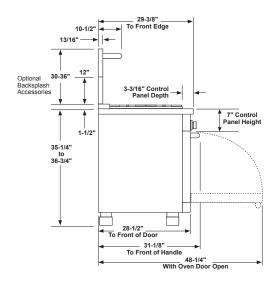

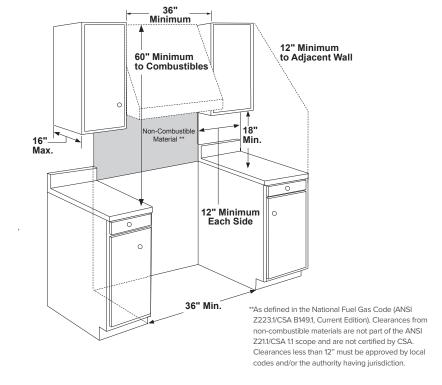

ADDITIONAL CLEARANCES

Allow 12" minimum clearance to an adjacent wall on each side. Working areas adjacent to the rangetop should have 18" minimum clearance between countertop and the bottom of the wall cabinet.

ADDITIONAL ACCESSORIES



CXPR6HKPTBZ Brushed Bronze 1 handle, 8 knobs (standard on Matte White)



CXPR6HKPTSS Brushed Stainless 1 handle, 8 knobs (standard on Matte Black)



UXADJB36PSS 30"-36"H Stainless Steel Adjustable Height Backsplash with Shelf



UX12B36PSS 12"H Stainless Steel Backsplash



UXPRRGG Grill/Griddle Accessory



CXPR6HKPTBT Brushed Black 1 handle, 8 knobs



CXPR6HKPTCU Brushed Copper 1 handle, 8 knobs



CXPR6TKPMWS Matte White Toe Kick



CXPR6TKPMDS Matte Black Toe Kick



CXPR6TKPMSS Stainless Steel Toe Kick