# STARY SEASON is here again!



### is your Shelter from the Storm

Add Tripp Lite power protection to every purchase to prevent equipment downtime, damage and data loss caused by severe weather

#### YOU HAVE...

Servers, switches, networking equipment



#### **NOW ADD...**

Tripp Lite rack-mount UPS systems, PDUs, rack enclosures, KVM switches and cooling



#### **YOU HAVE...**

PCs, workstation, computer peripherals and accessories



#### **NOW ADD...**

Tripp Lite desktop UPS systems and surge protectors



#### **YOU HAVE...**

Tablets, Chromebooks



#### **NOW ADD...**

Tripp Lite USB and AC charging stations and carts



#### **YOU HAVE..**

TVs, digital displays, monitors



Tripp Lite digital signage and connectivity solutions






#### **SURGE PROTECTORS**

Tripp Lite Model	Outlets/Cord
TLP606B	6/6 ft.
TLP606USB	6 + USB/6 ft.
TLP606DMUSB	6 + USB (with mounting clamp)/6 ft.
TLP608RUSBB	6 + USB/8 ft.
TLP712B	7/12 ft.
TLP725	7/25 ft.
SUPER7TEL15	7 + RJ11/15 ft.
TLP808	8/8 ft.
TLP810NET	8 + RJ11/RJ45/Coax/10 ft.
ISOBAR4ULTRA	4/6 ft.
ISOBAR6ULTRA	6/6 ft.
ISOBAR8ULTRA	8/12 ft.
IBAR12	12/15 ft.
IBAR12-20ULTRA*	12/15 ft.

\*20A circuit breaker.

## POWER DISTRIBUTION UNITS (PDUs)

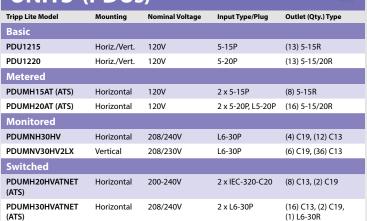

#### RACKS AND COOLING SOLUTIONS

ripp Lite Model	Size	Туре	Capacity		
nclosures	nclosures				
SR12UB	12U	Extended Depth	1,000 lb.		
SR18UB	18U	Extended Depth	1,000 lb.		
SR24UB	24U	Standard	1,000 lb.		
Wall-Mount I	Enclosures				
SRW6U	6U	Non-Swinging	200 lb.		
SRW9U	9U	Non-Swinging	200 lb.		
SRW10US	10U	Swinging	200 lb.		
SRW12U	12U	Non-Swinging	200 lb.		
SRW12US	12U	Swinging	200 lb.		
SRW12U13	12U	Non-Swinging	200 lb.		
SRW18US	18U	Swinging	250 lb.		
Open Frame Racks					
RWO12UHD	12U	Wall-Mount	200 lb.		
SRWO8U22	8U/12U/22U	Expandable Wall-Mount	150 lb.		
SR2POST	45U	2-Post Rack	800 lb.		
SR4POST	45U	4-Post Rack	1,000 lb.		
Cooling Solutions					
RCOOL7KRM	Rack-Mount A	ir-Conditioning Unit, 7,000 BT	TU, 120V, 60 Hz		
SRCOOL12K	Portable Air-Conditioning Unit, 12,000 BTU, 120V, 60 Hz				
SRCOOL18K	Portable Air-Conditioning Unit, 18,000 BTU, 208/240V, 60 Hz				
SRCOOL24K	Portable Air-Conditioning Unit, 24,000 BTU, 208/240V, 60 Hz				
SRCOOLNETLX	Web card for remote cooling management and monitoring of SRCOOL12K				

### **UPS SYSTEMS**

	Tripp Lite Model	Outlets	½ Load Runtime*	
Com	pact UPS Systems			
	BC350	6	10	
*	INTERNET550U	8	5.6	-Out-
	INTERNET750U	12	9.4	
	AVR550U	8	5.5	
*	AVR750U	12	8.6	
	AVR900U	12	8.4	

71115000	12	0.1	
Digital Tower and Rack-N	lount UPS	Systems	1
SMART1300LCDT	8	10	
OMNI1500LCDT	10	7.5	
SMART1500LCDT	10	10	
OMNI900LCD	8	10	
SMART1000LCD	8	10	
SMART1200LCCD	8	12	
SMART1500LCD	8	11.8	
SMC10002URM	6	15.6	

	SMC15002URM	8	17.7	
Sma	artPro Rack-Mount UP	S Syster	ns	
	SMART500RT1U	7	14.6	I TO THE REST OF T
	SMART750RM1U	6	16.2	8
	SMART1000RM1U	6	13.2	
	SMART1500RM2U	8	13	
	SMART1500RMXL2UA	8	14+	
	SMART2200RM2U	8	12	
	SMART2200RMXL2U	8	12+	
*	SMART3000RM2U	9	10+	
*	SMART3000RMXL2U	9	10+	
		LIDGG		the state of the s

*	SMART3000RMXL2U	9	10+	
Sma	artOnline Rack-Moun	UPS Sys	stems	
	SU750RTXL2U	6	11+	
	SU1000RTXL2UA	6	14+	
*	SU1000RTXLCD2U	6	14+	3500
	SU1500RTXL2UA	6	14+	
*	SU1500RTXLCD2U	6	14+	
	SU2200RTXL2UA	7	14+	
*	SU2200RTXLCD2U	7	12+	
	SU3000RTXL2U	7	15+	
	SU3000RTXL3U	9	14+	
*	SU3000RTXLCD3U	9	11+	
	Tripp Lite Model	Descrip	otion	

WEBCARDLX Web card for remote management of compatible Tripp Lite UPS systems WEBCARDLXMINI Web card for remote management of compatible Tripp Lite UPS systems



<sup>\*</sup>Represented in minutes, may vary based on load and battery condition. + Features expandable runtime with optional external battery packs.



