

Job Name

Purchaser

Submitted to

Unit Designation

Location

Engineer

Reference

Approval

Construction

Schedule #

Specifications			
Model	Indoor Unit Model Number (US Code)		AC024BNZDCH/AA (CNH24ZDB)
	Outdoor Unit Model Number (US Code)		AC024BXADCH/AA (CXH24ADB)
Performance	Nominal Capacity	Cooling / Heating (Btu/h)	24,000 / 27,000
	Capacity Range	Cooling (Btu/h)	8,000 - 30,000
		Heating (Btu/h)	7,000 - 35,000
	AHRI 210-240 2017 ¹	SEER	16.5
		EER	9.7
		HSPF	9.6
	AHRI 210-240 2023 ²	SEER2	16.9
		EER2	9.7
HSPF2		7.9	
Power	Voltage	ø / V / Hz	1 / 208-230 / 60
	Working Voltage Range (VAC)		187 - 253
	Operating Current (min. / std. / max.)	Cooling (A)	4.3 / 11.2 / 14.5
		Heating (A)	3.5 / 12.7 / 17.3
	Max. Breaker	Amps	30
Min. Circuit Ampacity (A)		24.1	
Dimensions	W X H X D (in.)	Indoor Unit	17 1/2 X 43 X 21
		Outdoor Unit	37 X 39 5/16 X 13
	Weight (lbs.)	Indoor Unit	98.1
		Outdoor Unit	158.7
	Duct Connections (W X H)	Supply (in.)	12 1/4 X 15 1/2
Return (in.)		17 1/2 X 21	
Sound Pressure Level	Indoor Unit dB(A)	L / M / H	35 / 38 / 41
	Outdoor Unit dB(A)	Cooling / Heating (high)	50 / 52
Operating Temperatures	Outdoor	Cooling	23 ~ 122°F (-5 ~ 50°C) 0 ~ 122°F (-18 ~ 50°C) W/Baffle
		Heating	-13 - 75°F (-25 - 24°C)
	Indoor	Cooling	64 ~ 90°F (16 ~ 32°C)
		Heating	T ≤ 86°F (30°C)
Pipe Connections	Indoor & Outdoor	High side	1/4"
		Low side	5/8"
	Maximum (ft.)		164
	Maximum Vertical Separation (ft.)		98.4
Condensate Connection		3/4 in. FNPT	
Refrigerant	Type		R410A
	Factory Charge	lbs.	5.73
	Charged for		24.6 ft.
Compressor	Manufacturer		Samsung
	Type		Inverter Driven, Twin BLDC Rotary
	RLA	Amps	15.9
Evaporator Fan	Type		Double-inlet, forward curve, centrifugal (with ECM motor)
	Air Volume	CFM (L/M/H)	547 / 636 / 759
	Output	Watts	290
	External Static Pressure	Standard ("WC)	0.58 in. WC
Min. / Max. ("WC)		0 / 0.80 in. WC	
Condenser Fan	Motor		BLDC With Axial Type Fan (1)
	FLA / Watts / CFM (max.)		1.25A X 1 / 125W X 1 / 2,684 CFM
Safety	Certifications	UL 60335-2-40	
	Devices	PCB fuses, indoor unit terminal block thermal fuse, current transformer, over-voltage protection, crankcase heating, temperature limit protection logic, compressor overload sensing	



- General Information**
- The outdoor unit shall supply power to indoor unit via 14 AWG X 3 power wire
 - High-voltage terminal block temperature sensor to disable unit in the event of power connection overheating
 - Auto-restart after power loss
 - Soft-start compressor minimizing current inrush
 - All heat exchangers shall be mechanically bonded aluminum fin to copper tube
 - The condensing unit heat exchanger salt spray test method: ISO-9227- the heat exchanger showed no unusual rust or corrosion development to 3,000 hours.
 - Base pan heater equipped as standard
 - System shall provide 100% heating capacity at -4°F(-20°C)

- Option settings**
- The outdoor unit shall have snow accumulation prevention option setting to prevent snow drifting against an idle outdoor unit.
 - Night-time Quiet Mode: reduction of operational sound during evening hours (*automatic or manual activation*).
 - System can be set up as heating/cooling, cooling only, or heating only via outdoor unit option setting.
 - Maximum Current Control configurable from 50% - 100% via outdoor unit, wired controller, or central controller

- Indoor Fan**
- Indoor fan is a double Inlet, forward curve, centrifugal type
 - Three fan speed settings and auto setting
 - Field configurable for downflow operation with optional conversion kit

- Construction**
- Outdoor unit shall be galvanized steel with a baked-on powder coated finish for durability
 - Indoor Unit: Insulated, galvanized steel.

- Controls**
- Control wiring shall be 2 X 16 AWG
 - No additional interface modules/adapters are required when connecting to Samsung central control options.
 - The unit shall be operated via a wireless or wired remote control with DDC type signal
 - Dual set temperature support when connected to MWR-WG00UN Advanced Wired Controller or central control options.
 - Wired or wireless controllers must be purchased separately

- Refrigerant System**
- The compressor shall be hermetically sealed, inverter-controlled BLDC rotary type.
 - Refrigerant flow shall be controlled by an electronic expansion valve at outdoor unit

Warranty
10 Years compressor, 10 years parts, 1 year limited labor when registered

This publication reflects both the 1987 Appendix M metric (SEER) and the 2023 Appendix M1 metric (SEER2). Efficiency requirements are published at 10 C.F.R. 430.32(c). Please refer to www.AHRInet.org for more information about updated energy metrics.

¹Performance data certified by AHRI to AHRI 210-240 (2017) with Addendum 1.

²Performance data certified by AHRI to AHRI 210-240 (2023). Effective January 1st, 2023.



Samsung HVAC maintains a policy of ongoing development, specifications are subject to change without notice. Refer to www.AHRIdirectory.org for current reference numbers.




Optional Accessories

Wired Controller	Advanced	MWR-WG00UN
	Touchscreen	MWR-SH11UN
Thermostat Adaptor (for connection to a standard 24VAC thermostat)		MIM-A60UN
Wireless Signal Control	Wireless Signal Receiver	MRK-A10N
	Wireless Controller	AR-EH04U
Wi-Fi Adapter		MIM-H05UN
External Temperature Sensor		MRW-TA
Filter Base (includes 1" MERV 8 filter)		VFB-1
External Contact Control		MIM-B14
Wall Bracket (for outdoor unit)		CKN-250
Wind Baffles	Front	WBF-2MB
	Back	WBB-3M
Hail Guard		HGK-3
Line Sets - insulated and flared, interconnect cables included	25' - ILS-2509	
	50' - ILS-5009	
Supplemental Electric Heat Kit	VHK-103A (3kW)	
	VHK-105A (5kW)	
Downflow Conversion Kit		VDK-1

No.	Description
①	Gas Pipe (brazed)
②	Liquid Pipe (brazed)
③	Drain Connection
④	Air Outlet
⑤	Air Inlet

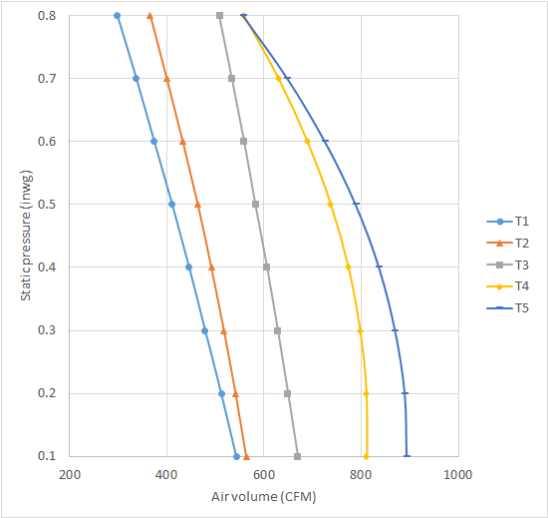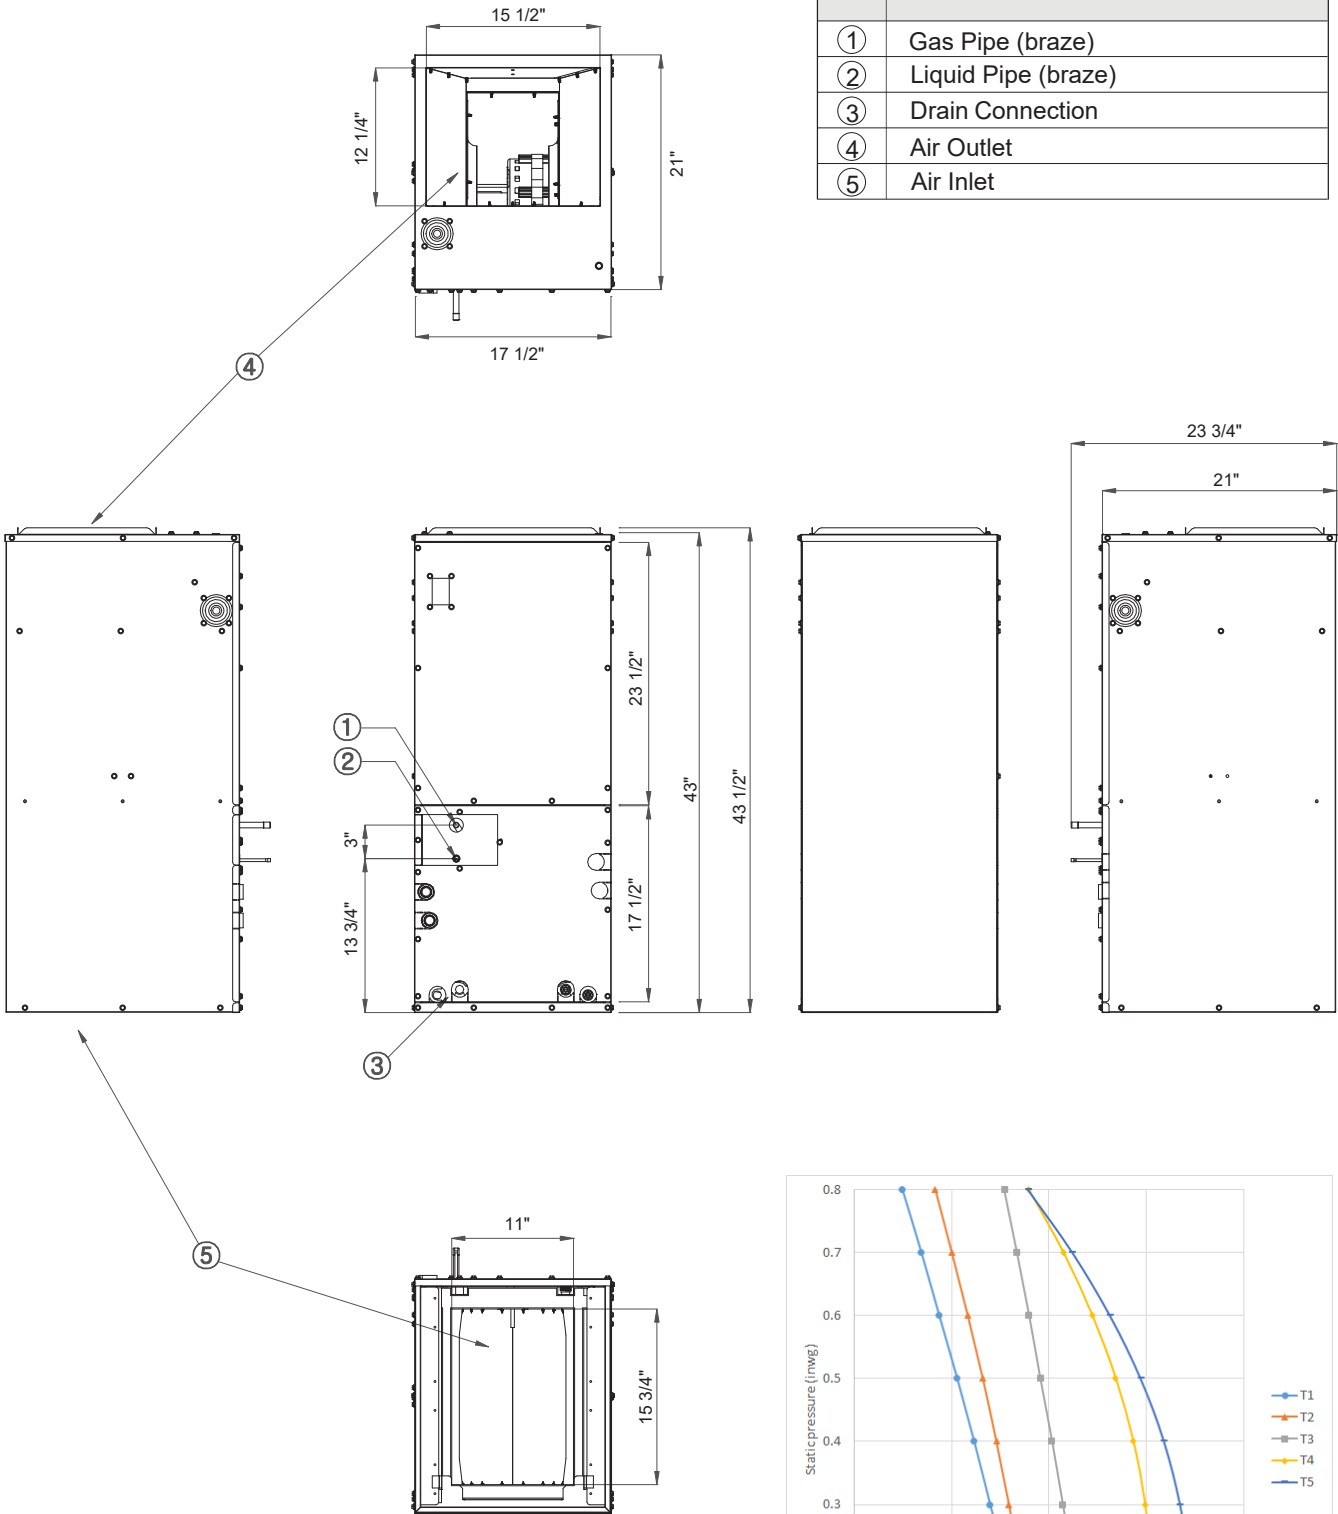

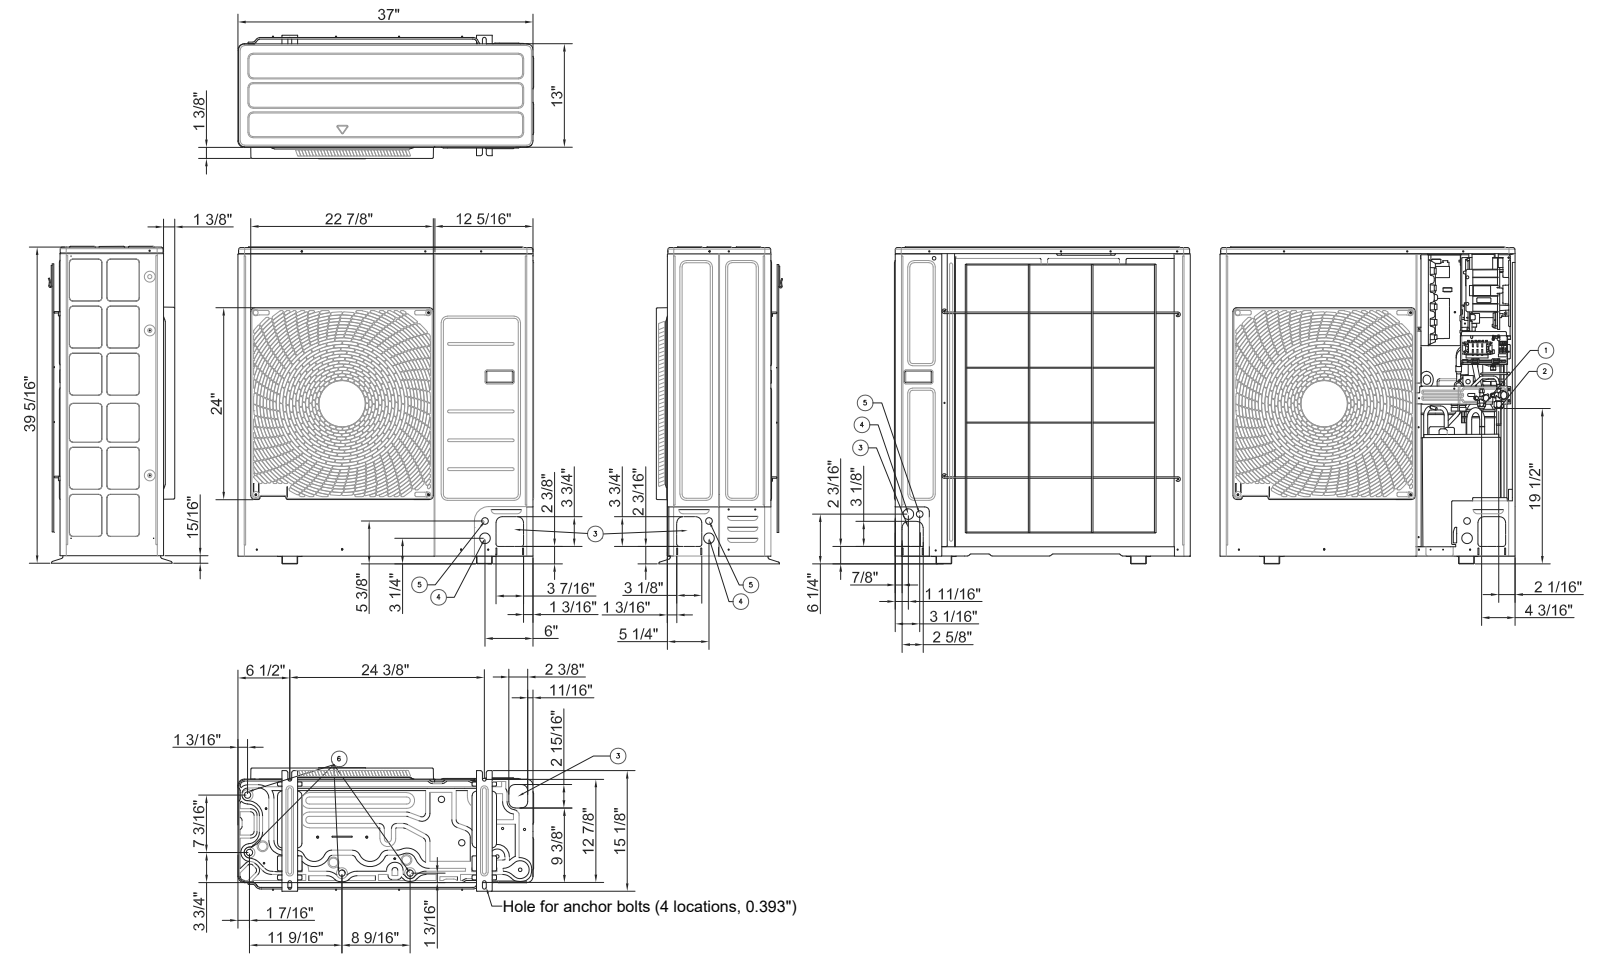

No.	Name	Description
1	Liquid pipe connection	ø 1/4"
2	Gas pipe connection	ø 5/8"
3	Piping knockout hole	Front, side, rear, and bottom
4	Power supply knowkout hole	Front, side, and rear (ø 1 3/8")
5	Comm. Wiring knockout hole	Front, side, and rear (ø 7/8")
6	Drain hole	Connect using provided drain fitting