


Plot 7-68. Lower Band Edge Plot (LTE Band 2 - 10MHz QPSK - Full RB Configuration)




Plot 7-69. Extended Lower Band Edge Plot (LTE Band 2 – 10MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 53 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	raye 33 01 90

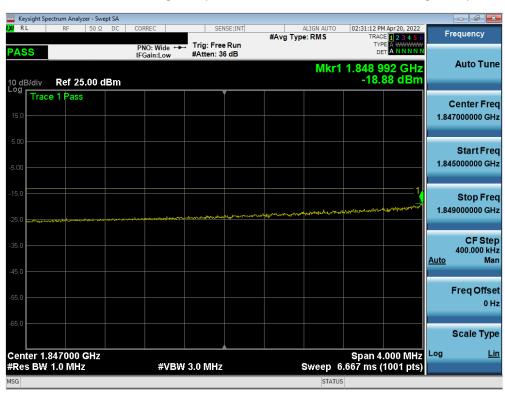



Plot 7-70. Upper Band Edge Plot (LTE Band 2 - 10MHz QPSK - Full RB Configuration)

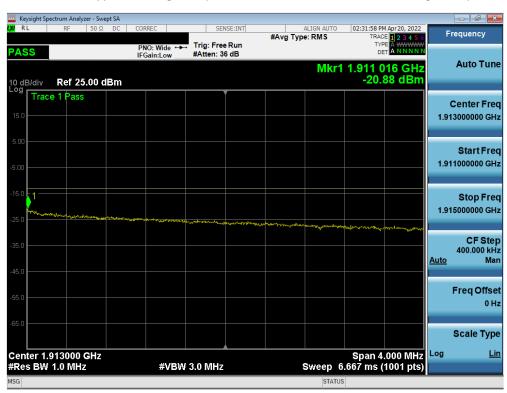


Plot 7-71. Extended Upper Band Edge Plot (LTE Band 2 – 10MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2727	element element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 54 of 00
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 54 of 90





Plot 7-72. Lower Band Edge Plot (LTE Band 2 - 15MHz QPSK - Full RB Configuration)

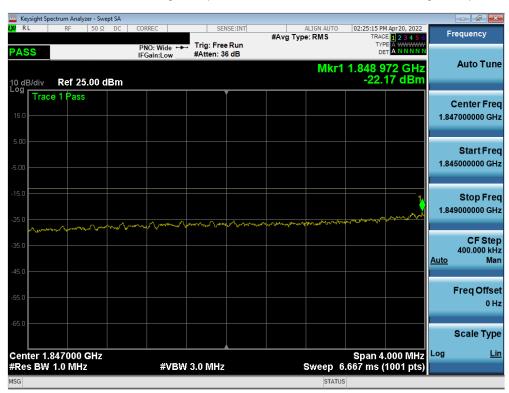

Plot 7-73. Extended Lower Band Edge Plot (LTE Band 2 – 15MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2727	element element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 55 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 55 of 90






Plot 7-74. Upper Band Edge Plot (LTE Band 2 - 15MHz QPSK - Full RB Configuration)




Plot 7-75. Extended Upper Band Edge Plot (LTE Band 2 – 15MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 56 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	



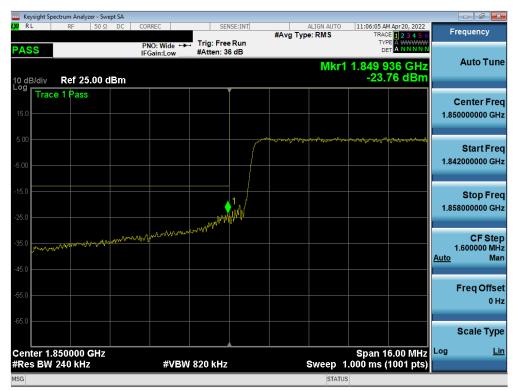


Plot 7-76. Lower Band Edge Plot (LTE Band 2 - 20MHz QPSK - Full RB Configuration)

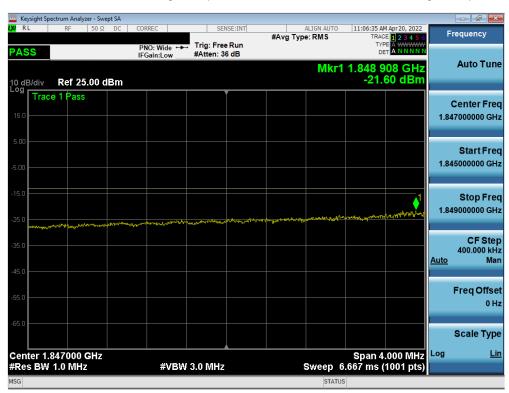

Plot 7-77. Extended Lower Band Edge Plot (LTE Band 2 – 20MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 57 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	



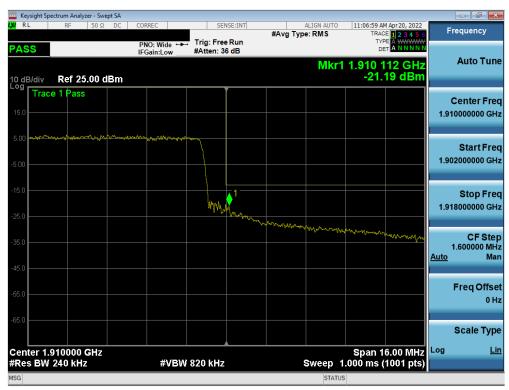

Plot 7-78. Upper Band Edge Plot (LTE Band 2 - 20MHz QPSK - Full RB Configuration)



Plot 7-79. Extended Upper Band Edge Plot (LTE Band 2 – 20MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 58 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	



#### **WCDMA PCS**



Plot 7-80. Lower Band Edge Plot (WCDMA PCS - Ch. 9262)



Plot 7-81. Extended Lower Band Edge Plot (WCDMA PCS - Ch. 9262)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 59 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 59 01 90





Plot 7-82. Upper Band Edge Plot (WCDMA PCS - Ch. 9538)



Plot 7-83. Extended Upper Band Edge Plot (WCDMA PCS - Ch. 9538)

FCC ID: BCG-A2727	element element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 60 of 00
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 60 of 90



# 7.5 Peak-Average Ratio §24.232(d)

#### **Test Overview**

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

#### **Test Procedure Used**

KDB 971168 D01 v03r01 - Section 5.7.1

#### **Test Settings**

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW ≥ OBW or specified reference bandwidth
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

#### **Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup


#### **Test Notes**

None.


FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 61 of 00
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 61 of 90



#### LTE Band 25

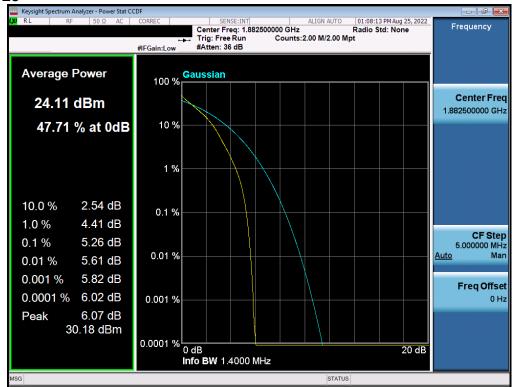


Plot 7-84. PAR Plot (LTE Band 25 - 1.4MHz QPSK - Full RB Configuration)

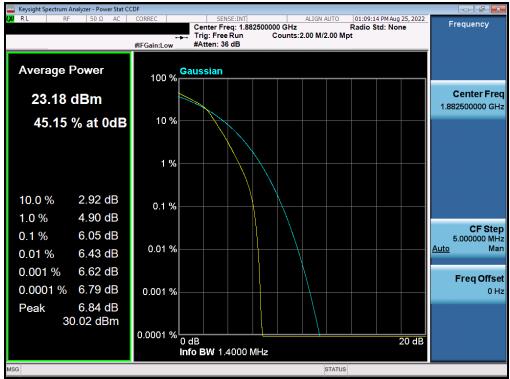


Plot 7-85. PAR Plot (LTE Band 25 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2727	<b>e</b> lement	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 62 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Fage 62 01 90



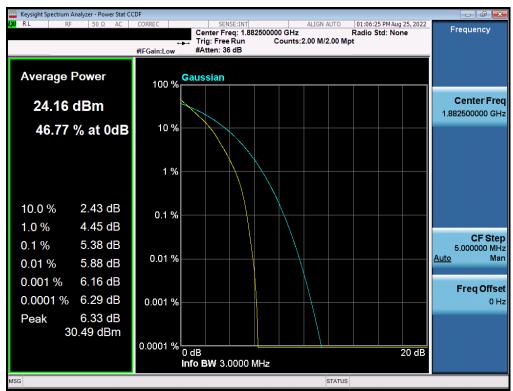


Plot 7-86. PAR Plot (LTE Band 25 - 3MHz QPSK - Full RB Configuration)

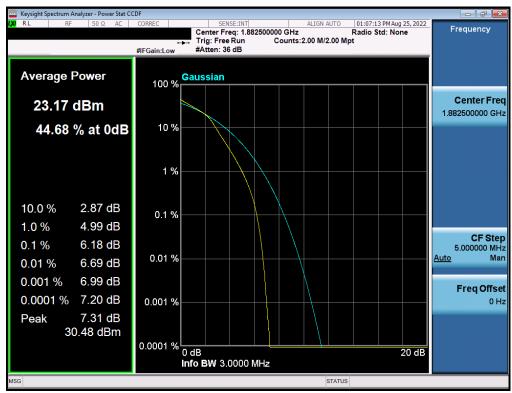


Plot 7-87. PAR Plot (LTE Band 25 - 3MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 63 of 00
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 63 of 90



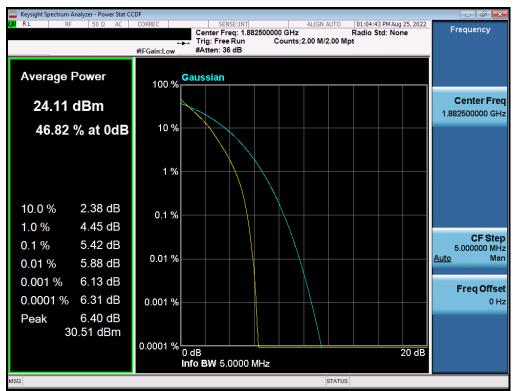


Plot 7-88. PAR Plot (LTE Band 25 - 5MHz QPSK - Full RB Configuration)

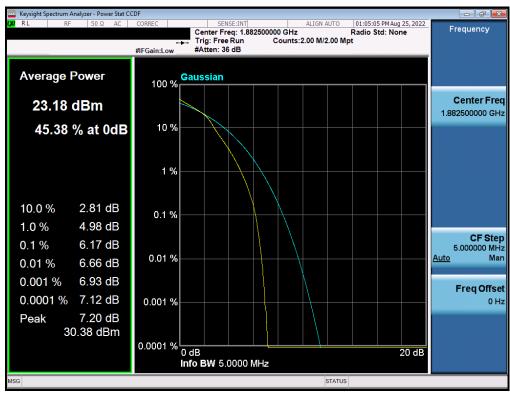


Plot 7-89. PAR Plot (LTE Band 25 - 5MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2727	element element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 64 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	



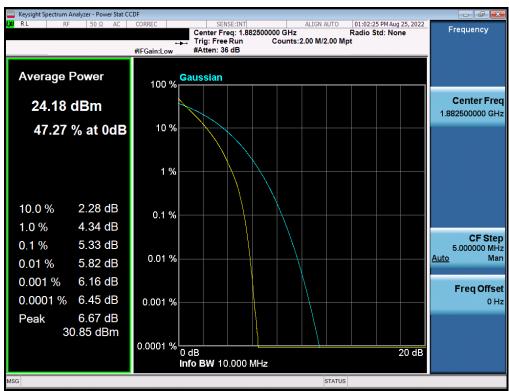


Plot 7-90. PAR Plot (LTE Band 25 - 10MHz QPSK - Full RB Configuration)

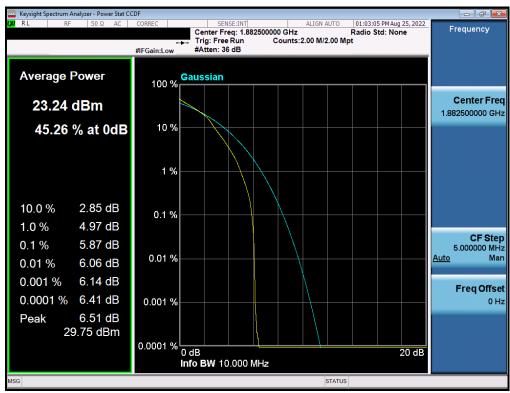


Plot 7-91. PAR Plot (LTE Band 25 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 65 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	raye 05 01 90



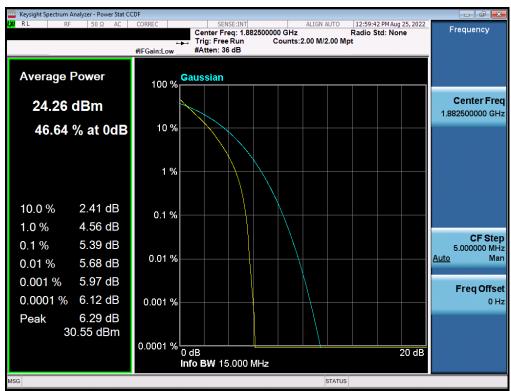


Plot 7-92. PAR Plot (LTE Band 25 - 15MHz QPSK - Full RB Configuration)

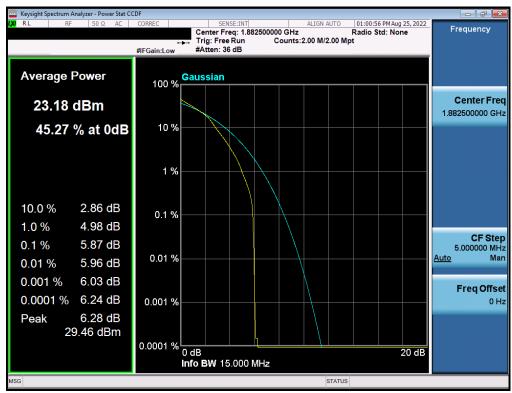


Plot 7-93. PAR Plot (LTE Band 25 - 15MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 66 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	rage 66 of 90



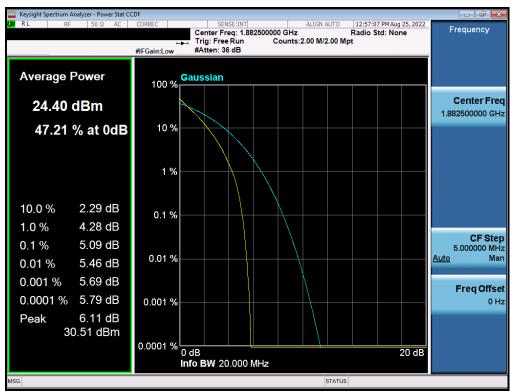

Plot 7-94. PAR Plot (LTE Band 25 - 20MHz QPSK - Full RB Configuration)

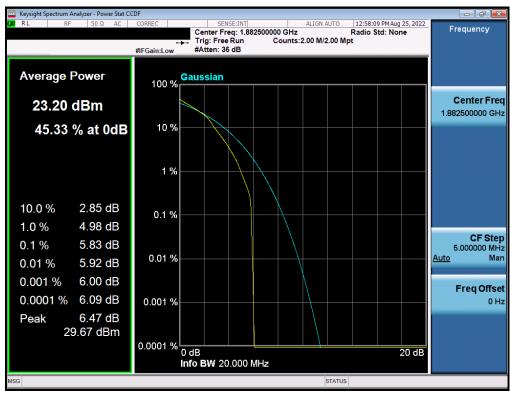


Plot 7-95. PAR Plot (LTE Band 25 - 20MHz 16-QAM - Full RB Configuration)


FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 67 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 67 OI 90



#### LTE Band 2

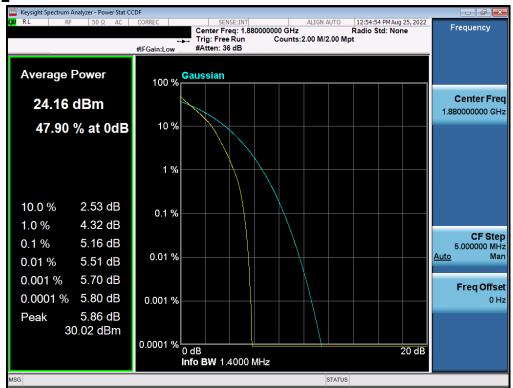


Plot 7-96. PAR Plot (LTE Band 2 - 1.4MHz QPSK - Full RB Configuration)

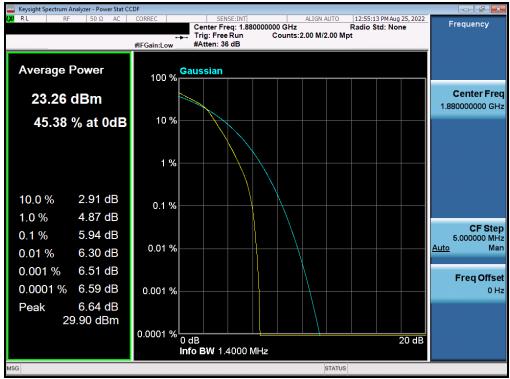


Plot 7-97. PAR Plot (LTE Band 2 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 68 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	rage 66 01 90



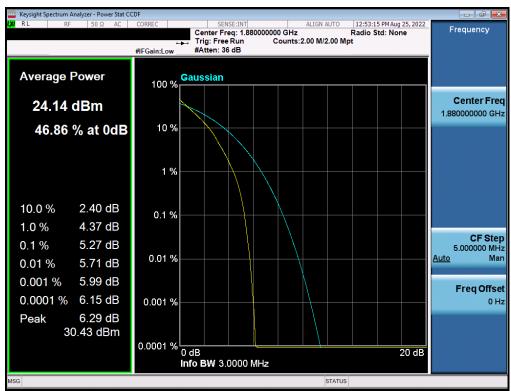


Plot 7-98. PAR Plot (LTE Band 2 - 3MHz QPSK - Full RB Configuration)

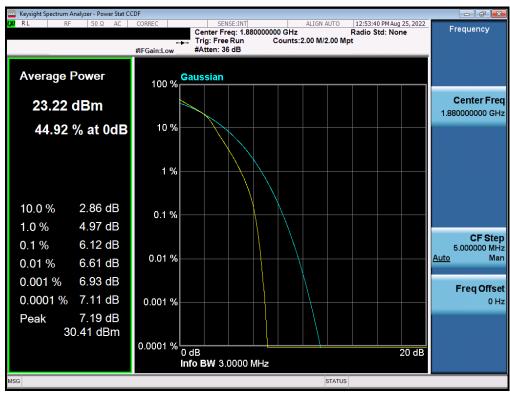


Plot 7-99. PAR Plot (LTE Band 2 - 3MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 69 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	rage 69 01 90



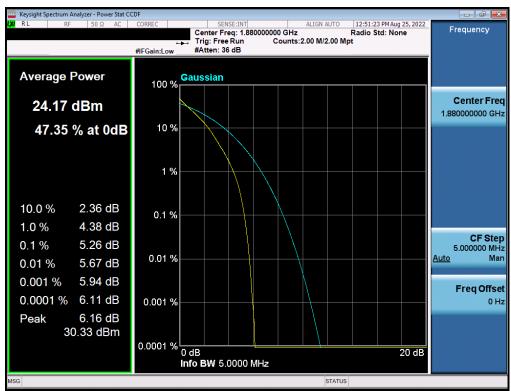


Plot 7-100. PAR Plot (LTE Band 2 - 5MHz QPSK - Full RB Configuration)

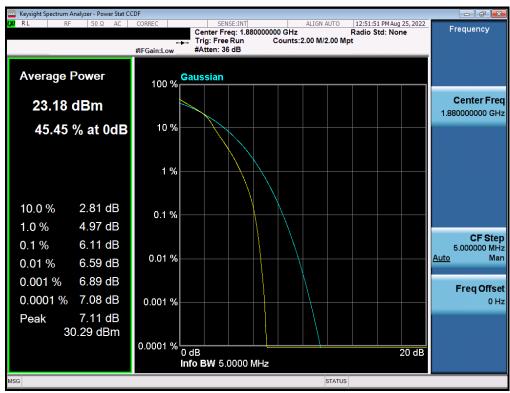


Plot 7-101. PAR Plot (LTE Band 2 - 5MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2727	element element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 70 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Page 70 01 90



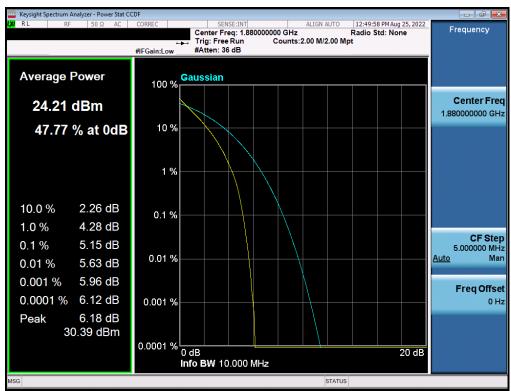


Plot 7-102. PAR Plot (LTE Band 2 - 10MHz QPSK - Full RB Configuration)

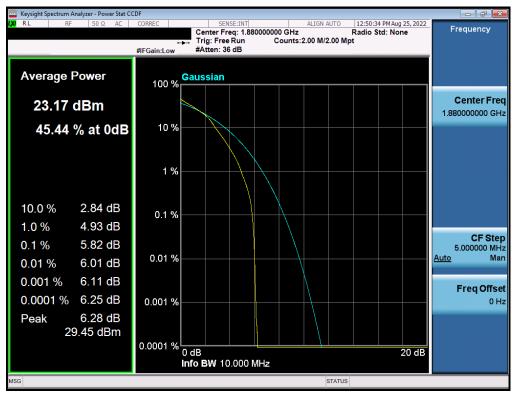


Plot 7-103. PAR Plot (LTE Band 2 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 71 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	raye / 1 01 90



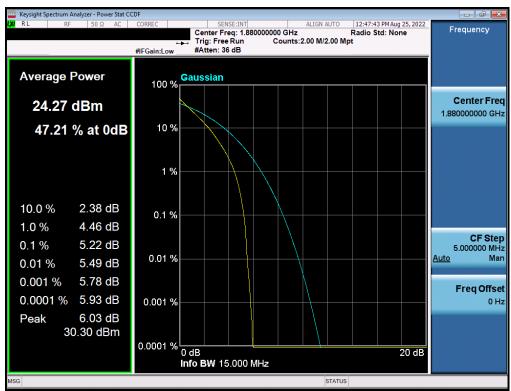


Plot 7-104. PAR Plot (LTE Band 2 - 15MHz QPSK - Full RB Configuration)

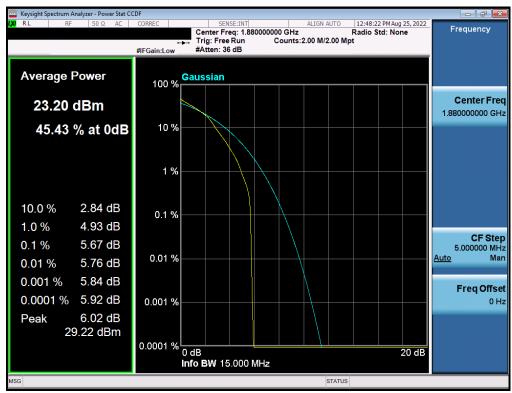


Plot 7-105. PAR Plot (LTE Band 2 - 15MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 72 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Faye 12 01 90



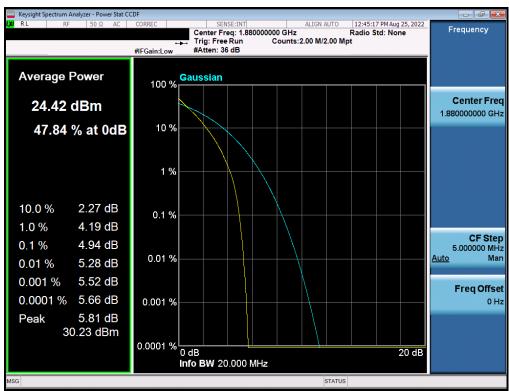

Plot 7-106. PAR Plot (LTE Band 2 - 20MHz QPSK - Full RB Configuration)

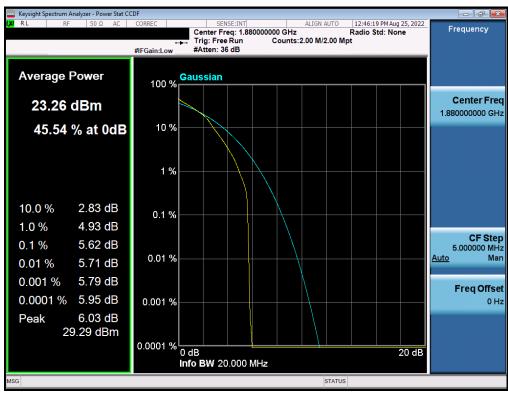

Plot 7-107. PAR Plot (LTE Band 2 - 20MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 73 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	raye 13 01 90



#### **WCDMA PCS**



Plot 7-108. PAR Plot (WCDMA, Ch. 9400)

FCC ID: BCG-A2727	<b>e</b> lement	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 74 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Fage 74 01 90



# 7.6 Radiated Power (EIRP)

§24.232(c)

#### **Test Overview**

Equivalent Isotropic Radiated Power (EIRP) measurements are calculated by adding highest antenna gain to maximum measured conducted output power. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

#### **Test Procedures Used**

KDB 971168 D01 v03r01 – Section 5.2.1 ANSI C63.26-2015 – Section 5.2.5.5

#### **Test Settings**

The relevant equation for determining the EIRP from the conducted RF output power measured is:

EIRP = PMeas - LC + GT

Where:

EIRP = Equivalent Isotropic Radiated Power (expressed in the same units as PMeas, typically dBW or dBm)

PMeas = measured transmitter output power or PSD, in dBW or dBm

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

GT = gain of the transmitting antenna, in dBi (EIRP)

#### **Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-5. EIRP Measurement Setup

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 75 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	rage 75 of 90



#### **Test Notes**

- 1. The EUT was tested in all possible test configurations. The worst case emissions are reported with the EUT modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2. This unit was tested with its standard battery.
- 3. The Level (dBm) readings in the table were taken with a correction table loaded into the base station simulator. The correction table was used to account for the signal attenuation in the connecting cable between the transmitter and antenna.
- 4. The Ant. Gains (GT) are listed in dBi.
- 5. This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 76 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	rage 70 or 90



#### **Antenna FCM LTE Band 25**

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
N		1850.7	-9.62	1 / 5	24.14	14.52	28.314	33.01	-18.49
₹	QPSK	1882.5	-9.62	1 / 5	24.34	14.72	29.648	33.01	-18.29
1.4 MHz		1914.3	-9.62	1 / 5	24.35	14.73	29.717	33.01	-18.28
1.	16-QAM	1882.5	-9.62	1/5	23.86	14.24	26.546	33.01	-18.77
NI.		1851.5	-9.62	1 / 7	24.20	14.58	28.708	33.01	-18.43
3 MHz	QPSK	1882.5	-9.62	1 / 0	24.34	14.72	29.648	33.01	-18.29
≥ ×		1913.5	-9.62	1 / 14	24.07	14.45	27.861	33.01	-18.56
.,	16-QAM	1882.5	-9.62	1 / 7	23.80	14.18	26.182	33.01	-18.83
		1852.5	-9.62	1 / 12	24.31	14.69	29.444	33.01	-18.32
至	QPSK	1882.5	-9.62	1 / 0	24.47	14.85	30.549	33.01	-18.16
5 MHz		1912.5	-9.62	1 / 24	24.16	14.54	28.445	33.01	-18.47
7	16-QAM	1882.5	-9.62	1 / 12	23.92	14.30	26.915	33.01	-18.71
z		1855.0	-9.62	1 / 25	24.17	14.55	28.510	33.01	-18.46
Ę	QPSK	1882.5	-9.62	1 / 0	24.36	14.74	29.785	33.01	-18.27
10 MHz		1910.0	-9.62	1 / 0	24.32	14.70	29.512	33.01	-18.31
1	16-QAM	1910.0	-9.62	1 / 0	23.90	14.28	26.792	33.01	-18.73
z		1857.5	-9.62	1 / 74	24.38	14.76	29.923	33.01	-18.25
15 MHz	QPSK	1882.5	-9.62	1 / 37	24.31	14.69	29.444	33.01	-18.32
5		1907.5	-9.62	1 / 37	24.25	14.63	29.040	33.01	-18.38
_	16-QAM	1882.5	-9.62	1 / 37	23.83	14.21	26.363	33.01	-18.80
z		1860.0	-9.62	1 / 0	24.34	14.72	29.648	33.01	-18.29
Ĭ	QPSK	1882.5	-9.62	1 / 50	24.26	14.64	29.107	33.01	-18.37
20 MHz		1905.0	-9.62	1 / 50	24.45	14.83	30.409	33.01	-18.18
2	16-QAM	1905.0	-9.62	1 / 50	23.86	14.24	26.546	33.01	-18.77

Table 7-2. Antenna FCM EIRP Data (LTE Band 25)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 77 of 90	
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Faye II 01 90	



#### **Antenna FCM LTE Band 2**

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
		1850.7	-9.62	1 / 0	24.14	14.52	28.314	33.01	-18.49
1.4 MHz	QPSK	1880.0	-9.62	1/0	24.36	14.74	29.785	33.01	-18.27
1.4 WITZ		1909.3	-9.62	1 / 0	24.41	14.79	30.130	33.01	-18.22
	16-QAM	1880.0	-9.62	1/3	23.81	14.19	26.242	33.01	-18.82
		1851.5	-9.62	1 / 7	24.17	14.55	28.510	33.01	-18.46
2 MU-	QPSK	1880.0	-9.62	1 / 7	24.36	14.74	29.785	33.01	-18.27
3 MHz		1908.5	-9.62	1 / 7	24.25	14.63	29.040	33.01	-18.38
	16-QAM	1880.0	-9.62	1/7	23.88	14.26	26.669	33.01	-18.75
		1852.5	-9.62	1 / 12	24.34	14.72	29.648	33.01	-18.29
5 MHz	QPSK	1880.0	-9.62	1 / 0	24.50	14.88	30.761	33.01	-18.13
3 IVITZ		1907.5	-9.62	1/0	24.38	14.76	29.923	33.01	-18.25
	16-QAM	1880.0	-9.62	1 / 12	23.91	14.29	26.853	33.01	-18.72
		1855.0	-9.62	1 / 25	24.19	14.57	28.642	33.01	-18.44
10 MHz	QPSK	1880.0	-9.62	1 / 25	24.36	14.74	29.785	33.01	-18.27
IO MINZ		1905.0	-9.62	1 / 25	24.36	14.74	29.785	33.01	-18.27
	16-QAM	1880.0	-9.62	1/0	23.86	14.24	26.546	33.01	-18.77
		1857.5	-9.62	1 / 74	24.43	14.81	30.269	33.01	-18.20
15 MHz	QPSK	1880.0	-9.62	1 / 37	24.42	14.80	30.200	33.01	-18.21
13 MIUS		1902.5	-9.62	1 / 37	24.34	14.72	29.648	33.01	-18.29
	16-QAM	1880.0	-9.62	1 / 37	24.00	14.38	27.416	33.01	-18.63
20 MHz		1860.0	-9.62	1/0	24.35	14.73	29.717	33.01	-18.28
	QPSK	1880.0	-9.62	1 / 50	24.23	14.61	28.907	33.01	-18.40
ZU WITZ		1900.0	-9.62	1 / 99	24.39	14.77	29.992	33.01	-18.24
	16-QAM	1880.0	-9.62	1 / 50	23.77	14.15	26.002	33.01	-18.86

Table 7-3. Antenna FCM EIRP Data (LTE Band 2)

#### **Antenna FCM WCDMA PCS**

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	24.00	-9.62	14.38	27.416	33.01	-18.63
1880.00	WCDMA1900	23.95	-9.62	14.33	27.102	33.01	-18.68
1907.60	WCDMA1900	23.99	-9.62	14.37	27.353	33.01	-18.64

Table 7-4. Antenna FCM EIRP Data (WCDMA PCS)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 78 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Fage 78 01 90



# 7.7 Radiated Spurious Emissions

#### §2.1053, 24.238(a)

#### **Test Overview**

Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

#### **Test Procedures Used**

KDB 971168 D01 v03r01 - Section 5.8

#### **Test Settings**

- 1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
- 2. VBW  $\geq$  3 x RBW
- 3. Span = 1.5 times the OBW
- 4. No. of sweep points ≥ 2 x span / RBW
- 5. Detector = RMS
- 6. Trace mode = Average (Max Hold for pulsed emissions)
- 7. The trace was allowed to stabilize

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 79 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Fage 79 01 90



#### **Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

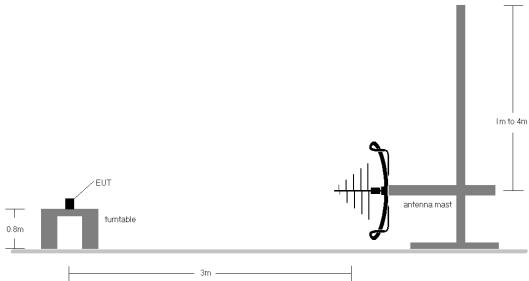


Figure 7-6. Test Instrument & Measurement Setup < 1GHz

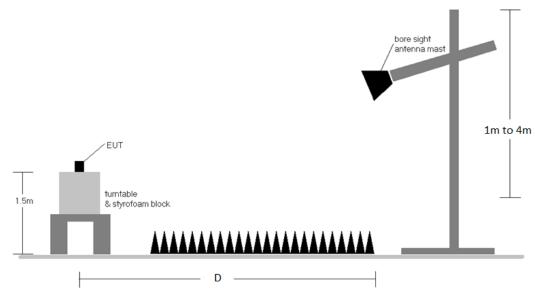


Figure 7-7. Test Instrument & Measurement Setup >1 GHz

FCC ID: BCG-A2727	element element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 80 of 90	
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	rage 60 01 90	




#### **Test Notes**

- 1. Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
  - a.  $E(dB\mu V/m) = Measured$  amplitude level (dBm) + 107 + Cable Loss (dB) + Antenna Factor (dB/m)
  - b. EIRP (dBm) =  $E(dB\mu V/m) + 20logD 104.8$ ; where D is the measurement distance in meters.
- 2. This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".
- 3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 4. This unit was tested with its standard battery.
- 5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 7. No significant emissions were found for below 1GHz and Above 18GHz measurement.
- 8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 81 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	raye of 01 90



# 7.7.1 Antenna FCM – Radiated Spurious Emission Measurement LTE Band 25/2

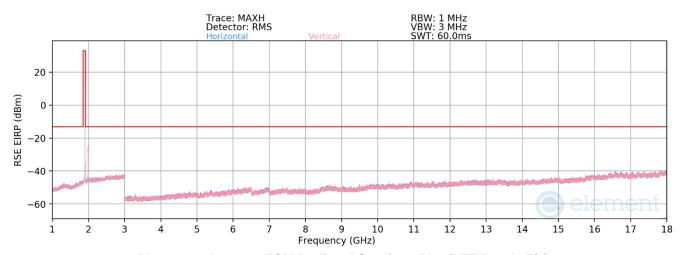

Plot 7-109. Antenna FCM Radiated Spurious Plot (LTE Band 25/2)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 82 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	Fage 62 01 90



Bandwidth (MHz):	20
Frequency (MHz):	1860.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3720.0	Н	-	-	-79.63	4.58	31.95	-63.31	-13.00	-50.31
5580.0	Н	319	226	-77.64	7.22	36.58	-58.68	-13.00	-45.68
7440.0	Н	-	-	-80.71	9.30	35.59	-59.66	-13.00	-46.66
9300.0	Н	-	-	-82.58	11.63	36.05	-59.20	-13.00	-46.20
11160.0	Н	-	-	-83.20	14.63	38.43	-56.83	-13.00	-43.83

## Table 7-5. Antenna FCM Radiated Spurious Data (LTE Band 25/2 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	1882.5
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3765.0	Н	-	-	-79.54	4.56	32.02	-63.23	-13.00	-50.23
5647.5	Н	326	242	-77.61	7.02	36.41	-58.84	-13.00	-45.84
7530.0	Н	-	-	-82.02	10.27	35.25	-60.01	-13.00	-47.01
9412.5	Н	-	-	-82.86	12.06	36.20	-59.06	-13.00	-46.06
11295.0	Н	-	-	-82.96	14.81	38.85	-56.41	-13.00	-43.41

### Table 7-6. Antenna FCM Radiated Spurious Data (LTE Band 25/2 - Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	1905.0
RB / Offset:	1 / 50


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3810.00	Н	-	-	-79.18	4.36	32.18	-63.08	-13.00	-50.08
5715.00	Н	102	237	-75.99	7.99	39.00	-56.25	-13.00	-43.25
7620.00	Н	-	-	-81.51	9.64	35.13	-60.13	-13.00	-47.13
9525.00	Н	-	-	-83.26	12.23	35.97	-59.29	-13.00	-46.29
11430.00	Н	-	-	-83.64	15.21	38.57	-56.69	-13.00	-43.69

Table 7-7. Antenna FCM Radiated Spurious Data (LTE Band 25/2 – High Channel)

FCC ID: BCG-A2727	element element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 83 of 90	
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch		



### **WCDMA PCS**

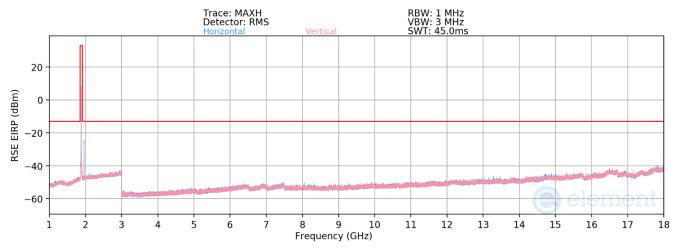

Plot 7-110. Antenna FCM Radiated Spurious Plot (WCDMA PCS)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 84 of 90	
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch		



Mode:	WCDMA RMC
Channel:	9262
Frequency (MHz):	1852.4

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3704.8	Н	-	-	-78.46	2.38	30.92	-64.34	-13.00	-51.34
5557.2	Н	-	-	-79.63	5.45	32.82	-62.44	-13.00	-49.44
7409.6	Н	-	-	-80.30	8.76	35.46	-59.79	-13.00	-46.79

Table 7-8. Antenna FCM Radiated Spurious Data (WCDMA PCS – Low Channel)

Mode:	WCDMA RMC
Channel:	9400
Frequency (MHz):	1880

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3760.0	Н	-	-	-78.10	2.18	31.08	-64.17	-13.00	-51.17
5640.0	Н	-	-	-78.06	5.34	34.28	-60.98	-13.00	-47.98
7520.0	Н	-	-	-81.70	8.74	34.04	-61.22	-13.00	-48.22

Table 7-9. Antenna FCM Radiated Spurious Data (WCDMA PCS – Mid Channel)

Mode:	WCDMA RMC
Channel:	9538
Frequency (MHz):	1907.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3815.2	Н	-	-	-78.12	2.18	31.06	-64.20	-13.00	-51.20
5722.8	Н	-	-	-79.14	5.76	33.62	-61.64	-13.00	-48.64
7630.4	Н	-	_	-82.04	9.44	34.40	-60.86	-13.00	-47.86

Table 7-10. Antenna FCM Radiated Spurious Data (WCDMA PCS – High Channel)

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 85 of 90	
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch		



# 7.8 Frequency Stability / Temperature Variation §2.1055, §24.235

#### **Test Overview and Limit**

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015 and TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 24 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

#### **Test Procedure Used**

ANSI C63.26-2015

TIA-603-E-2016

#### **Test Settings**

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

#### **Test Setup**

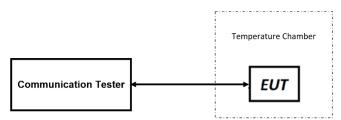


Figure 7-8. Test Instrument & Measurement Setup

#### **Test Notes**

1. None.

FCC ID: BCG-A2727	element element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 86 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	



## **Frequency Stability / Temperature Variation**

LTE Band				,			•
	Low Channel Frequency (Hz):				1,860,000,000		
	High Channel Frequency (Hz):			1,905,000,000			
	Ref. Voltage (VDC):				3.80		
Voltage (%)	Power (VDC)	Temp (°C)	Low Freq. (Hz)	High Freq. (Hz)	Low Freq. Dev. (Hz)	High Freq. Dev. (Hz)	Deviation (%)
		- 30	1,860,000,002	1,905,000,001	0.61	0.38	0.00000003
		- 20	1,860,000,001	1,905,000,001	0.29	0.64	0.00000003
		- 10	1,860,000,001	1,905,000,001	0.46	0.78	0.00000004
		0	1,860,000,002	1,905,000,001	0.67	0.75	0.00000004
100 %	3.80	+ 10	1,860,000,001	1,904,999,999	0.49	-1.09	-0.00000006
		+ 20 (Ref)	1,860,000,001	1,905,000,001	0.00	0.00	0.00000000
		+ 30	1,860,000,002	1,905,000,002	0.82	1.17	0.00000006
		+ 40	1,860,000,002	1,905,000,001	0.69	0.94	0.00000005
		+ 50	1,860,000,001	1,905,000,002	0.49	1.25	0.00000007
Battery Endpoint	3.40	+ 20	1,860,000,000	1,905,000,002	-1.29	1.53	0.00000008

Table 7-11. LTE Band 25/2 Frequency Stability Data

**Note:** The lowest and highest channel of this band have been tested and is determined to remain operating in-band over the temperature and voltage range as tested

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 87 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	



# **Frequency Stability / Temperature Variation**

WCDMA PCS									
	Low Channel Frequency (Hz):				1,852,400,000				
	High Channel Frequency (Hz):			1,907,600,000					
	Ref. Voltage (VDC):				3.80				
Voltage (%)	Power (VDC)	Temp (°C)	Low Freq. (Hz)	High Freq. (Hz)	Low Freq. Dev. (Hz)	High Freq. Dev. (Hz)	Deviation (%)		
		- 30	1,852,400,001	1,907,599,999	-0.28	0.40	0.00000002		
		- 20	1,852,400,001	1,907,600,000	-0.26	0.56	0.00000003		
		- 10	1,852,400,002	1,907,600,000	1.36	0.85	0.00000007		
		0	1,852,400,000	1,907,599,998	-0.62	-0.81	-0.00000004		
100 %	3.80	+ 10	1,852,400,000	1,907,599,997	-1.51	-1.60	-0.00000008		
		+ 20 (Ref)	1,852,400,001	1,907,599,999	0.00	0.00	0.00000000		
		'+ 30	1,852,400,000	1,907,599,998	-0.68	-0.55	-0.00000004		
		+ 40	1,852,400,002	1,907,599,998	0.57	-0.79	-0.00000004		
		+ 50	1,852,400,001	1,907,600,000	-0.40	0.65	0.00000003		
Battery Endpoint	3.40	+ 20	1,852,400,002	1,907,600,000	1.18	0.77	0.00000006		

Table 7-12. WCDMA PCS Frequency Stability Data

**Note:** The lowest and highest channel of this band have been tested and is determined to remain operating in-band over the temperature and voltage range as tested

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 88 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	



## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the Apple Watch FCC ID: BCG-A2727 complies with all the requirements of Part 24 of the FCC rules.

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 89 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	rage 69 01 90



## 9.0 APPENDIX A

#### Antenna gains provided by manufacturer:

Cellular Antenna Gain (FCM), Type: IFA						
Band	Frequency (MHz)	Horizontal (dBi)	Vertical (dBi)			
1	1921.6	-9.35	-11.83			
1	1950.0	-9.43	-10.84			
1	1978.4	-8.95	-9.78			
3	1711.6	-12.68	-13.17			
3	1747.5	-12.91	-13.66			
3	1783.4	-12.45	-14.13			
7	2502.6	-8.06	-8.68			
7	2535.0	-6.03	-7.07			
7	2567.4	-5.71	-6.74			
25	1851.0	-9.94	-13.63			
25	1882.4	-9.78	-12.73			
25	1914.0	-9.62	-12.2			
39	1882.6	-10.35	-13.62			
39	1900.0	-10.26	-13.01			
39	1917.4	-10.16	-12.29			
40	2302.6	-8.07	-9.21			
40	2350.0	-8.03	-9.67			
41	2498.6	-8.07	-8.36			
41	2593.0	-5.93	-6.31			
41	2687.4	-9.04	-10.04			

Table 9-1. Antenna Gains

FCC ID: BCG-A2727	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 90 of 90
1C2205090034-02.BCG	4/6/2022 - 8/25/2022	Watch	