



AIR PURIFIER

Quick Start Guide



RMAP-ST
RMAP-XL
RMAP-SST
RMAP-SXL



Note

This guide is for quick reference only. Please see the User Manual for complete product information and operational instructions.




CAUTION


- Be sure to unplug the unit before removing the filter packaging.
- Remove the plastic packaging from the filter before use.
- Keep plastic packaging away from children as it may cause suffocation.

How to Prepare/Change the Filter

- 1** Hold the top cover of the product with both hands and pull up.




- 2** Grasp the filter cover hole on the rear and pull it forward. Remove the filter from the unit by pulling it straight out.




- 3** Remove the plastic packaging from the filter.
▶ Failing to remove the packaging will result in abnormal sounds and the filter will not work properly; and it may cause a fire or other damage to the product.




- 4** Slide the filter back into the unit.



- 5** Replace filter cover.
▶ Insert the cover into the fixed groove at the bottom of the product.
▶ Slide the cover forward so that the cover fits into the top grooves.





Fixed groove at bottom



Cover-positioning groove at top


- 6** Hold the top cover of the product with both hands and slide it back in place, making sure the logo appears in the front.




- 7** When the filter installation is complete, plug the unit into a 120V outlet, press the  + "Auto" button on the control panel for five seconds or more to initialize it.

► The red filter light will turn off when the product is reset.



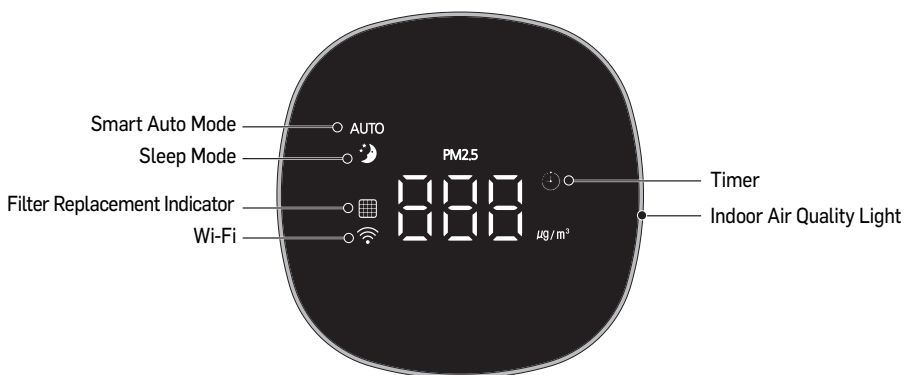


Display

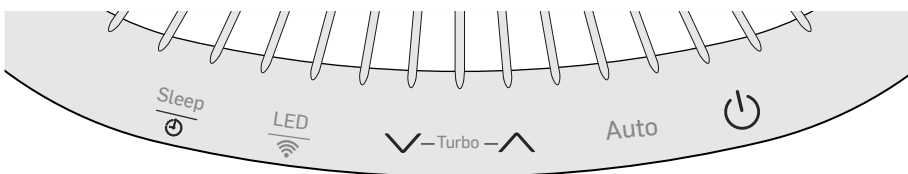

Control Panel



Control Panel Descriptions

	Sleep mode / Timer		Turn up the fan speed and time (by 1 hour)
	LED ON/OFF & Wi-Fi® connection	Auto	Smart automatic operation
	Turn down the fan speed and time (by 1 hour)		Power ON/OFF

Normal Operation



Note


When the air purifier turns on, the sensor is initialized and the display shows [_ _] during initialization.

1


Press the  button to turn on.


- ▶ The previously selected operation mode will be displayed.

2

Press the  button on the control panel to select your desired fan speed.

- ▶ You can adjust the fan speed from level 1 (F1) to level 18 (F18).

Note: The default home display on Wi-Fi® models will show a PM2.5 reading. Once the  button is pushed, the display will switch to show designated fan speed.



How to Install Casters (Optional)

1

Inside of the air purifier package, there is a small box containing four casters and eight screws.

2

Remove the four bottom bases from the air purifier with a screw driver.

3

Replace each base with a caster, utilizing two screws per caster.

4

Retain the removed bottom bases and screws for future use.



Note

If there is no caster box inside the product box, please contact customer service at 1-888-320-0909.



carrierathome.com 1-888-320-0909

01-811-20535-03



©2021 Carrier. All Rights Reserved.

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice or without incurring obligations. Third-party trademarks and Third-party trademarks and logos are the property of their respective owners.